HIOKI

BATTERY TESTER Series



Measuring Battery Quality

Cells - Modules - Packs


Quality Testing
Maintenance
Inspections
R & D

Measuring Battery Quality

A variety of processes must be completed before a battery becomes a finished product and each process level requires an appropriate testing measurement method. HIOKI battery testers are ideal for use in testing, development and inspections after cell completion.

Quality Testing | **Maintenance Inspections** | **R & D**

Processes after cell completion

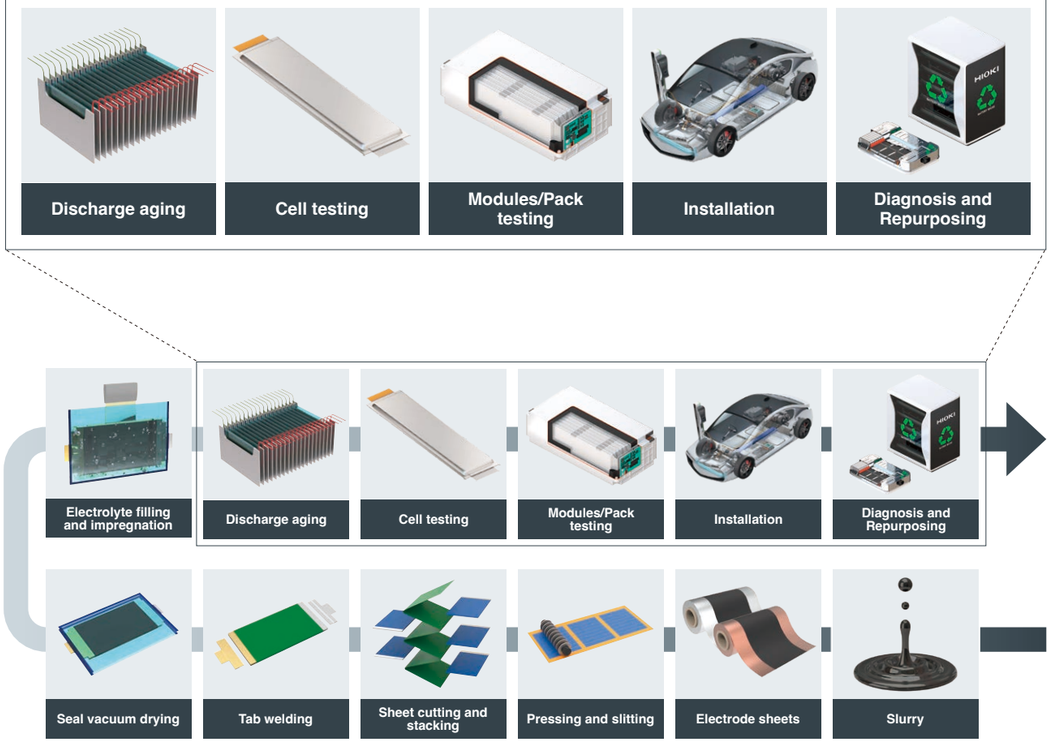

Lithium-ion Battery Production Processes

Quality Testing
P.6 to P.15
P.21

Acceptance/shipping inspections

Inspect the quality of completed cells, modules, and packs on production lines.
Measure internal resistance (AC-IR) and open-circuit voltage (OCV) to check battery quality.


3561,3561-01


BT3561A


BT3562A


BT3563A


BT3562-01


BT3563-01


BT3564


BT4560-50

Measuring open-circuit voltage with a high degree of precision
Learn more P.9

High-precision OCV measurement makes it possible to detect defects earlier in the production process.


DC VOLTMETER DM7276

Increasing the number of test channels
Learn more P.14, P.15

Increase the number of test channels and automatically switch between them while measuring.


SWITCH MAINFRAME SW1002

Maintenance Inspections
P.16 to P.17

Diagnosing degradation in batteries

Diagnose whether batteries embedded in a UPS or other system have degraded.


BT3554-50

Manage intensive workloads efficiently

Measured values can be wirelessly transmitted to a portable terminal for display, saving, and reporting.


WIRELESS ADAPTER Z3210 (sold separately)

Fit in tight spaces for speedy inspection

The tip is L-shaped for ease of use when inspecting batteries installed in tight spaces.



PIN TYPE LEAD L2020 (sold separately)

R & D
P.18 to P.20

Analyzing batteries

Analyze the battery characteristics by frequency sweep impedance measurement and equivalent circuit analysis.



BT4560-60

Measuring impedance over a broader frequency band
Learn more P.19

Broaden the measurement frequency range.



CHEMICAL IMPEDANCE ANALYZER IM3590


Analyzing fuel cells (FCs)

Measure the internal resistance (1 kHz) of fuel cells during cycle testing.


BT3563-01 (Special edition specifications)
BT3564 (Special edition specifications)

Converting measurement data into a Nyquist or Cole-Cole plot
Learn more P.20

Provided the web application "Multi-plot" free of charge.



Battery tester lineup

Application			Acceptance/shipping inspections			
			Small cells for general purpose High speed sorting	Small cells for power motors Small packs of up to 60 V	Large cells for xEVs Mid-sized packs of up to 100 V	Large packs for xEVs Large packs of up to 300 V
Model			3561, 3561-01	BT3561A	BT3562A	BT3563A
Appearance						
Measurement method			AC four-terminal method	AC four-terminal method	AC four-terminal method	AC four-terminal method
Measurement frequency			1 kHz ±0.2 Hz	1 kHz ±0.2 Hz	1 kHz ±0.2 Hz	1 kHz ±0.2 Hz
Rated input voltage			±22 V DC	±60 V DC	±100 V DC	±300 V DC
Maximum rated voltage to earth			±60 V DC	±60 V DC	±100 V DC	±300 V DC
Measurement parameters	Resistance measurement ranges	3 mΩ	N/A	N/A	3.1000 mΩ, 0.1 μΩ, 100 mA	3.1000 mΩ, 0.1 μΩ, 100 mA
		30 mΩ	N/A	31.000 mΩ, 1 μΩ, 100 mA	31.000 mΩ, 1 μΩ, 100 mA	31.000 mΩ, 1 μΩ, 100 mA
		300 mΩ	310.00 mΩ,10 μΩ, 10 mA	310.00 mΩ,10 μΩ, 10 mA	310.00 mΩ,10 μΩ, 10 mA	310.00 mΩ,10 μΩ, 10 mA
		3 Ω	3.1000 Ω,100 μΩ, 1 mA	3.1000 Ω,100 μΩ, 1 mA	3.1000 Ω,100 μΩ, 1 mA	3.1000 Ω,100 μΩ, 1 mA
	Max. display, resolution, measurement current	30 Ω	N/A	31.000 Ω, 1 mΩ, 100 μA	31.000 Ω, 1 mΩ, 100 μA	31.000 Ω, 1 mΩ, 100 μA
		300 Ω	N/A	310.00 Ω, 10 mΩ, 10 μA	310.00 Ω, 10 mΩ, 10 μA	310.00 Ω, 10 mΩ, 10 μA
		3 kΩ	N/A	3.1000 kΩ, 100 mΩ, 10 μA	3.1000 kΩ, 100 mΩ, 10 μA	3.1000 kΩ, 100 mΩ, 10 μA
	Basic accuracy	3 mΩ range	N/A	N/A	±0.5% rdg ±10 dgt	±0.5% rdg ±10 dgt
		30 mΩ range or more	±0.5% rdg ±5 dgt	±0.5% rdg ±5 dgt	±0.5% rdg ±5 dgt	±0.5% rdg ±5 dgt
	Voltage measurement ranges	6 V	N/A	6.000 00 V,10 μV	6.000 00 V,10 μV	6.000 00 V, 10 μV
		20 V	19.999 9 V, 100 μV	N/A	N/A	N/A
		60 V	N/A	60.000 0 V, 100 μV	60.000 0 V, 100 μV	60.000 0 V, 100 μV
		100 V	N/A	N/A	100.000 V, 1 mV	N/A
	Max. display, resolution	300 V	N/A	N/A	N/A	300.000 V, 1 mV
		1000 V	N/A	N/A	N/A	N/A
	Basic accuracy		±0.01% rdg ±3 dgt	±0.01% rdg ±3 dgt	±0.01% rdg ±3 dgt	±0.01% rdg ±3 dgt
Response time *1			3 ms	10 ms	10 ms	10 ms
Sampling period *2 EX.FAST, FAST, MEDIUM, SLOW		Ω or V	4 ms, 12 ms, 35 ms, 150 ms	4 ms, 12 ms, 35 ms, 150 ms	4 ms, 12 ms, 35 ms, 150 ms	4 ms, 12 ms, 35 ms, 150 ms
		ΩV	7 ms, 23 ms, 69 ms, 252 ms	8 ms, 24 ms, 70 ms, 253 ms	8 ms, 24 ms, 70 ms, 253 ms	8 ms, 24 ms, 70 ms, 253 ms
Allowable total line resistance *1 *3 (error detection) Ranges: 3 mΩ, 30 mΩ, 300 mΩ, 3 Ω		SENSE line	N/A, N/A, 20 Ω, 20 Ω	N/A, 6.5 Ω, 30 Ω, 30 Ω	6.5 Ω, 6.5 Ω, 30 Ω, 30 Ω	6.5 Ω, 6.5 Ω, 30 Ω, 30 Ω
		SOURCE line	N/A, N/A, 50 Ω, 500 Ω	N/A, 5.5 Ω, 15 Ω, 150 Ω	5.5 Ω, 5.5 Ω, 15 Ω, 150 Ω	5.5 Ω, 5.5 Ω, 15 Ω, 150 Ω
Open terminal voltage Ranges: 30 mΩ or less, 300 mΩ, 3 Ω or more			N/A, 7 V, 7 V peak	25 V, 7 V, 4 V peak	25 V, 7 V, 4 V peak	25 V, 7 V, 4 V peak
Interface	LAN (TCP/IP, 10BASE-T/100BASE-TX)		N/A	YES	YES	YES
	RS-232C *4 (Max. 38400 bps)		YES	YES	YES	YES
	USB		N/A	N/A	N/A	N/A
	GP-IB		YES (3561-01 Only)	N/A	N/A	N/A
	EXT I/O (37-pin Handler interface)		YES (36-pin)	YES	YES	YES
	Analog output (DC 0 V to 3.1 V)		N/A	YES	YES	YES
Function	Contact check		YES	YES	YES	YES
	Zero adjustment (±1000 counts)		YES	YES	YES	YES
	Measurement current pulse output		N/A	YES	YES	YES
	Comparator		Hi/ IN/ Lo	Hi/ IN/ Lo	Hi/ IN/ Lo	Hi/ IN/ Lo
	Statistical calculations		Max. 30,000	Max. 30,000	Max. 30,000	Max. 30,000
	Delay		YES	YES	YES	YES
	Average		2 to 16 times	2 to 16 times	2 to 16 times	2 to 16 times
	Panel saving/loading		126	126	126	126
	Memory storage		400	400	400	400
	LabVIEW® driver *5		YES	YES	YES	YES
Applicable standards			Safety: EN61010 EMC: EN61326 Class A	Safety: EN61010 EMC: EN61326 Class A	Safety: EN61010 EMC: EN61326 Class A	Safety: EN61010 EMC: EN61326 Class A
Effect of radiated radio-frequency electromagnetic field			Resistant *6	Resistant *6	Resistant *6	Resistant *6
Effect of conducted radiofrequency electromagnetic field		10 V	N/A	Resistant	Resistant	Resistant
		3 V	Resistant	Resistant	Resistant	Resistant
CE			YES	YES	YES	YES
CSA *7			N/A	YES	YES	YES
Dimensions • Weight			215W × 80H × 295D mm (8.46W × 3.15H × 11.61D in) 2.4 kg (84.66 oz)	215W × 80H × 295D mm (8.46W × 3.15H × 11.61D in) 2.4 kg (84.66 oz)	215W × 80H × 295D mm (8.46W × 3.15H × 11.61D in) 2.4 kg (84.66 oz)	215W × 80H × 295D mm (8.46W × 3.15H × 11.61D in) 2.4 kg (84.66 oz)

*1: Typical value *2: When the power supply frequency is 60 Hz *3: Total line resistance = wiring resistance + contact resistance + DUT resistance *4: Available as printer I/F
*5: LabVIEW® Driver is a registered trademark of National Instruments Corporation *6: Test conditions were 80 MHz to 1 GHz at 10 V/m and 1 GHz to 6 GHz at 3 V/m, all at 80% AM
*7: Canadian Standards Assosiation


Application			Acceptance/shipping inspections		R & D	Maintenance
			Extra large packs for xEV, ESS 1000 V high voltage model	GP-IB model	Cells Degree of deterioration for reuse	Large-scale UPS
Model			BT3564	BT3562-01 BT3563-01	BT4560-60	BT3554-50
Appearance						
Measurement method			AC four-terminal method	AC four-terminal method	AC four-terminal pair method	AC four-terminal method
Measurement frequency			1 kHz ±0.2 Hz	1 kHz ±0.2 Hz	0.01 Hz to 10 kHz	1 kHz ±80 Hz
Rated input voltage			±1000 V DC	BT3562-01: ±70 V DC BT3563-01: ±300 V DC	±5 V DC	±60 V DC
Maximum rated voltage to earth			±1000 V DC	BT3562-01: ±60 V DC BT3563-01: ±300 V DC	SOURCE-H, SENSE-H: ±5 V DC SOURCE-L, SENSE-L: 0 V DC	±60 V DC
Measurement parameters	Resistance measurement ranges	3 mΩ	3.1000 mΩ, 0.1 μΩ, 100 mA	3.1000 mΩ, 0.1 μΩ, 100 mA	**Resistance (R)** 3.6000 mΩ, 0.1 μΩ, 1.5 A 12.0000 mΩ, 0.1 μΩ, 500 mA 120.000 mΩ, 1 μΩ, 50 mA **Reactance (X)** ±3.6000 mΩ, 0.1 μΩ, 1.5 A ±12.0000 mΩ, 0.1 μΩ, 500 mA ±120.000 mΩ, 1 μΩ, 50 mA **Impedance (Z)** 3.6000 mΩ, 0.1 μΩ, 1.5 A 12.0000 mΩ, 0.1 μΩ, 500 mA 120.000 mΩ, 1 μΩ, 50 mA **Phase angle (θ)** ±180.000°, 0.001° **[Basic accuracy]** Refer to P.19 **Voltage (V)** ±5.10000 V, 10 μV **[Basic accuracy]** ±0.0035% rdg ±5 dgt **[Sampling period]** FAST, MEDIUM, SLOW 0.1 s, 0.4 s, 1.0 s **Temperature (°C)** -10.0°C to 60.0°C, 0.1°C **Allowable total line resistance** *1 *3 **(error detection)** 3 mΩ, 10 mΩ, 100 mΩ SENSE line: 10 Ω, 15 Ω, 50 Ω SOURCE line: 1.5 Ω, 4 Ω, 45 Ω	**Resistance (R)** 3.100 mΩ, 1 μΩ, 160 mA 31.00 mΩ, 10 μΩ, 160 mA 310.0 mΩ, 100 μΩ, 16 mA 3.100 Ω, 1 mΩ, 1.6 mA **[Basic accuracy]** ±1.0% rdg ±8 dgt (3 mΩ range) ±0.8% rdg ±6 dgt (30 mΩ range or more) **Voltage (V)** 6.000 V, 1 mV 60.00 V, 10 mV **[Basic accuracy]** ±0.08% rdg ±6 dgt **Temperature (°C)** -10.0°C to 60.0°C, 0.1°C
		30 mΩ	31.000 mΩ, 1 μΩ, 100 mA	31.000 mΩ, 1 μΩ, 100 mA		
		300 mΩ	310.00 mΩ,10 μΩ, 10 mA	310.00 mΩ,10 μΩ, 10 mA		
		3 Ω	3.1000 Ω,100 μΩ, 1 mA	3.1000 Ω,100 μΩ, 1 mA		
	Max. display, resolution, measurement current	30 Ω	31.000 Ω, 1 mΩ, 100 μA	31.000 Ω, 1 mΩ, 100 μA		
		300 Ω	310.00 Ω, 10 mΩ, 10 μA	310.00 Ω, 10 mΩ, 10 μA		
		3 kΩ	3.1000 kΩ, 100 mΩ, 10 μA	3.1000 kΩ, 100 mΩ, 10 μA		
	Basic accuracy	3 mΩ range	±0.5% rdg ±10 dgt *8	±0.5% rdg ±10 dgt		
		30 mΩ range or more	±0.5% rdg ±5 dgt *8	±0.5% rdg ±5 dgt		
	Voltage measurement ranges	6 V	N/A	6.000 00 V, 10 μV		
		10 V	9.999 99 V, 10 μV	N/A		
		60 V	N/A	60.000 0 V, 100 μV		
		100 V	99.999 9 V, 100 μV	N/A		
	Max. display, resolution	300 V	N/A	300.000 V, 1 mV (BT3563-01 only)		
		1000 V	1100.00 V, 1 mV *9	N/A		
	Basic accuracy		±0.01% rdg ±3 dgt *8	±0.01% rdg ±3 dgt		
Response time *1			700 ms	10 ms		1.6 s
Sampling period *2 EX.FAST, FAST, MEDIUM, SLOW		Ω or V	N/A, 12 ms, 35 ms, 253 ms	4 ms, 12 ms, 35 ms, 150 ms		N/A
		ΩV	N/A, 28 ms, 74 ms, 359 ms	8 ms, 24 ms, 70 ms, 253 ms		100 ms
Allowable total line resistance *1 *3 (error detection) Ranges: 3 mΩ, 30 mΩ, 300 mΩ, 3 Ω		SENSE line	3 Ω, 3 Ω, 20 Ω, 20 Ω	2 Ω, 2 Ω, 15 Ω, 15 Ω		N/A
		SOURCE line	3 Ω, 3 Ω, 20 Ω, 200 Ω	2 Ω, 2 Ω, 15 Ω, 150 Ω		N/A
Open terminal voltage Ranges: 30 mΩ or less, 300 mΩ, 3 Ω or more			25 V, 7 V, 4 V peak	25 V, 7 V, 4 V peak		5 V max
Interface	LAN (TCP/IP, 10BASE-T/100BASE-TX)		N/A	N/A	N/A	• USB • Wireless communications* (*when Z3210 installed)
	RS-232C *4 (Max. 38400 bps)		YES	YES	YES	
	USB		N/A	N/A	YES	
	GP-IB		YES	YES	N/A	
	EXT I/O (37-pin Handler interface)		YES	YES	YES	
	Analog output (DC 0 V to 3.1 V)		YES	YES	N/A	
Function	Contact check		YES	YES	YES	• Memory function (Up to 6000 data) • Auto memory function • Auto-hold function • Measurement Navigator (When using Z3210, Gennect Cross : Voice guide output) • Auto power-off • Tablet app (Gennect Cross) • PC app (Gennect One) • Comparator function (PASS/ WARNING/ FAIL) • Excel® Direct Input function (When using Z3210)
	Zero adjustment (±1000 counts)		YES	YES	YES *10	
	Measurement current pulse output		YES	YES	YES	
	Comparator		Hi/ IN/ Lo	Hi/ IN/ Lo	Hi/ IN/ Lo	
	Statistical calculations		Max. 30,000	Max. 30,000	N/A	
	Delay		YES	YES	YES	
	Average		2 to 16 times	2 to 16 times	1 to 99 times	
	Panel saving/loading		126	126	126	
	Memory storage		400	400	N/A	
	LabVIEW® driver *5		N/A	YES	YES	
Applicable standards			Safety: EN61010 EMC: EN61326 Class A	Safety: EN61010 EMC: EN61326 Class A	Safety: EN61010 EMC: EN61326 Class A	Safety: EN61010 EMC: EN61326 Class B
Effect of radiated radio-frequency electromagnetic field			Resistant *6	Resistant *6	Resistant *6	Resistant (3 V/m)
Effect of conducted radiofrequency electromagnetic field		10 V	N/A	N/A	N/A	N/A
		3 V	Resistant	Resistant	Resistant	N/A
CE			YES	YES	YES	YES
CSA *7			N/A	YES	N/A	N/A
Dimensions • Weight			215W × 80H × 329D mm (8.46W × 3.15H × 12.95D in) 2.6 kg (91.71 oz)	215W × 80H × 295D mm (8.46W × 3.15H × 11.61D in) 2.4 kg (84.66 oz)	330W × 80H × 293D mm (13.00W × 3.15H × 11.54D in) 3.7 kg (130.51 oz)	199W × 132H × 60.6D mm (7.83W × 5.20H × 2.39D in) 960 g (33.86 oz)


*8: Average function: When set to ON 4 times *9: Resolution 10 mV for 1000.00 V or more
*10: Zero-adjustment range R: ±0.1000 mΩ (3 mΩ range), ±0.3000 mΩ (10 mΩ range), ±3.000 mΩ (100 mΩ range), X: ±1.5000 mΩ (Common for all ranges), V: ±0.10000 V

Acceptance/shipping inspections

3561, 3561-01, BT3561A, BT3562A, BT3563A, BT3564, BT3562-01, BT3563-01, BT4560-50

Measuring battery performance and safety

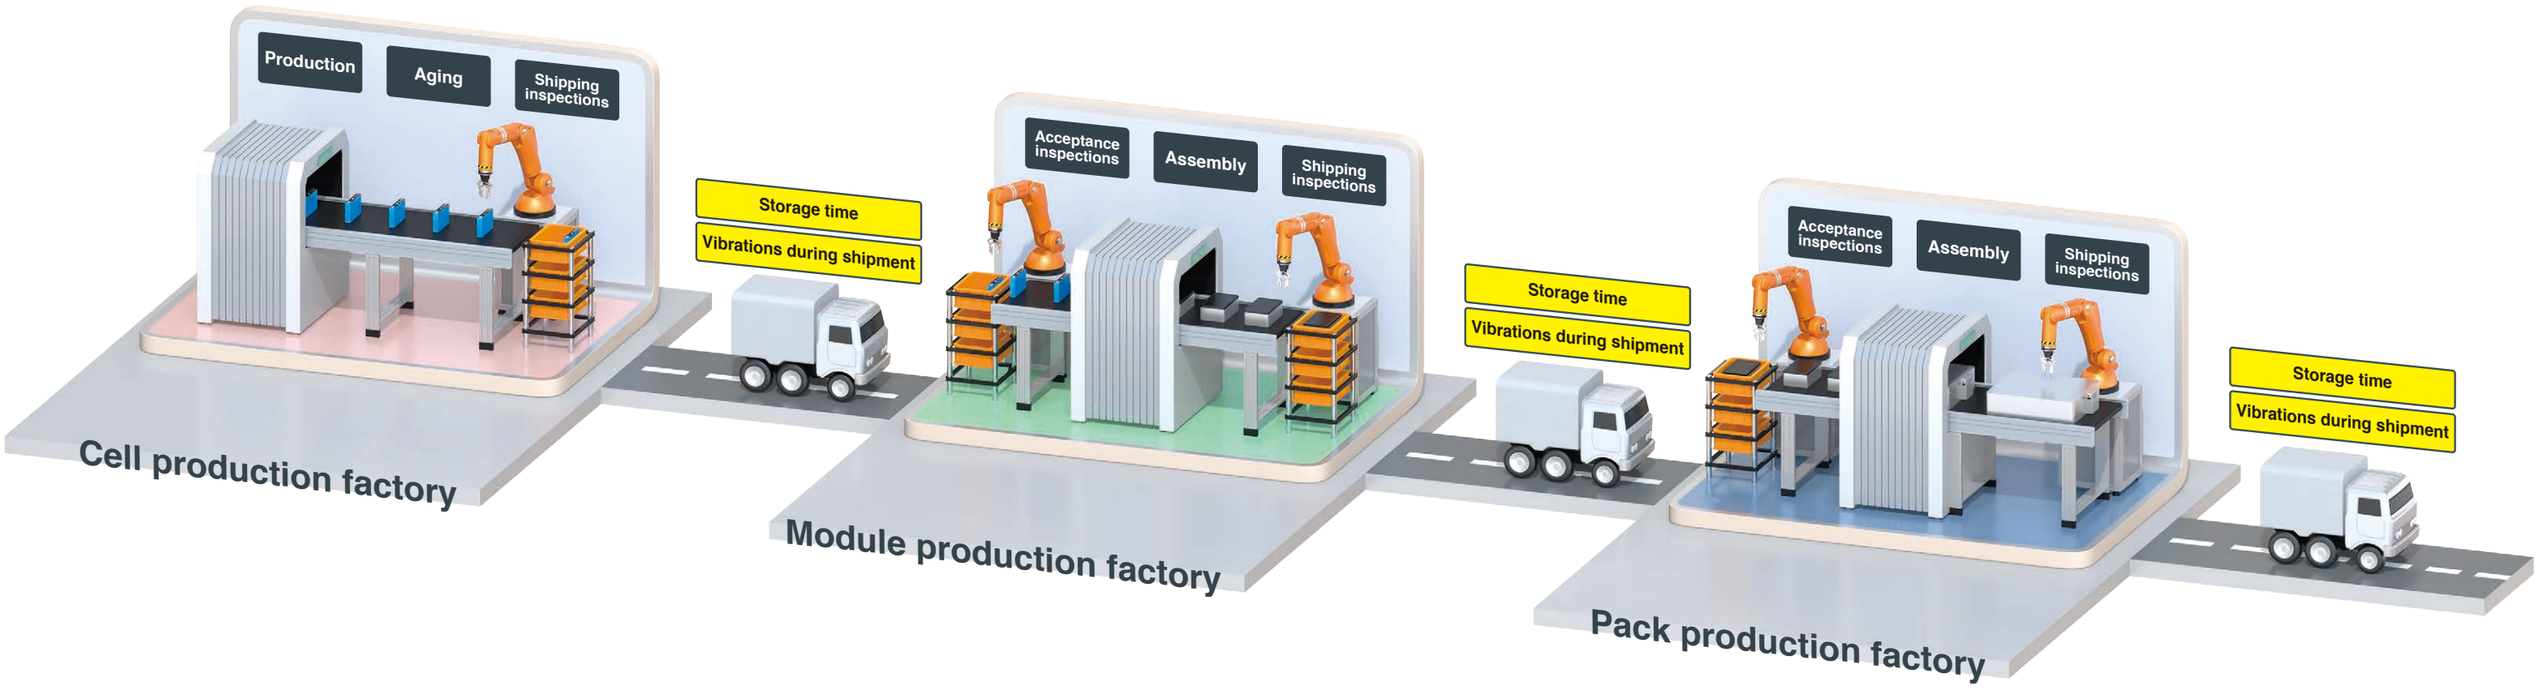

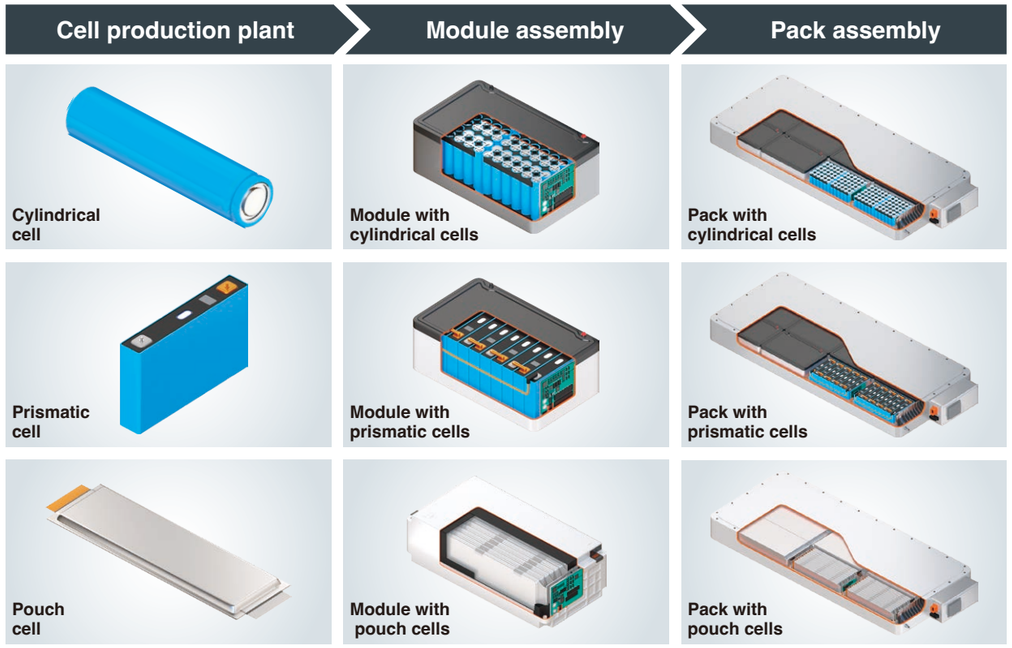

Measuring battery performance and safety using internal resistance (AC-IR) and open-circuit voltage (OCV)

Testing plays an important role in production processes by allowing plants to manufacture safe, high-performance batteries. During shipping and acceptance inspections, technicians assess battery performance by measuring internal resistance and safety by measuring open-circuit voltage.

Our Battery testers meet these needs...

“We want to manufacture batteries with stable performance.”

“We want to manufacture highly safe batteries.”

Assembly process (from cell batteries to pack batteries)

Cells produced at the cell production factory are shipped to the module production factory after undergoing a shipping inspection. Since factors such as vibrations during shipment and even the passage of time can cause defects, batteries undergo an acceptance inspection before being assembled into modules and packs.


Acceptance/shipping inspections

3561, 3561-01, BT3561A, BT3562A, BT3563A, BT3564, BT3562-01, BT3563-01, BT4560-50

Measuring battery performance and safety

Manufacturing batteries with stable performance

Explanation Battery quality and internal resistance (AC-IR)

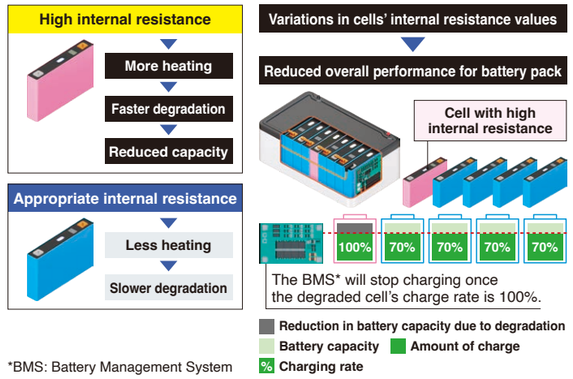

*BMS: Battery Management System

Relationship between the internal resistance and the decline of battery cell capacity

Battery cells with high internal resistance tend to generate more heat and degrade faster. When cells degrade, their capacity declines, and their internal resistance rises. Internal resistance also changes over time or as a consequence of vibrations during shipment. It's essential to eliminate cells with high internal resistance by carrying out an inspection each time cells are shipped or received.

Internal resistance and battery pack performance


It's important that all the cells in a given battery pack have uniform internal resistance. If one or more cells have high internal resistance or have degraded, they will become a bottleneck and limit the battery pack's capacity. Moreover, the battery pack's performance will rapidly decline as the BMS* attempts to protect degraded cells with reduced capacity from overcharging and over-discharging. You can improve battery cell quality by selecting cells with uniform internal resistance so that they will degrade uniformity.

Internal resistance measurement (AC-IR measurement)

3561, 3561-01, BT3561A, BT3562A, BT3563A, BT3564, BT3562-01, BT3563-01, BT4560-50

There are two methods for measuring a battery's internal resistance: the AC method and the DC method. Resistance values are known as AC-IR when measured using the AC method, and as DC-IR when measured using the DC method. AC-IR and DC-IR have a complementary relationship, and it's recommended to choose the one that best suits your application, or to carry out both measurements. HIOKI battery testers can perform 4-terminal AC-IR measurement.

DC method (DC-IR)




When you want to check battery performance under conditions close to actual operation

Issues with DC-IR

- Measurement takes more time.
- Measurements are less reproducible.
- Battery charges rate changes.
- Large charging and discharging equipment is required.
- The line must be capable of supplying large amounts of power.

Connect a load and measure the resistance value based on the change in voltage and current.

AC method (AC-IR)



When you wish to identify defective products quickly and accurately, for example during shipping or acceptance inspections

Issues resolved by AC-IR measurement

- Quickly measurement with milliseconds.
- Measurements are highly reproducible.
- Battery charges rate not changes.
- Testing can be carried out with compact equipment in an energy-saving manner.


Apply the measurement current at a measurement frequency of 1 kHz and calculate the battery's internal resistance from an AC voltmeter's voltage value.

Two standards on LIB performance testing, **IEC 61960-3/JIS C8711** (for compact equipment) and **IEC 62620/JIS C8715-1** (for industrial equipment), describe how to measure internal resistance using the AC method (AC-IR). The method is also used in manufacturing processes for automotive LIB cells, which are required to deliver high levels of performance and safety.

Low-resistance measurement (1 mΩ and lower) for large batteries

BT4560-50


The larger the battery, the lower its internal resistance. Large batteries used in automobiles and infrastructure applications sometimes have internal resistance values of less than 1 mΩ. The BT4560-50's four-terminal-pair measurement method, which reduces the effects of induction fields, is an optimal solution for accurately measuring such low resistance levels.



The induction field can cause some measurement error.

Measurement using the four-terminal method, which is susceptible to the effects of induction fields

1 magnetic flux generated by measurement current
2 magnetic flux generated by eddy current
3 external magnetic flux



BT4560-50

Stable, high-precision measurement using the four-terminal-pair method


The effects of induction fields can be reduced by applying a current that flows in the opposite direction as the measurement current in order to limit magnetic flux.

Measuring battery performance and safety

Manufacturing highly safe batteries

Explanation Internal shorts and open-circuit voltage (OCV)

Mechanism that causes battery fires

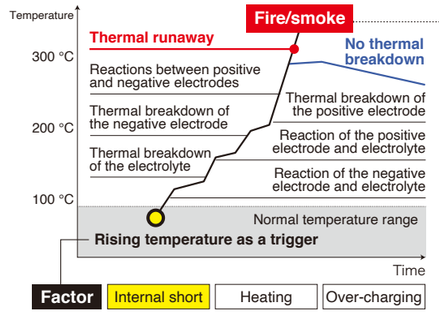



Dendrite or contaminated metal
(Dendrite: Metals precipitated dendritic form)

Internal shorts


Insulation defects, which can be caused by factors such as ageing and vibrations during shipment, can lead to fire and other dangerous accidents, making it necessary to check open-circuit voltage values in order to distinguish between defective and non-defective products.


Open-circuit voltage (OCV)

The battery voltage when no load is connected is known as the open-circuit voltage (OCV). When an insulation defect such as an internal short occurs inside the battery, self-discharge causes the open-circuit voltage to decrease.

Open-circuit voltage (OCV)

3561, 3561-01, BT3561A, BT3562A, BT3563A, BT3564, BT3562-01, BT3563-01, BT4560-50, DM7276

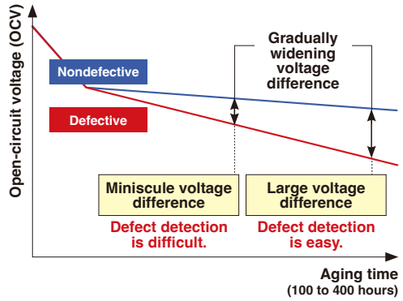



Since the amount of change in OCV caused by self-discharge is extremely small, it is necessary to age batteries at least 100 to 400 hours before testing can accurately distinguish between non-defective and defective products. Additionally, it is necessary to measure OCV multiple times during the aging process. Using an instrument with good accuracy makes it possible to remove defects from the testing line earlier in the process, significantly reducing management and testing costs.

Dendrites form over time as minuscule metal fragment contaminants dissolve, leading to internal shorts.

High-accuracy OCV measurement

BT3561A, BT3562A, BT3563A, BT3564, BT3562-01, BT3563-01, BT4560-50, DM7276


High-accuracy

Model	BT3561A, BT3562-01, BT3562A, BT3563-01, BT3563A, BT3564	BT4560-50	DM7276 (DC VOLTMETER)
Appearance			
Recommended range for 4 V measurement	6 V range	5 V range	10 V range
Number of digit, Max. Display	5 1/2 digit, 6.000 00	5 1/2 digit, 5.100 00	7 1/2 digit, 12.000 000
Resolution*1	10 µV	10 µV	1 µV
Basic accuracy*1	±0.01% rdg ±3 dgt	±0.0035% rdg ±5 dgt	±0.0009% rdg ±12 µV
Measurement error*1 *2	±430 µV	±190 µV	±48 µV
Period of accuracy guarantee	1 year	1 year	1 year
Temperature measurement	N/A	YES	YES
Temperature Compensation Function	N/A	N/A	YES

*1: When using recommended range for 4 V measurement *2: When measuring a 4 V LIB cell

OCV fluctuates with the ambient temperature

A battery's OCV value can fluctuate several hundred microvolts with a change of just 1°C in the ambient temperature. Temperature correction functionality allows the instrument to display a value that has been converted to the voltage at the reference temperature.




$$V_{T0} = \frac{V_T}{1+\alpha_{T0}(T-T_0)}$$

V_T : Measured voltage value [V]
T : Current ambient temperature [°C]
V_{T0} : Voltage value after correction [V]
T_0 : Reference temperature [°C]
α_{T0} : Temperature coefficient at T_0 [1/°C]

Acceptance/shipping inspections

3561, 3561-01, BT3561A, BT3562A, BT3563A, BT3564, BT3562-01, BT3563-01, BT4560-50

Integrate to automatic testing system

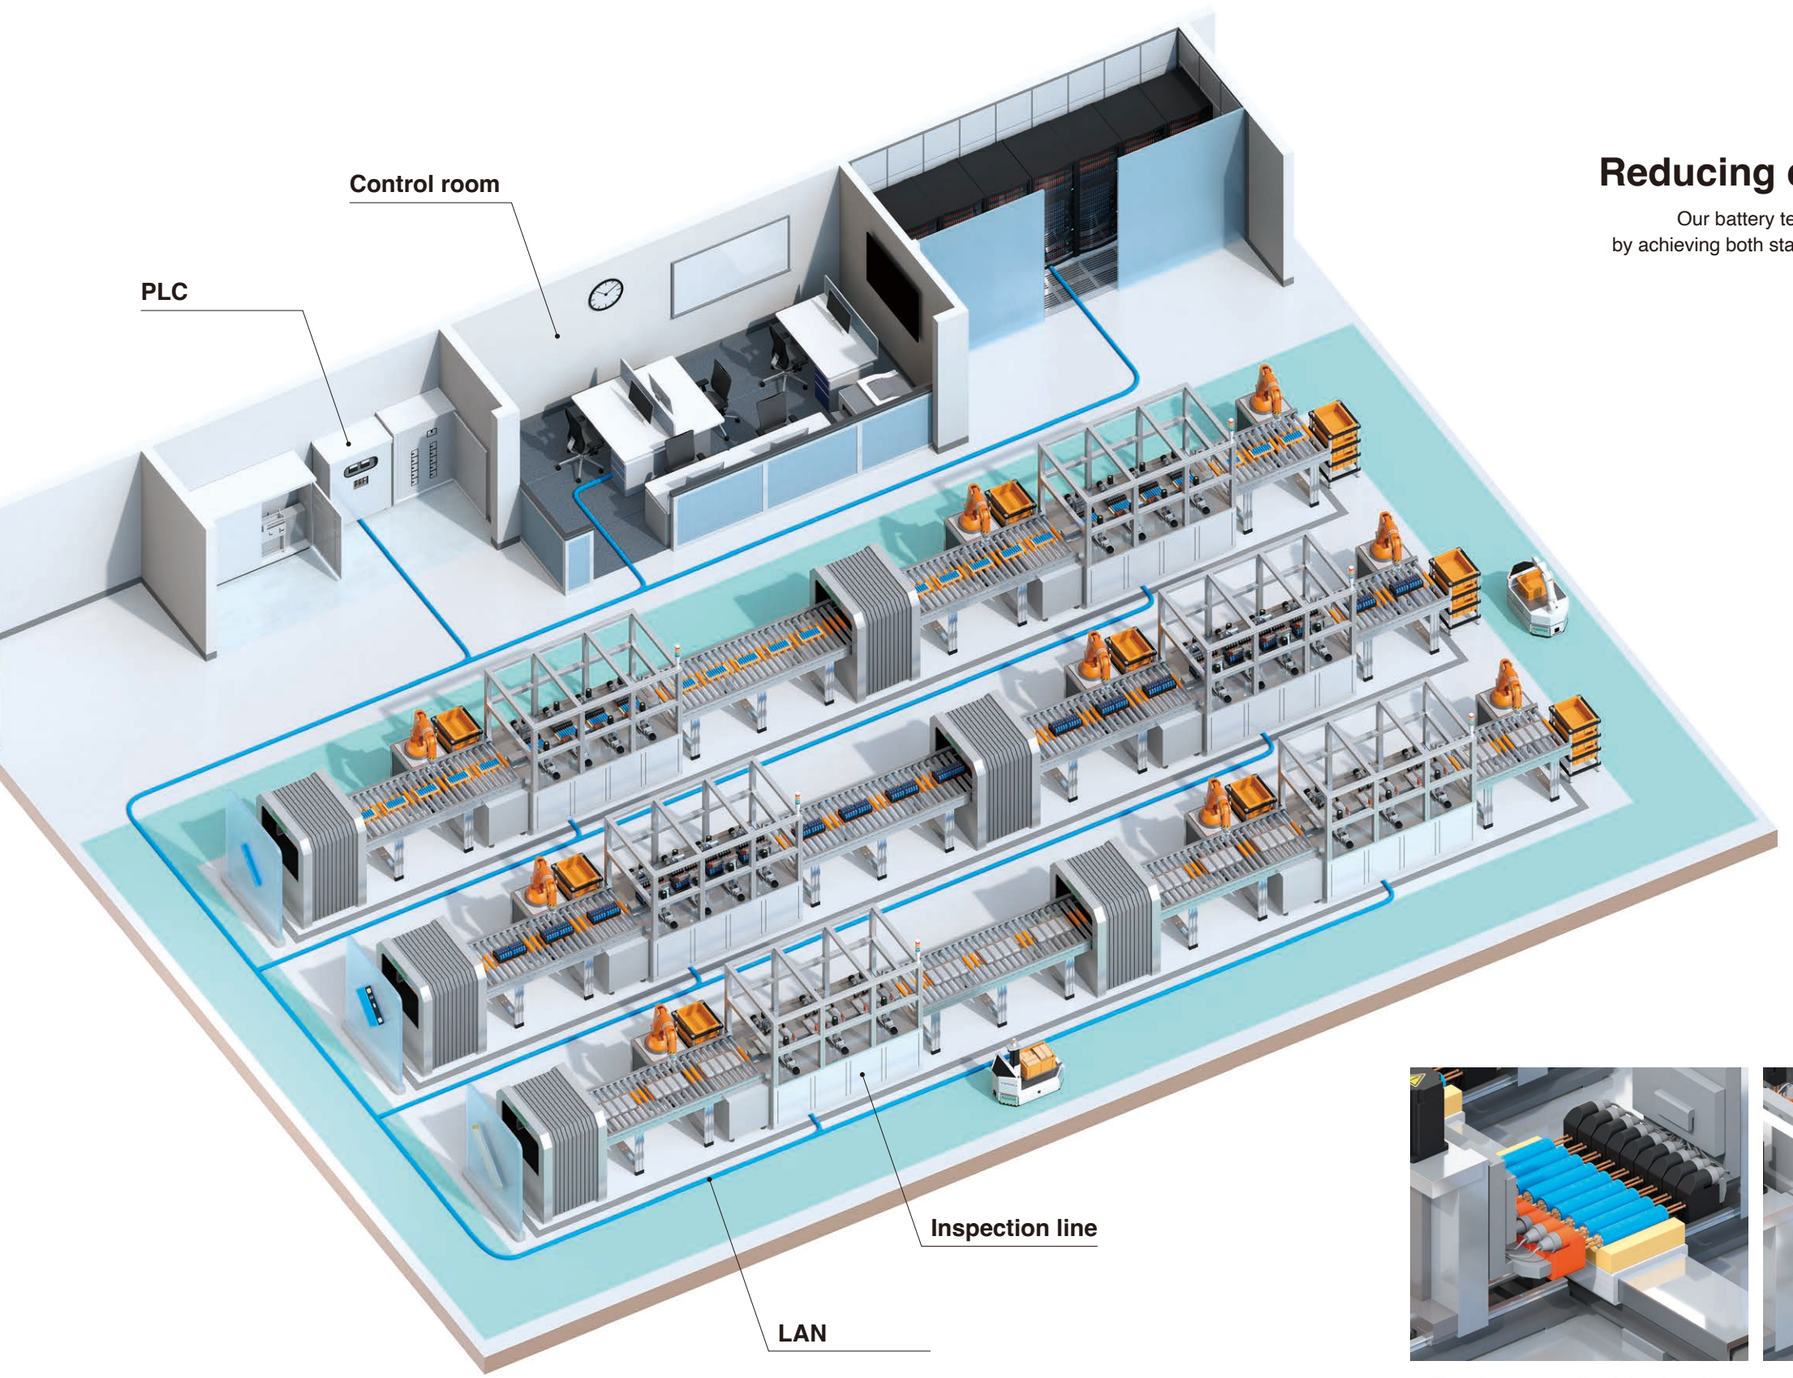

Lowering production costs
Reducing downtime and shortening test times

Our battery testers resolve issues manufacturers face when they build production systems by achieving both stable, high-precision measurements and reduction of downtime and test times.

Our Battery testers meet these needs...


“We want to reduce system development cost and management man-hours.”

“We want to increase productivity by shortening test times.”


Examples

- Reducing downtime caused by measurement errors
- Reducing downtime caused by instrument malfunctions
- Lengthening the probe replacement cycle
- Controlling instruments with embedded relays
- Establishing long measurement cable runs
- Using thinner wires for measurement cables
- Connecting a PLC to a testing line via LAN
- Using multiple instruments simultaneously
- Increasing the number of test channels

Testing of cylindrical cells



Testing of prismatic cells



Testing of pouch cells


Acceptance/shipping inspections


3561, 3561-01, BT3561A, BT3562A, BT3563A, BT3564, BT3562-01, BT3563-01, BT4560-50

Integrate to automatic testing system

Reducing test system development cost and management man-hours

Explanation Line resistance and measurement current, line resistance and leakage current

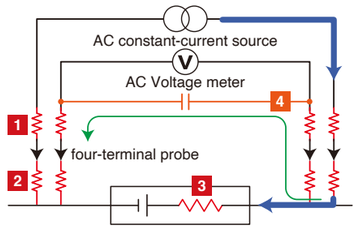



High line resistance can cause current errors and measurement errors, preventing accurate testing.


Constant-current errors

Flow of the measurement current is prevented, causing a constant-current error and making measurement impossible.

Measurement errors

Stray capacitance between cables causes a leakage current through the line resistance, generating a voltage that causes a measurement error.

Explanation Line resistance: causes and issues

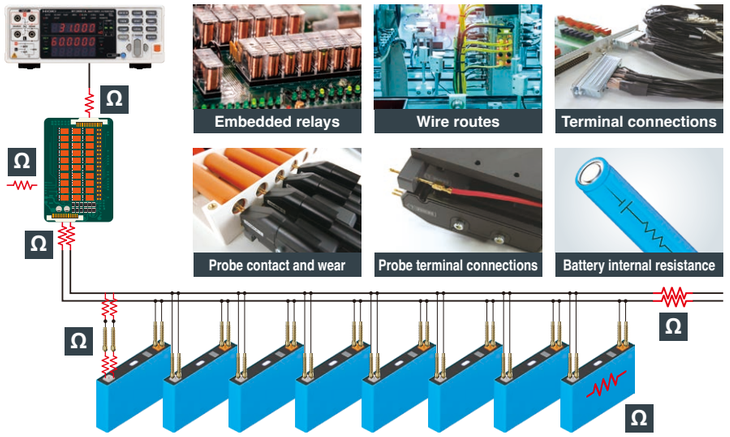

- Embedding relays
- Using long measurement cables
- Using thin measurement cables
- Using worn probes

▼

- Line resistance increases
- Current errors occur
- Measurement errors occur

▼ ▼


- More management man-hours
- Lower productivity

Increasing line resistance tolerances

BT3561A, BT3562A, BT3563A

The BT3561A, BT3562A and BT3563A have dramatically improved tolerances for line resistance compared to previous models. This improvement makes it easy to build test systems with large numbers of channels using relays. Additionally, a longer maintenance cycle for systems in use means fewer maintenance man-hours. Finally, its capability to handle thinner cables than with previous models*3 makes it easier to route cables.

(SENSE side when using 3 mΩ or 30 mΩ range)

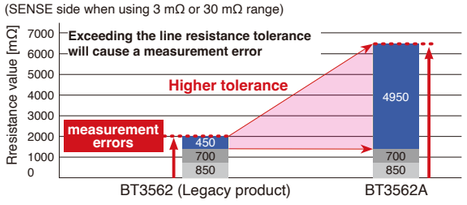

- **Margin before threshold at which a measurement error occurs**
- Line resistance of relay circuit (SW1001 + SW9001)
- Line resistance of 4 m measurement cable (When using AWG 25 cable) (AWG 25: 0.162 mm²)

Issues resolved by improved tolerance


- More relay options
- Able to use longer measurement cables*3
- Able to use thin measurement cables*3
- Fewer probe replacements

Model		3561, 3561-01				BT3561A				BT3562A, BT3563A				BT3562-01, BT3563-01, BT3564			
Range		3 mΩ	30 mΩ	300 mΩ	3 Ω	3 mΩ	30 mΩ	300 mΩ	3 Ω	3 mΩ	30 mΩ	300 mΩ	3 Ω	3 mΩ	30 mΩ	300 mΩ	3 Ω
Measurement current		N/A	N/A	10 mA	1 mA	N/A	100 mA	10 mA	1 mA	100 mA	100 mA	10 mA	1 mA	100 mA	100 mA	10 mA	1 mA
Allowable total line resistance (error detection) *1 *2	SENSE line	N/A	N/A	20 Ω	20 Ω	N/A	6.5 Ω	30 Ω	30 Ω	6.5 Ω	6.5 Ω	30 Ω	30 Ω	2 Ω	2 Ω	15 Ω	15 Ω
	SOURCE line	N/A	N/A	50 Ω	500 Ω	N/A	5.5 Ω	15 Ω	150 Ω	5.5 Ω	5.5 Ω	15 Ω	150 Ω	2 Ω	2 Ω	15 Ω	150 Ω

*1: Typical value *2: Total line resistance = (Wiring resistance + Contact resistance + DUT resistance)
*3: AWG 29 (0.064 mm²) wire equivalent to 2.2 Ω over an 8 m round trip can be used with the 3 mΩ or 30 mΩ range.

Preventing instrument malfunctions caused by static electricity

BT3561A, BT3562A, BT3563A

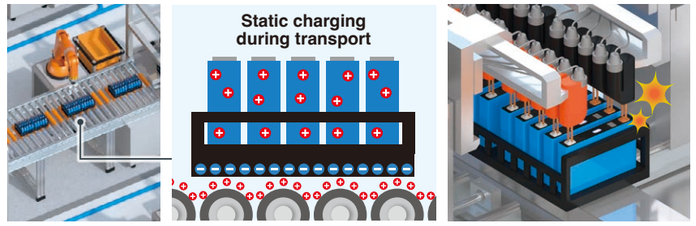


Batteries can become charged on production lines, for example, when being transported on a conveyor belt. When probes are placed in contact with such batteries, the resulting application of static electricity can then damage the instrument. The BT3561A, BT3562A and BT3563A are designed to withstand contact with ±30 kV of static electricity*, preventing static-caused malfunctions and reducing testing line downtime.

* ±30 kV IEC 61000-4-2 contact discharge

LAN interface as standard

BT3561A, BT3562A, BT3563A

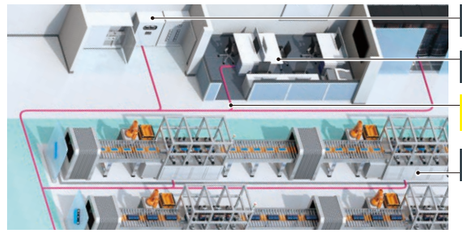

The BT3561A, BT3562A and BT3563A are equipped with a LAN interface as standard equipment, making it easy for the instrument to interoperate with a PLC*2-based control system. The ability to use readily accessible LAN cables helps lower costs during system development and maintenance. Furthermore, a design with strong noise and static electricity resistance helps avoid system problems.

*1: Max.30 m
*2: Programmable Logic Controller, a device that automatically controls one or more machines

Contact check

3561, 3561-01, BT3561A, BT3562A, BT3563A, BT3564, BT3562-01, BT3563-01, BT4560-50




Accurate probing is essential for accurate measurement. Our battery testers are equipped with probe contact monitoring functionality to ensure highly reliable testing.

Using multiple instruments simultaneously

BT3561A, BT3562A, BT3563A, BT3564, BT3562-01, BT3563-01, BT4560-50

When multiple battery testers are used at the same time, their induction fields can interfere with each other, causing measurement errors. Since the instruments' measurement currents flow continuously, such interference can occur even if measurements are timed so that they don't occur simultaneously. The measurement current pulse output function allows the measurement current to flow only during measurement. By using this function to make alternating measurements, you can avoid the effects of interference between induction fields caused by the measurement current.

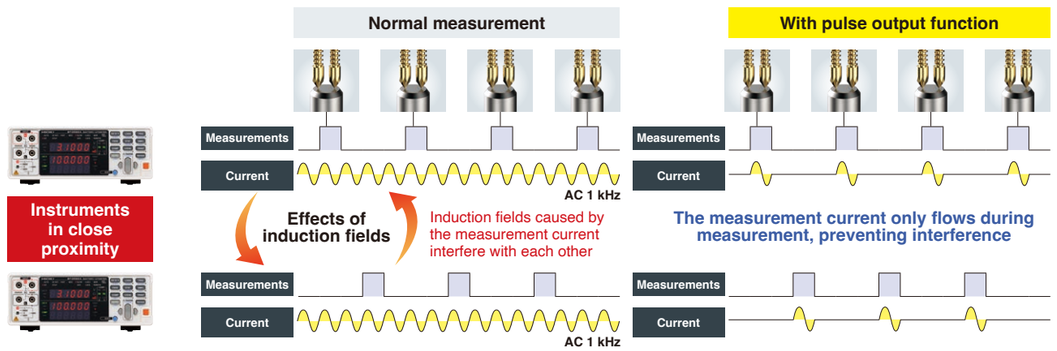

Acceptance/shipping inspections

3561, 3561-01, BT3561A, BT3562A, BT3563A, BT3564, BT3562-01, BT3563-01, BT4560-50

Integrate to automatic testing systems


Improving productivity by reducing test times

Multiple measurement with scanner

3561, 3561-01, BT3561A, BT3562A, BT3563A, BT3564, BT3562-01, BT3563-01, BT4560-50


You can use the Switch Mainframe Switch Mainframe SW1001/SW1002 to increase the number of measurement channels. Additionally, you can perform scan measurement by controlling two instruments at once, for example a Battery HiTester BT3561A and Precision DC Voltmeter DM7276, or a Battery Impedance Meter BT4560-50 and Precision DC Voltmeter DM7276.

BT3561A, BT3562A, BT3563A 132 ch — **AC-IR measurement (1 kHz) , OCV measurement**

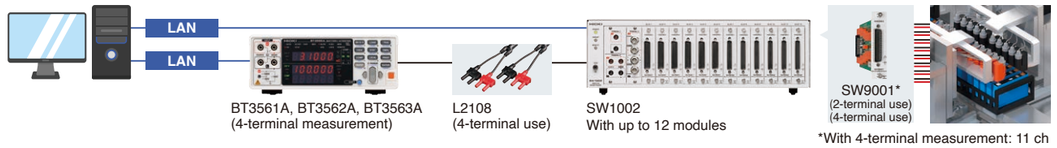


*With 4-terminal measurement: 11 ch

BT4560-50 72 ch — **AC-IR measurement (frequency sweep), OCV measurement**

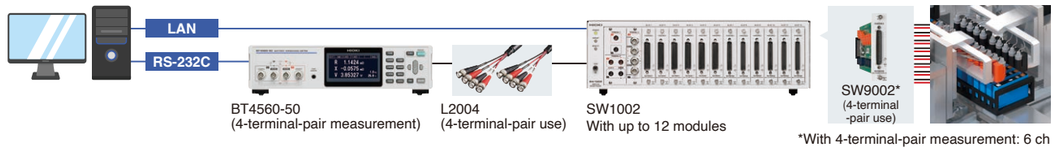


*With 4-terminal-pair measurement: 6 ch

DM7276 264 ch — **High-accuracy OCV measurement, Temperature Compensation Function**

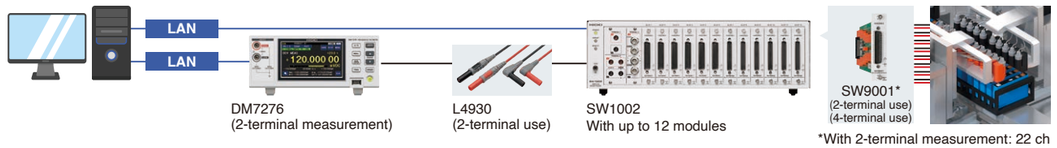


*With 2-terminal measurement: 22 ch

BT356xA + DM7276 132 cells — **AC-IR measurement (1 kHz) and High-accuracy OCV measurement, Temperature Compensation Function**

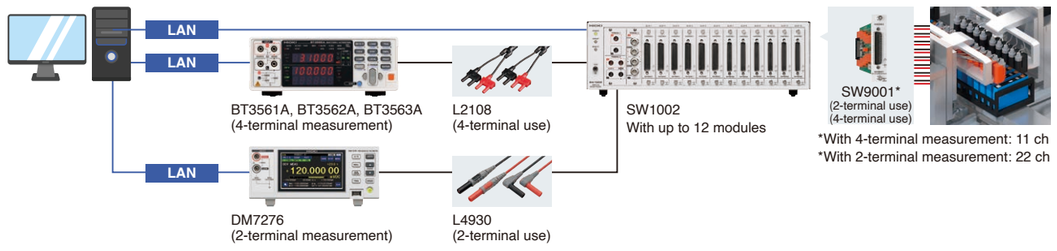

*With 4-terminal measurement: 11 ch
*With 2-terminal measurement: 22 ch

BT4560-50 + DM7276 72cells — **AC-IR measurement and High-accuracy OCV measurement, Temperature Compensation Function**

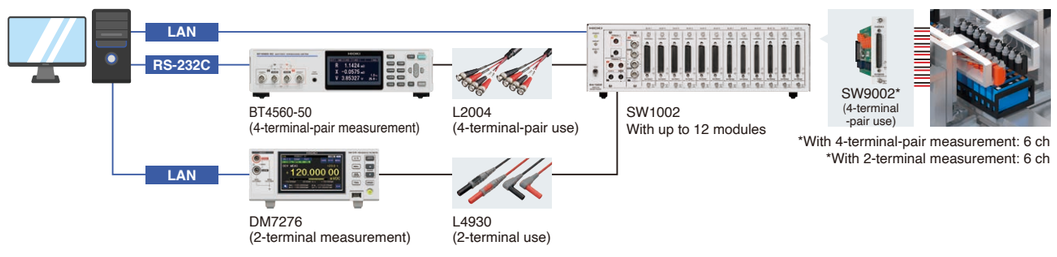

*With 4-terminal-pair measurement: 6 ch
*With 2-terminal measurement: 6 ch

Configuration Example of Multi-channel Battery Testing

Instrument	Number of instruments in use	AC-IR measurement 1 kHz	AC-IR measurement frequency sweep	OCV measurement	High-accuracy OCV measurement Temperature Compensation Function	Connection cable	Switch mainframe	Module	Maximum number of channels
BT3561A BT3562A BT3563A	1	YES	N/A	YES	N/A	L2108	SW1002	SW9001	132 ch
BT4560-50	1	YES	YES	YES	N/A	L2004	SW1002	SW9002	72 ch
DM7276	1	N/A	N/A	N/A	YES	L4930	SW1002	SW9001	264 ch
BT3561A BT3562A BT3563A	2 (switched)	YES	N/A	YES	N/A	L2108	SW1002 Switching instrument	SW9001	132 ch
DM7276		N/A	N/A	N/A	YES	L4930			
BT4560-50	2 (switched)	YES	YES	YES	N/A	L2004	SW1002 Switching instrument	SW9002	72 ch
DM7276		N/A	N/A	N/A	YES	L4930			


BT3561A
BT3562A
BT3563A
(4-terminal use)

L2108
(4-terminal use)


BT4560-50
(4-terminal-pair use)


L2004
(4-terminal-pair use)


DM7276
(2-terminal use)


L4930
(2-terminal use)


SW1002


SW1001



SW9001


SW9002

SW1002: accomodates up to 12 SW9001 or SW9002 modules
SW1001: accomodates up to 3 SW9001 or SW9002 modules
SW9001 (2-terminal use, 4-terminal use), SW9002 (4-terminal-pair use)

Recording results with a dedicated PC application*

3561, 3561-01, BT3561A, BT3562A, BT3563A, BT3562-01, BT3563-01, BT4560-50, DM7276


Logging function
(Interval setting: 1 second to 60 minutes)


Multichannel Nyquist or Cole-Cole plot

Logging function
Measure and log up to 264 channels.

OCV measurement function
Measure OCVs, and additionally record the initial voltages and change rates as well.


Multichannel Nyquist or Cole-Cole plot
Measure impedance while varying the frequency across up to 72 channels and display the results as a Nyquist or Cole-Cole plot.

*PC application for SW1001/SW1002.

Cycle time for measurement completion

3561, 3561-01, BT3561A, BT3562A, BT3563A, BT3562-01, BT3563-01, BT4560-50, DM7276

Basic connection example

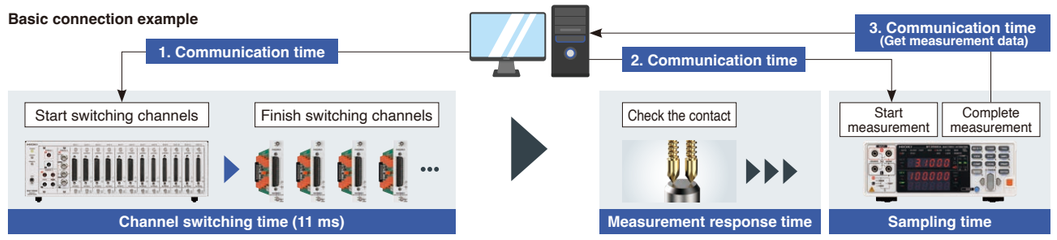


Cycle time calculation: Total time = (Communication time + Channel switching time + Measurement response time + Sampling time) × Number of channels

Instrument	Module	Number of channels	Function	Measurement speed	Measurement response time	Total time	(All channels)	Conditions
BT3562A	SW9001	11	ΩV	EX. FAST	10 ms	0.45 s	Approx. 41 ms/ch	Communication with BT3562A via RS-232C (38400 bps)
		11		MEDIUM	10 ms	1.1 s	Approx. 100 ms/ch	
BT4560-50	SW9002	6	RX	FAST	0 ms	1.0 s	Approx. 167 ms/ch	Communication with BT4560-50 via USB (9600 bps) Measurement frequency: 1 kHz
		6		MEDIUM	0 ms	1.2 s	Approx. 200 ms/ch	
DM7276	SW9001	22	V	0.02 PLC*	0 ms	0.45 s	Approx. 20 ms/ch	Communication with DM7276 via USB Contact check: Off
		22		FAST	0 ms	0.85 s	Approx. 39 ms/ch	
		22		MEDIUM	0 ms	4.9 s	Approx. 223 ms/ch	


*Power Line Cycle 20 ms at 50 Hz, 16.7 ms at 60 Hz

Diagnosing degradation in batteries

BT3554-50

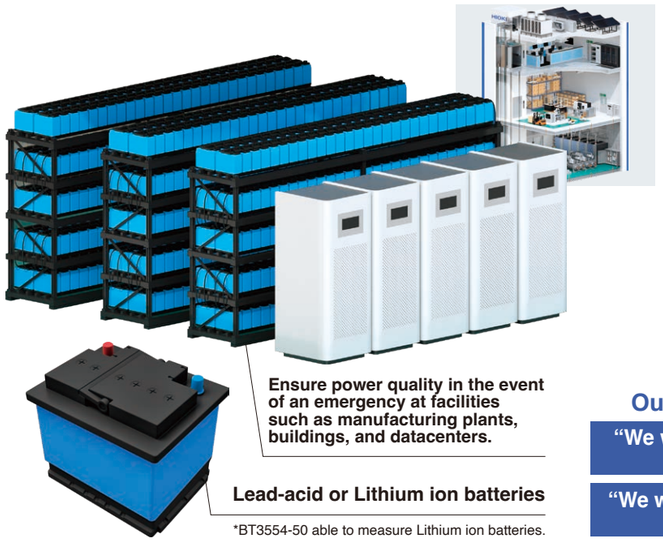

*BT3554-50 able to measure Lithium ion batteries.

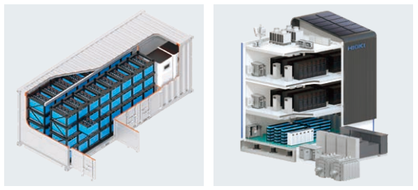

Accurately diagnosing battery degradation in an operating UPS

Measuring the battery's internal resistance and voltage to determine whether it has degraded

Our Battery testers meet these needs...

"We want to detect battery degradation in an operating UPS."

"We want to complete an intensive inspection workload efficiently."

Completing an intensive inspection workload efficiently

BT3554-50


You can efficiently inspect an enormous number of batteries, for example those found in UPS systems, with our free app "Gennect Cross"

GENNECT Cross

Register site information in advance



Registration of profile information
- Location information: Office Building East Wing
- Device information: UPS for server
- Battery number: 1 to 500




Register profiles Load profiles

Up to 100 sets of profile information can be registered on the BT3554-50. Up to 500 data sets can be saved for each profile. (The BT3554-50 can save up to 6,000 data sets.)
Profile information can be registered on the BT3554-50 from either Gennect Cross or the desktop application Gennect ONE.



Send measurement data

[Next: battery No.1] Audio guidance indicates the next battery number to be measured.



[No.1: PASS] Audio guidance indicates measurement results.

Next: No.2 ····· "No.2 PASS"
Next: No.3 ····· "No.3 PASS"
Next: No.4 ····· "No.2 FAIL"

Measurement data is recorded along with previously registered profile information.

Profile information	
Profile number	1
Location information	Office Building East Wing
Device information	UPS for server
Battery number	1
Measurement data	
Memory number	A.001
Data and time	2021/4/20 13:00:00
Resistance value	x.xxx mΩ
Voltage value	xx.xx V
Temperature	xx.xx°C
Comparetor Threshold value	x mΩ / x mΩ / x V
Judgement result	PASS/WARNING/FAIL

The optional Wireless Adapter Z3210 is required in order to use the measurement and recording guidance function as well as other functions that communicate with smartphones or tablets.



Fit in tight spaces for speedy inspection

BT3554-50



Easy data saving. Simply touch the leads to the terminals.

The instrument's auto-memory function, which automatically stores measured values resulting from the auto-hold function in its internal memory, further streamlines work tasks.



L-shaped lead for measurement in confined locations.

The L2020 pin-type lead with an L-shaped tip is available as an accessory, making it easy to measure in confined locations. The pin-type lead 9465-10 with a straight tip is also available.




Wall and shoulder straps let you work with both hands.

Use the included shoulder strap to carry the instrument with you while making measurements. Or use the Magnetic Strap Z5020 (sold separately) to hang the instrument on the wall while you work.


Accurate measurement, even in a noisy environment

BT3554-50

Inverters in operating UPS systems generate harmonic noise, and instruments usually have difficulties to make accurate measurements when affected by such noise. The BT3554-5x is able to measure accurately even when exposed to inverter noise thanks to its noise reduction technology.

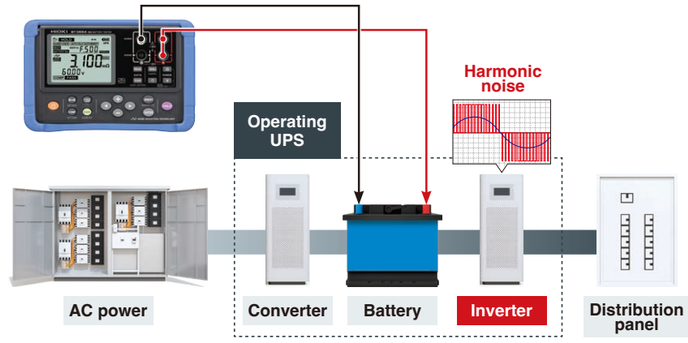

Results from measuring the same battery in an operating UPS



Products Lineup



Model No. (Order code)	BT3554-92	BT3554-91	BT3554-52	BT3554-51	BT3554-50
Included accessories	Pin Type Lead L2020	Pin Type Lead 9465-10	Pin Type Lead L2020	Pin Type Lead 9465-10	N/A
	Wireless Adapter Z3210	Wireless Adapter Z3210	N/A	N/A	N/A
	Carrying Case C1014	Protector Z5041	Fuse Set Z5050	0 Adj Board	Neck strap
	USB cable	Gennect One Software CD	AA alkaline battery (LR6) × 8 User Manual		

Analyzing batteries

BT4560-50, BT4560-60





Assessing battery characteristics with Nyquist or Cole-Cole plot

You can assess battery characteristics by analyzing Nyquist or Cole-Cole plots based on impedance values generated by frequency sweep measurement.

Our Battery testers meet these needs...

"We want to measure impedance using the frequency sweep method."


"We want to assess battery characteristics with Nyquist or Cole-Cole plots."

Assessing battery characteristics

BT4560-50, BT4560-60


The chemical reactions in batteries involve several processes and each process has its own reaction speed. Therefore by sweeping the frequency and measuring the impedance the characteristics of each part can be evaluated separately.

Drawing a Nyquist or Cole-Cole plot with an impedance spectrum

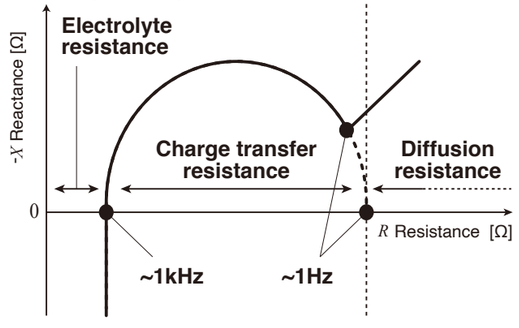


less than 1 Hz	Low frequencies	Li-ion diffusion in the electrode (Diffusion resistance)
1 Hz to several hundred Hz	Intermediate frequencies	Li-ion transfer (Charge transfer resistance)
About 1 kHz	High frequencies	Li-ion transport in electrolyte (electrolyte resistance)

Diagram of a discharging battery




Simple equivalent circuit



Check the battery deterioration level

The resistance of a degraded battery is significantly larger than a pristine one. The degradation of charge transfer resistance is particularly noticeable in the Nyquist or Cole-Cole plot for applications that involve charging/discharging at low temperatures or deep charging/discharging (SOC between 0% and 100%).


Compare measured data for pristine and deteriorated batteries

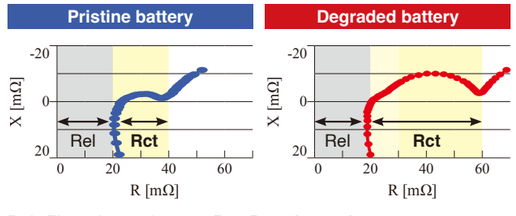

Rel: Electrolyte resistance **Rct: Reaction resistance**

Idenfity battery deterioration factors

An equivalent circuit analysis software (e.g. ZView®*) can provide the parameters of each element of an equivalent circuit model by means of curve fitting. It allows you to see which part of the battery has shown characteristic changes. This serves to identify battery deterioration factors.



An example of an equivalent circuit

R1	Resistance in the electrolyte and tab welding
R2//C2	Reaction at anode
R3//C3	Reaction at cathode
L	Lead and other inductance

*ZView® is a product of Scribner Associates, Inc.
For more information about ZView®, please contact Scribner Associates, Inc.

Measurement frequencies and low-impedance measurement

BT4560-50, BT4560-60

The BT4560 series offers measurements in the optimal frequency range for liquid Li-ion batteries. Its unparalleled capability to measure extremely low impedance is ideal for large cells such as ones for xEVs or ESSs. As a complementary instrument, the IM3590 offers impedance measurements across a wider frequency range. It is very capable at measuring larger impedance.

Model and specification	Measurement frequency	Measurable battery voltage	Impedance measurement ranges
BT4560-50	0.01 Hz to 1050 Hz	5 V	3 mΩ, 10 mΩ, 100 mΩ
BT4560-60	0.01 Hz to 10 kHz	5 V	3 mΩ, 10 mΩ, 100 mΩ
IM3590	1 mHz to 200 kHz	5 V	100 mΩ to 100 MΩ



BT4560-50, BT4560-60
BATTERY IMPEDANCE METER



IM3590
CHEMICAL IMPEDANCE ANALYZER

Probes for measurement are not included. Please purchase a probe according to your measurement application.
(Learn more P.22 to P23)


BT4560 series Accuracy specifications

Impedance measurement accuracy

3 mΩ range (0.1 Hz to 100 Hz)
10 mΩ range, 100 mΩ range

R accuracy $= \pm(0.004\,|R| + 0.0017\,|X|)$ [mΩ] $\pm\alpha$
X accuracy $= \pm(0.004\,|X| + 0.0017\,|R|)$ [mΩ] $\pm\alpha$
Z accuracy $= \pm 0.4\%$ rdg $\pm\alpha\,(|\sin\theta| + |\cos\theta|)$
θ accuracy $= \pm 0.1° \pm 57.3 \frac{\alpha}{Z}\,(|\sin\theta| + |\cos\theta|)$

Accuracy graph




Impedance accuracy excluding α
(0.004 | R | + 0.0017 | X |, 0.004 | X | + 0.0017 | R |)

3 mΩ range (110 Hz to 1050 Hz)

R accuracy $= \pm(0.004\,|R| + 0.0052\,|X|)$ [mΩ] $\pm\alpha$
X accuracy $= \pm(0.004\,|X| + 0.0052\,|R|)$ [mΩ] $\pm\alpha$
Z accuracy $= \pm 0.4\%$ rdg $\pm\alpha\,(|\sin\theta| + |\cos\theta|)$
θ accuracy $= \pm 0.3° \pm 57.3 \frac{\alpha}{Z}\,(|\sin\theta| + |\cos\theta|)$

Accuracy graph



Impedance accuracy excluding α
(0.004 | R | + 0.0052 | X |, 0.004 | X | + 0.0052 | R |)

The units of R and X are [mΩ], α is as shown below

	Range	3 mΩ	10 mΩ	100 mΩ
α	FAST	25 dgt	60 dgt	60 dgt
	MED	15 dgt	30 dgt	30 dgt
	SLOW	8 dgt	15 dgt	15 dgt
Temperature coefficient		R: ± R accuracy × 0.1 / °C X: ± X accuracy × 0.1 / °C Z: ± Z accuracy × 0.1 / °C θ: ± θ accuracy × 0.1 / °C (Applied in the ranges of 0°C to 18°C and 28°C to 40 °C)		

The number of waveforms

	FAST	MED	SLOW
0.10 Hz to 66 Hz	1 wave	2 waves	8 waves
67 Hz to 250 Hz	2 waves	8 waves	32 waves
260 Hz to 1050 Hz	8 waves	32 waves	128 waves

*For the frequency range of 1.06 kHz to 10 kHz, accuracy is not guaranteed for measurements below 1 mΩ on the 3 mΩ and 10 mΩ ranges, and below 10 mΩ on the 100 mΩ range. Please refer to the instruction manual for details.

Voltage measurement accuracy

(when self-calibration is performed)

V	Display range	−5.10000 V to 5.10000 V
	Resolution	10 µV
Voltage accuracy	FAST/MED/SLOW	±0.0035% rdg ±5 dgt
Temperature coefficient	±0.0005% rdg ±1 dgt / °C (applied in the ranges of 0°C to 18°C and 28°C to 40°C)	

Temperature measurement accuracy

(BT4560 series + Z2005 temperature sensor)

Accuracy	±0.5°C (measurement temperature: 10.0°C to 40.0°C) ±1.0°C (measurement temperature: -10.0°C to 9.9°C, 40.1°C to 60.0°C)
Temperature coefficient	±0.01°C/°C (applied in the ranges of 0°C to 18°C and 28°C to 40°C)

Measuring the internal resistance of fuel cells

BT3563-01 (Special edition specifications), BT3564 (Special edition specifications)

The BT3563-01/BT3564 with special edition specifications features increased noise resistance to reduce the effects of noise from load devices. The instrument can ascertain fuel cell state based on impedance measured at a frequency of 1 kHz.

Assess fuel cell characteristics in real time while under load



Simulated FC load

Measurement of fuel cell's internal resistance

BT3563-01 or BT3564 (special edition specifications)



Multi-plot

Web application "Multi-plot"


Converting measurement data into a Nyquist or Cole-Cole plot

web browser link
https://www.circuitfitting.net/multiplot

"Multi-plot", a free web application, enables you to draw a Nyquist or Cole-Cole plot simply by loading a file in your web browser.
Supported files: **CSV file, ZView®* (.z) file**









Draw Nyquist or Cole-Cole plots freely, **without any limits** on the number of points that can be rendered from files or the number of graphs that can be superposed. The horizontal and vertical axes are automatically scaled based on the graphs being rendered. You can even superpose, compare, and analyze files acquired using different instruments.

Loading files and superposing Nyquist or Cole-Cole plots


(You can even superpose files acquired using different instruments.)

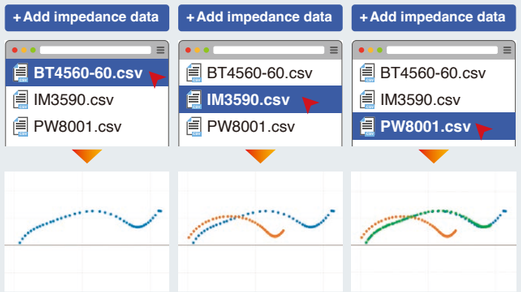

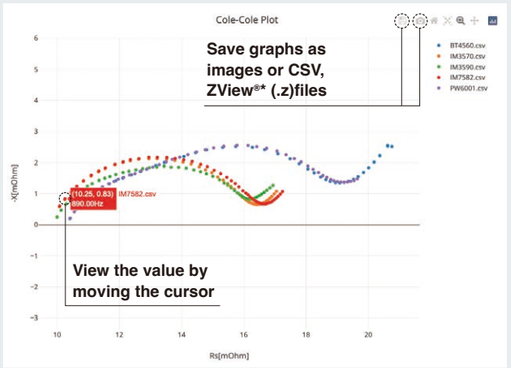


*ZView® is a product of Scribner Associates, Inc. For more information about ZView®, please contact Scribner Associates, Inc.

Display only the graphs you wish to compare

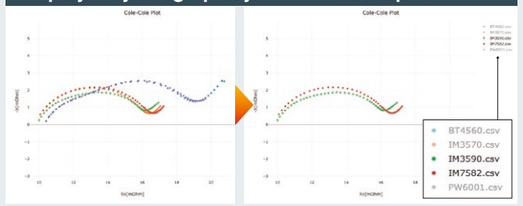


Enlarge and display a specific area

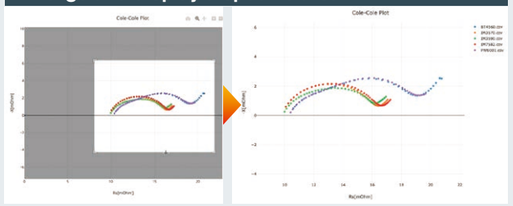


Analysis function

Conduct an equivalent circuit analysis



Model :
R0-(L3//R3)-(CPE1//R1)-(CPE2//R2)-W1




$$Z_{CPE} = \frac{1}{(j2\pi f)^{\gamma} Q}$$

$$Z_W = \frac{R}{\sqrt{j2\pi fT}} \coth\sqrt{j2\pi fT}$$

rmse_score[Ohm] : 6.93e-5
R0[Ohm] : 9.17e-3
L3[H] : 1.07e-7
R3[Ohm] : 1.00e+1
CPE1_Q[Ohm^-1 sec^p] : 3.25e+0
CPE1_p[] : 6.01e-1
R1[Ohm] : 7.57e-3
CPE2_Q[Ohm^-1 sec^p] : 3.35e+2
CPE2_p[] : 1.00e+0
R2[Ohm] : 3.13e-3
W1_R[Ohm] : 1.98e-5
W1_T[sec] : 5.00e+0


Analyze the data with predefined models. Display analysis results automatically simply by loading a file.

Draw Bode plots to assess phase characteristics



Bode plots are also drawn, enabling to assess phase characteristics.

Analyze characteristics with 3D view



Draw 3D Nyquist or Cole-Cole plots or 3D Bode plots, using the time or date as a third axis. Rotate 3D graphs in any direction as desired and save images.

Internal resistance and open-circuit voltage for various battery types and compatible instruments




Testing high-voltage battery packs safely



BT3564 Max. input voltage 1000 V


The BT3564 can safely test high-voltage battery packs such as infrastructure storage batteries.

Feature 1



The instrument reduces the likelihood of spark discharges, which are prone to occur during high-voltage measurement, by limiting the amount of current that flows the instant contact is established with a battery pack.











Feature 2









The optional L2110 probe, which is designed specifically for use with the BT3564, can make measurements safely thanks to its 1000 V withstand voltage. Additionally, the probe is designed to accommodate battery packs whose terminals are placed far apart.

Measurement lead and measurement probe compatibility chart

YES	:	Recommended measurement lead or probe.
N/A	:	Not compatible due to inability to connect.
*1	:	Although it can be connected, it may not meet the product specifications, such as accuracy guarantee.
*2	:	May be susceptible to external noise. Caution is particularly required when using a measurement current of 10 mA or less.
*3	:	BNC – banana plug adapter (custom-made) Connect the black banana plugs to the HCUR and HPOT terminals to reduce the influence of external noise.
*4	:	Temperature sensor cannot be connected.
*5	:	It does not use a 4-terminal-pair design, so wiring placement will have a greater effect on measured values.
*6	:	Some measurement ranges cannot be used due to rated current limitations.

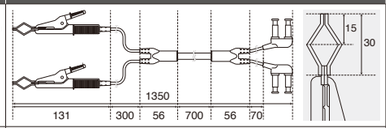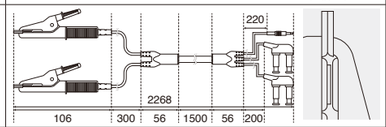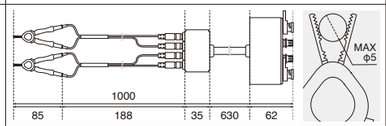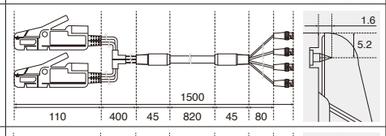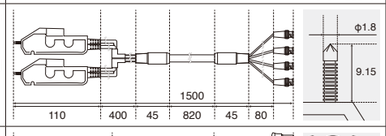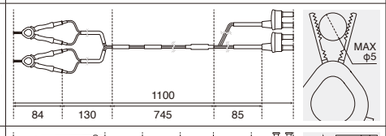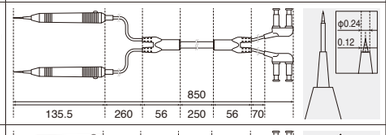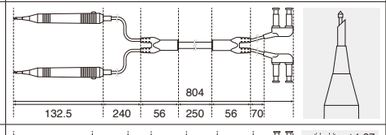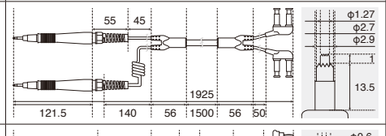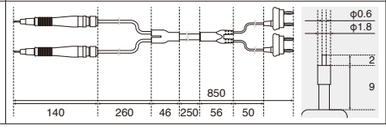Appearance		Dimensions (mm) *1	Model withstand voltage	3561 3561-01	BT3561A BT3562A BT3563A	BT3562-01 BT3563-01 BT3564	BT4560-50 BT4560-60	BT3554-50
Clips			**9467** **60 V DC** (Hi-to-Lo) **60 V DC** (voltage to earth)	YES	YES	YES	*1 *2 *3 *5	YES
Clips			**9460** **60 V DC** (Hi-to-Lo) **60 V DC** (voltage to earth)	*1 *4	*1 *4	*1 *4	*1 *2 *3 *5	YES
Clips			**L2000** **±42 V peak AC+DC** (Hi-to-Lo) **±42 V peak AC+DC** (voltage to earth)	N/A	N/A	N/A	*1 *6	N/A
Clips			**L2002** **±30 V peak AC+DC** (Hi-to-Lo) **±30 V peak AC+DC** (voltage to earth)	N/A	N/A	N/A	YES	N/A
Pins			**L2003** **±30 V peak AC+DC** (Hi-to-Lo) **±30 V peak AC+DC** (voltage to earth)	N/A	N/A	N/A	YES	N/A
Clips			**L2107** **60 V DC** (Hi-to-Lo) **60 V DC** (voltage to earth)	YES	YES	YES	*1 *2 *3 *5	*1
Pins			**9455** **60 V DC** (Hi-to-Lo) **60 V DC** (voltage to earth)	YES	*1	*1	*1 *2 *3 *5 *6	*1
Pins			**9461** **60 V DC** (Hi-to-Lo) **60 V DC** (voltage to earth)	*1	*1	*1	*1 *2 *3 *5	*1
Pins			**9465-10** **60 V DC** (Hi-to-Lo) **60 V DC** (voltage to earth)	*1	*1	*1	*1 *2 *3 *5	YES
Pins			**9770** **60 V DC** (Hi-to-Lo) **60 V DC** (voltage to earth)	YES	YES	YES	*1 *2 *3 *5	*1

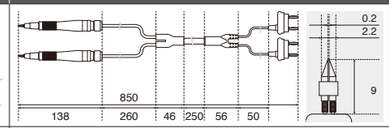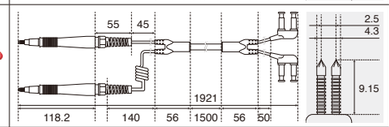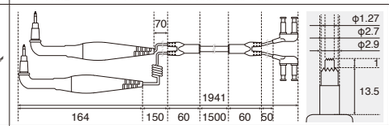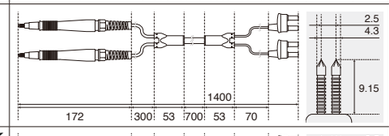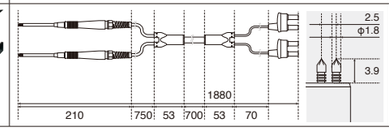Appearance		Dimensions (mm) *1	Model withstand voltage	3561 3561-01	BT3561A BT3562A BT3563A	BT3562-01 BT3563-01 BT3564	BT4560-50 BT4560-60	BT3554-50
Pins			**9771** **60 V DC** (Hi-to-Lo) **60 V DC** (voltage to earth)	YES	YES	YES	*1 *2 *3 *5	*1
Pins			**9772** **60 V DC** (Hi-to-Lo) **60 V DC** (voltage to earth)	*1	*1	*1	*1 *2 *3 *5	YES
Pins			**L2020** **60 V DC** (Hi-to-Lo) **60 V DC** (voltage to earth)	*1	*1	*1	*1 *2 *3 *5	YES
Pins			**L2100** **1000 V DC** (Hi-to-Lo) **1000 V DC** (voltage to earth)	*1	YES	YES	*1 *2 *3 *5	*2
Pins			**L2110** **1000 V DC** (Hi-to-Lo) **1000 V DC** (voltage to earth)	*1	YES	YES	N/A	N/A

Batteries are a driving force for a variety of innovations as we move towards a sustainable society

Batteries are used in an array of applications, and their performance can be a driving force for a variety of innovations and new lifestyles. The development and production of high-quality batteries will play an essential role as we work to realize a sustainable society. At the same time therefore, growing improvements in battery life cycle assessment have become a major priority. the focus on reducing CO2 emissions throughout the entire life cycle by means of improvements in manufacturing processes and reuse of high-quality batteries is increasing. HIOKI battery testers are helping resolve these issues through an electrical measurement approach.

Stacked battery voltage, Internal resistance of battery cells



FCV
800 V to 1000 V, 0.2 mΩ



EV truck
800 V to 1000 V, 0.2 mΩ



EV bus
800 V to 1000 V, 0.2 mΩ



EV car
200 V to 400 V, 0.3 mΩ to 1 mΩ




Storage batteries for home use
200 V to 400 V, 0.3 mΩ to 1 mΩ



Automatic transfer system
72 V to 96 V, 1 mΩ



Forklift
72 V to 96 V, 1 mΩ



5G base station
48 V, < 1 mΩ



Electric motorcycle
48 V to 96 V, 10 mΩ



Electric tricycle
48 V to 96 V, < 10 mΩ



Large drones
24 V to 48 V, 10 mΩ



Automatic transfer robot
24 V to 48 V, 10 mΩ



Electric bike
24 V, 10 mΩ



Power tool
12 V to 24 V, 10 mΩ



Cleaner
12 V to 24 V, < 10 mΩ



Laptop
7 V to 12 V, 100 mΩ




Tablet
3.7 V, 10 mΩ



Smart phone
3.7 V, 100 mΩ



Smart watch
3.7 V, 300 mΩ



Coin cell, All solid-state cell
3.7 V, < 100 Ω

HIOKI

HIOKI E. E. CORPORATION

DISTRIBUTED BY

HEADQUARTERS
81 Koizumi,
Ueda, Nagano 386-1192 Japan
https://www.hioki.com/

Scan for all regional contact information

All information correct as of Oct. 27, 2026. Contents are subject to change without notice.
Unauthorized reproduction or duplication of this publication, in whole or in part, is strictly prohibited without prior written permission from Hioki.
Company names and product names appearing in this document are trademarks or registered trademarks of various companies.

© HIOKI E.E. CORPORATION

series_Battery_tester_E12-6XE