

Recorders Data Loggers

Waveform recording
Data logging



Power Meters Power Analyzers

Power quality analysis
Power measurement




Current Probes Clamp Sensors

Non-contact sensing



Impedance Analyzers Battery Testers

Electronic components measurement
Renewable energy measurement

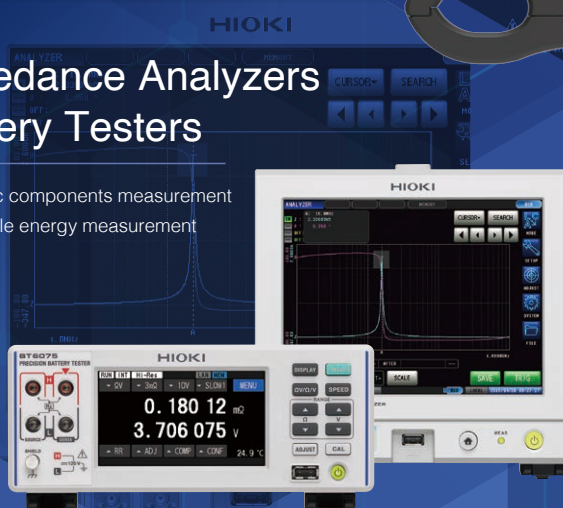

Our Commitment to Environmental Protection: From CD/DVD to Download

Hioki is gradually transitioning from including CDs and DVDs with its products to providing downloads as a way to reduce the environmental footprint of its operations.


During the transition period, you may still find references to included media in user manuals, catalogs, and other documents. Thank you for your understanding as we make this change.

<https://cloud.gennect.net/dl>

Please access the provided URL or QR code.



① Search for your product

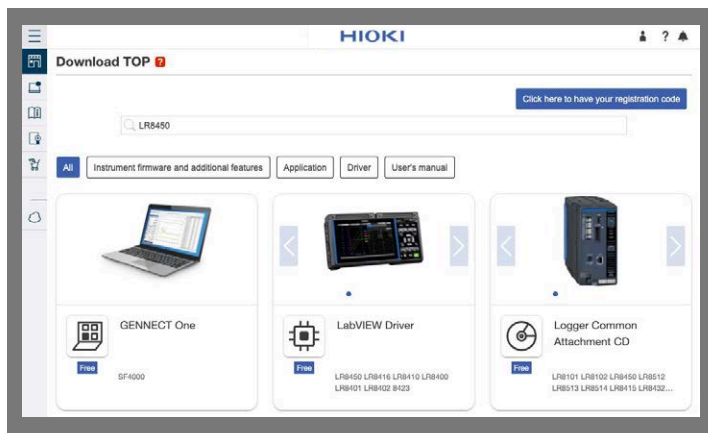

Enter the product's model in the search box.



Click the item with the CD (DVD) icon to proceed to screen (2).

② Download the software



Click the download button to begin the download.

③ Extract the zip file → Double-click the ISO file



Extract



Double-click



Extract the downloaded zip file. The extracted file will be an ISO file, which is a CD or DVD image file. You can mount the image by double-clicking the ISO file.

Contents

Featured New Products P.2 Hioki Philosophy P.3 About the Catalog P.4 Category Index P.6	Category Index
Data Acquisition, Memory Recorders, Data Loggers, Multichannel Loggers P.16	Data Recorders Loggers
Impedance Analyzers, LCR/Resistance Meters, Battery Testers, Super Megohm Meters, DMM, Signal Generators P.31	LCR/Resistance Meters
Motor Insulation Testers, Leakage Current Testers, Insulation Withstanding Testers P.59	Safety Testing
Power Meters, Power Analyzers, Power Quality Analyzers, Power Loggers P.65	Power Meters
Current Probes, Current Sensors P.76	Current Sensors
Digital Multimeters (DMMs), LAN Cable Testers P.87	DMM/Testers
Environmental Measuring Instruments, Insulation Testers, Clamp Meters, Ground Resistance Testers, Voltage Detectors, Phase Rotation Meters..... P.92	Field Measuring
GENNECT Software Series, ALDAS Series P.106	Software Solutions
ATE (Automatic Test Equipment) Bare Board & Package Testing, Populated Board Testing P.111	Bare Board & Package Testing
■ Model No. (Order Code) IndexP.120 ■ Product WarrantiesP.126 ■ After-sales ServiceP.126	Model No. Index / Other



Featured New Products

Optimizing energy consumption and transitioning to sustainable energy are major societal challenges. Hioki contributes to solving these issues by developing and delivering cutting-edge measuring instruments worldwide.

GENNECT Space

A next-generation data hub



See P. 106

Power Analyzer PW4001

Lab-grade precision, field-ready



See P. 66

Memory HiLogger LR8450

Thermistor modules now available



See P. 26

ALDAS series

ALDAS-α, ALDAS-Mini, ALDAS-E



See P. 109

Resistance Meter RM3546

Ideal for weld resistance inspection



See P. 40

Memory HiCorder MR8848

Sturdy high-speed DAQ system



See P. 17

Discover the latest innovations on our website.



<https://www.hioki.com/>



Hioki Philosophy

-Transforming People Value into Corporate Value -

We believe that for any company to grow, two conditions must be met: each and every employee must realize his or her full potential, and the company must act as a good corporate citizen.

At Hioki, the corporate philosophy of **Respect for Humanity** and **Contribution to Society** informs the personal value system of all employees, anchors the company's ultimate mission, and defines its social responsibility. To this end, we are dedicated to becoming a high value-added company unique in both culture and accomplishment so that we might both earn the trust of all stakeholders and provide customers with products of exceptional quality and services of the highest caliber.




Respect for Humanity

Hioki will build a free and open environment where employees can maximize their potential and abilities. Our aim is to foster the creativity and individuality of all persons and help them become the best version of themselves. To ensure that personal development is the driving force behind Hioki's evolution and achieve lasting growth and development, management demonstrates "Respect for Humanity" to achieve a high degree of harmony between individual potential and organizational goals.

Contribution to Society

As a manufacturer, Hioki contributes to the security and advancement of society and the happiness of people by providing high-quality products and unparalleled services. As a member of the communities we serve, we work actively to support the development of local youth and protect the local environment to make an educational, cultural, and environmental contribution.

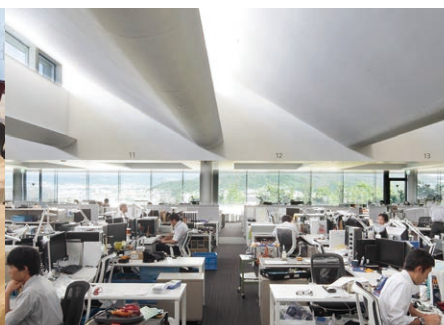

About the Catalog

● This catalog is organized by product group. Search for products using the field-based (category-based) index on the first page. Products have been grouped using general names by principal application.

● A list of all available products can be found at the end of the catalog. The list is organized by product model and encompasses all products, including options.

● Options. Individual product pages include dedicated options. Options that are used by entire product groups are introduced together under the corresponding product group. For option specifications and other detailed information, please see the catalog for the product in question.

● Dimensions and mass. Exterior dimensions exclude protrusions, and are given in order of width(W), height(H), and depth(D), in mm units. Indicated weight represents an approximation of the mass of the main unit only, not including case, accessories, etc.

● Battery labeling. Battery labeling complies with IEC international standards and includes R6P (AA), R03 (AAA), 6F22 (9 V), LR6 (AA alkaline), LR03 (AAA alkaline), and CR2032 (button-cell lithium).

About the Marks



Products that were released within 1 year from the publication date of this catalog



Products labeled as having a three-year warranty are covered for a period of three years from the date of purchase (or if the date of purchase is unknown, a period of three years from the date of manufacture). Accuracy is guaranteed for the duration of the separately indicated guaranteed accuracy period.



Use only when the measurement object is an insulated conductor.



True RMS measuring capability for accurate measurement of even distorted waveforms.



*Android, Google Play and the Google Play logo are trademarks of Google Inc.

*iOS is a registered trademark of Cisco Technology, Inc. and/or its affiliates in the United States and certain other countries.

*iPhone, iPad, iPad mini, iPad Pro and iPod touch are trademarks of Apple Inc.

*Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.

*Microsoft, Windows, Windows Vista, Excel, and Teams are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

*Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license.

*For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website.



Rectification Methods: True RMS and Mean

There are two methods for converting current into RMS values: the true RMS method (true RMS value indication) and the mean method (mean rectification RMS value indication). Although both methods yield the same value for undistorted sine waves, distortion of the waveform causes the values to diverge.

True RMS RMS value method (true RMS value indication)


The waveform including harmonic components is calculated according to an RMS calculation formula and displayed.

MEAN Mean method (mean rectification RMS value indication)


The input waveform is treated as an undistorted sine wave (single frequency only). The AC signal mean is calculated, converted to an RMS value, and displayed. The measurement error increases when the waveform is distorted.

*Widespread use of equipment such as inverter devices and switching power supplies has made it more common for current waveforms being measured to be distorted. It is recommended to use a measuring instrument that uses the true RMS method to ensure accurate measurement.


■ Comparing distorted current values from an inverter, etc.



Current waveform from an inverter (primary side)



Mean-type clamp ammeter



True RMS clamp ammeter

Accuracy and Tolerances

● f.s. (maximum display, or length of scale, ...full-scale)

Signifies the maximum display (scale) value or the length of the scale (in cases where the scale consists of unequal increments or where the maximum value cannot be defined). In general, this is the range value (the value written on the range selector, or equivalent) currently in use. However, be aware that in cases where the maximum display value is 2000 V but the range value is only 600 V, the maximum display value (scale value) is still used as the f.s. value.



300 V range

● rdg (displayed or indicated value, ... reading value)


This signifies the value actually being measured, i.e., the value that is currently indicated or displayed by the measuring instrument.



Measuring 100 V using the 300 V range

● dgt (digital resolution, ... digit)

Signifies the smallest display unit on a digital measuring instrument, i.e., the value displayed when the last digit on the digital display is "1". Essentially, this indicates an error of 1 digit (based on decimal processing in analog-to-digital conversion), but in actuality this is the digit error combined with the f.s. error converted to a fraction of a digit unit. The accuracy associated with a particular measured value as shown in the product specifications is derived from these values.



In the 300 V range, the 0.1 V digit is the smallest digit

Example accuracy calculations

[Example accuracy calculation 1] (when the accuracy notation combines rdg and dgt)

Accuracy specification: $\pm 1.0\% \text{ rdg} \pm 3 \text{ dgt}$
 Measurement range: 300.0 V
 Measured value: 100.0 V

Since the value being measured is 100.0 V:

(A) Reading error ($\pm\% \text{ rdg}$): $\pm 1.0\%$ of 100.0 V = ± 1.0 V

(B) Digit error (dgt): Since the maximum resolution is 0.1 V, $\pm 3 \text{ dgt} = \pm 0.3$ V

(C) Total error (A+B): ± 1.3 V

Based on the total error (C), the error boundary values for a measured value of 100.0 V would be **98.7 V to 101.3 V**.

[Example accuracy calculation 2] (when the accuracy notation combines rdg and f.s.)

Accuracy specification: $\pm 0.2\% \text{ rdg} \pm 0.1\% \text{ f.s.}$
 Measurement range: 300.00 V
 Measured value: 100.00 V

Since the value being measured is 100.00 V:

(A) Reading error ($\pm\% \text{ rdg}$): $\pm 0.2\%$ of 100.00 V = ± 0.20 V

(B) Full-scale error ($\pm\% \text{ f.s.}$): $\pm 0.1\%$ of 300 V = ± 0.30 V

(C) Total error (A+B): ± 0.50 V

Based on the total error (C), the error boundary values for a measured value of 100.00 V would be **99.50 V to 100.50 V**.

This Electrical Measuring Instruments General Catalog provides a product outline. For more detailed information, please refer to individual product catalogs and series catalogs, which group together similar products.

Ensuring Safe Operation of the Product

To help you use measuring instruments safely, the following information is provided in each product's Instruction Manual under "Specifications":


- Rated voltage to ground: The measurement point's voltage level relative to ground, Measurement Category, Anticipated transient overvoltage, etc.
- Location for use: Pollution Degree 2, indoor, altitude no more than 2000 m, etc.

Measurement Category

Under safety standards (EN61010 Series, JIS C 1010 Series), measurement is classified into Categories II to IV according to the measurement point's rated voltage to ground, current capacity (size of current that flows in a short-circuit fault), etc., and the transient overvoltage that occurs at the measurement point.

- **Category II** Measurement at a point from the power plug to the equipment's power circuits, where equipment is directly connected to an outlet.
- **Category III** Measurement at a point on the power distribution cabling or power supply circuits, or at a point from the distribution panel to a distribution terminal behind an outlet, where equipment (for example a fixed installation) takes electricity directly from a distribution panel.
- **Category IV** Measurement at a point on a service drop to a building, or on the line from the drop connection to the power meter or distribution panel.


The measurement instrument's Category is marked as "CAT II", "CAT III" or "CAT IV" near the measurement terminals.

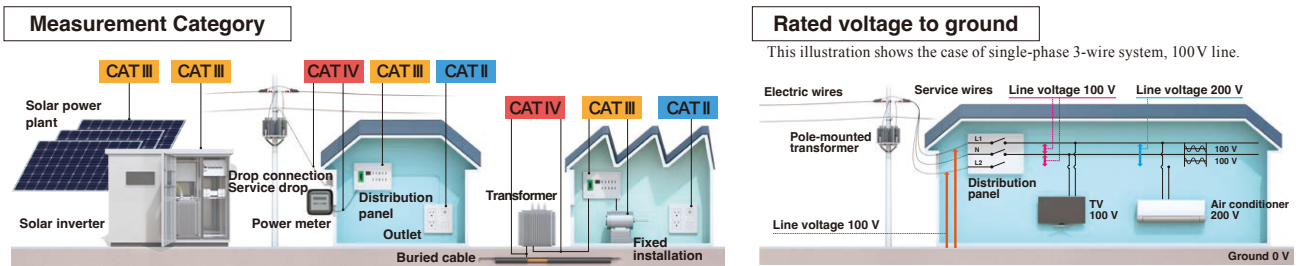

How to read a category indication



Three-phase three-wire (3P3W) system, 400 V line



* Voltage indications
Black: voltage to ground
 (including line-to-line voltage)
Red: line-to-line voltage

With the 400 V line in the figure, the line-to-line voltage is 415 V, whereas the voltage to ground is no more than 240 V (300 V).



Never measure a measurement point with a higher category number than the category indicated on the measuring instrument. Doing so could lead to a serious accident such as electric shock.

Anticipated Transient Overvoltage

Power lines in factories and similar facilities will at times include transient overvoltage (impulse voltage) that is around 10 times the power source voltage. The transient overvoltage of the measurement points must be predicted in advance, and the instrument will need a safety design that will enable it to withstand such overvoltage.

Safety standards stipulate values such as the following for transient overvoltage, according to the voltage to ground and the measurement category.

Assuming 600 V for the measurement point's voltage to ground, a Category IV location could potentially include transient overvoltage of 8000 V. Hence, CAT IV measurement instruments are designed to withstand transient overvoltage of 8000 V. CAT III measurement instruments can only withstand up to 6000 V, so if 8000 V transient overvoltage enters, it will cause insulation breakdown that could result in electric shock.

Rated voltage to ground [V]	Transient overvoltage [V]		
	CAT II	CAT III	CAT IV
300	2500	4000	6000
600	4000	6000	8000
1000	6000	8000	12000
1500	8000	10000	15000
2000	12000	15000	18000

Pollution Degrees

If contaminants adhere to the surfaces of a measuring instrument, its insulation performance will fall and it will pose a high risk of electric shock. Safety standards classify environments where measuring instruments are used into Pollution Degrees 1 to 4.

- **Pollution Degree 1**
Environment with no pollution, or with only dry contaminants present (non-conductive dirt, dust, etc.), which will not affect a measuring instrument's insulation performance.
- **Pollution Degree 2**
Environment with only dry contaminants present (non-conductive dirt, dust, etc.), but where condensation could form on a measuring instrument, in which case the contaminants could cause a temporary drop in its insulation performance.
- **Pollution Degree 3**
Environment with conductive contaminants present (water, soil, etc.), and which therefore could affect a measuring instrument's insulation performance, depending on how (much) contaminant adheres to it. Or, environment with high humidity, where even non-conductive contaminants could be a problem, since due to condensation a measuring instrument could have wet surfaces for relatively long periods.
- **Pollution Degree 4**
Environment that could cause a prolonged drop in a measuring instrument's insulation performance, due to conductive contaminants (water, soil and the like) adhering to its surfaces, or to being wetted by rain.

A "Pollution Degree 2" marking on a measurement instrument means that it can be used without detriment to safety in environments of Pollution Degree 1 or 2 described above, and a "Pollution Degree 3" marking means the measurement instrument can be used in environments of Pollution Degrees 1 to 3.

Altitude

As altitude (elevation) rises, the air pressure decreases and flashover (breakdown and discharge through the air) becomes more likely to occur.

Accordingly, safety standards stipulate safety design that assumes use locations of altitude no more than 2000 m for measuring instruments.

If measuring instruments are used in locations of altitude exceeding 2000 m, the spaces between their parts that are under hazardous voltage and their parts that humans touch should be made larger as a precaution.

Data Acquisition, Recorders, Data Loggers Index

Portable Recorders for Servicing and Maintenance

Simultaneously Capture Multiple Signals

Monitor Anomalies in the Power Line

Category Index

Sampling speed

200MS/s
(5ns)

20MS/s
(50ns)

10MS/s
(100ns)

1MS/s
(1μs)

100kS/s
(10μs)

10kS/s
(100μs)

1kS/s
(1ms)

100S/s
(10ms)

10S/s
(100ms)

1S/s
(1sec)

1ch

2ch

4ch

8ch

10ch

16ch

20ch

Number of channels



MEMORY HiCORDER MR6000 (16ch)

Instantaneous waveform/
Long term recording
..... p.16



MEMORY HiCORDER MR8848 (16ch)

Instantaneous waveform/
RMS value recording
..... p.17

MEMORY HiCORDER MR8870 (2ch)



Instantaneous waveform/
RMS value recording
..... p.19

MEMORY HiCORDER MR8880 (4ch)



Instantaneous waveform/
RMS value recording
..... p.19



MEMORY HiCORDER MR8875 (16ch)

Instantaneous waveform/
Temperature/Pulse measurement
..... p.18

Log Multiple Channels of Temperature, Voltage

MEMORY HILOGGER LR8450 (20ch)



Voltage/ Current/ Strain measurement
..... p.26

HEAT FLOW LOGGER LR8432 (10ch)



Heat flow/ Voltage/
Temperature/ Pulse measurement
..... p.28

MEMORY HILOGGER LR8431 (10ch)



Voltage/ Temperature/
Pulse measurement
..... p.28

WIRELESS MINI LOGGER LR8512- LR8515



Multi-signal recording
..... p.29-p.30

Non-contact CAN Sensors

NON-CONTACT CAN SENSOR SP7001



- Supports φ1.2mm to 2.0mm covered wires
- No modification of vehicle cables
- No impact on the CAN bus or ECUs
- Accurate, reliable signal capture
..... p.20

Recorder Peripherals



- Connection cord
- Storage media
- Logic probe
- Current probe, etc.
..... p.21-p.23


PC Software for Data Management

MR6000 Viewer




- For Memory HiCorder series, available for download free of charge from Hioki's website
..... p.24

WAVE PROCESSOR 9335



- For Memory HiCorder
• Convert data, print and display waveforms
..... p.24

LAN COMMUNICATOR 9333



- For Memory HiCorder
• For data collection and remote control
..... p.24

MEMORY HiCORDER
MR8827 (32ch)



Instantaneous waveform/
RMS value recording
..... p.17



MEMORY HiCORDER
MR740T (54ch)
Ideal for rack-mounting
..... p.18



MEMORY HiCORDER
MR8848 (32ch)
Instantaneous waveform/
Long term recording
..... p.17



MEMORY HiCORDER
MR6000 (32ch)
Instantaneous waveform/
Long term recording
..... p.16



MEMORY HiCORDER
MR740T (108ch)
Ideal for rack-mounting
..... p.18

and More

MEMORY HiLOGGER
LR8450-01 (55ch)



Voltage/ Current/ Strain
measurement
..... p.26

MEMORY HiCORDER
MR8875 (60ch)



Voltage/ Temperature
measurement
..... p.18

DATA LOGGER
LR8101 (300ch)
Voltage/ Temperature
measurement
..... p.25



DATA LOGGER
LR8102 (3000ch)
Voltage/ Temperature
measurement
..... p.25



MEMORY HiLOGGER
LR8450 (120ch)
Voltage/ Temperature/
Pulse measurement
..... p.26



MEMORY HiLOGGER
LR8450-01 (330ch)
Voltage/ Temperature/
Pulse measurement
..... p.26



32ch

60ch 64ch

120ch

300ch

...3000ch

Number of channels

Wireless Compact Loggers

WIRELESS PULSE
LOGGER LR8512



- 2 ch Pulse totalization/ No. of revolutions/ Logic recording
- Fastest 0.1 sec interval
- 500,000 data/ ch
- Three-way power
..... p.29

WIRELESS CLAMP
LOGGER LR8513



- AC/DC load current, AC leakage current recording
- 2ch, Clamp-on sensor input
- Fastest 0.5 sec interval
- 500,000 data/ ch
- Three-way power
..... p.29

WIRELESS HUMIDITY
LOGGER LR8514



- 2 ch Temperature/ 2 ch Humidity recording
- - 40 to 80 °C/ 0 to 100% RH (with optional sensor)
- Minimum 0.5 sec interval
- 500,000 data/ ch
- Three-way power
..... p.30

WIRELESS VOLTAGE/
TEMP LOGGER LR8515



- 2 ch Voltage (±50 mV to ±50 V)/ Thermocouple recording
- Minimum 0.1 sec interval
- 500,000 data/ ch
- Three-way power
..... p.30

Impedance, Inductance and Capacitance Testing in R&D and During Component Production

IMPEDANCE ANALYZER IM7587



- |Z|, L, C, R testing
- Testing source frequency: 1 MHz to 3 GHz
- Measuring time: 0.5 ms
- Measure LCR and conduct frequency sweeps simultaneously

p.31

IMPEDANCE ANALYZER IM7585



- |Z|, L, C, R testing
- Testing source frequency: 1 MHz to 1.3 GHz
- Measuring time: 0.5 ms
- Measure LCR and conduct frequency sweeps simultaneously

p.32

IMPEDANCE ANALYZER IM7583



- |Z|, L, C, R testing
- Testing source frequency: 1 MHz to 600 MHz
- Measuring time: 0.5 ms
- Measure LCR and conduct frequency sweeps simultaneously

p.32

IMPEDANCE ANALYZER IM7581



- |Z|, L, C, R testing
- Testing source frequency: 100 kHz to 300 MHz
- Measuring time: 0.5 ms
- Measure LCR and conduct frequency sweeps simultaneously

p.33


IMPEDANCE ANALYZER IM7580A



- |Z|, L, C, R testing
- Testing source frequency: 1 MHz to 300 MHz
- Measuring time: 0.5 ms
- Measure LCR and conduct frequency sweeps simultaneously

p.33

CHEMICAL IMPEDANCE ANALYZER IM3590



- |Z|, L, C, R, σ (conductivity), ϵ (dielectric constant) testing
- Battery measurement
- Testing source frequency: 1 MHz to 200 kHz
- Measuring time: 2 ms

p.34

IMPEDANCE ANALYZER IM3570



- |Z|, L, C, R testing
- Testing source frequency: 4 Hz to 5 MHz
- Measuring time: 0.5 ms
- Measure LCR and conduct frequency sweeps simultaneously

p.35

Impedance, Inductance and Capacitance Testing During Component Production

LCR METER IM3536



- |Z|, L, C, R testing
- Testing source frequency: DC, or 4 Hz to 8 MHz
- Measuring time: 1 ms
- Accuracy guaranteed range from 1m Ω
- Continuous testing under varying conditions

p.36

LCR METER IM3533



- |Z|, L, C, R testing
- Testing source frequency: 1 mHz to 200 kHz
- Measuring time: 2 ms
- Transformer measurement mode
- Frequency sweep measurement: (IM3533-01)

p.37

LCR METER IM3523A



- |Z|, L, C, R testing
- Testing source frequency: 40 Hz to 200 kHz
- Measuring time: 2 ms
- IM3523A: USB and LAN as standard

p.37

C METER 3506-10



- C, D, Q, low capacitance testing
- Testing source frequency: 1 kHz, 1 MHz
- Measuring time: 1.5 ms (1 MHz)
- RS-232C, GP-IB

p.38

C HITESTER 3504




- C, D, large capacitance MLCC testing
- Testing source frequency: 120 Hz or 1 kHz
- Measuring time: 2 ms
- RS-232C standard (3504-50) BIN function, GP-IB (3504-60) BIN function, Contact check, GP-IB

p.38

Exclusive Option for the IM3570

EQUIVALENT CIRCUIT ANALYSIS FIRMWARE IM9000



- Optional software built in to the IM3570
- Equivalent five circuit models
- Enables displaying the ideal frequency characteristics graph derived from the analysis results
- Cole-Cole plot, Admittance circle display

Probes and Test Fixtures



- Probes and test fixtures for lead components
- Test fixtures for SMDs
- DUT size reference table included

p.39

DC Resistance Testing

RESISTANCE METER RM3546



- Low-Resistance Measurement Optimized for Welding Quality Inspection in Battery Pack/Module Manufacturing Lines
- Equipped with Advanced Offset Voltage Compensation, Advanced Temp Correction, Active Circuit Protection
- Finest resolution: 1 n Ω

p.40

RESISTANCE METER RM3545A



- Market leading precision tests for testing every weld or connection on your production line
- 1000 $\mu\Omega$ to 1000 M Ω range
- Testing source current: DC, 1 A Max.
- Finest resolution: 1 n Ω
- Multi-point measurement: 20 locations

p.41

RESISTANCE METER RM3545-01



- Featuring super-high accuracy
- Testing source: DC, 1 A max
- Fastest measurement speed: 2.2ms
- Finest resolution: 10 n Ω
- GP-IB communication

p.42

RESISTANCE METER RM3544



- High-precision bench-top resistance meter for both manual operation and integration with automatic lines
- Testing source current: DC, 300 mA Max.
- Fastest measurement speed: 18 ms
- Finest resolution: 1 $\mu\Omega$

p.42

RESISTANCE HITESTER RM3543



- Advanced enough to measure 0.1 m Ω shunts with room to spare
- Ideal high precision & high resolution for automated lines
- Testing source: DC 1 A max.
- Minimum integration time: 0.1 ms
- Finest resolution: 0.01 $\mu\Omega$

p.43

RESISTANCE METER RM3542C



- DC resistance meter for automated in-line inspection of chip resistors and ferrite beads
- Shorten jumper resistor inspection time by up to 76%
- ΔR Function (process comparison), BIN grading (sorting) *RM3542C-3 only

p.43

DC Resistance Testing

RESISTANCE METER RM3548-50



- High-precision portable resistance meter measures from $\mu\Omega$ to M Ω
- Testing source current: DC, 1 A Max.
- Display refresh rate: approx. 100 ms
- Finest resolution: 0.1 $\mu\Omega$
- Compatible with Wireless Adapter Z3210

p.44


Accelerating R&D of Rechargeable Battery Materials

Powder Impedance Measurement System



- Simultaneously control powder press details while measuring impedance
- All-in-one glove box operation and time-saving efficiency

Slurry Analytical System



- Impedance measurement and analysis of LiB electrode slurries
- Analysis results "DCR, Rratio, Uniformity" indicate electron conductivity of slurry

ELECTRODE RESISTANCE MEASUREMENT SYSTEM RM2610



- Isolates and quantifies composite layer resistance and interface resistance in positive- and negative-electrode sheets used in lithium-ion batteries.

Battery Testing

BATTERY CELL VOLTAGE GENERATOR SS7081-50



- Easily build a BMS evaluation environment
- Power supply, electronic load, DMM function integrated into one (12 channels)
- Generated voltage: 5V / ch

SWITCH MAINFRAME SW1001, SW1002



- Pair with a measuring instrument to achieve multi-channel capabilities
- SW1001: max. 66 channels (2-wire) to max. 18 channels (4-terminal pair)
- SW1002: max. 264 channels (2-wire) to max. 72 channels (4-terminal pair)

Battery Testing

BATTERY IMPEDANCE METER BT4560-60



- EIS measuring instrument for Li-ion batteries
- EIS measurement frequency: 0.01 Hz to 10 kHz
- From R&D to production line
- Measurement of R, X, Z, V, θ , T
- Max. measurement voltage: 5VDC
- Measurement range: 3 m Ω and above
- Voltage measurement resolution: 10 μ V

BATTERY IMPEDANCE METER BT4560-50



- EIS measuring instrument for Li-ion batteries
- EIS measurement frequency: 0.01 Hz to 1.05 kHz
- From R&D to production line
- Measurement of R, X, Z, V, θ , T
- Max. measurement voltage: 5VDC
- Measurement range: 3 m Ω and above
- Voltage measurement resolution: 10 μ V

PRECISION BATTERY TESTER BT6075, BT6065



- Industry-leading precision model
- AC 4-terminal method
- Resistance measurement: 0 Ω to 51 Ω (max. resolution: 0.01 $\mu\Omega$)
- Voltage measurement: 0 V to ± 120 V DC (max. resolution: BT6075: 1 μ V, BT6065: 10 μ V)
- Route resistance monitor

BATTERY TESTER BT3561A



- Compact power cells
- Compact packs up to 60 V
- AC 4-terminal method
- Resistance measurement: 0 Ω to 3.1 k Ω (maximum resolution: 1 $\mu\Omega$)
- Voltage measurement: 0 V to ± 60 V DC (maximum resolution: 10 μ V)

BATTERY TESTER BT3562A



- Large cells for xEVs
- Medium-size packs up to 100 V
- AC 4-terminal method
- Resistance measurement: 0 Ω to 3.1 k Ω (maximum resolution: 0.1 $\mu\Omega$)
- Voltage measurement: 0 V to ± 100 V DC (maximum resolution: 10 μ V)

BATTERY TESTER BT3563A



- Large packs for xEVs
- Large packs up to 300 V
- AC 4-terminal method
- Resistance measurement: 0 Ω to 3.1 k Ω (maximum resolution: 0.1 $\mu\Omega$)
- Voltage measurement: 0 V to ± 300 V DC (maximum resolution: 10 μ V)

Battery Testing

BATTERY HiTESTER BT3564



- EV and PHEV battery pack testing
- Testing source: AC 1kHz
- Measure voltage up to 1000 V
- Measurement time: 728 ms
- Finest resolution: 0.1 $\mu\Omega$ and 10 μ V

BATTERY HiTESTER BT3562-01, BT3563-01



- The perfect battery tester for production lines
- Testing source: AC 1kHz
- Max. voltage: 60 V DC (BT3562-01) 300 V DC (BT3563-01)
- Measurement time: 18ms
- Finest resolution: 0.1 $\mu\Omega$ and 10 μ V

BATTERY HiTESTER 3561



- The perfect battery tester for small secondary batteries
- Testing source: AC 1kHz
- Measurement time: 10ms
- Finest resolution: 0.01 m Ω

PRECISION DC VOLTMETER DM7275, DM7276



- DC V only
- Measure DC voltage and temperature simultaneously
- 7-1/2 digit resolution
- 1-year 20ppm Accuracy (DM7275)
- 1-year 9ppm Accuracy (DM7276)
- Built-in EXT I/O, LAN, and USB

BATTERY INSULATION TESTER BT5525



- Ideal for insulation resistance testing before battery electrolyte filling
- Detecting minuscule insulation defects caused by contamination
- Test voltage: 500 V max.
- Insulation resistance test: up to 9999 M Ω
- Contact check

BATTERY TESTER BT3554-50



- Diagnose deterioration and health of UPS, compact and large lead-acid batteries
- Testing source: AC 1kHz
- Finest resolution: 1 $\mu\Omega$
- Compatible with Wireless Adapter Z3210

Super Insulation Testing of Capacitors

SUPER M Ω HiTESTER SM7810



- For testing leakage current in MLCC
- 6.8ms measurement speed over 8ch simultaneously
- Testing current is applied externally
- Resistance measurement: Max. $1 \times 10^6 \Omega$
- Current measurement: 1pA to 1mA

POWER SOURCE UNIT SM7860 series



- Specially designed power source unit for SM7810
- Supports multi-channel systems and provides functions required for MLCC test lines
- 50 mA per channel output

SUPER MEGOHM METER SM7420



- Fastest speed of 6.4 ms
- 4ch
- Dedicated micro current measurement (cannot generate or measure voltage)
- Max. $2 \times 10^8 \Omega$ display
- Min. 0.1 fA resolution

SUPER MEGOHM METER SM7110, SM7120



- Fastest speed of 6.4 ms
- 1ch
- Max. 2000 V output (SM7120)
- Max. 1000 V output (SM7110)
- Max. $2 \times 10^8 \Omega$ display
- Min. 0.1 fA resolution

Peripherals

SURFACE/VOLUME RESISTANCE MEASUREMENT ELECTRODE SM9001



- Simple and Convenient Surface/Volume Resistance Measurement (up to $10^{13} \Omega$, 1000 V)
- Measure surface and volume resistance of entire sheets without need to cut samples

Testing terminals for super megohm measurement



- For flat plate testing
- For surface resistance testing
- For liquid testing
- Screen box
- Comparing resistance box

Benchtop Multimeters for Production and Inspection Lines

PRECISION DC VOLTMETER
DM7275, DM7276



- DC V only
- Measure DC voltage and temperature simultaneously
- 7-1/2 digit resolution
- 1-year 9ppm Accuracy (DM7276)
- 1-year 20ppm Accuracy (DM7275)
- Built-in EXT I/O, LAN, and USB

..... p.57

System Integrated Digital Multi-Module Stations

DMM STATION
U8991+MR8740T




- Store entire data from 108 units of DMM in single operation
- Simultaneous 108 ch sampling without signal scanner
- High $\pm 0.02\%$ precision & ultra high 6-1/2 digit resolution
- 50 times/s sampling

..... p.57

Arbitrary Waveform Generation Recorders

ARBITRARY WAVEFORM GENERATION RECORDER
U8793+MR6000



- Max. 2 MHz D/A output Arbitrary Waveform Generation function
- 10 mHz to 100 kHz Function Generator
- Max. 200M-Sampling/s
- Max. 15V output
- Max. 16ch

..... p.58


ARBITRARY WAVEFORM GENERATION RECORDER
U8793+MR8848



- Max. 2 MHz D/A output Arbitrary Waveform Generation function
- 10 mHz to 100 kHz Function Generator
- Max. 20M-Sampling/s
- Max. 15V output
- Max. 16ch

..... p.58

ARBITRARY WAVEFORM GENERATION RECORDER
U8793+MR8827



- Max. 2 MHz D/A output Arbitrary Waveform Generation function
- 10 mHz to 100 kHz Function Generator
- Max. 20M-Sampling/s
- Max. 15V output
- Max. 32ch

..... p.58

ARBITRARY WAVEFORM GENERATION RECORDER
U8793+MR8740T



- Max. 2 MHz D/A output Arbitrary Waveform Generation function
- 10 mHz to 100 kHz Function Generator
- Max. 20M-Sampling/s
- Max. 15V output
- Max. 54ch

..... p.58

VIR GENERATOR UNIT
U8794+MR8740T



- DC voltage output
- DC current output
- Resistance output (simulated resistance)
- Max. 216ch

..... p.58

Motor Insulation Performance Inspection

PARTIAL DISCHARGE DETECTOR
ST4200



- Dual-mode PD detection discovers latent insulation defects in motor windings with the AC PD test and surge PD test
- Reliable PD testing even on the production line

..... p.59

HIGH VOLTAGE MULTIPLEXER
SW2001



- Boost efficiency with one multiplexer handling six tests
- Reduce connection man-hours and test time
- Safe switching between high-voltage testing and 4-terminal low-voltage measurement

..... p.59

IMPULSE WINDING TESTER
ST4030A



- Diagnose winding quality and insulation while the rotor is assembled
- Identify single-turn faults
- Detect partial discharge with high accuracy
- Diagnose insulation failure between motor windings
- Output voltage up to 4200 V

..... p.60

DISCHARGE DETECTION UPGRADE
ST9000



- Optional function for ST4030A
- Detect microscopic partial discharges obscured by noise
- Hioki original filter

..... p.60

Leakage Current Testing in Equipment and Medical Devices

LEAK CURRENT HITESTER
ST5540



- Test both medical- and general-use electrical devices
- Built-in support for all networks
- Support for rated currents of up to 20 A
- Support for automatic testing on production lines, etc.

..... p.60

LEAK CURRENT HITESTER
ST5541



- Testing of general-use electrical devices
- Built-in support for networks other than medical-use electrical devices
- Support for rated currents of up to 20 A
- Support for automatic testing on production lines, etc.

..... p.61

Insulation Resistance and Withstand Voltage Testing

BATTERY INSULATION TESTER
BT5525



- Ideal for insulation resistance testing before battery electrolyte filling
- Detecting minuscule insulation defects caused by contamination (Break Down Detect function)
- Test voltage: 500 V max.
- Insulation resistance test: up to 9999 M Ω
- Contact check

..... p.62

INSULATION TESTER
ST5520



- Rapid 50ms testing speed
- Test voltage: 1000 V max.
- Insulation resistance test: up to 9999 M Ω
- Contact check

..... p.62

AC AUTOMATIC INSULATION/WITHSTANDING HITESTER
3174



- Insulation resistance test: up to 2000 M Ω
- Withstanding voltage test: up to 5 kV AC
- Contact check
- Full remote control

..... p.63

AUTOMATIC INSULATION/WITHSTANDING HITESTER
3153



- Insulation resistance test: up to 9999 M Ω
- Withstanding voltage test: up to 5 kV AC/DC
- Full remote control

..... p.64

HIGH VOLTAGE SCANNER
3930



- Supports remote control
- For automatic multipoint testing of insulation / withstand voltage
- Use with 3153's program or with general-purpose logic sequencers

..... p.64

PC Applications

SAFETY TEST DATA MANAGEMENT SOFTWARE
9267



- PC-controlled application software

..... p.64

Evaluate and Analyze the Power Efficiency of Motors, Equipment and Other Energy Saving Devices

POWER ANALYZER PW8001



- Max. 16 ch power analysis by optical link
 - For total evaluation of equipment
 - Wide-band DC, 0.1 Hz to 5 MHz (U7005)
 - DC, or 1P2W to 3P4W
 - 8 ch/ current sensor input
 - Measure inverter equipment, analyze motors and high frequency reactors
 - Analyze waveforms without an oscilloscope
- p.65

POWER ANALYZER PW4001



- Max. 32ch by synchronizing eight 4-channel models
 - For total evaluation of equipment
 - Wide-band DC, 0.1 Hz to 600 kHz
 - DC, or 1P2W to 3P4W
 - 4 ch/ current sensor input
 - CAN / CAN FD output and input
 - DC powered(PW4001-04, -05)
 - Operates from -20°C to +50°C
- p.66

AC/DC CURRENT BOX PW9100A



- Direct current measurement option for PW8001/PW4001
 - Wide-band DC to 3.5MHz, 50A AC/DC rated input, 0.04V/A output
 - PW9100A-3 : 3 channels
 - PW9100A-4 : 4 channels
- p.67

AC/DC HIGH VOLTAGE DIVIDER VT1005



- Voltage measurement option for PW8001/PW4001
 - Divides high voltage by 1000:1 and outputs
 - Wide-band DC to 4 MHz
 - Measurement Accuracy: ±0.08% (DC) ±0.04% (50/60 Hz) ±0.17% (50 kHz)
- p.67

3-Phase Power Meters for Industrial Equipment Testing

POWER METER PW3337



- 3 ch input, DC, or 1P2W to 3P3W, or 3P4W
 - Max. input 1000 V, 65 A
 - DC, or 0.1 Hz to 100 kHz
 - ±0.1% basic accuracy
 - Direct input or clamp input
- p.69

POWER METER PW3336



- 2 ch input, DC, or 1P2W to 3P3W
 - Max. input 1000 V, 65 A
 - DC, or 0.1 Hz to 100 kHz
 - ±0.1% basic accuracy
 - Direct input or clamp input
- p.69

Single-Phase Power Meters for Industrial Equipment Testing

POWER METER PW3335



- Ultra-sensitive standby power measurement
 - Measure according to IEC 62301
 - DC, or 1P2W
 - Max. input 1000 V, 30 A
 - DC, or 0.1 Hz to 100 kHz
 - ±0.1% basic accuracy
 - Direct or clamp input
- p.70

Handheld Power Meter

AC CLAMP POWER METER CM3286-50



- Easy AC power checker
 - Single-phase, 3-phase (balanced condition/without distortion)
 - Phase angle, power factor
 - Voltage/current harmonics (with Z3210 installed)
 - AC clamp, True RMS, Battery operation
 - Compatible with Wireless Adapter Z3210
- p.71

Monitor and Record Power Quality

POWER QUALITY ANALYZER PQ3198



- IEC61000-4-30 Ed.3 Class A Power Quality Analyzer
 - Monitor and record the quality of power
 - 1P2W to 3P4W, DC/ 50/ 60/ 400 Hz
 - Clamp input
- p.72

POWER QUALITY ANALYZER PQ3100



- IEC61000-4-30 Ed.3 Class S Power Quality Analyzer
 - Monitor and record the quality of power
 - 1P2W to 3P4W, DC/ 50/ 60 Hz
 - Clamp input
- p.72

Monitor Energy Consumption and Analyze Energy Savings

CLAMP ON POWER LOGGER PW3365




- Designed for 50/60 Hz commercial line use
 - 3 circuits (1P2W), single circuit (1P3W, 3P3W, 3P4W)
 - Save data to the SD card continuously
 - (Current) Clamp input
 - (Voltage) Non-metallic contact sensor
- p.74

CLAMP ON POWER LOGGER PW3360



- Designed for 50/60 Hz commercial line use
 - 3 circuits (1P2W), single circuit (1P3W, 3P3W, 3P4W)
 - Save data to the SD card continuously
 - Clamp input
 - Harmonic analysis
- p.74

POWER LOGGER VIEWER SF1001



- Easy graphical processing of measurement data saved with the PW3360/PW3365 series on a PC

Non-contact CAN Sensors

NON-CONTACT CAN SENSOR SP7001



- Supports φ1.2mm to 2.0mm covered wires
 - No modification of vehicle cables
 - No impact on the CAN bus or ECUs
 - Accurate, reliable signal capture
- p.20

Current Probes to Observe DC to MHz Bandwidth Waveforms on Oscilloscopes and Memory Recorders

CURRENT PROBE CT6710, CT6711



- Clearly observe signals with high S/N ratio and 10x output rate
 - CT6710: DC to 50 MHz
 - CT6711: DC to 120 MHz
 - 30 Arms max. 3 ranges
 - φ 5 mm (0.20 in.) Core dia.
- p.76

CURRENT PROBE CT6700, CT6701



- CT6700: DC to 50 MHz
 - CT6701: DC to 120 MHz
 - 5 A rms max.
 - φ 5 mm (0.20 in.) Core dia.
- p.76

CLAMP ON PROBE 3273-50, 3276



- 3276: DC to 100 MHz
 - 3273-50: DC to 50 MHz
 - 30 A rms max.
 - φ 5 mm (0.20 in.) Core dia.
- p.77

CLAMP ON PROBE 3274, 3275



- 3275: DC to 2 MHz, 500 A rms max.
 - 3274: DC to 10 MHz, 150 A rms max.
 - φ 20 mm (0.79 in.) Core dia.
- p.77

Power Supplies for Current Probes

POWER SUPPLY 3269, 3272



- 3269: Power 2 × CT6710 series or 4 × CT6700, 3270 series
 - 3272: Power 1 × CT6700, 3270 series
- p.77

High Accuracy Pass-through Current Sensors

AC/DC CURRENT SENSOR
CT6904A



- Frequency bandwidth CT6904A
 - Amplitude: DC to 4 MHz, 500 A AC/DC
 - Phase: DC to 1 MHz
 - CT6904A-2
 - Amplitude: DC to 4 MHz, 800 A AC/DC
 - Phase: DC to 1 MHz
 - ϕ 32 mm (1.26 in.) Core dia.
- p.78

AC/DC CURRENT SENSOR
CT6875A, CT6876A
CT6877A



- Frequency bandwidth
 - CT6875A: Amplitude: DC to 2 MHz, 500 A AC/DC, Phase: DC to 1 MHz, ϕ 36 mm (1.42 in.) Core dia.
 - CT6876A: Amplitude: DC to 1.5 MHz, 1000 A AC/DC, Phase: DC to 1 MHz, ϕ 36 mm (1.42 in.) Core dia.
 - CT6877A: Amplitude: DC to 1 MHz, 2000 A AC/DC, Phase: DC to 700 kHz, ϕ 80 mm (3.15 in.) Core dia.
- p.79

AC/DC CURRENT SENSOR
CT6872, CT6873



- Frequency bandwidth
 - CT6872: Amplitude: DC to 10 MHz, 50 A AC/DC, Phase: DC to 1 MHz
 - CT6873: Amplitude: DC to 10 MHz, 200 A AC/DC, Phase: DC to 1 MHz
 - ϕ 24 mm (0.94 in.) Core dia.
- p.79

AC/DC CURRENT SENSOR
CT6862, CT6863



- Frequency bandwidth
 - CT6862-05: Amplitude: DC to 1 MHz, 50 A AC/DC rated, Phase: DC to 300 kHz
 - CT6863-05: Amplitude: DC to 500 kHz, 200 A AC/DC rated, Phase: DC to 300 kHz
 - ϕ 24 mm (0.94 in.) Core dia.
- p.79

High Accuracy Clamp-type Current Probes

AC/DC CURRENT PROBE
CT6845A, CT6846A,
CT6847A



- Frequency bandwidth, rated current, core dia.
 - CT6845A: DC to 200 kHz, 500 A AC/DC, ϕ 50 mm (1.97 in.)
 - CT6846A: DC to 100 kHz, 1000 A AC/DC, ϕ 50 mm (1.97 in.)
 - CT6847A: DC to 70 kHz, 2000 A DC/1400 A AC, ϕ 50 mm (1.97 in.)
- p.80

AC/DC CURRENT PROBE
CT6841A, CT6843A,
CT6844A



- Frequency bandwidth, rated current, core dia.
 - CT6841A: DC to 2 MHz, 20 A AC/DC, ϕ 20 mm (0.79 in.)
 - CT6843A: DC to 700 kHz, 200 A AC/DC, ϕ 20 mm (0.79 in.)
 - CT6844A: DC to 500 kHz, 500 A AC/DC, ϕ 20 mm (0.79 in.)
- p.80

AC/DC CURRENT PROBE
CT6833, CT6834



- Frequency bandwidth
 - DC to 50 kHz
 - Rated current
 - CT6833: 200 A AC/DC
 - CT6834: 500 A AC/DC
 - Core dia. ϕ 20 mm (0.79 in.)
- p.81

AC/DC CURRENT PROBE
CT6830, CT6831



- Frequency bandwidth
 - CT6830: DC to 100 kHz, 2 A AC/DC rated
 - CT6831: DC to 100 kHz, 20 A AC/DC rated
 - Core dia. ϕ 5 mm (0.20 in.)
- p.81

CLAMP ON SENSOR
9272-05



- Frequency bandwidth
 - amplitude: 1 Hz to 100 kHz
 - Phase: 5 Hz to 50 kHz
 - Rated current: 20A AC, or 200 A AC
 - Core dia.: ϕ 46 mm (1.81 in.)
- p.82

Power Supplies for Current Probes

SENSOR UNIT
CT9555, CT9556, CT9557



- Power supply for current sensors
 - CT9555: 1 ch, with waveform output
 - CT9556: 1 ch, with waveform/ RMS output
 - CT9557: 4 ch, with waveform/ total waveform/ total RMS output
- p.82

AC/DC Current Input

AC/DC CURRENT BOX
PW9100A



- Direct current measurement option for PW8001/ PW4001
 - Wide-band DC to 3.5 MHz, 50 A AC/DC rated input, 0.04 V/A output
 - PW9100A-3 : 3 channels
 - PW9100A-4 : 4 channels
- p.67

AC/DC Current Clamps Terminal HIOKI PL14

AC/DC CURRENT SENSOR
CT7812, CT7822



- Frequency bandwidth
 - CT7812: DC to 100 kHz, 2 A AC/DC rated
 - CT7822: DC to 100 kHz, 20 A AC/DC rated
 - Core dia. ϕ 5 mm (0.20 in.)
- p.83

AC/DC AUTO-ZERO CURRENT SENSOR
CT7742 series



- DC to 5 kHz (-3 dB)
 - Rated current, core dia.
 - CT7742: 2000 A AC/DC, ϕ 55 mm (2.17 in.)
 - CT7736: 600 A AC/DC, ϕ 33 mm (1.30 in.)
 - CT7731: 100 A AC/DC, ϕ 33 mm (1.30 in.)
- p.83

AC/DC CURRENT SENSOR
CT7600 series



- DC to 10 kHz (-3 dB)
 - Rated current, core dia.
 - CT7642: 2000 A AC/DC, ϕ 55 mm (2.17 in.)
 - CT7636: 600 A AC/DC, ϕ 33 mm (1.30 in.)
 - CT7631: 100 A AC/DC, ϕ 33 mm (1.30 in.)
- p.83

DISPLAY UNIT
CM7290



- Use with CT7000 series current sensors
 - DCA, ACA, (DC+AC)A, frequency measurement
 - Power supply for single sensor
- p.84

AC CURRENT SENSOR
CT7126, CT7131, CT7136



- CT7126:
 - Frequency band up to 20 kHz
 - 60 A AC rated input
 - ϕ 15 mm (0.59 in.) Core dia.
 - CT7131:
 - 100 A AC rated input
 - ϕ 15 mm (0.59 in.) Core dia.
 - CT7136:
 - 600 A AC rated input
 - ϕ 46 mm (1.81 in.) Core dia.
- p.86

AC FLEXIBLE CURRENT SENSOR
CT7040 series



- 10 Hz to 50 kHz (\pm 3dB)
 - 6000 A AC rated
 - Loop diameters
 - CT7044: ϕ 100 mm (3.94 in.)
 - CT7045: ϕ 180 mm (7.09 in.)
 - CT7046: ϕ 254 mm (10.0 in.)
- p.84

AC Current Clamps Terminal BNC

CLAMP ON SENSOR
9695



- 9695-02 Requires the 9219
 - 40 Hz to 5 kHz
 - Phase: 45 Hz to 5 kHz
 - 50 A AC rated input
 - ϕ 15 mm (0.59 in.) Core dia.
 - 9695-03 Requires the 9219
 - 100 A AC rated input
- p.86

CLAMP ON SENSOR
9661, 9669



- 9661
 - 500 A AC rated input
 - ϕ 46 mm (1.81 in.) Core dia.
 - 9669
 - 40 Hz to 5 kHz
 - Phase: 45 Hz to 5 kHz
 - 1000 A AC rated input
 - ϕ 55 mm (2.17 in.) Core dia.
- p.86

AC FLEXIBLE CURRENT SENSOR
CT9667



- 10 Hz to 20 kHz (\pm 3dB)
 - 5000 A/ 500 A AC rated input
 - Three types of core dia. : ϕ 100 mm (3.94 in.) to ϕ 254 mm (10.0 in.)
- p.85

CLAMP ON SENSOR
9660, 9694



- 9660:
 - Frequency characteristics
 - Amplitude: 40Hz to 5kHz, Phase: 45Hz to 5kHz
 - 100 A AC rated input
 - ϕ 15 mm (0.59 in.) Core dia.
 - 9694:
 - 5 A AC rated input
- p.86

Leak Current Terminal HIOKI PL14

AC LEAKAGE CURRENT SENSOR
CT7116



- Frequency band 40 Hz to 5 kHz
 - 6 A AC rated input
 - ϕ 40 mm (1.57 in.) Core dia.
- p.86

Leak Current Terminal BNC

CLAMP ON LEAK SENSOR
9657-10, 9675



- 9657-10:
 - ϕ 40 mm (1.57 in.) Core dia.
 - 9675:
 - Frequency characteristics
 - Amplitude: 40Hz to 5kHz
 - Primary rated 10 AAC
 - ϕ 30 mm (1.18 in.) Core dia.
- p.86

Load Current Terminal BNC

CLAMP ON PROBE
9132-50, 9010-50, 9018-50



- Use for level measurement
 - 9132-50: AC 20 to 1000 A, ϕ 55 mm (2.17 in.) Core dia.
 - 9010-50: AC 10 to 500 A, ϕ 46 mm (1.81 in.) Core dia.
 - Excellent phase characteristics
 - 9018-50: AC 10 to 500 A, ϕ 46 mm (1.81 in.) Core dia.
- p.85

Digital Multimeters, Testers Index

Because the DMM offers a large number of measurement functions and ranges, only a representative value (maximum accuracy) for each range is included as the basic accuracy (due to space limitations). For more accuracy information for each range, please see the detailed catalog or user manual.

High-Precision Handheld DMM

DIGITAL MULTIMETER DT4281



- 60000 count display
- DC+AC Voltage measurement
- + Peak, - Peak measurement
- Low-pass filter function
- AC Current measurement with Clamp-on probe
- USB communication (option)
- True RMS
- CAT IV 600 V

DIGITAL MULTIMETER DT4282



- 60000 count display
- DC+AC Voltage measurement
- + Peak, - Peak measurement
- Low-pass filter function
- 10 A Direct input
- USB communication (option)
- True RMS
- CAT IV 600 V

DMM for On-site Maintenance

DIGITAL MULTIMETER DT4261



- 6000 count display
- DC+AC Voltage measurement
- + Peak, - Peak measurement
- Low-pass filter function
- USB communication (option)
- True RMS
- CAT IV 600 V
- Compatible with Wireless Adapter Z3210

DMM for Electrical Work

DIGITAL MULTIMETER DT4255



- 6000 count display
- Current-limiting resistor/ fast-blow fuse
- Low-pass filter function
- AC current measurement with clamp-on probe
- Voltage detector
- USB communication (option)
- True RMS
- CAT IV 600 V

DIGITAL MULTIMETER DT4223



- 6000 count display
- Protective function against accidental voltage input
- Low-pass filter function
- No current measurement
- Voltage detector
- True RMS
- CAT III 600 V

DMM for Heating, Ventilation and Air Conditioning (HVAC)

DIGITAL MULTIMETER DT4253



- 6000 count display
- Low-pass filter function
- DC 60 μ A to 60 mA measurement
- AC Current measurement with Clamp-on probe
- USB communication (option)
- True RMS
- CAT IV 600 V

General Purpose DMM

DIGITAL MULTIMETER DT4256



- 6000 count display
- Low-pass filter function
- 10 A Direct input
- AC current measurement with clamp-on probe
- Voltage detector
- USB communication (option)
- True RMS
- CAT IV 600 V

DIGITAL MULTIMETER DT4252



- 6000 count display
- Low-pass filter function
- 10 A Direct input
- USB communication (option)
- True RMS
- CAT IV 600 V

DIGITAL MULTIMETER DT4224



- 6000 count display
- Protective function against accidental voltage input
- Low-pass filter function
- No current measurement
- True RMS
- CAT III 600 V

PENCIL HI-TESTER 3246-60



- Insulated test pin sleeves prevent short-circuits
- Pencil type DMM
- CAT III 600 V
- 4199 count display
- Average rectified
- Ultra bright LED light at probe tip

CARD HI-TESTER 3244-60



- Insulated test pin sleeves prevent short-circuits
- A thin card size DMM
- CAT III 300 V, CAT II 600 V
- 4199 count display
- Average rectified

Benchtop Multimeters for Production and Inspection Lines

PRECISION DC VOLTMETER DM7275, DM7276



- DC V only
- Measure DC voltage and temperature simultaneously
- 7-1/2 digit resolution
- 1-year 20ppm Accuracy (DM7275)
- 1-year 9ppm Accuracy (DM7276)
- Built-in EXT I/O, LAN, and USB

System Integrated Digital Multi-Module Stations

DMM STATION U8991+MR8740T



- Store entire data from 108 units of DMM in single operation
- Simultaneous 108 ch sampling without signal scanner
- High $\pm 0.02\%$ precision & ultra high 6-1/2 digit resolution
- 50 times/s sampling

Communication Testing for Electrical Construction

LAN CABLE HI-TESTER 3665



- Use for installing LAN cables or repair maintenance
- Detect split pairs with wiring check
- Get NVP-Enhanced measurement
- Identify cable destinations

Infrared Thermometers

INFRARED THERMOMETER
FT3701



- Long-focus, precise-field type
- ϕ 100mm at a 3m distance
- -35.0 °C to 500.0 °C
- Measurement wavelength 8 to 14 μ m
- Two-beam laser marker
- p.92

INFRARED THERMOMETER
FT3700



- Long-focus type
- ϕ 83mm at a 1m distance
- -35.0 °C to 500.0 °C
- Measurement wavelength 8 to 14 μ m
- Two-beam laser marker
- p.92

Illumination Testing

LUX METER
FT3424, FT3425



- DIN 5032-7:1985 class B, JIS C 1609-1: 2006 general AA class compliant
- 0 to 200 000 lx
- Timer hold function
- Memory function
- Built-in Bluetooth* wireless technology (FT3425)
- p.92

5-Range Digital Meg-ohm Meters

HIGH VOLTAGE INSULATION TESTER
IR5050, IR5051



- 5 high voltage ranges
- 250/500/1 k/2.5 k/5 kV testing voltages
- Insulation resistance, leakage current, voltage, capacitance (DD function), PV insulation resistance (IR5051 only)
- IP65 rated all-in-one storage and carrying case
- p.95

INSULATION TESTER
IR4053



- Built-in dedicated PV function
- 600 V AC/ 1000 V DC
- 5 test voltage ranges from 50 to 1000 V
- Comparator function
- Integrated hard carrying case
- p.94

5-Range Digital Meg-ohm Meters for Electrical Equipment Maintenance

INSULATION TESTER
IR4057-50, IR4059



- 5 test voltage ranges from 50 to 1000 V
- High-speed measurement with bar graph
- Comparator detection function
- 600 V AC/DC voltmeter
- Compatible with Wireless Adapter Z3210
- p.93

INSULATION TESTER
IR4056



- 5 test voltage ranges from 50 to 1000 V
- Comparator function
- 600 V AC/DC meter
- 200 mA continuity check
- Integrated hard carrying case
- p.94

Ground Clamps and Earth Resistance Testers

CLAMP ON EARTH TESTER
FT6380-50



- Grounding resistance measurement for multiple-ground installations
- Current measurement capable (AC)
- CAT IV 600 V compliant
- RMS measurement (true RMS rectification)
- Compatible with Wireless Adapter Z3210
- p.104

EARTH TESTER
FT6041



- 4- or 3- or 2- pole method
- Grounding resistance measurement without disconnecting ground electrodes
- IP67 protected, built tough to withstand use at harsh sites
- Compatible with Wireless Adapter Z3210
- p.102

EARTH TESTER
FT6031-50



- 3- or 2- pole method
- Supports Class A to Class D ground types
- IP67 dustproof and waterproof
- Compatible with Wireless Adapter Z3210
- p.103

Voltage Detectors

VOLTAGE DETECTOR
3481



- Non-metallic contact
- 40 to 600 V AC range
- Sensitivity adjustment function
- With LED light
- p.104

Phase Detectors

DIGITAL PHASE DETECTOR
PD3259-50



- Non-metallic voltage measurements
- Non-metallic measure voltage and detect phase sequence simultaneously
- 90 to 520 V AC
- ϕ 6 - 30 mm (0.24 - 1.18 in.) core dia.
- Compatible with Wireless Adapter Z3210
- p.105

PHASE DETECTOR
PD3129



- Non-metallic contact clip PD3129-10: For use on 70 to 1000 V lines (50/60 Hz), Thick conductors ϕ 10 - 40 mm (0.39 - 1.57 in.) core dia.
- PD3129: For use on 70 to 600 V lines (50/60 Hz), Conductors ϕ 2.4 - 17 mm (0.09 - 0.67 in.) core dia.
- p.105

AC/DC Current Clamp Meters for General Industrial Applications

AC/DC CLAMP METER
CM4375-50



- Easily get into tight spaces
- 1000 A AC/DC range
- True RMS
- V, A, Hz, Ω , and other extensive measurement parameters
- Inrush current
- Compatible with Wireless Adapter Z3210
- p.96

AC/DC CLAMP METER
CM4373-50



- 600/2000 A AC/DC range
- True RMS
- V, A, Hz, Ω , and other extensive measurement parameters
- Inrush current
- Max/Min/Avg/Peak
- Compatible with Wireless Adapter Z3210
- p.96

AC/DC CLAMP METER
CM4371-50



- 20/600 A AC/DC range
- True RMS
- V, A, Hz, Ω , and other extensive measurement parameters
- Inrush current
- Max/Min/Avg/Peak
- Compatible with Wireless Adapter Z3210
- p.97

CLAMP ON AC/DC HITESTER
3288



- 100/ 1000 A AC/DC range
- True RMS (3288-20)
- Average rectified (3288)
- Weighing only 150g with thin 16 mm body
- DMM function
- p.98

CLAMP ON AC/DC HITESTER
3287






- 10/ 100 A AC/DC range
- True RMS
- Weighing only 170 g with thin 16 mm body
- DMM function
- p.98

DISPLAY UNIT
CM7290







- Use with CT7000 series current sensors
- DCA, ACA, (DC+AC)A, frequency measurement
- Power supply for single sensor
- p.84


AC Current Leakage Clamp Meters

- | | | |
|---|---|--|
| <p>CLAMP ON EARTH TESTER FT6380-50</p>  <ul style="list-style-type: none"> • Grounding resistance measurement for multiple-ground installations • Current measurement capable (AC) • CAT IV 600 V compliant • True RMS • Compatible with Wireless Adapter Z3210 <p>..... p.104</p> | <p>AC LEAKAGE CLAMP METER CM4001</p>  <ul style="list-style-type: none"> • Measure everything from leakage to load • 0.60 mA (resolution 10 μA) to 600.0 A • True RMS • Filter function • Inrush current measurement • Compatible with Wireless Adapter Z3210 <p>..... p.101</p> | <p>AC LEAKAGE CLAMP METER CM4002, CM4003</p>  <ul style="list-style-type: none"> • Measure everything from leakage to load • 0.060 mA (resolution: 1 μA) to 200.0 A • True RMS • External output function (CM4003) • Compatible with Wireless Adapter Z3210 <p>..... p.101</p> |
|---|---|--|



AC Current Clamp Meters for Electrical Work

- | | | | |
|--|--|--|--|
| <p>AC CLAMP METER CM4141-50</p>  <ul style="list-style-type: none"> • Thin jaw easily gets into tight spaces • 60 to 2000 AAC range • True RMS • V, A, Hz, Ω, and other extensive measurement parameters • Compatible with Wireless Adapter Z3210 <p>..... p.99</p> | <p>AC CLAMP METER CM3281 CM3291</p>  <ul style="list-style-type: none"> • 42 to 2000 A AC range • Average rectified (CM3281) • True RMS (CM3291) • V, A, Ω, and other extensive measurement parameters <p>..... p.100</p> | <p>AC CLAMP METER CM3289</p>  <ul style="list-style-type: none"> • 42 to 1000 A AC range • Weighing only 100g with thin 16 mm body • True RMS • DMM function <p>..... p.99</p> | <p>AC CLAMP METER 3280-10F</p>  <ul style="list-style-type: none"> • 42 to 1000 A AC range • Weighing only 100 g with thin 16 mm body • Average rectified • DMM function <p>..... p.99</p> |
|--|--|--|--|






Handheld Power Meter

- AC CLAMP POWER METER CM3286-50**
- 
- Easy AC power checker
 - Single-phase, 3-phase (balanced condition/without distortion)
 - Phase angle, power factor
 - Voltage/current harmonics (with Z3210 installed)
 - AC clamp, True RMS, Battery operation
 - Compatible with Wireless Adapter Z3210
- p.71




Accessories for AC Clamp Meters

- | | |
|--|--|
| <p>AC FLEXIBLE CURRENT SENSOR CT6280</p>  <ul style="list-style-type: none"> • For large diameter and large current measurement in combination with AC clamp meter • 4200 A AC continuous <p>..... p.100</p> | <p>CLAMP ON ADAPTER 9290-10</p>  <ul style="list-style-type: none"> • Primary 1000 A, secondary 100 A (1/10 ratio) output • Superior phase angle characteristics for power <p>..... p.86</p> |
|--|--|

GENNECT Software Series

- | | | | | |
|--|---|---|---|---|
| <p>GENNECT Space SF4300</p>  <ul style="list-style-type: none"> • High-speed, large-scale data handling: 1 ms sampling / up to 3,000 channels • Time-synchronized measurement, video, and GPS data • Customizable analysis dashboards for flexible workflows <p>..... p.106</p> | <p>GENNECT Cloud SF4180</p>  <ul style="list-style-type: none"> • Connects to the Gennect series to provides added value through cloud services • Exchanging data via the cloud • Offers a range of plans and payment methods <p>..... p.107</p> | <p>GENNECT One SF4000</p>  <ul style="list-style-type: none"> • Automatically pair with LAN-connected measuring instruments • Display acquired data graphically in real-time • List MAX, MIN and AVG values • Windows compatible <p>..... p.107</p> | <p>GENNECT Cross SF4071, SF4072</p>  <ul style="list-style-type: none"> • Mobile app for iOS and Android • Improve efficiency especially for repeated measurements and recording • Find root cause of failures through data analysis and create quick reports <p>..... p.108</p> | <p>WIRELESS ADAPTER Z3210</p>  <ul style="list-style-type: none"> • Simply plug in the Z3210 wireless adapter and your compatible Hioki device is Bluetooth® ready <p>..... p.108</p> |
|--|---|---|---|---|

Advanced Technologies ALDAS Series

- | | | |
|---|--|---|
| <p>EIS MEASUREMENT SYSTEM ALDAS-α</p>  <ul style="list-style-type: none"> • Improve EC/FC evaluation cycles with high-speed EIS measurements • Apply up to DC 20 A without a booster <p>..... p.109</p> | <p>EIS MEASUREMENT SYSTEM ALDAS-Mini</p>  <ul style="list-style-type: none"> • For R&D, analysis of electrolysis cells • Wide compatibility: supports electrolysis cell types including PEM, SOEC, AEM, AWE, etc. <p>..... p.109</p> | <p>EIS MEASUREMENT SYSTEM ALDAS-E</p>  <ul style="list-style-type: none"> • EIS measurement of kW to MW class stacks in actual operation • Easy connection to existing electrolyzers and FC systems • Simultaneous measurement of stack and cell with up to 48 channels <p>..... p.110</p> |
|---|--|---|

Never Miss a Waveform. The Trusted Recorder for High-reliability Development

MEMORY HiCORDER MR6000

Recorders
Data Loggers



Basic specifications (Accuracy guaranteed for 1 year)

	MR6000	MR6000-01
Additional function	N/A	Real-time waveform calculation, Digital Filter calculation
Number of input units	Max. 8 units	
Number of channels	Max. 32 analog channels (when using the U8975), or 128 logic channels (when using the 8973)	
Measurement ranges (20 div full-scale)	10 mV to 400 V f.s., 12 ranges (when using the U8976), Resolution : 1/1600 of range 4 V to 200 V f.s., 6 ranges (when using the U8975), Resolution : 1/32000 of range	
Max. allowable input	1000 V DC/700 V AC (when using the U8974), 400 V DC (when using the U8976), 200 V DC (when using the U8975)	
Frequency characteristics	DC to 30 MHz (when using the U8976), DC to 2 MHz (when using the U8975)	
Max. sampling rate	200 MS/s, all channels simultaneously (when using the U8976) External sampling: 10 MS/s	
Recording methods	Normal: Normal waveform recording Envelope: Record maximum and minimum values every fixed period	
Storage memory capacity	1 G-words	
Removable storage	SD memory card ×1, USB memory ×7, SSD/HDD (built in the main unit) ×1 FTP transmission (to LAN-connected computer) *Use only Storage Media sold by Hioki.	
Display	12.1 inch XGA-TFT color LCD (1024 × 768 dots)	
External interfaces	LAN, USB, SD, SATA, Monitor output	
Power supply	100 to 240 V AC (50/60 Hz) (300 VA max.)	
Dimensions and mass	353 mm (13.9 in.)W × 235 mm (9.25 in.)H × 154.8 mm (6.09 in.)D, 6.5 kg (229.3 oz.) (main unit only)	
Included accessories	Power cord ×1, Quick start manual ×1, Precautions concerning use ×1, Blank panel (for blank slots only)	

- Work efficiently and intuitively using the MR6000's large touch panel
- Capture momentary phenomena by performing isolation measurement at up to 200 MS/s (when using the High Speed Analog Unit U8976)
- Enjoy a stress-free user experience thanks to dramatically faster saving of data
- Save data in real time while measurement continues
- CAN, CAN FD, and LIN measurement; MDF saving
- Generate user-defined waveforms and monitor values

Model No. (Order Code) MR6000	(Main unit only, input modules up to 8 units)
MR6000-01	(Built-in real-time waveform calculation and other functionality)

Note: main unit MR6000/MR6000-01 cannot operate alone. You must install one or more optional input modules in the unit.

Note: user cannot install or change the SSD Unit U8335, U8332 and the Probe Power Unit Z5021

Options	PROBE POWER UNIT Z5021 Specified upon order of the MR6000, power max. 4 × CT6710 series, or max. 8 × other probes	SSD UNIT U8335 Specified upon order, built-in type, 1 TB	SSD UNIT U8332 Specified upon order, built-in type, 256 GB	CARRYING CASE C1010 For the MR6000, includes compartment for options, hard trunk type	SD MEMORY CARD 2GB Z4001 2 GB capacity SD MEMORY CARD Z4003 8 GB capacity USB DRIVE Z4006 16 GB, Long-life, high-reliability SLC Flash Memory	Storage Media Precaution Use only Storage Media sold by Hioki. Compatibility and performance are not guaranteed for Storage Media made by other manufacturers. You may be unable to read from or save data to such media.
---------	---	--	--	---	---	---

Shared modules for Memory HiCorder series MR6000/MR8848/MR8827/MR8740T Install by inserting into the main unit. Can be replaced by user.



	Module name	Max. input	A/D resolution	Function	MR6000 8 slots	MR8848 8 slots	MR8827 16 slots	MR8740T (MR8740-50) 27 slots
Voltage	HIGH SPEED ANALOG UNIT U8976	DC 400 V	12	2 ch, 200 MS/s (DC to 30 MHz)	✓	n/a	n/a	n/a
	ANALOG UNIT 8966	DC 400 V	12	2 ch, 20 MS/s (DC to 5 MHz)	✓	✓	✓	✓
	4CH ANALOG UNIT U8975	DC 200 V	16	4 ch, 5 MS/s (DC to 2 MHz), 4 - 200 V f.s.	✓	✓	n/a	✓
	4CH ANALOG UNIT U8978	DC 40 V	16	4 ch, 5 MS/s (DC to 2 MHz), 100 mV - 40 V f.s.	✓	✓	n/a	✓
	HIGH RESOLUTION UNIT 8968	DC 400 V	16	2 ch, 1 MS/s (DC to 100 kHz)	✓	✓	✓	✓
	DC/RMS UNIT 8972	DC 400 V	12	2 ch, 1 MS/s (DC to 400 kHz), or RMS (DC/ 30 to 100 kHz)	✓	✓	✓	✓
	DIGITAL VOLTMETER UNIT MR8990	DC 500 V	24	2 ch, 0.1 μV resolution, 0.1 - 100 PLC, 500 times/s sampling	✓	✓	✓	✓
	DIGITAL VOLTMETER UNIT U8991	DC 100 V	24	4 ch, 1 μV resolution, 1, 10, 100 PLC, 50 times/s sampling	n/a	n/a	n/a	✓
	HIGH VOLTAGE UNIT U8974	DC 1000 V AC 700 V	16	2 ch, 1 MS/s (DC to 100 kHz)	✓	✓	✓	✓
Current	3CH CURRENT UNIT U8977	-	16	3 ch, 5 MS/s(DC to 2 MHz), current measurement by dedicated sensor	✓	✓	n/a	✓
	CURRENT UNIT 8971	Discontinuation scheduled	12	2 ch, 1 MS/s(DC to 100 kHz), RMS (DC, 30 to 1 kHz), current measurement by dedicated sensor	✓	✓	✓	✓
Temp	TEMP UNIT 8967	-	16	2 ch, thermocouple temperature input (K, E, T, N, R, S, B,W)	✓	✓	✓	✓
Strain	STRAIN UNIT U8969	-	16	2 ch, strain gauge type converter amp	✓	✓	✓	✓
Charge	CHARGE UNIT U8979	DC 40 V	16	2 ch, for acceleration measurement, charge output / preamplifier output / voltage output	✓	✓	✓	✓
Freq	FREQ UNIT 8970	DC 400 V	16	2 ch, for measurement of frequency, rpm, pulse	✓	✓	✓	✓
Logic	LOGIC UNIT 8973	-	-	4 ch * 4 probes	✓	✓	✓	✓
Gener- ation	WAVEFORM GENERATOR UNIT MR8790	-	-	4 ch, ±10 V DC output, 1 Hz to 20 kHz sine waveform output	✓	✓	✓	✓
	PULSE GENERATOR UNIT MR8791	-	-	8 ch, 0.1 Hz to 20 kHz pulse, pattern output	✓	✓	✓	✓
	ARBITRARY WAVEFORM GENERATOR UNIT U8793	-	-	2 ch, FG function 10 mHz to 100 kHz, arbitrary waveform generator D/A refresh rate 2 MHz, output 15 V	✓	✓	✓	✓
	VIR GENERATOR UNIT U8794	-	-	8 ch, DC voltage, DC current, resistance (simulated output)	n/a	n/a	n/a	✓

Engineered for Extremes, Trusted for Precision

MEMORY HiCORDER MR8848



- LAN
- USB 3.0
- SD
- SSD
- CE
- 3 year Warranty

Internal Storage U8334: 1 year

MR8848 main unit with U8351 Printer Unit installed

- Safely measure with isolated channels
- Capture data quickly with 20 MS/s high-speed sampling
- Handle complex tasks using 32 analog and 64 logic channels
- Record for extended periods with high-capacity memory
- Work anywhere with a durable, shock-resistant, portable design
- Save data directly to 1TB SSD or external storage
- Capture diverse events using versatile trigger options
- Make pass/fail judgments with waveform and numerical analysis
- Seamlessly connect to PCs via LAN or USB
- Check printed waveforms on-site using a built-in printer

Model No. (Order Code) **MR8848** (Max. 32ch, 512MW memory, main unit only)

Note: main unit MR8848 cannot operate alone. You must install one or more optional input modules in the unit.



Basic specifications

Measurement functions	Memory function (waveform recording), Recorder function (peak/trough recording), X-Y Recorder function, FFT function
Example channel configurations/numbers	Eight analog input modules: 16 analog channels + 16 logic channels (built-in) Eight 4ch analog input modules: 32 analog channels + 16 logic channels (built-in) Five analog input modules + three logic input modules: 10 analog channels + 64 logic channels (16 built-in channels + 48 channels in logic input modules) Five 4ch analog input modules + three logic input modules: 20 analog channels + 64 logic channels (16 built-in channels + 48 channels in logic input modules)
Module slots	Up to 8 modules Restrictions: Up to 4 modules of Model 8971 CURRENT UNIT, Up to 3 modules of Model 8973 LOGIC PROBE Up to 3 modules of Model U8977 3CH CURRENT UNIT
Maximum sampling speed	20 MS/s for simultaneous use of all channels (when using ANALOG UNIT 8966) 10 MS/s for external sampling
Memory capacity	Total 512 megawords (no memory expansion) (16 megawords/ch using 32 analog channels, 256 megawords/ch using 2 analog channels)
Removable storage	SD card slot × 1, USB memory slot × 1, Internal storage (1 TB, factory option)
Printer	PRINTER UNIT U8351 (factory option)
Control terminals	External trigger input, trigger output, external sampling input, two external outputs (GO, NG), three external inputs (START, STOP, SAVE)
External interface	LAN: 1000BASE-T (FTP server, HTTP server) USB: USB 3.0 compliant, series A receptacle × 1, series B receptacle × 1
Environmental conditions (no condensation)	Operation: -10°C to 40°C (14°F to 104°F), 20% to 80% RH With printer in use: 0°C to 40°C (32°F to 104°F), 20% to 80% RH Storage: -20°C to 50°C (-4°F to 122°F), 90% RH or less
Power supply	100 V to 240 V AC, 50 Hz/60 Hz 10 V to 28 V DC (when using DC POWER UNIT 9784)
Power consumption	130 VA (220 VA when using PRINTER UNIT U8351)
Dimensions and weight	Approx. 351 mm (13.82 in.) W × 261 mm (10.28 in.) H × 140 mm (5.51 in.) D (excluding protrusions), 7.6 kg (268.1 oz., main unit only)
Included accessories	Startup guide × 1, precautions for use × 1, input code label × 1, power cord × 1 (recording paper × 1 and roll paper attachment × 2, when PRINTER UNIT U8351 is installed)

Other options: refer to the detailed catalog

Note: user cannot install or change the Printer Unit U8351, the DC Power Unit 9784, and the Internal Storage U8334.


Option



The shared modules for Memory HiCorder MR6000, MR8848, MR8827, and MR8740T are listed on page 16.

Waveform Generation and Recording. Total 64ch, 32 Analog Channels + 32 Logic Channels

MEMORY HiCORDER MR8827

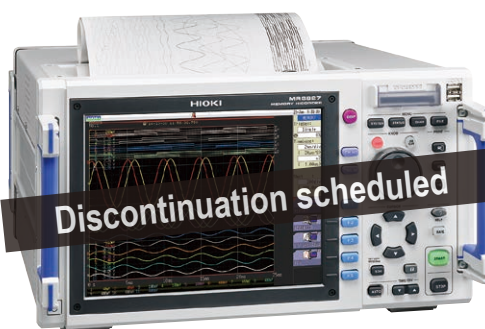

- USB 2.0
- LAN
- CE
- 3 year Warranty

Discontinuation scheduled

MR8827 main unit with U8350 Printer Unit installed

- Generate and record waveforms with a single unit
- Output previously recorded problematic waveforms and apply to devices under test to simulate potential issues
- 32 analog + 32 logic channels to 28 analog + 64 logic channels
- High-speed sampling up to 20MS/s with fully isolated inputs
- Safe measurement with all isolated analog inputs
- Large capacity memory of total 512M-words
- Measure various system signals from high voltage to ultra low voltage simultaneously

Model No. (Order Code) **MR8827** (Max. 32 ch, 512 MW memory, main unit only)

Note: main unit MR8827 cannot operate alone. You must install one or more optional input modules in the unit.

Basic specifications (Accuracy guaranteed for 1 year)

Max. Number of channels	32 ch analog + 32 ch logic, or 28 ch analog + 64 ch logic (when use with built-in logic input + plug-in logic unit 8973 × 2)
Number of slots	16 slots (Max. 16)
Number of logic channels	32 ch logic (logic probe terminal GND share a common GND with chassis) Built-in logic input not available when using DVM Unit MR8990 on slots 1, 2, 9, or 10. [Limitation on using built-in logic input] (with logic measurement ON) • Measurement resolution on slots 1, 2, 9, and slot 10 is limited up to 12 bits • Cannot use Frequency Unit 8970 on slots 1, 2, 9, or 10
Measurement ranges (20 div full-scale)	[Analog Unit 8966]: 5 mV/div to 20 V/div, 12 ranges, resolution: 1/100 of range (using 12-bit A/D) [High Resolution Unit 8968]: 5 mV/div to 20 V/div, 12 ranges, resolution: 1/1600 of range (using 16-bit A/D)
Max. allowable input	400 V DC (using the 8966/8968)
Frequency characteristics	DC to 5 MHz (-3 dB, using the 8966), DC to 100 kHz (-3 dB, using the 8968)
Time axis (Memory function)	5 μs to 5 min/div, 26 ranges, at 100 points/div resolution
Measurement functions	Memory (high-speed recording), Recorder (real-time recording), X-Y recorder, FFT
Other functions	Numerical calculation, Waveform processing, Waveform judgment (at Memory, or FFT function)
Memory capacity	128M-words/ch (using 4 Analog channels) to 16M-words/ch (using 32 Analog channels), Total capacity 512MW memory
Data storage media	USB memory stick, CF card, Built-in SSD unit (option, 128GB) *Approx. 125 sec. when saving 100 MB of data, *Data of 100 MB in size can record 16,000 div waveforms across 32 channels
Printing	[Built-in A4-size printer option]: 216 mm (8.50 in.) × 30 m (98.43 ft.), thermal paper roll, Recording speed: Max. 50 mm (1.97 in.)/s
Display	10.4 inch TFT color LCD (SVGA, 800 × 600 dots)
External interfaces	LAN: 100BASE-TX, USB 2.0 series A receptacle 2 port (for USB memory, mouse) USB 2.0 series B receptacle (for communication with PC, mass storage)
Power supply	100 to 240 V AC, 50/60 Hz (220 VA max., when using printer: 350 VA max.)
Dimensions and mass	401 mm (15.79 in.) W × 233 mm (9.17 in.) H × 388 mm (15.28 in.) D (including protruding parts except handle), 12.6 kg (444.4 oz.) (main unit only)
Included accessories	Instruction manual × 1, Power cord × 1, Input cord label × 1, Printer paper × 1 (when ordering printer unit), Roll paper attachment × 2 (when ordering printer unit)

Option



Other options: refer to the detailed catalog

The shared modules for Memory HiCorder MR6000, MR8848, MR8827, and MR8740T are listed on page 16.

Max. 108 Analog Channels, Reduce Inspection Data Transfer Time to Zero

MEMORY HiCORDER MR8740T



- Ideal for multipoint inspection of high performance boards such as ECU
- 108ch analog to 96ch analog + 48ch logic input
- Reduce time required to save to external media to max.1/100 compared with conventional method
- 20 MS/s simultaneous sampling on all channels
- Safe measurement with all analog inputs isolated
- Supports 4K monitor to display multi-channel waveforms without overlapping
- Measure 4 channels with 1 unit (4 ch analog Unit U8975, 4 ch DVM Unit U8991)
- Generate constant voltage, constant current, and simulated resistance (VIR Generator Unit U8794)

Model No. (Order Code) **MR8740-50** (Max. 108ch, 1GW memory, main unit only)

Note: a special option such as an input unit is required for the main unit. Please purchase various common options such as input code separately.

Basic specifications (Accuracy guaranteed for 1 year)

Number of input units	Max. 27 slots
Number of channels	[Using the U8975] Max. 108 ch analog, or 96 ch analog + 48 ch logic (when used in combination with U8975 + 8973) [Using the 8966] Max. 54 ch analog, or 48 ch analog + 48 ch logic (when used in combination with 8966 + 8973) *Logic unit 8973 is limited to slots 25 to 27, up to 3 units. *Analog unit channels are isolated from each other and from chassis. Logic unit channels share a common GND with chassis.
Measurement ranges	100 mV to 400 V f.s., 12 ranges, resolution: 1/2000 of range (when using 8966) 4 V to 200 V f.s., 6 ranges, resolution: 1/32000 of range (when using U8975) 100 mV to 1000 V f.s., 5 ranges, resolution: 1/1000 000 of range (when using MR8990) 1 V, 10 V, 100 V f.s., 3 ranges, resolution: 1/1000 000 of range (when using U8991)
Max. allowable input	400 V DC (when using 8966; upper limit voltage that can be applied between input terminals without damage)
Max. rated voltage to earth	300 V AC/DC (input and instrument are isolated; between input channels and chassis; upper limit voltage that can be applied between input channels without damage)
Frequency characteristics	DC to 5 MHz (-3 dB, when using 8966)
Max. sampling speed	20 MS/s, all ch simultaneous, external sampling: 10 MS/s
Measurement functions	Memory (high-speed recording)
Memory capacity	Total of 1 G Word installed, 16 MW/ch (when using 8966), 8 MW/ch (when using U8975 or MR8990), 4 MW/ch (when using U8991)
Internal storage	SSD 480 GB
Removable storage	USB memory stick × 8
Monitor output	VGA, HDMI, Display Port, Recommended resolution 1920 × 1080 dot or more
External interfaces	[LAN] 1000 BASE-T, 100 BASE-TX, 10 BASE-TX (2 port) (DHCP and DNS support, FTP server/client, HTTP server) [USB] USB 3.0 Series A receptacle × 4, USB 2.0 × 4
Power supply	100 to 240 V AC, 50/60 Hz (400 VA max.)
Dimensions and mass	426 mm (16.77 in.)W × 177 mm (6.97 in.)H × 505 mm (19.88 in.)D, 13.3 kg (469.1 oz.) (main unit only)
Included accessories	Power cord × 1, Quick Start Manual (booklet) × 1, blank panel (blank slot only), rack installation hardware

The shared modules for Memory HiCorder MR6000, MR8848, MR8827, and MR8740T are listed on page 16.

1000 V Direct Input Multi-channel Logger

MEMORY HiCORDER MR8875



- 1000 V input and instantaneous DC or RMS waveform measurement with new Analog Unit MR8905
- Multi-channel logger capable of thermocouple temperature measurement up to 60 ch at 10 msec intervals
- Measure multiple channels simultaneously despite handheld portable design
- Max. 2 µsec high-speed simultaneous logging for all input channels
- Save directly to the SD Card in real time for uninterrupted long-term logging
- 16-bit high-resolution measurement of voltage, temperature, and distortion
- FFT calculation, waveform calculation functions for advanced analysis
- Intuitive touch screen for optimal operability
- Tough against vibrations and extreme temperatures
- 3 different power supplies

Model No. (Order Code) **MR8875** (Max. 16 - 60ch, 32MW memory, main unit only)

Note: test leads are not included. Purchase the leads appropriate for your application separately. AC Adapter Z1005 is included as standard.

Basic specifications (Accuracy guaranteed for 1 year)

Number of input units	Up to 4 slots
Number of channels	Max. 16 analog channels (Max. 60 channels when using the MR8902) + standard 8 logic channels + 2 pulse channels Note: For analog units, channels are isolated from each other and from the MR8875's GND. For CAN unit ports or standard logic terminals or standard pulse terminals, all channels have common GND.
Measurement ranges (20 div full-scale)	5 mV to 10 V/div, 11 ranges (when using the MR8901), 500 mV to 50 V/div, 7 ranges (when using the MR8905), resolution: 1/1250 of range
Max. rated voltage	Between terminals: 1000 V DC, 700 V AC (when using the MR8905)
Frequency characteristics	DC to 100 kHz (-3 dB, when using the MR8901)
Time axis	200 µs to 5 min/div, 21 ranges, sampling period: 1/100 of range, External sampling possible
Max. sampling rate	[When using MR8901] 500 kS/s (2 µs period, all channels simultaneously) [When using MR8902] 10 ms (all input channels are scanned at high speed during every recording interval) [When using MR8903] 200 kS/s (5 µs period, all channels simultaneously) External sampling: 200 kS/s (5 µs period)
Measurement functions	High-speed function (high speed recording), Real-time calculation between channels, FFT calculation, or other functions
Storage memory capacity	Total 32 M-words (memory expansion: N/A, 8 MW each input unit) Note: 1 word = 2 bytes, therefore 32 Mega-words = 64 Mega-bytes. Note: storage memory can be allocated depending on the number of channels used at each input unit
Removable storage	SD card slot × 1, USB 2.0 memory
Display	Touch-panel operation 8.4-inch SVGA-TFT color LCD (800 × 600 dots)
Communication interfaces	LAN: 100BASE-TX (DHCP, DNS supported, FTP server/client, WEB server, send E-mail, command control) USB: USB 2.0 compliant, series mini-B receptacle × 1 (setting / measure with communication command, or file transfer SD card to PC), series A receptacle × 2 (USB memory, USB mouse/ key-board)
Power supply	1) AC adapter Z1002: 100 to 240 V AC (50/60 Hz), 56 VA 2) Battery pack Z1003: 7.2 V DC, 36 VA, continuous operation time: 1 hour with back light ON (AC adapter has priority when used in combination with battery pack), Charges while installed in the MR8875, recharging time: 3 hours 3) External DC Power: 10 to 28 V DC, 56 VA, (please contact your Hioki distributor for connection cord)
Dimensions and mass	298 mm (11.73 in.)W × 224 mm (8.82 in.)H × 84 mm (3.31 in.)D, 2.4 kg (84.7 oz.), (excluding input units and the Battery pack Z1003) Reference data: 3.47 kg/ 122.4 oz (including the MR8901 × 4 units and the Battery pack Z1003)
Included accessories	Instruction manual × 1, Measurement guide × 1, AC adapter Z1002 × 1, Protection sheet × 1, USB cable × 1, Shoulder strap × 1

Other options: refer to the detailed catalog

AC ADAPTER Z1002
For main unit, 100 to 240 V AC

POWER CABLE L1012
For main unit, DC drive, connect to external battery. Unprocessed ends, approx. 2 m (6.6 ft.)

BATTERY PACK Z1003
NiMH. Charges while installed in the main unit

CAN CABLE 9713-01
For the MR8904, unprocessed on one end, 1.8 m (5.91 ft.) length, CAN FD is not supported

SD MEMORY CARD
Z4001 (2GB)
Z4003 (8GB)

SD Card Precaution
Use only SD Cards sold by Hioki. Compatibility and performance are not guaranteed for SD cards made by other manufacturers. You may be unable to read from or save data to such cards.

CARRYING CASE C1004
For the MR8875, includes compartment for options, hard trunk type

Modules for MR8875 only. Install by inserting into the main unit. Can be replaced by user.

ANALOG UNIT MR8901 4ch, Voltage measurement, DC to 100kHz	CAN UNIT MR8904 2-port, up to 15 analog channels and up to 16 logic channels, CAN FD is not supported.
VOLTAGE/TEMP UNIT MR8902 15ch, Voltage measurement, thermocouple measurement	ANALOG UNIT MR8905 2ch, High-voltage measurement (available with MR8875 Ver 2.14/3.14 or later)
STRAIN UNIT MR8903 4ch, Voltage measurement, strain gauge converter input	

Capture High- to Low-Voltage Signals in a Single Device! Rugged, Professional and Ready for the Field

MEMORY HiCORDER MR8880



USB 2.0

CE

3 Year Warranty



Optional printer docks onto main unit

- CAT III 600 V isolation performance; directly measure a 480 V power line
- 4 completely isolated channels let you simultaneously record data on a 3-phase power line plus have one extra channel
- Tough against harsh environments; -10°C to 50°C operating temperature range
- Built to withstand mechanical shocks and vibrations (ships standard with side protectors)
- Make settings easily with PRESETS function

Model No. (Order Code) **MR8880-20** (4ch, printer unit option, English model)

Note: input cords and Battery Pack are not included. Purchase the cords appropriate for your application separately. Printer Unit MR9000 is optional and sold separately.

Basic specifications (Accuracy guaranteed for 1 year)

Number of channels	4 analog channels + 8 logic channels (standard) <i>Note: isolated analog channels, isolated input and frame, logic has common GND</i>
Measurement ranges (10 div full-scale)	4 channels of voltage measurement; mode switchable between instantaneous waveform or RMS value, 10 mV to 100 V/div, 13 ranges, resolution: 1/640 of range RMS value mode: 30 Hz to 10 kHz, Crest factor: 2
Max. rated voltage	Between terminals: 600 V AC/DC, Between terminal to earth: 600 V AC/DC CAT III; 300 V AC/DC CAT IV
Frequency characteristics	DC to 100 kHz (±3dB)
Time axis (High-speed function)	100 μs to 100 ms/div, 10 ranges, Sampling period: 1/100 of range
Recording intervals (Real-time function)	100 μs to 1 minute, 19 selections (simultaneous sampling in all channels)
Measurement functions	High-speed function (high speed recording) Real-time function (actual time recording)
Memory capacity	14-bits × 1M-words/ch (1 word = 2 bytes)
Removable storage	CF card slot ×1 (Up to 2 GB); USB 2.0 memory ×1
Printing	[Printer unit is option] 112 mm (4.41 in.) × 18 mm (59.06 ft.), thermal paper roll, Recording speed: 10 mm (0.39 in.)/sec <i>Note: printing is not supported when using alkaline batteries</i>
Display	5.7-inch VGA-TFT color LCD (640 × 480 dots)
Displayable languages	English, Japanese, Chinese
Communication interfaces	USB 2.0 mini-B receptacle ×1; Transfers files from the installed CF card or USB memory stick to a PC when connected, and External PC control
Power supply	AC adapter Z1002: 100 to 240 V AC (50/60 Hz), 45 VA (include AC adapter, when Real-time recording), 107 VA (include AC adapter, when Real-time recording and printing) Battery pack Z1000: AC adapter has priority when used in combination with battery pack, recharge with AC adapter 3 hours, Continuous use 3 hours (with back-light ON) L/R6 (AA) alkaline batteries ×8, Continuous use 40 minutes, (with back-light ON, cannot be used with the Printer unit) DC power supply: 10 to 28 V DC (cable available by special order)
Dimensions and mass	205 mm (8.07 in.)W × 199 mm (7.83 in.)H × 67 mm (2.64 in.)D, 1.66 kg (58.6 oz.) (with the Battery pack installed) When printer is combined - with main unit: 303 mm (11.93 in.)W × 199 mm (7.83 in.)H × 67 mm (2.64 in.)D, 2.16 kg (76.2 oz.) (with the Battery pack installed)
Included accessories	Instruction manual ×1, AC adapter Z1002 ×1, Alkaline battery box ×1, Strap ×1, USB cable ×1

Other options: refer to the detailed catalog

Options	<p>PRINTER UNIT MR9000 Printing width 100 mm (3.94 in.), used together with the MR8880-20 main body, includes 1 roll of recording paper</p>	<p>RECORDING PAPER 9234 112 mm (4.41 in.) × 18 mm (59.06 ft.), roll type, 10 rolls/set</p>	<p>AC ADAPTER Z1002 For main unit, 100 to 240 V AC</p>	<p>POWER CABLE L1012 For main unit, DC drive, connect to external battery, Unprocessed ends, approx. 2 m (6.6 ft.)</p>	<p>BATTERY PACK Z1000 NiMH, Charges while installed in the main unit</p>	<p>CARRYING CASE C1003 For the MR8880 series, includes compartment for options, soft case type</p>	<p>PC CARD 2G 9830 (2 GB capacity) PC CARD 1G 9729 (1 GB capacity) PC CARD 512M 9728 (512 MB capacity)</p>
	Other options: refer to the detailed catalog						

Oscilloscope-like Waveform Observation, Plus Recording of RMS Variations - In a Single Device!

MEMORY HiCORDER MR8870



USB 2.0

CE

3 Year Warranty

- Mode for recording instantaneous waveform and RMS fluctuations
- Save values in real time to a CF card
- Record four channels at once by synchronizing two instruments with the PC application (free to download)
- Compact and easy to carry
- Easy, intuitive operation
- Fast, 1MS/s performance despite the compact size
- Built-in, compact-yet-sharp QVGA-TFT wide LCD

Model No. (Order Code) **MR8870-20** (2ch, English model)

Note: input cords and battery pack are not included. Purchase the cords appropriate for your application separately. The AC Adapter Z1005 is included as standard.

Basic specifications (Accuracy guaranteed for 1 year)

Number of channels	2 analog channels + 4 logic channels (standard) <i>Note: isolated analog channels, isolated input and frame, logic has common GND</i>
Measurement ranges	10 mV to 50 V/div (10 div full-scale), 12 ranges, Resolution: 1/100 of range
Max. rated voltage	Between terminals: 400 VDC, Between terminal to earth: 300 VAC, DC CAT II
Frequency characteristics	DC to 50 kHz (-3 dB)
Time axis (Memory mode)	100 μs to 5 min/div, 20 ranges, at 100 points/div resolution, three steps of time-axis magnification from ×2 to ×10, and 9 steps of time-axis compression from ×1/2 to ×1/1,000
Recording intervals (RMS mode)	1 ms to 1 min., 16 settings, sampling period: 200 μs (fixed) (for AC voltage/current, 1,000 RMS values/sec.), envelope mode always on <i>Note: only the maximum value and minimum value for each recording interval are recorded.</i>
Measurement functions	Memory recorder (high speed recording), RMS recorder (50/60 Hz, DC only)
Memory capacity	12-bits × 2M-words/ch (1 word = 2 bytes)
Removable storage	CF card TYPE I slot ×1 (Up to 2 GB)
Display	4.3-inch WQVGA-TFT color LCD (480 × 272 dots)
Displayable languages	English, Japanese
Interfaces	USB 2.0 mini-B receptacle ×1, Functionality: Connect the instrument to a PC to send files on the CF card to the PC. The instrument cannot be controlled from a PC.
Printer	N/A
Power supply	AC Adapter Z1005: 100 to 240 VAC (50/60 Hz), 30 VA max. (when using the AC adapter and charging the 9780 with the instrument) Battery Pack 9780: 3 VA, continuous operating time of approx. 2 hr. (25°C reference value; when used with the Z1005, the Z1005 takes priority), charging time of 200 min. using the AC adapter (25°C reference value) (option) External DC power: 10 to 16 V, 10 VA max. (connection cord of 3 m or less is available by special-order)
Dimensions and mass	176 mm (6.93 in.)W × 101 mm (3.98 in.)H × 41 mm (1.61 in.)D, 600 g (21.2 oz.) (with the Battery pack 9780 installed)
Included accessories	Instruction manual ×1, Measurement guide ×1, AC adapter Z1005 ×1, Strap ×1, USB cable ×1, Protection sheet 9809 ×1

Other options refer to the detailed catalog

Accessories	<p>PROTECTION SHEET 9809 For LCD protection, pairs of additional sheets can be purchased separately, bundled with instrument</p>	<p>AC ADAPTER Z1005 100 to 240 V AC, bundled with instrument</p>	Options	<p>BATTERY PACK 9780 NiMH, Charges while installed in the main unit</p>	<p>SOFT CASE 9812 Includes space for small items, Neoprene rubber</p>	<p>CARRYING CASE 9782 Includes compartment for options, resin coated</p>	<p>PC CARD 2G 9830 (2 GB capacity) PC CARD 1G 9729 (1 GB capacity) PC CARD 512M 9728 (512 MB capacity)</p>
	Other options refer to the detailed catalog						

Non-contact Sensing

Easy CAN Acquisition, Simply Pinch Over Wire Insulation

NON-CONTACT CAN SENSOR SP7001

Basic specifications

Detection method	Capacitive-coupled signal detection *No bare-wire connections
Detectable cables	AVS/AVSS-compliant cables, External diameter: 1.2 mm (0.05 in.) to 2.0 mm (0.08 in.)
Number of channels	1 CH (SP7150), 2 CH (SP7100)
Compatible communications speeds	CAN, CAN FD 125 kbit/s to 3 Mbit/s
Total delay time	130 ns (typical)
CAN terminal resistance	60 Ω (typical), built-in
Signal output connector	D-sub 9-pin female
Operating temperature, humidity	Temperature: -40 °C to 85 °C (-40 °F to 185 °F) Humidity: -40 °C to 60 °C (-40 °F to 140 °F), 80% RH or less (with no condensation), 60 °C to 85 °C (140 °F to 185 °F), 60% RH or less (with no condensation)
Power supply	(1) When using the SP7001-95 or SP7150 - USB bus power (5 V DC), Maximum rated power: 1 VA - Z1013 AC Adapter: Rated supply voltage: 100 V to 240 V AC, Maximum rated power: 6 VA (including AC adapter), 1 VA (product only) (2) When using the SP7001-90 or SP7100 - Z1008 AC Adapter: Rated supply voltage: 100 V to 240 V AC, Maximum rated power: 8 VA (including AC adapter), 3 VA (product only) - External power supply: Rated supply voltage: 10 V to 30 V DC, Maximum rated power: 3 VA
Dimensions and mass	SP7001: 44 W × 85 H × 20 D mm (1.73 in. W × 3.35 in. H × 0.79 in. D), 180 g (6.35 oz.), Cable length: 2.5 m (8.20 ft.) SP7100: 55 W × 120 H × 25 D mm (2.17 in. W × 4.72 in. H × 0.98 in. D), 130 g (4.59 oz.), Cable length: 0.3 m (0.98 ft.) SP7150: 47 W × 100 H × 20 D mm (1.85 in. W × 3.94 in. H × 0.79 in. D), 100 g (3.52 oz.), Cable length: 0.3 m (0.98 ft.) SP9250: 10.5 W × 24.5 H × 101 D mm (0.41 in. W × 0.96 in. H × 3.98 in. D), 45 g (1.59 oz.), Cable length: 0.8 m (2.62 ft.) SP9200: φ11.6 × 33.7 H mm (φ0.46 in. × 1.33 in.), 26 g (0.92 oz.), Cable length: 0.5 m (1.64 ft.) *Dimensions do not include cables. Mass includes cables.
Included accessories (SP7001)	Quick Start Manual ×1, Operating Precautions ×1
Included accessories (SP7100)	Quick Start Manual ×1, Operating Precautions ×1, Spiral tube ×1, Power cable L9500 ×1, Alligator clip ×1, Ground connection cable ×1
Included accessories (SP7150)	Quick Start Manual ×1, Operating Precautions ×1, Spiral tube (for fixing power cable) ×1, USB Cable L9510 ×1, Ground connection cable ×1, Alligator clip ×1

- Acquire CAN FD/CAN data immediately, simply by pinching probes over wire insulation with one-hand
- Eliminate concerns by using non-contact sensing technology
- Use in a diverse array of development and evaluation applications that demand reliability

Model No. (Order Code) **SP7001-90** (Supports CAN FD / CAN signals, SP7001, SP7100, SP9200 set)
SP7001-95 (Supports CAN FD / CAN signals, SP7001, SP9250, SP7150 set)

For more information on product combinations, please see our product catalog.

Single item sales



SIGNAL PROBE SP9250
Trigger Type, Set of 2



SIGNAL PROBE SP9200
Screw type, Set of 2



NON-CONTACT CAN SENSOR SP7001
Supports CAN FD / CAN signals



CAN INTERFACE SP7150
1 ch, USB power supply



USB CABLE L9510
USB A-C type, Power supply only



CAN INTERFACE SP7100
2 ch, power supply +10 V to +30 V DC



POWER CABLE L9500
For supplying 10 V to 30 V DC

Options



AC ADAPTER Z1013
For SP7150
Can be powered from a commercial power supply



AC ADAPTER Z1008
For SP7100
Can be powered from a commercial power supply



SPLIT CABLE SP9900
For CH1, CH2 output branch



CARRYING CASE C1013
Hard case, 2CH can be stored

Recorders
Peripherals

CAN FD
CAN



Measure High Voltages Safely

DIFFERENTIAL PROBE P9000



- Compact probe for CAT III 1000 V environments
- Wave mode: Observe instantaneous waveforms
- RMS mode: Observe RMS value waveforms
- Principal areas of use
 1. High-voltage battery circuits in EVs, HEVs, and other automobiles
 2. High-voltage circuits in energy-related equipment such photovoltaic cells
 3. Commercial power line circuits (480 V rms, etc.)
 4. High-voltage surge noise from inverters, motors, solenoids, etc.

Model No. (Order Code) **P9000-01** (For the Memory HiCorder series, Wave only)
P9000-02 (For the Memory HiCorder series, Wave/RMS)

Connect to a Memory HiCorder's analog input terminal. Must be powered by an AC adapter, USB bus power, or other suitable power source. Please visit the Hioki website to see the number of P9000 probes that can be used when power is supplied from the standard USB terminal of the Memory HiCorder.

Basic specifications (Accuracy guaranteed for 1 year)

	P9000-01	P9000-02
Measurement functions	Waveform monitor output only Frequency characteristics: DC to 100 kHz, -3 dB	Waveform monitor output/AC RMS value output (switchable) Wave mode frequency characteristics: DC to 100 kHz, -3 dB RMS mode frequency characteristics: 30 Hz to 10 kHz; response time: 300 ms (rising) or 500 ms (falling)
Division ratio	1000:1 or 100:1 (user selectable)	
DC amplitude accuracy	±0.5% f.s. (f.s. = 1.0 V; voltage division ratio: 1000:1) (f.s. = 3.5 V; voltage division ratio: 100:1)	
RMS amplitude accuracy (P9000-02 only)	±1% f.s. (30 Hz to 1 kHz non-inclusive, sine wave), ±3% f.s. (1 kHz to 10 kHz, sine wave)	
Input resistance, capacity	Between H and L: 10.5 MΩ, 5 pF or less (at 100 kHz)	
Max. allowable input	1000 V AC/DC	
Max. rated voltage to earth	1000 V AC/DC (CAT III)	
Operating temperature	-40°C (-40°F) to 80°C (176°F)	
Power supply	(1) AC Adapter Z1008 (100 to 240 V AC, 50/60 Hz), 6 VA (including AC adapter) or 0.9 VA (probe only) (2) USB bus power (5 V DC, USB Micro-B receptacle), 0.8 VA To prevent an electric shock, when supplying power from the USB-microB terminal, please supply from a device which USB's GND terminal of the source device is grounded. (3) External power supply (2.7 V to 15 V DC)	
Dimensions and mass	128 mm (5.04 in.)W × 36 mm (1.42 in.)H × 22 mm (0.87 in.)D, 170 g (6.0 oz.) Cord length: Input: 70 cm (2.30 ft.); output: 1.5 m (4.92 ft.)	
Included accessories	Instruction manual ×1, alligator clips ×2, carrying case ×1	

Can also be used with accessories such as L4936/L4937/L4931 as available for other testers.

Options	Description
	AC ADAPTER Z1008 100 to 240 V AC
	GRABBER CLIP L9243 Attaches to the tip of the banana plug cable, Red/Black: 1 each, 185 mm (7.28 in.) length, CAT II 1000 V
	CONVERSION CABLE L1011 30 cm (0.98 ft.) length, covert BNC to wire
	CONVERSION CABLE L1011-10 2.4 m (7.87 ft.) length, covert BNC to wire

3 Kinds of Measurements with a Single Probe

DIFFERENTIAL PROBE 9322



- Floating measurement of high-voltage waveforms (DC mode)
- Detection of power supply surge noise (AC mode)
- RMS rectified output (RMS mode)
- Main Applications
 1. Measurement of potential differences included in common mode voltages, such as IGBT
 2. Measurement of commercial power line waveforms, such as on 400 V power lines
 3. Measurement of high voltage surge noise waveforms
 4. Measurement of the RMS value of inverter outputs, etc.

Model No. (Order Code) **9322** (For the Memory HiCorder series)

The Differential Probe 9322 cannot be used by itself. Please use it in combination with a Hioki Memory HiCorder. The Differential Probe 9322 requires a power supply.

* For the latest information about how to power the 9322 with a Memory HiCorder, please visit the Hioki website.

Basic specifications (Accuracy guaranteed for 1 year)

Measurement functions	DC mode: Waveform monitor output, DC to 10 MHz ±3 dB AC mode: Detection of power line surge noise, 1 kHz to 10 MHz ±3 dB (Low frequency cut-off frequency 1 kHz ± 300 Hz) RMS mode: Rectified RMS output of DC and AC voltages, DC, 40 Hz to 100 kHz, Response speed: 200 ms or less (400 V AC)
Max. allowable input	2000 V DC, 1000 V AC
Max. rated voltage to earth	When using the Grabber Clip L9243: 1000 V AC/DC (CAT II) When using alligator clip: 1000 V AC/DC (CAT II), 600 V AC/DC (CAT III)
Output	Voltage division ratio: 1/1000, BNC terminal (DC/AC/RMS 3-mode selectable output)
DC amplitude accuracy	±1% f.s. (1000 V DC or less), ±3% f.s. (2000 V DC or less) (f.s.=2000 V DC)
RMS amplitude accuracy	±1% f.s. (DC, 40 Hz to 1 kHz), ±4% f.s. (1 kHz to 100 kHz) (f.s.=1000 VAC)
Input resistance, capacity	H-L: 9 MΩ, approx 10 pF (C at 100 kHz) H-case, L-case: 4.5 MΩ, approx 20 pF (C at 100 kHz)
Power supply	+5 to +12 V, less than 300 mA. (DC jack OD 5.5 mm [0.22 in], ID 2.1 mm [0.08 in]) - Via AC adapter 9418-15 - Via MR6000 dedicated Probe Power Unit Z5021 through Power cord 9248 - Via Logic terminal on Memory HiCorder through Power cord 9324 ^(*) - Via sensor terminal of F/V Unit 8940 ^(*) through Power cord 9325 ^(*) - Via DC power output terminal attached to the input unit for the 8855 through Power cord 9328 ^(*) - Via the 8860 series dedicated Probe Power Unit 9687 ^(*) through Power cord 9248
Dimensions and mass	70 mm (2.76 in.)W × 150 mm (5.91 in.)H × 25 mm (0.98 in.)D, 285 g (10.1 oz.), Cord length: Input 46 cm (1.51 ft.), Output 1.3 m (4.27 ft.)
Included accessories	Alligator clips ×1 (red/black set), Grabber clip L9243 ×1 (red/black set), Carrying case C0203 ×1, Instruction manual ×1

*1: Discontinued product

Supplied Accessories

GRABBER CLIP L9243
Attaches to the tip of the banana plug cable, Red/Black: 1 each, 185 mm (7.28 in.) length, CAT II 1000 V

CARRYING CASE C0203

Power Supply

AC ADAPTER 9418-15
100 to 240 V AC

When a current sensor is connected to the Probe Power Unit Z5021, or the Current Unit 8971, U8977, the number of the 9322 connection including the current sensor is limited (up to a total of 9 including the current sensor).

Power Supply 2

MR6000 dedicated option

PROBE POWER UNIT Z5021
Number of the 9322 connections : 8 (Combined with 9248 cable)

POWER CORD 9248
Power supply to the 9322 through this cord from the Probe power unit Z5021 / 9687, 70 cm (2.30 ft.) length

Recorders Peripherals

Recorder Peripherals



For more information about compatible models, please see Hioki website.

Recorders Peripherals

Voltage Measurement Type A					Voltage Measurement Type B	
	<p>CONNECTION CORD L9790 Flexible ϕ 4.1 mm (0.16 in.) thin dia., cable allowing for up to 600 V input. 1.8 m (5.91 ft.) length * The end clip is sold separately.</p>	<p>ALLIGATOR CLIP L9790-01 Red/black set attaches to the ends of the cables L9790</p>	<p>CONTACT PIN 9790-03 Red/black set attaches to the ends of the cables L9790</p>	<p>GRABBER CLIP 9790-02 Red/black set attaches to the ends of the cables L9790 * When this clip is attached to the end of the L9790, input is limited to 300 V. Red/black set.</p>		<p>CONNECTION CORD L9198 ϕ 5.0 mm (0.20 in.) dia., cable allowing for up to 300 V input. 1.7 m (5.58 ft.) length, small alligator clip</p>

Voltage Measurement Type C			Voltage Measurement Type D		
	<p>CONNECTION CORD L9197 ϕ 5.0 mm (0.20 in.) dia., cable allowing for up to 600 V input. 1.8 m (5.91 ft.) length, a detachable large alligator clips are bundled</p>	<p>GRABBER CLIP L9243 Attaches to the tip of the banana plug cable, Red/Black: 1 each, 185 mm (7.28 in.) length, CAT II 1000 V</p>		<p>10:1 PROBE 9665 Max. rated voltage to earth is same as for input module, Frequency characteristics DC to 150 MHz, 1.5 m (4.92 ft.) length</p>	<p>100:1 PROBE 9666 Max. rated voltage to earth is same as for input module, Frequency characteristics DC to 200 MHz, 1.5 m (4.92 ft.) length</p>

Voltage Measurement Type E						
	<p>CONNECTION CABLE SET L4940 Banana plug - banana plug, 1.8 m (4.92 ft.) length, red/black each 1</p>	<p>EXTENSION CABLE SET L4931 Expands the length of L4930/L4940, 1.5 m (4.92 ft.) length</p>	<p>ALLIGATOR CLIP SET L4935 Attaches to the tip of the L4930/L4940, CAT IV 600 V, CAT III 1000 V</p>	<p>BUS BAR CLIP SET L4936 Attaches to the tip of the L4930/L4940, CAT III 600 V</p>	<p>MAGNETIC ADAPTER SET L4937 Attaches to the tip of the L4930/L4940, CAT III 1000 V</p>	<p>GRABBER CLIP L9243 Attaches to the tip of the Connection cord or cable, CAT II 1000 V, 185 mm (7.28 in.) length</p>

High Voltage Measurement			High Voltage Measurement		Storage Media	
	<p>DIFFERENTIAL PROBE P9000-01 For up to 2 kV DC or 1 kV AC. Use with AC Adapter 9418-15</p>	<p>AC ADAPTER Z1008 100 to 240 V AC</p>		<p>DIFFERENTIAL PROBE P9000-02 (Waveform / RMS mode selectable) For up to 1 kV AC, DC</p>		<p>PC CARD 2G 9830 2 GB capacity</p> <p>PC CARD 1G 9729 1 GB capacity</p> <p>PC CARD 512M 9728 512 MB capacity</p>

Logic Measurement				Storage Media		Precaution
	<p>LOGIC PROBE 9320-01 4-channel type, for voltage/contact signal ON/OFF detection (response pulse width 500 ns or more, miniature terminal type)</p>	<p>LOGIC PROBE MR9321-01 4 isolated channels, ON/OFF detection of AC/DC voltage (miniature terminal type)</p>	<p>LOGIC PROBE 9327 4-channel type, for voltage/contact signal ON/OFF detection (response pulse width 100 ns or more, miniature terminal type)</p>		<p>SD MEMORY CARD 2GB Z4001 2 GB capacity</p> <p>SD MEMORY CARD Z4003 8 GB capacity</p> <p>USB DRIVE Z4006 16 GB, Long-life, High-reliability SLC Flash Memory</p>	

Connection Cables								
	<p>OUTPUT CORD L9094 ϕ 3.5 mm (0.14 in.) dia. mini plug to banana, 1.5 m (4.92 ft.) length</p>	<p>OUTPUT CORD L9095 Connect to BNC terminal, 1.5 m (4.92 ft.) length</p>	<p>OUTPUT CORD L9096 Connect to terminal block, 1.5 m (4.92 ft.) length</p>	<p>CONNECTION CORD 9165 Cord has metallic BNC connectors at both ends, use at metallic terminal, 1.5 m (4.92 ft.) length</p>	<p>CONNECTION CORD 9166 Metal BNC to clip, 1.5 m (4.92 ft.) length</p>	<p>CONVERSION ADAPTOR 9199 Receiving side banana (female), output BNC (male)</p>	<p>CONNECTION CORD L9217 Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft.) length</p>	<p>LAN CABLE 9642 Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft.) length</p>

Recording Papers					
	<p>RECORDING PAPER 9234 For the MR8880 (MR9000), 8860/8861 (8995-01), 8420/21/22 (8992), 8807/08 (8992), 8807-50/8808-50 (8992), 8714/15 Roll type A6 width 112 mm (4.41 in.) \times 18 m (59.06 ft.), 10 rolls/set</p>	<p>RECORDING PAPER 9232 For the 8804/05/06, 3193 (9604), 3194 (9604) Roll type, 74 mm (2.91 in.) \times 10 m (32.81 ft.), 10 rolls/set</p>	<p>RECORDING PAPER 9231 For the MR8848(U8351)/MR8847A/MR8847/MR8827(U8350), 8860-50/8861-50(8995), 8855/47/46/45/42/41/40 Roll type A4 width 216 mm (8.50 in.) \times 30 m (98.43 ft.), 6 rolls/set</p>	<p>RECORDING PAPER 9235 For the 8205 (-10), 8206 (-10) Roll type, 74 mm (2.91 in.) \times 15 m (49.22 ft.), 10 rolls/set</p>	<p>RECORDING PAPER 9236-01 For the 8205 (-10), 8206 (-10) Climate-resistant roll type, 74 mm (2.91 in.) \times 15 m (49.22 ft.), 10 rolls/set</p>
	<p>RECORDING PAPER 9229 For the 8825/8826 Roll type, 264 mm (10.39 in.) \times 30 m (98.43 ft.), 6 rolls/set</p>	<p>RECORDING PAPER 9221 For the 8801 series, 8810 series, 8830 series, 8835 series, 8851/52/53, 8710, 3195, 3620 Roll type, 110 mm (4.33 in.) \times 30 m (98.43 ft.), 10 rolls/set</p>	<p>RECORDING PAPER SE-10Z-2 For the PR8111/12, EPR-3000 series, EPR-3500 series, EPR-10B Folding, 170 mm (6.69 in.) \times 15 m (49.22 ft.), 10 books/set</p>	<p>RECORDING PAPER SE-10 For the PR8111/12, EPR-3000 series, EPR-10B Roll type, 170 mm (6.69 in.) \times 20 m (65.62 ft.), 10 rolls/set</p>	<p>RECORDING PAPER SF-10CXZ-35 For the INR-9000, PRR-5000 Folding, 250 mm (9.84 in.) \times 35 m (114.84 ft.), 1 book</p>
	<p>RECORDING PAPER SE-10P For the 8825/8826 Perforated roll type, 264 mm (10.39 in.) \times 30 m (98.43 ft.), 6 rolls/set</p>	<p>RECORDING PAPER SF-10PXZ-45 For the PRR-5000 Folding, 250 mm (9.84 in.) \times 45 m (147.65 ft.), 1 book</p>	<p>RECORDING PAPER SG-10Z For the FBR-250 series Folding, 250 mm (9.84 in.) \times 20 m (65.62 ft.), 10 books/set</p>	<p>RECORDING PAPER SH-OZ-T1 For the PSR-2101 Folding, 30 m (98.43 ft.), 10 books/set</p>	

Recorders Peripherals

Recorder Peripherals, Current Sensors

For more information about compatible models, please see Hioki's website.

For high-precision current measurement

CT9555, CT9556, CT9557 and connection cord are required separately

*While the CT9555, CT9556, CT9557 is not required in order to use a sensor equipped with PL23 (10-pin) terminal with the 8971 or 8940, the Conversion Cable 9318 (which comes with the 8971) is required for that setup.

Input Units for Current Sensors

3CH CURRENT UNIT U8977
For MR6000, MR8848, MR8740T

CURRENT UNIT 8971
For MR6000, MR8848, MR8827, MR8740T

CONVERSION CABLE 9318
Connect current sensor equipped with PL23 (10-pin) terminal to 8971/40/51, 38 cm (14.96 in.) length

Discontinuation scheduled

*A separate power supply (CT9556, CT9557) is required in order to use a high-precision current sensor. *Only sensors with ME15W (12-pin) terminals can be connected to the CT9555, CT9556, CT9557. *The separately available Conversion Cable CT9900 is required in order to use a sensor with PL23 (10-pin) terminal.

Power Supply for Current Sensors

SENSOR UNIT CT9555
1ch, with waveform output

SENSOR UNIT CT9556
1ch, with waveform/RMS output

SENSOR UNIT CT9557
4ch, with waveform/total waveform/total RMS output

CONNECTION CORD L9217
Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft.) length

PL23 (10-pin) - ME15W (12-pin) conversion

CONVERSION CABLE CT9900
Convert PL23 (10-pin) terminal to ME15W (12-pin) terminal

Discontinuation scheduled

Connection between Memory HiCorder and high precision current sensor

Memory HiCorder	Current Sensor terminal type	Connection
MR8880/MR8875/MR8870	ME15W	CT9555/CT9556/CT9557 + BNC cable
	PL23	CT9900 + CT9555/CT9556/CT9557 + BNC cable
MR6000/MR8848/MR8827/MR8740T	Current Unit 8971	ME15W CT9901 + 9318
	Except for Current Unit 8971	PL23 9318
	ME15W	CT9555/CT9556/CT9557 + BNC cable
	PL23	CT9900 + CT9555/CT9556/CT9557 + BNC cable

Up to 8000 A (High precision)
Aggregate and measure large currents in multi-cable circuits

Use multiple AC/DC Current Sensor CT6877A units with the Sensor Unit CT9557 to measure currents of up to 8000 A in multi-cable circuits.

AC/DC CURRENT SENSOR CT6877A
High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 1 MHz bandwidth, 2000 A input, $\pm 0.04\%$ amplitude accuracy, $\pm 0.08^\circ$ phase accuracy, ME15W terminal ($\pm 0.1\%$ amplitude accuracy, $\pm 0.18^\circ$ phase accuracy in case of the addition wave output)

Up to 2000 A (High precision)

AC/DC CURRENT SENSOR CT6877A
High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 1 MHz bandwidth, 2000 A input, $\pm 0.04\%$ amplitude accuracy, $\pm 0.08^\circ$ phase accuracy, ME15W terminal

AC/DC CURRENT PROBE CT6847A
Monitor the waveforms of DC to distorted AC current, DC to 70 kHz bandwidth, 2000 A AC / 1400 A DC input, $\pm 0.15\%$ amplitude accuracy, $\pm 0.1^\circ$ phase accuracy, ME15W terminal

Up to 1000 A (High precision)

AC/DC CURRENT SENSOR CT6876A
High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 1.5 MHz bandwidth, 1000 A input, $\pm 0.04\%$ amplitude accuracy, $\pm 0.08^\circ$ phase accuracy, ME15W terminal

AC/DC CURRENT PROBE CT6846A
Monitor the waveforms of DC to distorted AC current, DC to 100 kHz bandwidth, 1000 A input, $\pm 0.2\%$ amplitude accuracy, $\pm 0.1^\circ$ phase accuracy, ME15W terminal

Up to 500 A (High precision)

AC/DC CURRENT SENSOR CT6875A
High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 2 MHz bandwidth, 500 A input, $\pm 0.04\%$ amplitude accuracy, $\pm 0.1^\circ$ phase accuracy, ME15W terminal

AC/DC CURRENT PROBE CT6844A
Monitor the waveforms of DC to distorted AC current, DC to 500 kHz bandwidth, 500 A input, $\pm 0.2\%$ amplitude accuracy, $\pm 0.1^\circ$ phase accuracy, ME15W terminal

AC/DC CURRENT PROBE CT6845A
Monitor the waveforms of DC to distorted AC current, DC to 200 kHz bandwidth, 500 A input, $\pm 0.2\%$ amplitude accuracy, $\pm 0.1^\circ$ phase accuracy, ME15W terminal

AC/DC CURRENT PROBE CT6834
Monitor the waveforms of DC to distorted AC current, DC to 50 kHz bandwidth, 500 A input, $\pm 0.07\% \pm 0.007^\circ$ amplitude accuracy, $\pm 0.1^\circ$ phase accuracy, ME15W terminal

Up to 200 A (High precision)

AC/DC CURRENT SENSOR CT6873
High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 10 MHz bandwidth, 200 A input, $\pm 0.03\%$ amplitude accuracy, $\pm 0.05^\circ$ phase accuracy, ME15W terminal

AC/DC CURRENT SENSOR CT6863-05
High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 500 kHz bandwidth, 200 A input, $\pm 0.05\%$ amplitude accuracy, $\pm 0.2^\circ$ phase accuracy, ME15W terminal

AC/DC CURRENT PROBE CT6843A
Monitor the waveforms of DC to distorted AC current, DC to 700 kHz bandwidth, 200 A input, $\pm 0.2\%$ amplitude accuracy, $\pm 0.1^\circ$ phase accuracy, ME15W terminal

CLAMP ON SENSOR 9272-05
Observe waveforms of distorted AC (not for DC), 1 Hz to 100 kHz bandwidth, 20/200 A input, $\pm 0.3\%$ amplitude accuracy, $\pm 0.2^\circ$ phase accuracy, ME15W terminal

AC/DC CURRENT PROBE CT6833
Monitor the waveforms of DC to distorted AC current, DC to 50 kHz bandwidth, 200 A input, $\pm 0.07\% \pm 0.007^\circ$ amplitude accuracy, $\pm 0.1^\circ$ phase accuracy, ME15W terminal

Up to 50 A (High precision)

AC/DC CURRENT SENSOR CT6872
High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 10 MHz bandwidth, 50 A input, $\pm 0.03\%$ amplitude accuracy, $\pm 0.05^\circ$ phase accuracy, ME15W terminal

AC/DC CURRENT SENSOR CT6862-05
High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 1 MHz bandwidth, 50 A input, $\pm 0.05\%$ amplitude accuracy, $\pm 0.2^\circ$ phase accuracy, ME15W terminal

AC/DC CURRENT PROBE CT6841A
Monitor the waveforms of DC to distorted AC current, DC to 2 MHz bandwidth, 20 A input, $\pm 0.2\%$ amplitude accuracy, $\pm 0.1^\circ$ phase accuracy, ME15W terminal

AC/DC CURRENT PROBE CT6830/CT6831
DC to 100 kHz bandwidth, 2 A input (CT6830), 20 A input (CT6831), $\pm 0.3\% \pm 0.05^\circ$ amplitude accuracy (CT6830), $\pm 0.3\% \pm 0.01^\circ$ amplitude accuracy (CT6831), $\pm 0.1^\circ$ phase accuracy, ME15W terminal

For wide-band current observation

A separate power supply (3272 or other) is required

POWER SUPPLY *Required when using Current Probe 3270 series

POWER SUPPLY 3272
The CT6700, CT6701: up to 2 units
The 3273-50, 3274, 3275 or 3276: up to 1 unit (May be used with up to 2 units on condition that the measurement current is sufficiently low.)

POWER SUPPLY 3269
The CT6710, CT6711: up to 2 units
The CT6700, CT6701, 3273-50, 3274, 3275 or 3276: up to 4 units

1 mA order to 500 A (High speed)

CURRENT PROBE CT6700
Wide DC to 50 MHz bandwidth, 1 mA-class to 5 A rms

CURRENT PROBE CT6701
Wide DC to 120 MHz bandwidth, 1 mA-class to 5 A rms

CLAMP ON PROBE 3273-50
Wide DC to 50 MHz bandwidth, 10 mA-class to 30 A rms

CLAMP ON PROBE 3276
Wide DC to 100 MHz bandwidth, 10 mA-class to 30 A rms

CLAMP ON PROBE 3274
Wide DC to 10 MHz bandwidth, max. 150 A rms

CLAMP ON PROBE 3275
Wide DC to 2 MHz bandwidth, max. 500 A rms

CURRENT PROBE CT6710
Wide DC to 50 MHz bandwidth, 0.5 A-class to 30 A rms

CURRENT PROBE CT6711
Wide DC to 120 MHz bandwidth, 0.5 A-class to 30 A rms

For easy measurement of AC/DC currents

A separate power supply (CT7290) is required

100 to 2000 A (Medium speed), PL14 terminal

AC/DC CURRENT SENSOR CT7631 (AUTO-ZERO CT7731)
DC, 1 Hz to 10 kHz (5 kHz), 100 A, 1 mV/A output

AC/DC CURRENT SENSOR CT7636 (AUTO-ZERO CT7736)
DC, 1 Hz to 10 kHz (5 kHz), 600 A, 1 mV/A output

AC/DC CURRENT SENSOR CT7642 (AUTO-ZERO CT7742)
DC, 1 Hz to 10 kHz (5 kHz), 2000 A, 1 mV/A output

DISPLAY UNIT CM7290
Measurement, display, signal output in combination with CT 7000 series

For easy measurement of AC currents

Other than CT9667, separate power supply is not required

500 A to 5000 A *For commercial power lines, 50/60Hz

CLAMP ON PROBE 9018-50
Good phase characteristics, Frequency characteristics: 40 Hz to 3 kHz, 10 to 500 A AC range, output 0.2 V AC f.s.

CLAMP ON PROBE 9132-50
Frequency characteristics: 40 Hz to 1 kHz, 20 to 1000 A AC range, output 0.2 V AC f.s.

AC FLEXIBLE CURRENT SENSOR CT9667-01/-02/-03
10 Hz to 20 kHz, 5000 A / 500 A AC, 500 mV/f.s. output, ϕ 100 to 254 mm (3.94 to 10.00 in.), 3 loop diameters

For measurement of AC leak currents

Battery operated (Long-term observation is possible with separate power supply)

Leak Current *For commercial power lines, 50/60 Hz

AC LEAKAGE CLAMP METER CM4003
6 mA range (1 μ A resolution) to 200 A range, with WAVE/RMS output, CONNECTION CABLE L9097 (output terminal: BNC, power terminal: USB-C, 1.5 m (4.92 ft.) length) is included

AC ADAPTER Z1013
100 V to 240 V AC

Input signal (Observed waveforms) Output signal (Calculated waveforms)

OUTPUT CORD L9094
3.5 mm (0.14 in.) dia. mini plug to banana, 1.5 m (4.92 ft.) length

OUTPUT CORD L9095
Connect to BNC terminal, 1.5 m (4.92 ft.) length

OUTPUT CORD L9096
Connect to terminal block, 1.5 m (4.92 ft.) length

Measurement support software

MR6000 Viewer

Load measurement data on a computer to display waveforms and perform calculations.

- Take advantage of functionality similar to the MR6000 on a computer, including numerical calculations, waveform processing, and FFT calculations.
*Some functions limited.
- Ideal for report creation



Supported products:
MR6000, MR6000-01, MR8848, MR8847A, MR8827, MR8740T, MR8740, MR8741


Available for download free of charge from Hioki's website.

Operating environment:
Computer running Windows 11, 10 (64-bit)
For other information and system requirements, please see the user manual.

WAVE PROCESSOR 9335

Display, convert, calculate, and print waveforms with a PC

- Display waveform screens, X-Y graphs, and numerical results
- Rich printing and hard copy functions to assist in creating reports
- Save in CSV format and export to spreadsheet application (EXCEL)



Supported products:
Model MR6000, MR6000-01, MR8848, MR8827, MR8880, MR8875, MR8870, MR8847A, MR8847, 8861-50/8860-50 (not compatible with dual time-axis data), 8870, 8855, 8847, 8842, 8841, 8840, 8835-01, 8835, 8826, 8825, 8808, 8807, 8808-51, 8807-51 (excluding harmonic analysis function), MR8730, MR8731, MR8740, MR8740-50, MR8741, 8730, 8731, 8720, 8715, 8714


Model No. (Order Code)	9335	CD
	9335-01	Downloadable (license card)
	9335-03	Downloadable (digital license)

Operating environment:
Computer running under Windows 11, 10

LAN COMMUNICATOR 9333

Remote control via LAN Memory HiCorders and PC Communications

- Auto save a waveform data to the PC
- Remote control with the PC via LAN
- Save in CSV format and export to spreadsheet application



Supported products:
Model MR8848, MR8847-51/-52/-53, MR8827 (Ver. 1.00 or later), MR8740 (Ver. 3.12 or later), MR8741 (Ver. 2.12 or later), MR8847-01/-02/-03, 8847 (Ver. 3.07 or later), 8826 (Ver. 2.30 or later)

Model No. (Order Code)	9333	CD
	9333-01	Downloadable (license card)
	9333-03	Downloadable (digital license)

Operating environment:
Computer running under Windows 11, 10

Other compatible software (third party)

FlexPro

FlexPro - Advanced Software for Analysis and Presentation of Memory HiCorder Data

- Search through large amounts of data at lightning fast speeds for the MEMORY HiCORDER Series
- Use your analyses on any number of measurements at the click of a button.
- Share your analysis templates with colleagues over your network.



Supported products : MR6000, MR6000-01, MR8848, MR8827, MR8740, MR8741, MR8847A, MR8875, LR8450, LR8432, LR8431, LR8410


Model	FlexPro	Software (third party)
-------	---------	------------------------

More information: [Weisang GmbH \(Germany\) https://www.weisang.com/](https://www.weisang.com/)

NI DIAdem

NI DIAdem - Analyze the data measured by Memory HiCorder

- Data management, display, analysis and report creation with interactive operation.
- Synchronous playback and analysis function of video and measurement data.




Supported products : MR6000, MR6000-01, MR8848, MR8827, MR8740, MR8741, MR8847A (MR8990 is not supported), MR8875, MR8880, LR8400, LR8401, LR8402, LR8410, LR8416

Model	NI DIAdem	Software (third party)
-------	-----------	------------------------

FAMOS

FAMOS - The software for engineers, which can quickly analyze measured data

- Load, display, and analyze the data measured by Memory HiCorder.
- Generate a report.
- More than 400 function libraries, like a FFT.



Supported products : MR6000, MR6000-01, MR8875, MR8847, 8825, 8840, 8826, 8835, 8841, 8842, 8807, 8808
(Download a free MR6000 import filter free of charge from Hioki's website.)

Model	FAMOS	Software (third party)
-------	-------	------------------------

More information: [imc Test & Measurement GmbH \(Germany\) https://www.imc-tm.com/](https://www.imc-tm.com/)

Introducing a Modular Data Logger, Engineered for Use in Embedded Applications

DATA LOGGER LR8101, LR8102



LR8102 main unit with ten M7100 Voltage/Temp modules (sold separately) attached



- Add measurement modules as needed to create the measurement system you need
- Connect up to 10 measurement modules per logger
- Compatible with Gennect Space data integration and analysis software
- [LR8102] Add channels by synchronizing sampling across multiple loggers
- [LR8102] Transfer high-speed data in real time

Model No. (Order Code)	LR8101	(Main unit only, standard model)
	LR8102	(Main unit only, advanced model)

Note: the LR8101 and LR8102 cannot be used alone. They must be combined with one or more measurement modules (sold separately).

This product does not include an AC adapter. An AC Adapter Z1016 or the Power Cable L1012 must be purchased separately.

For data storage, choose either the Hioki SD Memory Card Z4001 (2 GB), SD Memory Card Z4003 (8 GB), or the USB Drive Z4006 (16 GB). (Not necessary when acquiring data in real time to a PC) Thermocouples are not provided by Hioki, and must be purchased from a separate vendor.

Basic specifications (Accuracy guaranteed for 1 year)

	LR8101	LR8102
Maximum number of module connections	10(M7100, M7102), 4(M7103)	
Maximum number of synchronizable loggers	N/A	10 (Requires optical connection cables)
Power supply	AC adapter: AC Adapter Z1016 (operates on 12 V DC $\pm 10\%$) External power supply: 10 V DC to 30 V DC	
Operating temperature and humidity range	-10°C to 50°C (14°F to 122°F), 80% RH or less (non-condensing)	
Number of LAN ports	1	2
Communication interface	[LAN1 functionality] Collecting data and setting recording conditions using Logger Utility Setting the initial IP address using Logger Utility Setting and controlling recording using communication commands Manually acquiring data using an FTP Server Automatically sending data via FTP (FTP client) HTTP server function, XCP on Ethernet (TCP), NTP client function ----- [LAN2 functionality] XCP on Ethernet (UDP) Measurement data can be output by UDP	
External media	USB Drive, Operation guaranteed: Z4006 (16 GB) SD memory card/SDHC memory card supported, Operation guaranteed: Z4001 (2 GB), Z4003 (8 GB)	
External control terminal	Pulse/logic input (1), External sampling input (1), External input and output (4), Alarm output (4), GND terminal (5)	Pulse/logic input (1), External sampling input (1), External input and output (4), Alarm output (4), GND terminal (5), CAN interface (1)
Dimensions and weight	- No module: Approx. 80W \times 166H \times 238D mm (3.1W \times 6.5H \times 9.4D in.) (excluding protruding parts), Approx. 1.5 kg (3.3 lbs) - With one M7100 installed: Approx. 134W \times 166H \times 263D mm (5.3W \times 6.5H \times 10.4D in.) (excluding protruding parts) - With ten M7100 installed: Approx. 620W \times 166H \times 263D mm (24.4W \times 6.5H \times 10.4D in.) (excluding protruding parts)	
Included accessories	Operating Precautions \times 1, Startup Guide \times 1	

Measurement Modules

VOLTAGE/TEMP MODULE M7100
 • For 600 V to 1500 V battery packs
 • 15ch, voltage and temperature (thermocouple) measurement

VOLTAGE/TEMP MODULE M7102
 • For 600 V or lower battery packs
 • 30ch, voltage and temperature (thermocouple) measurement

POWER MEASUREMENT MODULE M7103
 • 3ch, voltage, current (current sensor), and power measurement

Only LR8102 is supported

CAN CABLE 9713-01
 Unprocessed on one end, 1.8 m (5.9 ft.)

- CAN connectivity: Use to combine data with information about onboard devices such as a battery management system (BMS). One CAN cable is required for each logger.

Only LR8102 is supported

OPTICAL CONNECTION CABLE
 L6101 1 m (3.3 ft.)
 L6102 10 m (32.8 ft.)

- Synchronizing sampling across multiple loggers (optical connection): Use when synchronizing measurements across multiple Data Logger LR8102 instruments. One optical connection cable is required for each logger.

Power Supply

AC ADAPTER Z1016
100 V to 240 V AC

POWER CABLE L1012
For main unit, DC drive, Connect to external battery, Unprocessed ends, Approx. 2 m (6.6 ft.)

AC POWER MODULE M1100
Supplies power up to four Power Measurement Modules M7103

All except LAN CABLE 9642 are available for free download from Hioki website.

PC Communication

LAN CABLE 9642
Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.4 ft.) length

GENNECT Space SF4300
Measurement data integration software: time-synchronized measurement, video, and GPS data (Max. 3000ch, 1 ms sampling resolution)

GENNECT One SF4000
Application for Windows

LOGGER UTILITY SF1000
Control the measurement of loggers and collect data in real-time

CAN EDITOR SF1002
Software for CAN unit settings

Storage Media

SD MEMORY CARD 2GB Z4001
2 GB capacity

SD MEMORY CARD Z4003
8 GB capacity

USB DRIVE Z4006
16 GB, Long-life, High-reliability SLC Flash Memory

1 ms Sampling Portable Logger Expandable to 120 Channels with Your Choice of Plug-in Modules

MEMORY HiLOGGER LR8450

Measurement units (Sold separately)



LR8450 Main unit installed with U8552+U8550



- Expandable to 120 ch with wired/plug-in modules
- Record voltage output from pressure and other sensors with 1ms sampling speed
- Directly connect strain gauge and measure signals in as fast as 1ms intervals
- Significantly reduced effects from noise let you safely measure in high voltage and high frequency areas such as around inverter motors
- Compatible with Gennect Space data integration and analysis software

Model No. (Order Code) **LR8450** (Standard model, main unit only)

Note) Measurement is not possible with the LR8450 only. One or more plug-in units are required (sold separately).

Basic specifications (Accuracy guaranteed for 1 year)

Max. number of connectable modules	4 plug-in input modules
Connectable modules (Plug-in modules)	U8550, U8551, U8552, U8553, U8554, U8555, U8556, U8557
No. of measurement channels	Up to 120 ch with plug-in input modules (U8555 can input up to 500 channels per unit)
Pulse/logic input	[Number of ch] 8 ch (common GND, non-isolated, exclusive setting for pulse/logic input for individual channels) [Adaptive input format] Non-voltage contact, open collector, or voltage input [Count] 0 to 1000 M pulse, 1 pulse resolution [Rotational speed] 0 to 5000/n (r/s), 1/n (r/s) resolution, 0 to 300,000/n (r/min.), 1/n (r/min.) resolution, n: Number of pulses per rotation (1 to 1000) [Logic input] Records 1 or 0 for each recording interval
Recording intervals	1 ms *, 2 ms *, 5 ms * (* Can be set only when using 1 ms/S modules), 10 ms to 1 hour, 22 selections (Data refresh interval can be set for each unit)
Data storage	SD Memory Card/USB Drive (user-selectable) (Only storage media sold by Hioki are guaranteed for operation)
LAN interface	100BASE-TX / 1000BASE-T, DHCP, DNS support, Functions: Data acquisition, condition settings used with the Logger Utility software, configuring settings and controlling recording using communications commands, FTP server / FTP client, HTTP server, Email transmission, NTP client
USB interface	Series A receptacle × 2: USB 2.0 compliant (USB drive, keyboard, or hub) Series mini-B receptacle × 1: Data acquisition, condition settings used with the Logger Utility, configuring settings and controlling recording using communications commands, transferring data from a connected SD Memory Card to a computer
SD card slot	SD standard-compliant slot × 1 (with SD memory card/SDHC memory card support), Guaranteed-operation options: Z4001, Z4003
Display	7 inch TFT color liquid crystal display (WVGA 800 × 480 pixel)
Functions	Save waveform data in real time to the SD memory card or USB drive, numerical value calculations, waveform calculations, 8ch alarm output, voltage output × 2 (5 V / 12 V / 24 V selectable)
Power supply	[AC adapter] Using the Z1014 (100 V to 240 V AC, 50 Hz/60 Hz), 95 VA Max. (including AC adapter), 28 VA Max. (exclusive of AC adapter) [Battery Pack] Using the Z1007 (accommodates 2 batteries), continuous use 4 hr (reference value for 2 pieces), 20 VA Max. [External power] 10 V to 30 V DC, 28 VA Max. (Please contact your Hioki distributor for connection cord)
Dimensions and mass (excluding protrusions, excluding Battery Pack)	Without any modules: 272 mm (10.71 in.) W × 145 mm (5.71 in.) H × 43 mm (1.69 in.) D, 1108 g (39.1 oz.) With 2 modules: 272 mm (10.71 in.) W × 198 mm (7.80 in.) H × 63 mm (2.48 in.) D With 4 modules: 272 mm (10.71 in.) W × 252 mm (9.92 in.) H × 63 mm (2.48 in.) D
Included accessories	Quick Start Manual × 1, USB Cable × 1, AC Adapter Z1014 × 1

1 ms Sampling Portable Logger Expandable to 330 Channels with Your Choice of Wireless and Plug-in Modules

MEMORY HiLOGGER LR8450-01 (Wireless LAN model)

Measurement units (Sold separately)



LR8450-01 Main unit installed with U8552+U8550



- Wireless LAN model expandable to 330 ch with wireless and plug-in modules
- Record voltage output from pressure and other sensors with 1ms sampling speed
- Directly connect strain gauge and measure signals in as fast as 1ms intervals
- Significantly reduced effects from noise let you safely measure in high voltage and high frequency areas such as around inverter motors
- Avoid wiring issues by minimizing cable length using wireless units
- Monitor data captured remotely on PC with wireless LAN technology
- Compatible with Gennect Space data integration and analysis software

Model No. (Order Code) **LR8450-01** (Wireless LAN equipped model, main unit only)

The LR8450 and LR8450-01 cannot perform measurement on their own. One or more plug-in modules or wireless modules are required (sold separately).

Note) The LR8450-01 and wireless modules emit radio waves. Use of radio waves is subject to licensing requirements in certain countries. Using it in a country or region other than those indicated may violate the law and may result in legal penalties for the operator.

Note) For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website.

Basic specifications (Accuracy guaranteed for 1 year)

Max. number of connectable modules	4 plug-in input modules + 7 wireless input modules
Connectable modules	Plug-in modules: U8550, U8551, U8552, U8553, U8554, U8555, U8556, U8557 Wireless modules: LR8530, LR8531, LR8532, LR8533, LR8534, LR8535, LR8536, LR8537
No. of measurement channels	Up to 120 ch with plug-in input modules, up to 330 ch with plug-in input modules and wireless input modules (U8555 and LR8535 can input up to 500 channels per unit)
Pulse/logic input	[Number of ch] 8 ch (common GND, non-isolated, exclusive setting for pulse/logic input for individual channels) [Adaptive input format] Non-voltage contact, open collector, or voltage input [Count] 0 to 1000 M pulse, 1 pulse resolution [Rotational speed] 0 to 5000/n (r/s), 1/n (r/s) resolution, 0 to 300,000/n (r/min.), 1/n (r/min.) resolution, n: Number of pulses per rotation (1 to 1000) [Logic input] Records 1 or 0 for each recording interval
Recording intervals	1 ms *, 2 ms *, 5 ms * (* Can be set only when using 1 ms/S modules), 10 ms to 1 hour, 22 selections (Data refresh interval can be set for each unit)
Data storage	SD Memory Card/USB Drive (user-selectable) (Only storage media sold by Hioki are guaranteed for operation)
LAN interface	100BASE-TX / 1000BASE-T, DHCP, DNS support, Functions: Data acquisition, condition settings used with the Logger Utility software, configuring settings and controlling recording using communications commands, FTP server / FTP client, HTTP server, Email transmission, NTP client
Wireless LAN interface	IEEE 802.11b/g/n Communications range: 30 m, line of sight Encryption function: WPA-PSK/WPA2-PSK, TKIP/AES Usable channels: 1 to 11 Supported modes: Wireless unit connectivity, access point, station Functions: Configuring settings and controlling recording using communications commands, FTP server / client, HTTP server, NTP client
USB interface	Series A receptacle × 2: USB 2.0 compliant (USB drive, keyboard, or hub) Series mini-B receptacle × 1: Data acquisition, condition settings used with the Logger Utility, configuring settings and controlling recording using communications commands, transferring data from a connected SD Memory Card to a computer
SD card slot	SD standard-compliant slot × 1 (with SD memory card/SDHC memory card support), Guaranteed-operation options: Z4001, Z4003
Display	7 inch TFT color liquid crystal display (WVGA 800 × 480 pixel)
Functions	Save waveform data in real time to the SD memory card or USB drive, numerical value calculations, waveform calculations, 8ch alarm output, voltage output × 2 (5 V / 12 V / 24 V selectable)
Power supply	[AC adapter] Using the Z1014 (100 V to 240 V AC, 50 Hz/60 Hz), 95 VA Max. (including AC adapter), 28 VA Max. (exclusive of AC adapter) [Battery Pack] Using the Z1007 (accommodates 2 batteries), continuous use 4 hr (reference value for 2 pieces), 20 VA Max. [External power] 10 V to 30 V DC, 28 VA Max. (Please contact your Hioki distributor for connection cord)
Dimensions and mass (excluding protrusions, excluding Battery Pack)	Without any modules: 272 mm (10.71 in.) W × 145 mm (5.71 in.) H × 43 mm (1.69 in.) D, 1108 g (39.1 oz.) With 2 modules: 272 mm (10.71 in.) W × 198 mm (7.80 in.) H × 63 mm (2.48 in.) D With 4 modules: 272 mm (10.71 in.) W × 252 mm (9.92 in.) H × 63 mm (2.48 in.) D
Included accessories	Quick Start Manual × 1, USB Cable × 1, AC Adapter Z1014 × 1, Precautions Concerning Use of Equipment that Emits Radio Waves × 1

Data Loggers/Data Acquisition

Common options for LR8450 and LR8450-01

Plug-in modules



VOLTAGE/TEMP UNIT U8550
Voltage, Temperature (thermocouples), Humidity, 15 ch, 10 ms sampling



UNIVERSAL UNIT U8551
Voltage, Temperature (thermocouples), Humidity, Pt100/1000, JPt100, Resistance, 15 ch, 10 ms sampling



VOLTAGE/TEMP UNIT U8552
Voltage, temperature (thermocouples), humidity, 30 ch, 20 ms sampling, 10 ms when the number of channels used is 15 or less



HIGH SPEED VOLTAGE UNIT U8553
Voltage, 5 ch, 1 ms sampling



STRAIN UNIT U8554
Strain, voltage, strain gauge transducer, 5 ch, 1 ms sampling



CAN UNIT U8555
CAN/CAN FD input and output switchable, 2 ports, max. sampling 10 ms (up to 50 ch), Up to 500 ch (at 100 ms)



CURRENT MODULE U8556
Current 5 ch (instantaneous, RMS values), 1 ms sampling



THERMISTOR MODULE U8557
Temperature (thermistor), resistance, 15 ch, 50 ms sampling

Wireless Modules



WIRELESS VOLTAGE/TEMP UNIT LR8530
Voltage and temperature (thermocouples), 15 ch, 10 ms sampling



WIRELESS UNIVERSAL UNIT LR8531
Voltage, Temperature (thermocouples), Humidity, Pt100/1000, JPt100, Resistance, 15 ch, 10 ms sampling



WIRELESS VOLTAGE/TEMP UNIT LR8532
Voltage and temperature (thermocouples), 30 ch, 20 ms sampling, 10 ms sampling when the number of channels used is 15 or less



WIRELESS HIGH SPEED VOLTAGE UNIT LR8533
Voltage, 5 ch, 1 ms sampling



WIRELESS STRAIN UNIT LR8534
Strain, voltage, strain gauge transducer, 5 ch, 1 ms sampling



WIRELESS CAN UNIT LR8535
CAN/CAN FD input and output switchable, 2 ports, max. sampling 10 ms (up to 50 ch), Up to 500 ch (at 100 ms)



WIRELESS CURRENT MODULE LR8536
Current 5 ch (instantaneous, RMS values), 1 ms sampling



WIRELESS CURRENT MODULE LR8537
Temperature (thermistor), resistance, 15 ch, 50 ms sampling

Input Options



HUMIDITY SENSOR Z2000
3 m (9.84 ft.) length



Thermocouple
*For reference only. Please purchase locally.

For CAN Modules



NON-CONTACT CAN SENSOR SP7001-95
Supports CAN FD/CAN signals, SP7001, SP9250, SP7150 set



CAN CABLE 9713-01
For U8555/LR8535, unprocessed on one end, 1.8 m (5.91 ft.) length

Storage Media

SD MEMORY CARD 2GB Z4001
2 GB capacity

SD MEMORY CARD Z4003
8 GB capacity

USB DRIVE Z4006
16 GB, Long-life, high-reliability SLC Flash Memory



Precaution on purchasing memory device

Use only the memory device sold by Hioki. Compatibility and performance are not guaranteed for memory device made by other manufacturers. You may be unable to read from or save data to such devices.

All except LAN CABLE 9642 are available for free download from Hioki website.

PC Communication




LAN CABLE 9642
Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft.) length



GENNECT Space SF4300
Measurement data integration software: time-synchronized measurement, video, and GPS data (Max. 3000ch, 1 ms sampling resolution)



GENNECT One SF4000
Application for Windows



LOGGER UTILITY SF1000
Control the measurement of loggers and collect data in real-time



CAN EDITOR SF1002
Software for CAN unit settings

Current Sensors



AC/DC CURRENT SENSOR CT7812
2 A AC/DC, ϕ 5 mm (0.20 in.) core dia., cord length 4 m (13.12 ft.) (between sensor and multiplexer)



AC/DC CURRENT SENSOR CT7822
20 A AC/DC, ϕ 5 mm (0.20 in.) core dia., cord length 4 m (13.12 ft.) (between sensor and multiplexer)



AC/DC AUTO-ZERO CURRENT SENSOR CT7731
100 A AC/DC, ϕ 33 mm (1.30 in.) core dia., cord length 2.5 m (8.20 ft.)



AC/DC AUTO-ZERO CURRENT SENSOR CT7736
600 A AC/DC, ϕ 33 mm (1.30 in.) core dia., cord length 2.5 m (8.20 ft.)



AC/DC AUTO-ZERO CURRENT SENSOR CT7742
2000 A AC/DC, ϕ 55 mm (2.17 in.) core dia., cord length 2.5 m (8.20 ft.)



AC LEAKAGE CURRENT SENSOR CT7116
6 A AC, ϕ 40 mm (1.57 in.) core dia., cord length 2.5 m (8.20 ft.)



AC CURRENT SENSOR CT7126
60 A AC, ϕ 15 mm (0.59 in.) core dia., cord length 2.5 m (8.20 ft.)



AC CURRENT SENSOR CT7131
100 A AC, ϕ 15 mm (0.59 in.) core dia., cord length 2.5 m (8.20 ft.)



AC CURRENT SENSOR CT7136
600 A AC, ϕ 46 mm (1.81 in.) core dia., cord length 2.5 m (8.20 ft.)



AC FLEXIBLE CURRENT SENSOR CT7044
6000 A AC, ϕ 100 mm (3.94 in.) core dia., cord length 2.3 m (7.55 ft.)



AC FLEXIBLE CURRENT SENSOR CT7045
6000 A AC, ϕ 180 mm (7.09 in.) core dia., cord length 2.3 m (7.55 ft.)



AC FLEXIBLE CURRENT SENSOR CT7046
6000 A AC, ϕ 254 mm (10.00 in.) core dia., cord length 2.3 m (7.55 ft.)

Power Supply



BATTERY PACK Z1007
For LR8450, LR8450-01 and wireless modules



AC ADAPTER Z1014
For LR8450 and LR8450-01, 100 to 240 V AC



AC ADAPTER Z1008
For wireless modules, 100 to 240 V AC



POWER CABLE L1012
For main unit, DC drive, Connect to external battery, Unprocessed ends, Approx. 2 m (6.6 ft.)

Carrying Cases / Stands



CARRYING CASE C1012
Holds the main unit, 4 plug-in modules and 7 wireless modules



FIXED STAND Z5040
For installing logger on wall

Featuring USB Flash Drive and Improved Accuracy! Your Personal 10-channel Logger

MEMORY HILOGGER LR8431



USB 2.0

CE

3 Year Warranty

- Record measurement data on a USB flash drive for easy transfer to a computer
- Record to reliable Compact Flash cards during long-term measurement applications for increased peace of mind
- Replace storage media during real-time recording
- Improved thermocouple measurement accuracy and reference junction compensation accuracy
- Ten isolated analog input channels
- 10 ms sampling and recording across all channels
- Noise-resistant measurement circuitry for improved readings
- Ultra-compact for convenient portability
- Widescreen, bright LCD gives excellent viewability

Model No. (Order Code) **LR8431-20** (10 ch, English model)

Note: the LR8431-20 is not bundled with the Battery Pack 9780. Thermocouples are not provided by Hioki, and must be purchased from a separate vendor.

Note: use only Hioki CF cards, which are manufactured to strict industrial standards, for long-term storage of important data. Correct operation of non-Hioki CF cards or USB memory sticks is not guaranteed.

Basic specifications (Accuracy guaranteed for 1 year)

Analog inputs	[No. of channels] 10 isolated analog channels using scanning input method (M3 mm dia. screw terminal block) [Voltage measurement range] ± 100 mV to ± 60 V, 1-5 V, Max. resolution 5 μ V [Temperature : thermocouples] -200°C to 1800°C (depending on sensor), thermocouples (K, J, E, T, N, R, S, B), Max. resolution 0.1 $^{\circ}\text{C}$ [Humidity] not available [Max. allowable input] 60 V DC [Max. rated voltage between input channels] [Max. rated voltage to earth] 30 AC V rms, 60 V DC (max. voltage between input channel terminals, and from terminals to chassis ground without damage)
Pulse inputs	[No. of channels] 4 pulse input channels (requires CONNECTION CABLE 9641, all pulse inputs share common ground with the main unit) [Totalized pulses] 0 to 1000M (count) (No-voltage 'a' contact, open collector or voltage input), Max. resolution 1 pulse [Rotation count] 0 to 5000/n (r/s), Resolution 1/n (r/s) * n = pulses per rotation (1 to 1,000) [Max. allowable input] 0 to 10 V DC [Max. rated voltage between input channels] [Max. rated voltage to earth] Non-isolated
Recording intervals	10 ms to 1 hour, 19 selections (All input channels are scanned at high speed during every recording interval)
Selectable filters	50 Hz, 60 Hz, or OFF (digital filtering of high frequencies on analog channels)
Memory capacity	Internal storage: 3.5 M-words, External storage: CF card or USB memory stick (only Hioki CF cards are guaranteed for correct operation)
External interface	USB 2.0 mini-B receptacle x1; Functions: Control from a PC, Transfers files from the installed CF card to a PC (cannot transfer files from the connected USB memory stick to a PC via USB communication), Data copy between CF card and USB memory stick
Display	4.3-inch WQVGA-TFT color LCD (480 x 272 dots)
Functions	Save data to the CF Card or USB memory stick in real time, Numerical Calculations, etc.
Power supply	AC Adapter Z1005: 100 to 240 VAC (50/60 Hz), 30 VA Max. (including AC adapter), 10 VA Max. (main unit only) Battery Pack 9780: Continuous use 2.5 hours (@25 $^{\circ}\text{C}$ /77 $^{\circ}\text{F}$), 3 VA Max. External power source: 10 to 16 V, 10 VA Max. (please contact Hioki distributor for cable; less than 3 m/9.84 ft cable length)
Dimensions and mass	176 mm (6.93 in.) W x 101 mm (3.98 in.) H x 41 mm (1.61 in.) D, 550 g (19.4 oz.) (Battery Pack 9780 not installed)
Included accessories	Measurement Guide x1, USB cable x1, AC Adapter Z1005 x1

Compact & Lightweight Heat Flow Logger for Analyzing the Causes of Temperature Change

HEAT FLOW LOGGER LR8432



USB 2.0

CE

3 Year Warranty

- Use a heat flow sensor to measure the movement and volume of heat energy
- Measure of temperature and voltage
- Record measurement data on a USB flash drive for easy transfer to a computer
- Record to reliable Compact Flash cards during long-term measurement applications for increased peace of mind
- Ten isolated analog input channels
- 10 ms sampling and recording across all channels
- Record raw waveforms and post-calculation waveforms at the same time. (Heat transmission coefficient processing)
- Two graduations can be displayed with a double gauge

Model No. (Order Code) **LR8432-20** (10 ch, English model)

Note: the LR8432-20 is not bundled with the Battery Pack 9780. Thermocouples are not provided by Hioki, and must be purchased from a separate vendor.

Note: use only Hioki CF cards, which are manufactured to strict industrial standards, for long-term storage of important data. Correct operation of non-Hioki CF cards or USB memory sticks is not guaranteed.

Basic specifications (Accuracy guaranteed for 1 year)

Specialized functions for heat flow measurement	Easy scaling settings: directly enter the sensitivity of the heat flow sensor Calculations: waveform processing function for the analysis of temperature and heat flow (Simple average, moving average, integration, heat transmission coefficient), Integration with numerical calculations
Analog inputs	[No. of channels] 10 isolated analog channels using scanning input method (M3 mm dia. screw terminal block) [Voltage measurement range] ± 10 mV to ± 60 V, 1-5V, Max. resolution 500 mV [Temperature : thermocouples] -200°C to 1800°C (depending on sensor), thermocouples (K, J, E, T, N, R, S, B), Max. resolution 0.1 $^{\circ}\text{C}$ [Humidity] not available [Max. allowable input] 60 V DC [Max. rated voltage between input channels] [Max. rated voltage to earth] 30 AC V rms, 60 V DC (max. voltage between input channel terminals, and from terminals to chassis ground without damage)
Pulse inputs	[No. of channels] 4 pulse input channels (requires CONNECTION CABLE 9641, all pulse inputs share common ground with the main unit) [Totalized pulses] 0 to 1000M (count) (No-voltage 'a' contact, open collector or voltage input), Max. resolution 1 pulse [Rotation count] 0 to 5000/n (r/s), Resolution 1/n (r/s) * n = pulses per rotation (1 to 1,000) [Max. allowable input] 0 to 10 V DC [Max. rated voltage between input channels] [Max. rated voltage to earth] Non-isolated
Recording intervals	10 ms to 1 hour, 19 selections (All input channels are scanned at high speed during every recording interval)
Selectable filters	50 Hz, 60 Hz, or OFF (digital filtering of high frequencies on analog channels)
Memory capacity	Internal storage: 3.5 M-words, External storage: CF card or USB memory stick (only Hioki CF cards are guaranteed for correct operation)
External interface	USB 2.0 mini-B receptacle x1; Functions: Control from a PC, Transfers files from the installed CF card to a PC (cannot transfer files from the connected USB memory stick to a PC via USB communication), Data copy between CF card and USB memory stick
Display	4.3-inch WQVGA-TFT color LCD (480 x 272 dots)
Functions	Save data to the CF Card or USB memory stick in real time, Numerical Calculations, etc.
Power supply	AC Adapter Z1005: 100 to 240 VAC (50/60 Hz), 30 VA Max. (including AC adapter), 10 VA Max. (main unit only) Battery Pack 9780: Continuous use 2.5 hours (@25 $^{\circ}\text{C}$ /77 $^{\circ}\text{F}$), 3 VA Max. External power source: 10 to 16 V, 10 VA Max. (please contact Hioki distributor for cable; less than 3 m/9.84 ft cable length)
Dimensions and mass	176 mm (6.93 in.) W x 101 mm (3.98 in.) H x 41 mm (1.61 in.) D, 550 g (19.4 oz.) (Battery Pack 9780 not installed)
Included accessories	Measurement Guide x1, USB cable x1, AC Adapter Z1005 x1

Shared options for LR8431 and LR8432

Other options: refer to the detailed catalog

<p>BATTERY PACK 9780 NiMH, Charges while installed in the main unit</p>	<p>SOFT CASE 9812 Includes space for small items, Neoprene rubber</p>	<p>CARRYING CASE 9782 Includes compartment for options, Resin coated</p>	<p>CONNECTION CABLE 9641 For pulse inputs, 1.5 m (4.92 ft) length</p>	<p>PROTECTION SHEET 9809 For LCD protection, pairs of additional sheets</p>
--	--	---	--	--

<p>PC CARD 2G 9830 2 GB capacity</p>	<p>PC CARD 1G 9729 1 GB capacity</p>	<p>PC CARD 512M 9728 512 MB capacity</p>	<p>PC Card Precaution Use only PC Cards sold by Hioki. Compatibility and performance are not guaranteed for PC cards made by other manufacturers. You may be unable to read from or save data to such cards.</p>
---	---	---	---

Perform Pulse Integration of Vehicle Speed or Flow Rate for Equipment Such as Air Conditioners

WIRELESS PULSE LOGGER LR8512




*Bundled accessory (L1010)
Not covered by warranty

- For pulse totalization and measuring logical ON/OFF signals or revolutions
- Compact, two-channel model fits where other devices don't
- Download measurement data to a tablet or computer with Bluetooth® wireless technology
- Three-way power (AC adapter, AA alkaline batteries, or external 5 to 13.5 V power supply)
- Store 500,000 data points per channel

Model No. (Order Code) **LR8512** (2 ch)

For the latest information about countries and regions where wireless operation is currently supported, please visit the HIOKI website.
Bluetooth® is a trademark of Bluetooth SIG, Inc. and licensed for use by HIOKI E.E. CORPORATION.

■ Data can be downloaded using HioKI's tablet and smartphone app (for Android devices).
Search for "HIOKI" and download the Wireless Logger Collector!



■ Basic specifications (Accuracy guaranteed for 1 year)

Functionality	Windows PC or Windows tablet Android smartphone or Android tablet terminal (Software can be downloaded free of charge from Google Play) *Communication range varies with the performance of the computer or tablet (up to a line-of-sight distance of roughly 30 m)
Number of channels	2ch (common GND)
Measurement items	Integrating (cumulative/ Instant), Revolution, Logic (Records a 1/0 for each recording interval)
Supported input format	Non-voltage "a" contact (always-open contact point), open collector, or voltage input (DC 0 to 50 V)
Measurement range	[Totalization] 0 to 1000 M pulse, Max. resolution 1 pulse, [No. of revolutions] 0 to 5000/n [r/s], Max. resolution 1/n [r/s]
Display items	Measurement value, date, time, number of recorded data, maximum value, minimum value, and average value
Functions	Alarm, Scaling, Recording operation hold function, Erroneous operation prevention, Comment recording function, Power saving function, Authentication function
Recording	[Capacity] 500,000 data items for each channel [Mode] Instantaneous value [Interval] 0.1 to 30 sec, 1 to 60 min, 16 selections
Power source	AC Adapter Z2003 (100 to 240 V AC, 50/60 Hz), AA alkaline batteries (LR6) ×2, External power 5 to 13.5 V DC (can also be supplied from USB bus power, with a conversion cable)
Continuous operating time ((Capacity) 500,000 data items for each channel) (23°C)	2 months (Recording interval of 1 min, Bluetooth® OFF), 14 days (Recording interval of 1 sec, Bluetooth® ON),
Dimensions and mass	85 mm (3.35 in.) W × 61 mm (2.40 in.) H × 31 mm (1.22 in.) D, 95 g (3.4 oz.) (excluding the battery)
Included accessories	Measurement Guide ×1, Caution for Using Radio Waves ×1, AA alkaline batteries (LR6) ×2, Connection cable L1010 ×2

Measure Load Current and Leak Current Easily with Clamp Sensors

WIRELESS CLAMP LOGGER LR8513



*Clamp sensor is sold separately
(Sensor guaranteed for 1 year.)

- Measure AC and DC load current and AC leak current
- Choose from many current sensors
- Place inside a distribution panel, close the cover, and monitor measured values from the outside
- Measure power easily—just set the voltage and power factor
- Compact, two-channel model fits where other devices don't
- Download measurement data to a tablet or computer with Bluetooth® wireless technology
- Three-way power (AC adapter, AA alkaline batteries, or external 5 to 13.5 V power supply)
- Store 500,000 data points per channel

Model No. (Order Code) **LR8513** (2 ch, sensor is sold separately)

Note: the LR8513 alone is not capable of making measurements.
For the latest information about countries and regions where wireless operation is currently supported, please visit the HioKI website.
Bluetooth® is a trademark of Bluetooth SIG, Inc. and licensed for use by HIOKI E.E. CORPORATION.

■ Data can be downloaded using HioKI's tablet and smartphone app (for Android devices).
Search for "HIOKI" and download the Wireless Logger Collector!



■ Basic specifications (Accuracy guaranteed for 1 year)

Functionality	Windows PC or Windows tablet Android smartphone or Android tablet terminal (Software can be downloaded free of charge from Google Play) *Communication range varies with the performance of the computer or tablet (up to a line-of-sight distance of roughly 30 m)
Number of channels	2ch (common GND)
Measurement items	AC load current, DC load current, AC leak current (using current sensor)
Effective value calculation	Software calculates the true RMS value
Measurement range	500.0 mA to 5000 A AC, 10.00 A to 2000 A DC (By current sensor) *Current and leak current that occur intermittently cannot be measured.
Measurement accuracy	±0.5% rdg ±5 dgt (DC, AC 50/60 Hz) *Add the sensor's accuracy when the current sensor is connected
Display items	Measurement value, date, time, number of recorded data, maximum value, minimum value, and average value
Functions	Alarm, Scaling, Recording operation hold function, Erroneous operation prevention, Comment recording function, Power saving function, Authentication function, Free run
Recording	[Capacity] 500,000 data items for each channel [Mode] Instantaneous value, average value, maximum value [Interval] 0.5 to 30 sec, 1 to 60 min, 14 selections
Power source	AC Adapter Z2003 (100 to 240 V AC, 50/60 Hz), AA alkaline batteries (LR6) ×2, External power 5 to 13.5 V DC (can also be supplied from USB bus power, with a conversion cable)
Continuous operating time ((Capacity) 500,000 data items for each channel) (23°C)	3 months (Recording interval of 1 min, Bluetooth® OFF), 10 days (Recording interval of 1 sec, Bluetooth® ON)
Dimensions and mass	85 mm (3.35 in.) W × 75 mm (2.95 in.) H × 38 mm (1.50 in.) D, 130 g (4.6 oz.) (excluding the battery)
Included accessories	Measurement Guide ×1, Caution for Using Radio Waves ×1, AA alkaline batteries (LR6) ×2

For more information about sensors other than those listed below that can be used with the LR8513, see the product brochure or HioKI website.

AC load current

Approx. 3m (118.1 in.)

CLAMP ON SENSOR CT6500 500 A AC

AC load current

Approx. 3m (118.1 in.)

CLAMP ON SENSOR 9669 1000 A AC

AC load current

Connected to an AC flexible current sensor

CM7290

CT7044 CT7045 CT7046

AC leak current

Insulated conductor Approx. 3m (118.1 in.)

CLAMP ON LEAK SENSOR 9657-10

AC leak current

Insulated conductor Approx. 3m (118.1 in.)

CLAMP ON LEAK SENSOR 9675

AC/DC load current

Connected to an AC/DC auto-zero current sensor

CM7290

CT7731 CT7736 CT7742

Clamp on Leak Sensor 9657-10, 9675: Rated primary current 5 A* AC *Maximum measurable current when used with the LR8513

Ideal for Managing Environmental Temperature and Humidity at Production Plants and Agricultural Sites

WIRELESS HUMIDITY LOGGER LR8514

Recorders
Data Loggers



CE
3 Year Warranty
Main unit only.
Sensors sold separately: 1 year
Bluetooth

*Temperature and humidity sensor is sold separately (Sensor guaranteed for 1 year.)

- High-precision, $\pm 3\%$ RH humidity sensor
- Convenient for simultaneously recording and comparing temperature and humidity readings at 2 locations
- Compact, two-channel model fits where other devices don't
- Download measurement data to a tablet or computer with Bluetooth® wireless technology
- Three-way power (AC adapter, AA alkaline batteries, or external 5 to 13.5 V power supply)
- Store 500,000 data points per channel

Model No. (Order Code) **LR8514** (2 ch, sensor is sold separately)

Note: the LR8514 alone is not capable of making measurements. Only the temperature and humidity sensors affect the measurement accuracy and are subject to calibration. The LR8514 logger does not require calibration. For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website. Bluetooth® is a trademark of Bluetooth SIG, Inc. and licensed for use by HIOKI E.E. CORPORATION.

■ Data can be downloaded using Hioki's tablet and smartphone app (for Android devices). Search for "HIOKI" and download the Wireless Logger Collector!



Basic specifications

Functionality	Windows PC or Windows tablet Android smartphone or Android tablet terminal (Software can be downloaded free of charge from Google Play.) *Communication range varies with the performance of the computer or tablet (up to a line-of-sight distance of roughly 30 m)
Number of channels	2 ch for temperature + 2 ch for humidity (2 sensors can be attached)
Measurement items	Temperature, Humidity
Measurable Range	[Temperature] -40°C to 80°C, Range 100°C f.s., Max. resolution 0.1°C [Humidity] 0 to 100% RH, Range 100% RH f.s., Max. resolution 0.1%RH
Measurement accuracy (using Z2010/ Z2011)	[Temperature basic accuracy] $\pm 0.5^\circ\text{C}$ (10 to 60°C) *If outside above temperature range: Add 0.015 °C/°C (-40 to 10°C) or 0.02 °C/°C (60 to 80°C) [Humidity basic accuracy] $\pm 3\%$ RH (20 to 30°C, 20 to 90% RH), Hysteresis: $\pm 1\%$ RH (Added to the humidity measurement accuracy)
Display items	Measurement value, date, time, number of recorded data, maximum value, minimum value, and average value
Functions	Alarm, Scaling, Recording operation hold function, Erroneous operation prevention, Comment recording function, Power saving function, Authentication function, Free run
Recording	[Capacity] 500,000 data items for each channel [Mode] Instantaneous value [Interval] 0.5 to 30 sec, 1 to 60 min, 14 selections
Power source	AC Adapter Z2003 (100 to 240 V AC, 50/60 Hz), AA alkaline batteries (LR6) $\times 2$, External power 5 to 13.5 V DC (can also be supplied from USB bus power, with a conversion cable)
Continuous operating time (Capacity) 500,000 data items for each channel (23°C)	3.5 months (Recording interval of 1 min, Bluetooth® OFF), 20 days (Recording interval of 1 sec, Bluetooth® ON)
Dimensions and mass	85 mm (3.35 in.) W \times 61 mm (2.40 in.) H \times 31 mm (1.22 in.) D (Excluding protrusions), 95 g (3.4 oz.) (Not including the battery)
Included accessories	Measurement Guide $\times 1$, Caution for Using Radio Waves $\times 1$, AA alkaline batteries (LR6) $\times 2$



Wireless Collection of a Variety of Data Types, Voltage and K and T Thermocouple Input with a Single Device

WIRELESS VOLTAGE/ TEMP LOGGER LR8515



CE
3 Year Warranty
Main unit only.
Bluetooth

*Temperature sensor is sold separately

- A single device to measure everything from the minute voltages of pyranometers or heat flow sensors to battery voltage to temperature
- Compact, two-channel model fits where other devices don't
- Download measurement data to a tablet or computer with Bluetooth® wireless technology
- Three-way power (AC adapter, AA alkaline batteries, or external 5 to 13.5 V power supply)
- Store 500,000 data points per channel

Model No. (Order Code) **LR8515** (2 ch, sensor is sold separately)

For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website. Bluetooth® is a trademark of Bluetooth SIG, Inc. and licensed for use by HIOKI E.E. CORPORATION.

■ Data can be downloaded using Hioki's tablet and smartphone app (for Android devices). Search for "HIOKI" and download the Wireless Logger Collector!



Basic specifications (Accuracy guaranteed for 1 year)

Functionality	Windows PC or Windows tablet Android smartphone or Android tablet terminal (Software can be downloaded free of charge from Google Play.) *Communication range varies with the performance of the computer or tablet (up to a line-of-sight distance of roughly 30 m)
Number of channels	2 ch (isolated; select voltage of thermocouple for each channel), Input terminals: M3 screw type terminal block
Measurement items	Voltage/ Thermocouple (K, T)
Maximum input voltage	± 50 V DC, Max. inter-channel voltage 60 V DC
Measurement range	[Voltage] ± 50 mV to ± 50 V, Max. resolution 0.01 mV [Thermocouple] -200°C to 999.9°C, Thermocouples (K, T), Max. resolution 0.1 °C
Measurement accuracy	[Voltage] ± 0.05 mV (50 mV range) [Thermocouple] $\pm 0.8^\circ\text{C}$ (Thermocouple K -100°C to 999.9°C) *Reference junction compensation: Switchable between internal and external *Reference junction compensation accuracy: $\pm 0.5^\circ\text{C}$ (When using internal compensation, add to thermocouple measurement accuracy.) *Temperature characteristics: Add (measurement accuracy $\times 0.1$) / °C to measurement accuracy.
Display items	Measurement value, date, time, number of recorded data, maximum value, minimum value, and average value
Functions	Alarm, Scaling, Recording operation hold function, Erroneous operation prevention, Comment recording function, Power saving function, Authentication function, Free run
Recording	[Capacity] 500,000 data items for each channel [Mode] Instantaneous value [Interval] 0.1 to 30 sec, 1 to 60 min, 16 selections
Power source	AC Adapter Z2003 (AC100 V to 240 V, 50 Hz/60 Hz), AA alkaline batteries (LR6) $\times 2$, External power DC5 V to 13.5 V (can also be supplied from USB bus power, with a conversion cable)
Continuous operating time (Capacity) 500,000 data items for each channel (23°C)	2.5 months (Recording interval of 1 min, Bluetooth® OFF), 7 days (Recording interval of 1 sec, Bluetooth® ON)
Dimensions and mass	85 mm (3.35 in.) W \times 75 mm (2.95 in.) H \times 38 mm (1.50 in.) D, 126 g (4.4 oz.) (Not including the battery)
Included accessories	Measurement Guide $\times 1$, Caution for Using Radio Waves $\times 1$, AA alkaline batteries (LR6) $\times 2$



Impedance Analyzers/LCR Meters

Choose from 5 Models

A complete product line to fully meet your measurement frequency and applications.



Photo: IM7581

IMPEDANCE ANALYZER IM7580A

Measurement frequency: **1 MHz to 300 MHz**
 Measurement range: L : 0.0531 nH to 0.795 mH
 C : 0.1061 pF to 1.59 μF
 (Depending on the measurement frequency)
 Measurement signal level: -40.0 dBm to +7.0 dBm
 Basic accuracy: Z : 0.72% rdg θ: 0.41°

IMPEDANCE ANALYZER IM7581

Measurement frequency: **100 kHz to 300 MHz**
 Measurement range: L : 0.0531 nH to 7.95 mH
 C : 0.1061 pF to 15.9 μF
 (Depending on the measurement frequency)
 Measurement signal level: -40.0 dBm to +7.0 dBm
 Basic accuracy: Z : 0.72% rdg θ: 0.41°

IMPEDANCE ANALYZER IM7583

Measurement frequency: **1 MHz to 600 MHz**
 Measurement range: L : 0.0265 nH to 0.795 mH
 C : 0.0531 pF to 1.59 μF
 (Depending on the measurement frequency)
 Measurement signal level: -40.0 dBm to +1.0 dBm
 Basic accuracy: Z : 0.65% rdg θ: 0.38°

IMPEDANCE ANALYZER IM7585

Measurement frequency: **1 MHz to 1.3 GHz**
 Measurement range: L : 0.0123 nH to 0.795 mH
 C : 0.0245 pF to 1.59 μF
 (Depending on the measurement frequency)
 Measurement signal level: -40.0 dBm to +1.0 dBm
 Basic accuracy: Z : 0.65% rdg θ: 0.38°


IMPEDANCE ANALYZER IM7587

Measurement frequency: **1 MHz to 3 GHz**
 Measurement range: L : 0.0053 nH to 0.795 mH
 C : 0.011 pF to 1.59 μF
 (Depending on the measurement frequency)
 Measurement signal level: -40.0 dBm to +1.0 dBm
 Basic accuracy: Z : 0.65% rdg θ: 0.38°



Photo: IM7585


A rich lineup covering a wide range of measurement frequencies

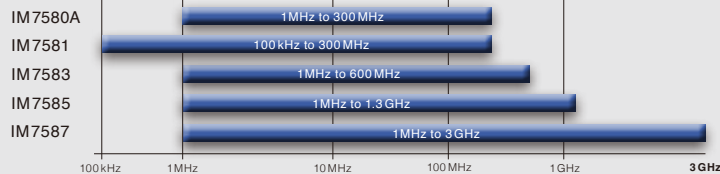

LCR Meters

3 GHz High Frequency Testing

IMPEDANCE ANALYZER IM7587

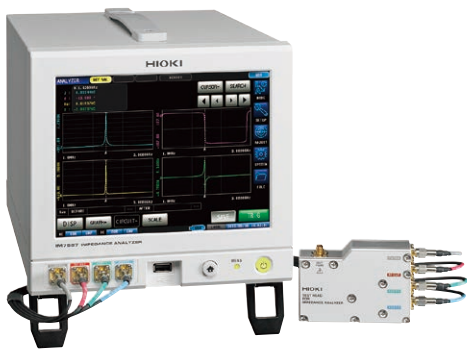

LAN

USB_{2.0}

GP-IB
option

RS-232C
option

CE

3 Year
Warranty

- 1 MHz to 3 GHz testing source frequency
- Fastest test speed of 0.5 msec (Analog measurement time)
- 0.07% measured value variability (When measuring a 1 nH coil at 3 GHz)
- ±0.65% rdg basic accuracy
- Half-rack size body and palm-sized test head
- Comprehensive contact check (via DCR testing, Hi-Z reject or waveform judgment)
- Make frequency sweeps, level sweeps and time interval measurements in Analyzer Mode

Model No. (Order Code) **IM7587-01** (Connection cable 1 m is bundled)
IM7587-02 (Connection cable 2 m is bundled)

The instrument does not ship with a test fixture or probe. A test fixture designed specifically for use with the Impedance Analyzer is required.

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR mode, Analyzer mode (sweeps with measurement frequency and measurement level), Continuous measurement mode
Measurement parameters	Z, Y, θ, Rs (ESR), Rp, X, G, B, Cs, Cp, Ls, Lp, D (tanδ), Q
Measurable range	100 mΩ to 5 kΩ
Display range	Z: 0.00 m to 9.99999 GΩ / Rs, Rp, X: ±(0.00 m to 9.99999 GΩ) Ls, Lp: ±(0.00000 n to 9.99999 GH) / Q: ±(0.00 to 9999.99) θ: ±(0.000° to 180.000°), Cs, Cp: ±(0.00000 p to 9.99999 GF) D: ±(0.00000 to 9.99999), Y: (0.000 n to 9.99999 GS) G, B: ±(0.000 n to 9.99999 GS), Δ%: ±(0.000% to 999.999%)
Basic accuracy	Z: ±0.65% rdg θ: ±0.38°
Measurement frequency	1 MHz to 3 GHz (100 kHz setting resolution)
Measurement signal level	Power: -40.0 dBm to +1.0 dBm Voltage: 4 mV to 502 mVrms Current: 0.09 mA to 10.04 mA rms
Output impedance	50 Ω (at 10 MHz)
Display	8.4-inch color TFT with touch screen
Measurement speeds	FAST: 0.5 ms (Analog measurement time, typical value)
Functions	Contact check, Comparator, BIN measurement (classification), Panel loading/saving, Memory function, Equivalent circuit analysis, Correlation compensation
Interfaces	EXT I/O (Handler), USB communication, USB memory, LAN, RS-232C (optional), GP-IB (optional)
Power supply	100 to 240 V AC, 50/60 Hz, 70 VA max.
Dimensions and mass	Main unit: 215 mm (8.46 in.) W × 200 mm (7.87 in.) H × 348 mm (13.70 in.) D, 8.0 kg (28.2 oz.) Test head: 90 mm (3.54 in.) W × 64 mm (2.52 in.) H × 24 mm (0.94 in.) D, 300 g (10.58 oz.)
Included accessories	Test head ×1, Connection cable ×1, Instruction manual ×1, Power cord ×1

Probe and Test Fixtures



TEST FIXTURE IM9202
Combination use with the IM9200



SMD TEST FIXTURE IM9201
Combination use with the IM9200



TEST FIXTURE STAND IM9200
Includes magnifying glass



ADAPTER IM9906
3.5 mm (0.14 in.) male to 7 mm (0.28 in.) conversion



CALIBRATION KIT IM9905
Open/Short/Load set

PC Communication



GP-IB INTERFACE Z3000



GP-IB CONNECTOR CABLE 9151-02
2 m (6.56 ft.) length



RS-232C INTERFACE Z3001




RS-232C CABLE 9637
For the PC, 9 pin - 9 pin, cross, 1.8 m (5.91 ft.) length

Impedance Analyzers/LCR Meters

Fastest Measurement Time of 0.5ms and Measurement Stability of 0.07% to Boost Your Production Volume

IMPEDANCE ANALYZER IM7585

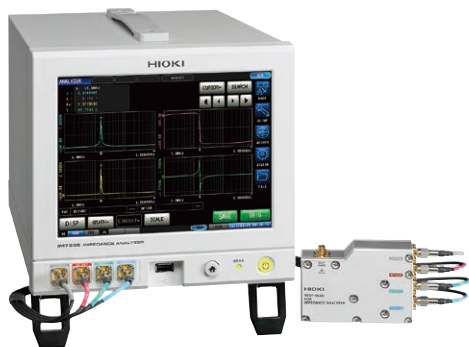

LAN

USB 2.0

GP-IB
option

RS-232C
option

CE

3 Year
Warranty

- 1 MHz to 1.3 GHz testing source frequency
- Fastest test speed of 0.5 msec (Analog measurement time)
- 0.07% measured value variability (when measuring at 1GHz)
- $\pm 0.65\%$ rdg basic accuracy
- Half-rack size body and palm-sized test head
- Comprehensive contact check (via DCR testing, Hi-Z reject or waveform judgment)
- Make frequency sweeps, level sweeps and time interval measurements in Analyzer Mode

Model No. (Order Code) **IM7585-01** (Connection cable 1 m is bundled)
IM7585-02 (Connection cable 2 m is bundled)

The instrument does not ship with a test fixture or probe. A test fixture designed specifically for use with the Impedance Analyzer is required.

Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR mode, Analyzer mode (sweeps with measurement frequency and measurement level), Continuous measurement mode
Measurement parameters	Z, Y, θ , Rs (ESR), Rp, X, G, B, Cs, Cp, Ls, Lp, D ($\tan\delta$), Q
Measurable range	100 m Ω to 5 k Ω Z: 0.00 m to 9.99999 G Ω / Rs, Rp, X: \pm (0.00 m to 9.99999 G Ω) Ls, Lp: \pm (0.00000 n to 9.99999 GH) / Q: \pm (0.00 to 9999.99)
Display range	θ : \pm (0.000° to 180.000°), Cs, Cp: \pm (0.00000 p to 9.99999 GF) D: \pm (0.00000 to 9.99999), Y: (0.000 n to 9.99999 GS) G, B: \pm (0.000 n to 9.99999 GS), $\Delta\%$: \pm (0.000% to 999.999%)
Basic accuracy	Z: $\pm 0.65\%$ rdg θ : $\pm 0.38^\circ$
Measurement frequency	1 MHz to 1.3 GHz (100 kHz setting resolution)
Measurement signal level	Power: -40.0 dBm to +1.0 dBm Voltage: 4 mV to 502 mV rms Current: 0.09 mA to 10.04 mA rms
Output impedance	50 Ω (at 10 MHz)
Display	8.4-inch color TFT with touch screen
Measurement speeds	FAST: 0.5 ms (Analog measurement time, typical value)
Functions	Contact check, Comparator, BIN measurement (classification), Panel loading/saving, Memory function, Equivalent circuit analysis, Correlation compensation
Interfaces	EXT I/O (Handler), USB communication, USB memory, LAN, RS-232C (optional), GP-IB (optional)
Power supply	100 to 240 V AC, 50/60 Hz, 70 VA max.
Dimensions and mass	Main unit: 215 mm (8.46 in.) W \times 200 mm (7.87 in.) H \times 348 mm (13.70 in.) D, 8.0 kg (282.2 oz.) Test head: 90 mm (3.54 in.) W \times 64 mm (2.52 in.) H \times 24 mm (0.94 in.) D, 300 g (10.58 oz.)
Included accessories	Test head \times 1, Connection cable \times 1, Instruction manual \times 1, Power cord \times 1

Probe and Test Fixtures



TEST FIXTURE
IM9202
Combination use with the IM9200



SMD TEST FIXTURE
IM9201
Combination use with the IM9200



TEST FIXTURE STAND
IM9200
Includes magnifying glass



ADAPTER (3.5mm/7mm)
IM9906
3.5 mm (0.14 in.) male to 7 mm (0.28 in.) conversion



CALIBRATION KIT
IM9905
Open/Short/Load set

PC Communication



GP-IB
INTERFACE
Z3000



GP-IB
CONNECTOR
CABLE 9151-02
2 m (6.56 ft.) length



RS-232C
INTERFACE
Z3001



RS-232C CABLE
9637
For the PC, 9 pin - 9 pin,
cross, 1.8 m (5.91 ft.) length

Fastest Measurement Time of 0.5ms to Boost Your Production Volume

IMPEDANCE ANALYZER IM7583



LAN

USB 2.0

GP-IB
option

RS-232C
option

CE

3 Year
Warranty

- 1 MHz to 600 MHz testing source frequency
- Fastest test speed of 0.5 msec (Analog measurement time)
- $\pm 0.65\%$ rdg basic accuracy
- Half-rack size body and palm-sized test head
- Comprehensive contact check (via DCR testing, Hi-Z reject or waveform judgment)
- Make frequency sweeps, level sweeps and time interval measurements in Analyzer Mode

Model No. (Order Code) **IM7583-01** (Connection cable 1 m is bundled)
IM7583-02 (Connection cable 2 m is bundled)

The instrument does not ship with a test fixture or probe. A test fixture designed specifically for use with the Impedance Analyzer is required.

Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR mode, Analyzer mode (Sweeps with measurement frequency and measurement level), Continuous measurement mode
Measurement parameters	Z, Y, θ , Rs (ESR), Rp, X, G, B, Cs, Cp, Ls, Lp, D ($\tan\delta$), Q
Measurable range	100 m Ω to 5 k Ω Z: 0.00 m to 9.99999 G Ω / Rs, Rp, X: \pm (0.00 m to 9.99999 G Ω) Ls, Lp: \pm (0.00000 n to 9.99999 GH) / Q: \pm (0.00 to 9999.99)
Display range	θ : \pm (0.000° to 180.000°), Cs, Cp: \pm (0.00000 p to 9.99999 GF) D: \pm (0.00000 to 9.99999), Y: (0.000 n to 9.99999 GS) G, B: \pm (0.000 n to 9.99999 GS), $\Delta\%$: \pm (0.000% to 999.999%)
Basic accuracy	Z: $\pm 0.65\%$ rdg θ : $\pm 0.38^\circ$
Measurement frequency	1 MHz to 600 MHz (100 kHz setting resolution)
Measurement signal level	Power: -40.0 dBm to +1.0 dBm Voltage: 4 mV to 502 mV rms Current: 0.09 mA to 10.04 mA rms
Output impedance	50 Ω (at 10 MHz)
Display	8.4-inch color TFT with touch screen
Measurement speeds	FAST: 0.5 ms (Analog measurement time, typical value)
Functions	Contact check, Comparator, BIN measurement (classification), Panel loading/saving, Memory function, Equivalent circuit analysis, Correlation compensation
Interfaces	EXT I/O (Handler), USB communication, USB memory, LAN, RS-232C (optional), GP-IB (optional)
Power supply	100 to 240 V AC, 50/60 Hz, 70 VA max.
Dimensions and mass	Main unit: 215 mm (8.46 in.) W \times 200 mm (7.87 in.) H \times 348 mm (13.70 in.) D, 8.0 kg (282.2 oz.) Test head: 90 mm (3.54 in.) W \times 64 mm (2.52 in.) H \times 24 mm (0.94 in.) D, 300 g (10.58 oz.)
Included accessories	Test head \times 1, Connection cable \times 1, Instruction manual \times 1, Power cord \times 1

Probe and Test Fixtures



TEST FIXTURE
IM9202
Combination use with the IM9200



SMD TEST FIXTURE
IM9201
Combination use with the IM9200



TEST FIXTURE STAND
IM9200
Includes magnifying glass



ADAPTER (3.5mm/7mm)
IM9906
3.5 mm (0.14 in.) male to 7 mm (0.28 in.) conversion



CALIBRATION KIT
IM9905
Open/Short/Load set

PC Communication



GP-IB
INTERFACE
Z3000



GP-IB
CONNECTOR
CABLE 9151-02
2 m (6.56 ft.) length



RS-232C
INTERFACE
Z3001



RS-232C CABLE
9637
For the PC, 9 pin - 9 pin,
cross, 1.8 m (5.91 ft.) length

Impedance Analyzers/LCR Meters

LCR Meters

100kHz to 300MHz Measurement Frequency at High Speeds with Superior Repeatability

IMPEDANCE ANALYZER IM7581



- LAN**
- USB_{2.0}**
- GP-IB**
option
- RS-232C**
option
- CE**
- 3 year Warranty**

- 100 kHz to 300 MHz testing source frequency
- Fastest test speed of 0.5 msec (Analog measurement time)
- ±0.72% rdg basic accuracy
- Half-rack size body and palm-sized test head
- Comprehensive contact check (via DCR testing, Hi-Z reject or waveform judgment)
- Make frequency sweeps, level sweeps and time interval measurements in Analyzer Mode

Model No. (Order Code) **IM7581-01** (Connection cable 1 m is bundled)
IM7581-02 (Connection cable 2 m is bundled)

The instrument does not ship with a test fixture or probe. A test fixture designed specifically for use with the Impedance Analyzer is required.

Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR mode, Analyzer mode (Sweeps with measurement frequency and measurement level), Continuous measurement mode
Measurement parameters	Z, Y, θ , Rs (ESR), Rp, X, G, B, Cs, Cp, Ls, Lp, D (tan δ), Q
Measurable range	100 m Ω to 5 k Ω
Display range	Z: 0.00 m to 9.99999 G Ω / Rs, Rp, X: \pm (0.00 m to 9.99999 G Ω) Ls, Lp: \pm (0.00000 n to 9.99999 GH) / Q: \pm (0.00 to 9999.99) θ : \pm (0.000° to 180.000°), Cs, Cp: \pm (0.00000 p to 9.99999 GF) D: \pm (0.00000 to 9.99999), Y: (0.000 n to 9.99999 GS) G, B: \pm (0.000 n to 9.99999 GS), $\Delta\%$: \pm (0.000% to 999.999%)
Basic accuracy	Z: \pm 0.72% rdg θ : \pm 0.41°
Measurement frequency	100.00 kHz to 300.00 MHz (5 digits resolution)
Measurement signal level	Power: -40.0 dBm to +7.0 dBm Voltage: 4 mV to 1001 mV rms Current: 0.09 mA to 20.02 mA rms User-configured power, voltage, and current
Output impedance	50 Ω
Display	8.4-inch color TFT with touch screen
Measurement speeds *1	FAST: 0.5 ms / MED: 0.9 ms / SLOW: 2.1 ms / SLOW2: 3.7 ms *1 Analog measurement time
Functions	Contact check, Comparator, BIN measurement (classification), Panel loading/saving, Memory function, Equivalent circuit analysis, Correlation compensation
Interfaces	Handler, USB, LAN, GP-IB (optional), RS-232C (optional)
Power supply	100 to 240 V AC, 50/60 Hz, 70 VA max.
Dimensions and mass	Main unit: 215 mm (8.46 in.) W \times 200 mm (7.87 in.) H \times 268 mm (10.55 in.) D, 6.5 kg (229.3 oz.) Test head: 61 mm (2.40 in.) W \times 55 mm (2.17 in.) H \times 24 mm (0.94 in.) D, 175 g (6.2 oz.)
Included accessories	Test head \times 1, Connection cable \times 1, Power cord \times 1, Instruction manual \times 1

Probe and Test Fixtures

TEST FIXTURE IM9202 Combination use with the IM9200	SMD TEST FIXTURE IM9201 Combination use with the IM9200	TEST FIXTURE STAND IM9200 Includes magnifying glass	ADAPTER (3.5mm/7mm) IM9906 3.5 mm (0.14 in.) male to 7 mm (0.28 in.) conversion	CALIBRATION KIT IM9905 Open/Short/Load set

PC Communication

GP-IB INTERFACE Z3000	GP-IB CONNECTOR CABLE 9151-02 2 m (6.56 ft.) length	RS-232C INTERFACE Z3001	RS-232C CABLE 9637 For the PC, 9 pin - 9 pin, cross, 1.8 m (5.91 ft.) length

1MHz to 300MHz Measurement Frequency at High Speeds with Superior Repeatability

IMPEDANCE ANALYZER IM7580A



- LAN**
- USB_{2.0}**
- GP-IB**
option
- RS-232C**
option
- CE**
- 3 year Warranty**

- 1 MHz to 300 MHz testing source frequency
- Fastest test speed of 0.5 msec
- ±0.72% rdg basic accuracy
- Half-rack size body and palm-sized test head
- Comprehensive contact check (via DCR testing, Hi-Z reject or waveform judgment)
- Make frequency sweeps, level sweeps and time interval measurements in Analyzer Mode

Model No. (Order Code) **IM7580A-1** (Connection cable 1 m is bundled)
IM7580A-2 (Connection cable 2 m is bundled)

The instrument does not ship with a test fixture or probe. A test fixture designed specifically for use with the Impedance Analyzer is required.

Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR mode, Analyzer mode (Sweeps with measurement frequency and measurement level), Continuous measurement mode
Measurement parameters	Z, Y, θ , Rs (ESR), Rp, X, G, B, Cs, Cp, Ls, Lp, D (tan δ), Q
Measurable range	100 m Ω to 5 k Ω
Display range	Z: 0.00 m to 9.99999 G Ω / Rs, Rp, X: \pm (0.00 m to 9.99999 G Ω) Ls, Lp: \pm (0.00000 n to 9.99999 GH) / Q: \pm (0.00 to 9999.99) θ : \pm (0.000° to 180.000°), Cs, Cp: \pm (0.00000 p to 9.99999 GF) D: \pm (0.00000 to 9.99999), Y: (0.000 n to 9.99999 GS) G, B: \pm (0.000 n to 9.99999 GS), $\Delta\%$: \pm (0.000% to 999.999%)
Basic accuracy	Z: \pm 0.72% rdg θ : \pm 0.41°
Measurement frequency	1.0000 MHz to 300.00 MHz (5 digits resolution)
Measurement signal level	Power: -40.0 dBm to +7.0 dBm Voltage: 4 mV to 1001 mV rms Current: 0.09 mA to 20.02 mA rms
Output impedance	50 Ω
Display	8.4-inch color TFT with touch screen
Measurement speeds	FAST: 0.5 ms (Analog measurement time, typical value)
Functions	Contact check, Comparator, BIN measurement (classification), Panel loading/saving, Memory function, Equivalent circuit analysis, Correlation compensation
Interfaces	EXT I/O (Handler), USB communication, USB memory, LAN, RS-232C (optional), GP-IB (optional)
Power supply	100 to 240 V AC, 50/60 Hz, 70 VA max.
Dimensions and mass	Main unit: 215 mm (8.46 in.) W \times 200 mm (7.87 in.) H \times 268 mm (10.55 in.) D, 6.5 kg (229.3 oz.) Test head: 61 mm (2.40 in.) W \times 55 mm (2.17 in.) H \times 24 mm (0.94 in.) D, 175 g (6.2 oz.)
Included accessories	Test head \times 1, Connection cable \times 1, Instruction manual \times 1, Power cord \times 1

Probe and Test Fixtures

TEST FIXTURE IM9202 Combination use with the IM9200	SMD TEST FIXTURE IM9201 Combination use with the IM9200	TEST FIXTURE STAND IM9200 Includes magnifying glass	ADAPTER (3.5mm/7mm) IM9906 3.5 mm (0.14 in.) male to 7 mm (0.28 in.) conversion	CALIBRATION KIT IM9905 Open/Short/Load set

PC Communication

GP-IB INTERFACE Z3000	GP-IB CONNECTOR CABLE 9151-02 2 m (6.56 ft.) length	RS-232C INTERFACE Z3001	RS-232C CABLE 9637 For the PC, 9 pin - 9 pin, cross, 1.8 m (5.91 ft.) length

Impedance Analyzers/LCR Meters

For R & D applications of Electrochemical Components and Materials, Batteries, and EDLCs

CHEMICAL IMPEDANCE ANALYZER IM3590



- USB 2.0**
- LAN** option
- GP-IB** option
- RS-232C** option
- CE
- CS® US
- 3 Year Warranty

- Broad 1 mHz to 200 kHz signal source range supports measurements of ion behavior and solution resistance
- Continuous measuring and high-speed testing of LCR and sweep measurements with a single instrument
- Measure internal impedance of batteries with no load
- Perform high-speed sweep measurements in as little as 2 ms
- Basic accuracy of $\pm 0.05\%$ is ideal for applications from component testing to R&D
- Measure LCR impedance for Cole-Cole plots and equivalent-circuit analyses of electro-chemical components and materials

Model No. (Order Code) **IM3590** (For electrochemical components)

This product is not supplied with measurement probes or test fixtures. Please select and purchase the measurement probe or test fixture options appropriate for your application separately. For an RS-232C connection: A crossover cable for interconnection can be used. You can use the RS-232C Cable 9637 without hardware flow control.

Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR mode, Continuous measurement mode (LCR mode / Analyzer mode), Analyzer mode (Sweeps with measurement frequency and measurement level, temperature characteristics, equivalent circuit analysis)
Measurement parameters	Z, Y, θ , Rs (ESR), Rp, Rdc (DC resistance), X, G, B, Cs, Cp, Ls, Lp, D (tan δ), Q, T, σ (conductivity), ϵ (dielectric constant)
Measurement range	100 m Ω to 100 M Ω , 10 ranges (All parameters are determined according to Z)
Display range	Z, Y, Rs, Rp, Rdc, X, G, B, Ls, Lp, Cs, Cp, σ , ϵ : $\pm(0.00000$ [unit]) to 9.999999 G [unit]. Absolute value display for Z and Y only θ : $\pm(0.000^\circ$ to $180.000^\circ)$, D : $\pm(0.00000$ to $9.99999)$ Q : $\pm(0.00$ to $99999.9)$, $\Delta\%$: $\pm(0.00000\%$ to $999.999\%)$ T : -10.0°C to 99.9°C σ , ϵ : $\pm(0.00000f$ [unit]) to $999.999G$ [unit]
Basic accuracy	Z: $\pm 0.05\%$ rdg θ : $\pm 0.03^\circ$
Measurement frequency	1 mHz to 200 kHz (5 digits setting resolution, minimum resolution 1 mHz)
Measurement signal level	Normal mode: V mode/CV mode: 5 mV to 5 V rms, 1 mV rms steps CC mode: 10 μA to 50 mA rms, 10 μA rms steps Low impedance high repeatability mode: V mode/CV mode: 5 mV to 2.5 V rms, 1 mV rms steps CC mode: 10 μA to 100 mA rms, 10 μA rms steps
Output impedance	Normal mode: 100 Ω , Low impedance high repeatability mode: 25 Ω
Display	5.7-inch color TFT, display can be set to ON/OFF
Measurement time	2 ms (1 kHz, FAST, display OFF, representative value)
Functions	DC bias measurement, DC resistance temperature compensation (converted reference temperature is displayed), Temperature measurement, Battery measurement (Automatic DC biasing system), Comparator, BIN measurement (classification), Panel loading/saving, Memory function
Interfaces	EXT I/O (Handler), USB communication (high-speed), USB memory Optional: Choose 1 from RS-232C, GP-IB, or LAN
Power supply	100 to 240 V AC, 50/60 Hz, 50 VA max.
Dimensions and mass	330 mm (12.99 in.) W \times 119 mm (4.69 in.) H \times 168 mm (6.61 in.) D, 3.1 kg (109.3 oz.)
Included accessories	Power cord \times 1, Instruction manual \times 1

Shared options for IM3590, IM3533, IM3523A



*Please see the individual product catalog for more information

Probe and Test Fixtures



SMD TEST FIXTURE IM9110
 Direct connection two-terminal measurement type for measuring SMDs, DC to 1 MHz, measurable sample sizes: 008004 (inch)



SMD TEST FIXTURE IM9100
 Direct connection type, For measuring SMDs with electrodes on the bottom, DC to 8 MHz, measurable sample sizes: 01005 to 0402 (inch), 0402 to 1005 (metric)



4-TERMINAL PROBE L2000
 Cable length 1 m (3.28 ft), DC to 8 MHz, impedance characteristics of 50 Ω , 4-terminal pair configuration, measurable conductor diameter: $\phi 0.3$ (0.01 in.) to 5 mm (0.20 in.)



PINCHER PROBE L2001
 Cable length 73 cm (28.74 ft), DC to 8 MHz, impedance characteristics of 50 Ω , 4-terminal pair configuration, tip electrode spacing: 0.3 (0.01 in.) to 6 mm (0.24 in.)



CONTACT TIPS IM9901
 To replace the tip on the L2001, regular size, bundled with the L2001



CONTACT TIPS IM9902
 To replace the tip on the L2001, small size



4-TERMINAL PROBE 9140-10
 Cable length 1 m (3.28 ft), DC to 200 kHz, 50 Ω , measurable conductor diameter: $\phi 0.3$ mm (0.01 in.) to 5 mm (0.20 in.)



TEST FIXTURE 9261-10
 Cable length 1 m (3.28 ft), DC to 8 MHz, impedance characteristics of 50 Ω , 4-terminal pair configuration, measurable conductor diameter: $\phi 0.3$ (0.01 in.) to 1.5 mm (0.06 in.)



TEST FIXTURE 9262
 Direct connection type, DC to 8 MHz, measurable conductor diameter: $\phi 0.3$ (0.01 in.) to 2 mm (0.08 in.)



SMD TEST FIXTURE 9263
 Direct connection type, DC to 8 MHz, test sample dimensions: 1 mm (0.04 in.) to 10 mm (0.39 in.)



4-TERMINAL PROBE 9500-10
 Cable length 1 m (3.28 ft), DC to 200 kHz, impedance characteristics of 50 Ω , measurable conductor diameter: $\phi 0.3$ mm (0.01 in.) to 2 mm (0.08 in.)

When using the 9268-10 or 9269-10, external constant-voltage and constant-current sources are required.



SMD TEST FIXTURE 9677
 Direct connection type, For measuring SMDs with electrodes on the side; DC to 120 MHz, test sample dimensions: 3.5 mm ± 0.5 mm (0.14 in ± 0.02 in.)



SMD TEST FIXTURE 9699
 Direct connection type, For measuring SMDs with electrodes on the bottom; DC to 120 MHz, test sample dimensions: 1.0 mm (0.04 in.) to 4.0 mm (0.16 in.) wide, max. 1.5 mm (0.06 in.) high



DC BIAS VOLTAGE UNIT 9268-10
 Direct connection type, 40 Hz to 8 MHz, maximum applied voltage of DC ± 4 V



DC BIAS CURRENT UNIT 9269-10
 Direct connection type, 40 Hz to 2 MHz, maximum applied current of DC 2 A

Temperature probe



SHEATH TYPE TEMPERATURE PROBE 9478
 Pt100, Tip dia. $\phi 2.3$ mm (0.09 in.), Cord length 1 m (3.28 ft), Waterproof construction

*Use only for the IM3590, IM3533

PC Communication

Not available for IM3523A.



GP-IB INTERFACE Z3000



RS-232C INTERFACE Z3001



LAN INTERFACE Z3002



GP-IB CONNECTOR CABLE 9151-02
 2 m (6.56 ft.) length

Impedance Analyzers/LCR Meters

Single Device Solution for High Speed Testing and Frequency Sweeping

IMPEDANCE ANALYZER IM3570



LAN

USB 2.0

GP-IB

RS-232C



- LCR measurement, DCR measurement, sweep measurement, continuous measurement and high-speed testing achieved with one instrument
- High-speed testing, achieving maximum speeds of 1.5ms (1 kHz) and 0.5ms (100kHz) in LCR mode
- High-accuracy measurements, basic accuracy of Z parameter: $\pm 0.08\%$
- Perfect impedance analyzer for testing the resonance characteristics of piezoelectric elements, C-D and low ESR measurement of functional polymer capacitors, DCR and L-Q measurement of inductors (coils and transformers)
- Perform frequency sweeps, level sweeps, and time interval measurements in analyzer mode

Model No. (Order Code) **IM3570**

This product is not supplied with measurement probes or test fixtures. Please select and purchase the measurement probe or test fixture options appropriate for your application separately.

For an RS-232C connection: A crossover cable for interconnection can be used. You can use the RS-232C CABLE 9637 without hardware flow control.

Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR mode, Analyzer mode (Sweeps with measurement frequency and measurement level), Continuous measurement mode
Measurement parameters	Z, Y, θ , Rs (ESR), Rp, Rdc (DC resistance), X, G, B, Cs, Cp, Ls, Lp, D (tan δ), Q
Measurement range	100 m Ω to 100 M Ω , 12 ranges (All parameters are determined according to Z)
Display range	Z, Y, Rs, Rp, Rdc, X, G, B, Ls, Lp, Cs, Cp : $\pm(0.000000$ [unit] to 9.9999999 [unit]), Absolute value display for Z and Y only θ : $\pm(0.000^\circ$ to $180.000^\circ)$, D : $\pm(0.000000$ to $9.9999999)$ Q : $\pm(0.00$ to $99999.99)$, $\Delta\%$: $\pm(0.00000\%$ to 999.99999%)
Basic accuracy	Z $\pm 0.08\%$ rdg θ : $\pm 0.05^\circ$
Measurement frequency	4 Hz to 5 MHz (5 digits setting resolution, minimum resolution 10 mHz)
Measurement signal level	Normal mode: V mode/CV mode: 5 mV to 5 V rms (up to 1 MHz) 10 mV to 1 V rms (1.0001 MHz to 5 MHz), 1 mV rms steps CC mode: 10 μ A to 50 mA rms (up to 1 MHz) 10 μ A to 10 mA rms (1.0001 MHz to 5 MHz), 10 μ A rms steps Low impedance high repeatability mode: V mode/CV mode: 5 mV to 1 V rms (up to 100 kHz), 1 mV rms steps CC mode: 10 μ A to 100 mA rms (100 m Ω and 1 Ω ranges of up to 100 kHz), 10 μ A rms steps
Output impedance	Normal mode: 100 Ω , Low impedance high repeatability mode: 10 Ω
Display	5.7-inch color TFT, display can be set to ON/OFF
Measurement time	0.5 ms (100 kHz, FAST, display OFF, representative value)
Functions	DC bias measurement, Comparator, BIN measurement (classification), Panel loading/saving, Memory function
Interfaces	EXT I/O (handler), RS-232C, GP-IB, USB communication, USB memory, LAN
Power supply	90 to 264 V AC, 50/60 Hz, 150 VA max.
Dimensions and mass	330 mm (12.99 in.) W \times 119 mm (4.69 in.) H \times 307 mm (12.09 in.) D, 5.8 kg (204.6 oz.)
Included accessories	Power cord \times 1, Instruction manual \times 1

LCR Meters

SMD TEST FIXTURE IM9110
Direct connection two-terminal measurement type for measuring SMDs, DC to 1 MHz, measurable sample sizes: 008004 (inch)

SMD TEST FIXTURE IM9100
Direct connection type, For measuring SMDs with electrodes on the bottom, DC to 8 MHz, measurable sample sizes: 01005 to 0402 (inch), 0402 to 1005 (metric)

4-TERMINAL PROBE L2000
Cable length 1 m (3.28 ft), DC to 8 MHz, impedance characteristics of 50 Ω , 4-terminal pair configuration, measurable conductor diameter: $\phi 0.3$ (0.01 in.) to 5 mm (0.20 in.)

PINCHER PROBE L2001
Cable length 73 cm (28.74 ft), DC to 8 MHz, impedance characteristics of 50 Ω , 4-terminal pair configuration, tip electrode spacing: 0.3 (0.01 in.) to 6 mm (0.24 in.)

CONTACT TIPS IM9901
To replace the tip on the L2001, regular size, bundled with the L2001

CONTACT TIPS IM9902
To replace the tip on the L2001, small size

4-TERMINAL PROBE 9140-10
Cable length 1 m (3.28 ft), DC to 200 kHz, 50 Ω , measurable conductor diameter: $\phi 0.3$ mm (0.01 in.) to 5 mm (0.20 in.)

TEST FIXTURE 9261-10
Cable length 1 m (3.28 ft), DC to 8 MHz, impedance characteristics of 50 Ω , 4-terminal pair configuration, measurable conductor diameter: $\phi 0.3$ (0.01 in.) to 1.5 mm (0.06 in.)

TEST FIXTURE 9262
Direct connection type, DC to 8 MHz, measurable conductor diameter: $\phi 0.3$ (0.01 in.) to 2 mm (0.08 in.)

SMD TEST FIXTURE 9263
Direct connection type, DC to 8 MHz, test sample dimensions: 1 mm (0.04 in.) to 10 mm (0.39 in.)

4-TERMINAL PROBE 9500-10
Cable length 1 m (3.28 ft), DC to 200 kHz, impedance characteristics of 50 Ω , measurable conductor diameter: $\phi 0.3$ mm (0.01 in.) to 2 mm (0.08 in.)

SMD TEST FIXTURE 9677
Direct connection type, For measuring SMDs with electrodes on the side; DC to 120 MHz, test sample dimensions: 3.5 mm \pm 0.5 mm (0.14 in. \pm 0.02 in.)

SMD TEST FIXTURE 9699
Direct connection type, For measuring SMDs with electrodes on the bottom; DC to 120 MHz, test sample dimensions: 1.0 mm (0.04 in.) to 4.0 mm (0.16 in.) wide, max. 1.5 mm (0.06 in.) high

When using the 9268-10 or 9269-10, external constant-voltage and constant-current sources are required.

DC BIAS VOLTAGE UNIT 9268-10
Direct connection type, 40 Hz to 8 MHz, maximum applied voltage of DC \pm 40 V


DC BIAS CURRENT UNIT 9269-10
Direct connection type, 40 Hz to 2 MHz, maximum applied current of DC 2 A

Option
EQUIVALENT CIRCUIT ANALYSIS FIRMWARE IM9000, IM9000-01, IM9000-03 For the IM3570

PC Communication
GP-IB CONNECTOR CABLE 9151-02
2 m (6.56 ft.) length

Simple Circuit Analysis & Detailed Acceptance/Rejection Decision-Making

EQUIVALENT CIRCUIT ANALYSIS FIRMWARE IM9000

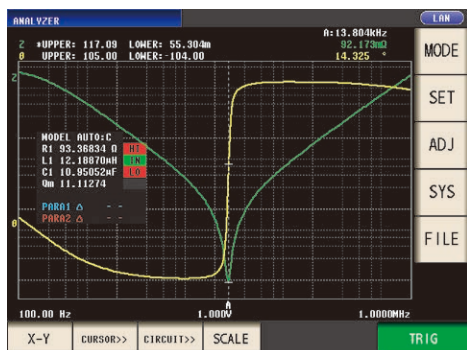

- The IM9000 can automatically select the equivalent circuit model from the five typical models to minimize the differences between the measured values and the ideal frequency characteristics derived from the analysis results
- An acceptance/rejection decision can be made for the L, C, and R elements comprising a part and the resonance sharpness (mechanical quality coefficient)
- A detailed decision can be made on the elements using the resonance of a piezoelectric element or inductor


Model No. (Order Code) **IM9000** Factory option firmware for the IM3570
IM9000-01 Downloadable (license card)
IM9000-03 Downloadable (digital license)

Basic specifications


Three-element model	Equivalent circuit model: Four models for Coil, Resistance, Capacitor Measurement items: L1 (Inductance), C1 (Capacitance), R1 (Resistance), Qm (Resonance sharpness), fr (Resonance frequency) / fa (Anti-resonance frequency)
Four-element model	Equivalent circuit model: One model for Piezoelectric element Measurement items: L1 (Inductance), C1 (Capacitance), R1 (Resistance), C0 (Parallel capacitance), Qm (Resonance sharpness or mechanical quality coefficient) fr (Resonance frequency), fa (Anti-resonance frequency), fs (Series resonance frequency), fp (Parallel resonance frequency), fm (Maximum admittance frequency), fn (Minimum admittance frequency), fl (Maximum susceptance frequency), f2 (Minimum susceptance frequency)
Other functions	Simulation: Enables displaying and comparing the ideal frequency characteristics graph derived from the analysis results or the values specified by the user Comparator: Runs a comparator on the analysis results and outputs the decision results to screen, EXT. I/O
X-Y display	Cole-Cole plot, Admittance circle display

Equivalent Circuit Model and Measurement Items

Three-element model



Four-element model



General-Purpose LCR Meter with Measurement Frequency from DC, 4 Hz to 8 MHz

LCR METER IM3536



LAN

USB 2.0

GP-IB

RS-232C

CE

3 Year Warranty

- DC, 4 Hz to 8 MHz measurement frequency
- High-speed measurement of 1 ms (fastest time)
- High-precision measurement of $\pm 0.05\%$ rdg (representative value)
- Guaranteed accuracy range from 1 m Ω , low-impedance measurement with unmatched repeatability
- DC bias function: Measure under conditions simulating actual use or in accordance with industry standards
- Exceptional specifications and cost-performance for a wide range of applications, from R&D to production lines

Model No. (Order Code) **IM3536**

This product is not supplied with measurement probes or test fixtures. Please select and purchase the measurement probe or test fixture options appropriate for your application separately. All probes are constructed with a 1.5D-2V coaxial cable. For an RS-232C connection: A crossover cable for interconnection can be used. You can use the RS-232C CABLE 9637 without hardware flow control.

Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR (Measurement with single condition), Continuous testing (Continuous measurement under saved conditions)
Measurement parameters	Z, Y, θ , X, G, B, Q, Rdc (DC resistance), Rs (ESR), Rp, Ls, Lp, Cs, Cp, D (tan δ), σ , ϵ
Measurement range	100 m Ω to 100 M Ω , 10 ranges (All parameters are determined according to Z)
Display range	Z: 0.00 m to 9.999999 G Ω , Y: 0.000 n to 9.999999 GS, θ : \pm (0.000 $^\circ$ to 180.000 $^\circ$), Q: \pm (0.00 to 9999.99), Rdc: \pm (0.00 m to 9.999999 G Ω), D: \pm (0.00000 to 9.999999), $\Delta\%$: \pm (0.000% to 999.999%), or other
Basic accuracy	Z: $\pm 0.05\%$ rdg θ : $\pm 0.03^\circ$ (representative value, Measurable range: 1 m Ω to 200 M Ω)
Measurement frequency	4 Hz to 8 MHz (5 digits setting resolution, minimum resolution 10 mHz)
Measurement signal level	[Normal mode: V mode/CV mode] 4 Hz to 1.0000 MHz: 10 mV to 5 V rms (maximum 50 mA rms) 1.0001 MHz to 8 MHz: 10 mV to 1 V rms (maximum 10 mA rms) [Low impedance high repeatability mode: V mode/CV mode] 4 Hz to 1.0000 MHz: 10 mV to 1 V rms (maximum 100 mA rms) [Normal mode: CC mode] 4 Hz to 1.0000 MHz: 10 μ A to 50 mA rms (maximum 5 V rms) 1.0001 MHz to 8 MHz: 10 μ A to 10 mA rms (maximum 1 V rms) [Low impedance high repeatability mode: CC mode] 4 Hz to 1.0000 MHz: 10 μ A to 100 mA rms (maximum 1 V rms) [DC resistance measurement] Measurement signal level: Fixed at 1 V
DC bias measurement	Generating range: DC voltage 0 V to 2.50 V (10 mV resolution) In low Z high repeatability mode: 0 V to 1 V (10 mV resolution)
Output impedance	Normal mode: 100 Ω , Low impedance high repeatability mode: 10 Ω
Display	5.7-inch color TFT with touch panel
Functions	Comparator, BIN measurement (10 categories for 2 measurement parameters), Trigger function, Open/short compensation, Contact check, Panel loading/saving, Memory function
Interfaces	EXT. I/O(HANDLER), USB, USB flash drive, LAN, GP-IB, RS-232C, BCD
Power supply	100 to 240 V AC, 50/60 Hz, 50 VA max.
Dimensions and mass	330 mm (12.99 in.) W \times 119 mm (4.69 in.) H \times 230 mm (9.06 in.) D, 4.2 kg (148.1 oz.)
Included accessories	Power cord \times 1, Instruction manual \times 1

Probe and Test Fixtures



SMD TEST FIXTURE IM9110
Direct connection two-terminal measurement type for measuring SMDs, DC to 1 MHz, measurable sample sizes: 0.08004 (inch)



SMD TEST FIXTURE IM9100
Direct connection type, For measuring SMDs with electrodes on the bottom, DC to 8 MHz, measurable sample sizes: 0.1005 to 0.402 (inch), 0.402 to 10.05 (metric)



4-TERMINAL PROBE L2000
Cable length 1 m (3.28 ft.), DC to 8 MHz, impedance characteristics of 50 Ω , 4-terminal pair configuration, measurable conductor diameter: ϕ 0.3 (0.01 in.) to 5 mm (0.20 in.)



PINCHER PROBE L2001
Cable length 73 cm (28.74 ft.), DC to 8 MHz, impedance characteristics of 50 Ω , 4-terminal pair configuration, tip electrode spacing: 0.3 (0.01 in.) to 6 mm (0.24 in.)



CONTACT TIPS IM9901
To replace the tip on the L2001, regular size, bundled with the L2001



CONTACT TIPS IM9902
To replace the tip on the L2001, small size



4-TERMINAL PROBE 9140-10
Cable length 1 m (3.28 ft.), DC to 200 kHz, 50 Ω , measurable conductor diameter: ϕ 0.3 mm (0.01 in.) to 5 mm (0.20 in.)



TEST FIXTURE 9261-10
Cable length 1 m (3.28 ft.), DC to 8 MHz, impedance characteristics of 50 Ω , 4-terminal pair configuration, measurable conductor diameter: ϕ 0.3 (0.01 in.) to 1.5 mm (0.06 in.)



TEST FIXTURE 9262
Direct connection type, DC to 8 MHz, measurable conductor diameter: ϕ 0.3 (0.01 in.) to 2 mm (0.08 in.)




SMD TEST FIXTURE 9263
Direct connection type, DC to 8 MHz, test sample dimensions: 1 mm (0.04 in.) to 10 mm (0.39 in.)



4-TERMINAL PROBE 9500-10
Cable length 1 m (3.28 ft.), DC to 200 kHz, impedance characteristics of 50 Ω , measurable conductor diameter: ϕ 0.3 mm (0.01 in.) to 2 mm (0.08 in.)



SMD TEST FIXTURE 9677
Direct connection type, For measuring SMDs with electrodes on the side, DC to 120 MHz, test sample dimensions: 3.5 mm \pm 0.5 mm (0.14 in. \pm 0.02 in.)



SMD TEST FIXTURE 9699
Direct connection type, For measuring SMDs with electrodes on the bottom; DC to 120 MHz, test sample dimensions: 1.0 mm (0.04 in.) to 4.0 mm (0.16 in.) wide, max. 1.5 mm (0.06 in.) high

When using the 9268-10 or 9269-10, external constant-voltage and constant-current sources are required.



DC BIAS VOLTAGE UNIT 9268-10
Direct connection type, 40 Hz to 8 MHz, maximum applied voltage of DC \approx 40 V



DC BIAS CURRENT UNIT 9269-10
Direct connection type, 40 Hz to 2 MHz, maximum applied current of DC 2 A

PC Communication

RS-232C CABLE 9637
1.8 m (5.91 ft.) length

GP-IB CONNECTOR CABLE 9151-02
2 m (6.56 ft.) length

From R&D Applications to Windings, Coil and Transformer Manufacturing

LCR METER IM3533



USB_{2.0}

LAN
option

GP-IB
option

RS-232C
option

CE

3 year
Warranty

- $\pm 0.05\%$ accuracy with wide measurement range (DC, 1mHz to 200kHz, 5mV to 5V, 10 μ A to 50 mA)
- Non-stop testing over mixed measurement conditions such as C-D and ESR at 10 times the speed of previous models
- Built-in low impedance high repeatability mode effective for testing low inductance or the ESR of aluminum electrolysis capacitance
- Dedicated modes for measuring transformer winding ratio, mutual inductance and temperature compensated DCR
- Frequency sweep testing (IM3533-01 only)
- 2m/4m cable setting in addition to the standard 0m/1m
- Touch screen with intuitive operation

Model No. (Order Code) **IM3533**
IM3533-01 (Advanced function model)

*This product is not supplied with measurement probes or test fixtures. Please select and purchase the measurement probe or test fixture options appropriate for your application separately. All probes are constructed with a 1.5D-2V coaxial cable.
For an RS-232C connection: A crossover cable for interconnection can be used. You can use the RS-232C CABLE 9637 without hardware flow control.*

Basic specifications (Accuracy guaranteed for 1 year)

	IM3533	IM3533-01
Measurement modes	LCR (Measurement with single condition), Transformer testing (N, M, Δ L), Continuous testing (Continuous measurement under saved conditions) (LCR mode)	LCR (Measurement with single condition), Transformer testing (N, M, Δ L), Analyzer (sweep testing), Continuous Testing (LCR/Analyzer mode)
Measurement parameters	Z, Y, θ , X, G, B, Q, Rdc (DC resistance), Rs (ESR), Rp, Ls, Lp, Cs, Cp, D ($\tan\delta$), N, M, Δ L, T	
Measurement range	100 m Ω to 100 M Ω , 10 ranges (All parameters defined in terms of Z.)	
Displayable range	Z, Y, Rs, Rp, Rdc, X, G, B, Ls, Lp, Cs, Cp : \pm (0.00000 [unit] to 9.99999G [unit]) Real value display for Z and Y only θ : \pm (0.000° to 180.000°), D: \pm (0.00000 to 9.99999) Q: \pm (0.00 to 99999.9), Δ %: \pm (0.00000% to 999.9999%) T: -10.0°C to 99.9°C	
Basic accuracy	Z : $\pm 0.05\%$ rdg θ : $\pm 0.03^\circ$	
Measurement frequency	1 mHz to 200 kHz (5 digits setting resolution, minimum resolution 1 mHz)	
Measurement signal level	[Normal mode] V mode, CV mode: 5 mV to 5 V rms, 1 mV rms steps CC mode: 10 μ A to 50 mA rms, 10 μ A rms steps [Low impedance high repeatability mode] V mode, CV mode: 5 mV to 2.5 V rms, 1 mV rms steps CC mode: 10 μ A to 100 mA rms, 10 μ A rms steps	
Output impedance	Normal mode: 100 Ω , Low impedance high repeatability mode: 25 Ω	
Display	5.7-inch touch-screen color TFT, display can be set to ON/OFF	
Measurement time	2 ms (1 kHz, FAST, display OFF, representative value)	
Functions	DC bias measurement, DC resistance temperature compensation (converted reference temperature display), Comparator, BIN measurement (classify function), Panel loading/saving, Memory function	
Interfaces	EXT I/O (Handler), USB communication (high-speed), USB memory Optional: Choose 1 from RS-232C, GP-IB, or LAN	
Power supply	100 to 240 V AC, 50/60 Hz, 50 VA max	
Dimensions and mass	330 mm (12.99 in.) W \times 119 mm (4.69 in.) H \times 168 mm (6.61 in.) D, 3.1 kg (109.3 oz.)	
Included accessories	Power cord \times 1, Instruction manual \times 1	

LCR Meters

The shared options for LCR Meter series IM3590, IM3533, and IM3523A are listed on page 34.

Ideal for Production Lines of Electronic Parts and Automated Testing

LCR METER IM3523A



USB_{2.0}

LAN

CE

3 year
Warranty

- $\pm 0.05\%$ accuracy with wide measurement range (DC, 40 Hz to 200 kHz, 5 mV to 5 V, 10 μ A to 50 mA)
- Non-stop testing over mixed measurement conditions such as C-D (120 Hz) and ESR (100 kHz) at 10 times the speed of previous models (compared with Model 3532-50)
- Built-in comparator and BIN functions
- Rapid 2msec test time

Model No. (Order Code) **IM3523A**

This product is not supplied with measurement probes or test fixtures. Please select and purchase the measurement probe or test fixture options appropriate for your application separately. All probes are constructed with a 1.5D-2V coaxial cable.

Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR (Measurement with single condition), Continuous testing (Continuous measurement under saved conditions)
Measurement parameters	Z, Y, θ , X, G, B, Q, Rdc (DC resistance), Rs (ESR), Rp, Ls, Lp, Cs, Cp, D ($\tan\delta$)
Measurement range	100 m Ω to 100 M Ω , 10 ranges (All parameters defined in terms of Z.)
Displayable range	Z, Y, Rs, Rp, Rdc, X, G, B, Ls, Lp, Cs, Cp : \pm (0.00000 [unit] to 9.99999G [unit]) Real value display for Z and Y only θ : \pm (0.000° to 180.000°), D: \pm (0.00000 to 9.99999) Q: \pm (0.00 to 99999.9), Δ %: \pm (0.00000% to 999.999%)
Basic accuracy	Z : $\pm 0.05\%$ rdg θ : $\pm 0.03^\circ$
Measurement frequency	40 Hz to 200 kHz (5 digits setting resolution)
Measurement signal level	V mode, CV mode: 5 mV to 5 V rms, 1 mV rms steps CC mode: 10 μ A to 50 mA rms, 10 μ A rms steps
Output impedance	100 Ω
Display	Monochrome LCD
Measurement time	2 ms (1 kHz, FAST, representative value)
Functions	Comparator, BIN measurement (classify function), Panel loading/saving, Memory function
Interfaces	EXT I/O (handler), USB communication (high-speed), LAN (100BASE-T)
Power supply	100 to 240 V AC, 50/60 Hz, 50 VA max
Dimensions and mass	260 mm (10.24 in.) W \times 88 mm (3.46 in.) H \times 203 mm (7.99 in.) D, 2.1 kg (74.1 oz.)
Included accessories	Power cord \times 1, Startup guide \times 1, Operating precautions \times 1

The shared options for LCR Meter series IM3590, IM3533, and IM3523A are listed on page 34.

High-speed 1 MHz C Tester Delivering Super Precise Measurements Even from Low Capacitance Levels

C METER 3506-10



GP-IB

RS-232C



- High-speed analog test time of 0.6 ms (at 1 MHz)
- Improved noise resistance and enhanced repeatability in measurement precision even for production lines
- 1 kHz and 1 MHz measurement frequency supports stable low capacitance testing with taping machines
- BIN function, for easy component screening

Model No. (Order Code) **3506-10** (Measurement frequencies: 1 kHz and 1 MHz)

Basic specifications (Accuracy guaranteed for 1 year)

Measurement parameters	C (Capacitance), D (loss coefficient, tan δ), Q (1/tan δ)
Measurement range	C: 0.001 fF to 15.0000 μF, D: 0.00001 to 1.99999, Q: 0.0 to 19999.9
Basic accuracy	(Typ.) C: ±0.14% rdg, D: ±0.0013
Measurement frequency	1 kHz, 1 MHz
Measurement signal level	500 mV, 1 V rms
Output impedance	1 Ω (at 1 kHz in 2.2 μF and higher ranges), 20 Ω (in ranges other than the above)
Display	LED (six digits, full scale count depends on measurement range)
Measurement time	1.5 ms: 1 MHz, 2.0 ms: 1 kHz (Typ. value. Depends on measurement configuration settings)
Functions	BIN (measurement values can be classified by rank), Trigger-synchronous output, Setting configurations can be stored, Comparator, Averaging, Low-C reject (bad contact detection), Chatter detection, Current detection circuit monitoring, Applied voltage value monitoring, EXT. I/O, RS-232C, GP-IB
Power supply	Selectable from 100, 120, 220 or 240 V AC ±10%, 50/60 Hz 40 VA max.
Dimensions and mass	260 mm (10.24 in.) W × 100 mm (3.94 in.) H × 298 mm (11.73 in.) D, 4.8 kg (10.6 lb)
Included accessories	Power cord ×1, Instruction manual ×1, Spare fuse ×1

Measurement probes or test fixtures are not included. Please select and purchase the measurement probe or test fixture options appropriate for your application separately.
For an RS-232C connection: A crossover cable for interconnection can be used. You can use the RS-232C cable 9637 without hardware flow control.

PC Communication



GP-IB CONNECTOR CABLE 9151-02
2m (6.56 ft.) length

Probe and Test Fixtures

<p>SMD TEST FIXTURE IM9110 Direct connection two-terminal measurement type for measuring SMDs, DC to 1 MHz, measurable sample sizes: 008004 (inch)</p>	<p>SMD TEST FIXTURE IM9100 Direct connection type, For measuring SMDs with electrodes on the bottom, DC to 8 MHz, measurable sample sizes: 01005 to 0402 (inch), 0402 to 1005 (metric)</p>	<p>4-TERMINAL PROBE L2000 Cable length 1 m (3.28 ft.), DC to 8 MHz, impedance characteristics of 50 Ω, 4-terminal pair configuration, measurable conductor diameter: ø0.3 (0.01 in.) to 5 mm (0.24 in.)</p>	<p>PINCHER PROBE L2001 Cable length 73 cm (2.40 ft.), DC to 8 MHz, impedance characteristics of 50 Ω, 4-terminal pair configuration, tip electrode spacing: 0.3 (0.01 in.) to 6 mm (0.24 in.)</p>	<p>CONTACT TIPS IM9901 To replace the tip on the L2001, regular size, bundled with the L2001</p>	<p>CONTACT TIPS IM9902 To replace the tip on the L2001, small size</p>	<p>4-TERMINAL PROBE 9140-10 Cable length 1 m (3.28 ft.), DC to 200 kHz, 50 Ω, measurable conductor diameter: ø0.3 mm (0.01 in.) to 5 mm (0.20 in.)</p>	<p>TEST FIXTURE 9261-10 Cable length 1 m (3.28 ft.), DC to 8 MHz, impedance characteristics of 50 Ω, 4-terminal pair configuration, measurable conductor diameter: ø0.3 (0.01 in.) to 1.5 mm (0.06 in.)</p>
<p>TEST FIXTURE 9262 Direct connection type, DC to 8 MHz, measurable conductor diameter: ø0.3 (0.01 in.) to 2 mm (0.08 in.)</p>	<p>SMD TEST FIXTURE 9263 Direct connection type, DC to 8 MHz, test sample dimensions: 1 mm (0.04 in.) to 10 mm (0.39 in.)</p>	<p>SMD TEST FIXTURE 9677 Direct connection type, For measuring SMDs with electrodes on the side, DC to 120 MHz, test sample dimensions: 3.5 mm ±0.5 mm (0.14 in. ±0.02 in.)</p>	<p>SMD TEST FIXTURE 9699 Direct connection type, For measuring SMDs with electrodes on the bottom; DC to 120 MHz, test sample dimensions: 1.0 mm (0.04 in.) to 4.0 mm (0.16 in.) wide, max. 1.5 mm (0.06 in.) high</p>	<p>4-TERMINAL PROBE 9500-10 Cable length 1 m (3.28 ft.), DC to 200 kHz, impedance characteristics of 50 Ω, measurable conductor diameter: ø0.3 mm (0.01 in.) to 2 mm (0.08 in.)</p>			

High-speed, Large-capacitance MLCC Inspection with Constant Voltage

C HiTESTER 3504



GP-IB

RS-232C



- High speed measurement of 2ms
- Supports C measurements with voltage dependency characteristics through the use of constant voltage testing (CV)
- Model 3504-60 can detect contact failure on all 4 terminals for increased reliability
- BIN function on the 3504-60/-50 is ideal for sorting machines
- Model 3504-40 offers high speed and affordability, perfect for integrating into taping machines
- In all models, contact error is constantly monitored during measurement, contributing to increased yield

Model No. (Order Code) **3504-40** (Built-in RS-232C interface)
3504-50 (Built-in GP-IB, RS-232C)
3504-60 (Built-in GP-IB, RS-232C)

Basic specifications (Accuracy guaranteed for 6 months)

Measurement parameters	C (capacitance), D (loss coefficient tan δ)
Measurement range	C: 0.9400 pF to 20.0000 mF, D: 0.00001 to 1.99999
Basic accuracy	(Typ.) C: ±0.09% rdg ±10 dgt, D: ±0.0016
Measurement frequency	120 Hz, 1 kHz
Measurement signal level	100 mV (3504-60 only), 500 mV, 1 V rms CV 100 mV Measurement range: up to 170 μF range (Source frequency 1 kHz), up to 1.45 mF range (Source frequency 120 Hz) CV 500 mV Measurement range: up to 170 μF range (Source frequency 1 kHz), up to 1.45 mF range (Source frequency 120 Hz) CV 1V Measurement range: up to 70 μF range (Source frequency 1 kHz), up to 700 μF range (Source frequency 120 Hz)
Output impedance	5Ω (In open terminal voltage mode outside of the CV measurement range)
Display	LED (six digits, full scale count depends on measurement range)
Measurement time	2 ms (Typ. value. Depends on measurement configuration settings)
Functions	4-terminal contact check function (3504-60 only) BIN (measurement values can be classified by rank) (3504-50, 3504-60), Trigger-synchronous output, Setting configurations can be stored, Comparator, Averaging, Low-C reject (bad contact detection), Chatter detection, EXT. I/O, RS-232C GP-IB (3504-50, 3504-60)
Power supply	Selectable from 100, 120, 220 or 240 V AC ±10%, 50/60 Hz, 110 VA max.
Dimensions and mass	260 mm (10.24 in.) W × 100 mm (3.94 in.) H × 220 mm (8.66 in.) D, 3.8 kg (8.4 lb)
Included accessories	Power cord ×1, Instruction manual ×1, Spare fuse ×1

Measurement probes or test fixtures are not included. Please select and purchase the measurement probe or test fixture options appropriate for your application separately.
For an RS-232C connection: A crossover cable for interconnection can be used. You can use the RS-232C CABLE 9637 without hardware flow control.

PC Communication



GP-IB CONNECTOR CABLE 9151-02
2m (6.56 ft.) length


Probe and Test Fixtures

<p>PINCHER PROBE L2001 Cable length 73 cm (2.40 ft.), DC to 8 MHz, impedance characteristics of 50 Ω, 4-terminal pair configuration, tip electrode spacing: 0.3 (0.01 in.) to 6 mm (0.24 in.)</p>	<p>CONTACT TIPS IM9901 To replace the tip on the L2001, regular size, bundled with the L2001</p>	<p>CONTACT TIPS IM9902 To replace the tip on the L2001, small size</p>	<p>SMD TEST FIXTURE 9699 Direct connection type, For measuring SMDs with electrodes on the bottom; DC to 120 MHz, test sample dimensions: 1.0 mm (0.04 in.) to 4.0 mm (0.16 in.) wide, max. 1.5 mm (0.06 in.) high</p>	<p>SMD TEST FIXTURE 9677 Direct connection type, For measuring SMDs with electrodes on the side; DC to 120 MHz, test sample dimensions: 3.5 mm ±0.5 mm (0.14 in. ±0.02 in.)</p>	<p>SMD TEST FIXTURE 9263 Direct connection type, DC to 8 MHz, test sample dimensions: 1 mm (0.04 in.) to 10 mm (0.39 in.)</p>	<p>TEST FIXTURE 9262 Direct connection type, DC to 8 MHz, measurable conductor diameter: ø0.3 (0.01 in.) to 2 mm (0.08 in.)</p>	<p>4-TERMINAL PROBE 9140 DC to 100 kHz, 1 m (3.28 ft.) length, impedance characteristics of 75 Ω</p>
--	---	---	---	--	--	--	---

For LCR Meters and Impedance Analyzers Probes & Test Fixtures and Applicable SMD size

Please use the probes specified below. For probe characteristic impedance of 50 Ω, a 50 Ω coaxial cable is used. For probe characteristic impedance of 75 Ω, a 75 Ω coaxial cable is used.


Probes and Test Fixtures for Lead Components

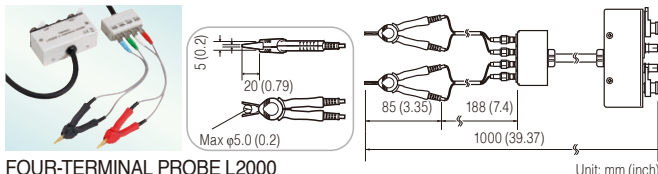

FOUR-TERMINAL PROBE L2000
Cable length 1 m (3.28 ft), DC to 8 MHz, impedance characteristics of 50 Ω, 4-terminal pair configuration, measurable conductor diameter: φ0.3 (0.01 in.) to 5 mm (0.20 in.)



TEST FIXTURE 9261-10
Cable length 1 m (3.28 ft), DC to 8 MHz, impedance characteristics of 50 Ω, 4-terminal pair configuration, measurable conductor diameter: φ0.3 (0.01 in.) to 1.5 mm (0.06 in.)

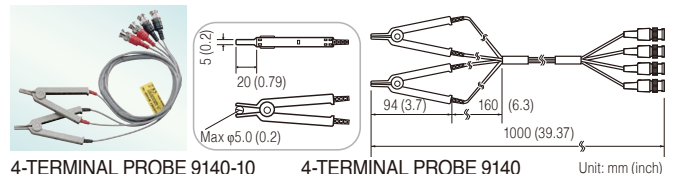

4-TERMINAL PROBE 9140-10
Cable length 1 m (3.28 ft), DC to 200 kHz, impedance characteristics of 50 Ω, 4-terminal pair configuration, measurable conductor diameter: φ0.3 (0.01 in.) to 5 mm (0.20 in.)

4-TERMINAL PROBE 9140
Cable length 1 m (3.28 ft), DC to 100 kHz, impedance characteristics of 75 Ω, 4-terminal pair configuration, measurable conductor diameter: φ0.3 (0.01 in.) to 5 mm (0.20 in.)



TEST FIXTURE 9262
Direct connection type, DC to 8 MHz, measurable conductor diameter: φ0.3 (0.01 in.) to 2 mm (0.08 in.)

Test Fixtures for SMDs

Applicable SMD size ✓ : Measurable
 ▲ : Not recommended

SMD type		Length: L (inch)	Width: W (inch)	IM9202	IM9201	IM9110	IM9100	L2001 with tip IM9901	L2001 with tip IM9902	9699	9677	9263
JIS CODE (metric)	EIA CODE (inch)											
0201	008004	0.25 mm (0.01 in.)	0.125 mm (0.005 in.)			✓						
0402	01005	0.40 mm (0.02 in.)	0.20 mm (0.01 in.)				✓					
0603	0201	0.60 mm (0.02 in.)	0.30 mm (0.01 in.)		✓		✓		✓		▲	
1005	0402	1.00 mm (0.04 in.)	0.50 mm (0.02 in.)		✓		✓		✓		✓	
1608	0603	1.60 mm (0.06 in.)	0.80 mm (0.03 in.)	✓	✓		✓	✓	✓	✓	✓	▲
2012	0805	2.00 mm (0.08 in.)	1.25 mm (0.05 in.)	✓	✓		✓	✓	✓	✓	▲	✓
3216	1206	3.20 mm (0.13 in.)	1.60 mm (0.06 in.)	✓	✓		✓	✓	✓	▲		✓
3225	1210	3.20 mm (0.13 in.)	2.50 mm (0.10 in.)	✓	✓		✓	✓	✓	▲		✓
4532	1812	4.50 mm (0.18 in.)	3.20 mm (0.13 in.)	✓			✓	✓	✓			✓
5750	2220	5.70 mm (0.22 in.)	5.00 mm (0.20 in.)	✓			✓	✓	✓			✓

Use in combination



TEST FIXTURE IM9202
Use in combination with the IM9200



TEST FIXTURE STAND IM9200
Includes magnifying glass
SMD TEST FIXTURE IM9201
Use in combination with the IM9200



ADAPTER(3.5mm/7mm) IM9906
3.5 mm (0.14 in.) male to 7 mm (0.28 in.) conversion




CALIBRATION KIT IM9905
Open/Short/Load set



SMD TEST FIXTURE IM9110
Direct connection two-terminal measurement type for measuring SMDs, DC to 1 MHz, measurable sample sizes: 008004 (inch)

Probe contact


Advanced contact technology delivers highly reproducible measurement results.



SMD TEST FIXTURE IM9100
Direct connection type, SMDs with electrodes on the bottom, DC to 8 MHz, metric(inch): 0402(01005), 0603(0201), 1005(0402)

SMD positioning mechanism

Test pieces can be positioned easily and reliably using templates and guide grooves for various SMD sizes.




High-precision four-terminal measurement


The fixture uses stable, high-precision four-terminal measurement to reliably apply four probes to the SMD's small electrodes.




SMD TEST FIXTURE 9699
Direct connection type. For measuring SMDs with electrodes on the bottom; DC to 120 MHz, test sample dimensions: 1.0 mm (0.04 in.) to 4.0 mm (0.16 in.) wide, max. 1.5 mm (0.06 in.) high



SMD TEST FIXTURE 9677
Direct connection type, For measuring SMDs with electrodes on the side; DC to 120 MHz, test sample dimensions: 3.5 mm ±0.5 mm (0.14 in ±0.02 in.)



SMD TEST FIXTURE 9263
Direct connection type, DC to 8 MHz, Test sample dimensions: 1 mm (0.04 in.) to 10 mm (0.39 in.)



PINCHER PROBE L2001
Cable length 73 cm (2.40 ft), DC to 8 MHz, impedance characteristics of 50 Ω, 4-terminal pair configuration, tip electrode spacing: 0.3 (0.01 in.) to 6 mm (0.24 in.)



CONTACT TIPS IM9901
To replace the tip on the L2001, regular size, bundled with the L2001



CONTACT TIPS IM9902
To replace the tip on the L2001, small size

Resistance Meters

New Standard in Weld Resistance Inspection

RESISTANCE METER RM3546



LAN

RS-232C

USB 2.0

CE

SP Us

3 Year Warranty

- Evaluate welding quality with resistance measurement values
- A-OVC function for stable measurement (Advanced Offset Voltage Compensation)
- A-TC function compensates for temperature effects (Advanced Temperature Correction)
- Prevent sudden malfunctions with the ACP function (Active Circuit Protection)
- Design systems without worrying about path resistance
- Simple installation with easy wiring and dedicated probes

Model No. (Order Code) **RM3546**

Measurement probes not included.
The L2100 is for low resistance measurement. Accuracy is guaranteed only for the following ranges with a measurement current is 100 mA or more: 1000 $\mu\Omega$ range (HIGH, LOW), 10 m Ω range (HIGH, LOW), 100 m Ω range (HIGH, LOW), 1000 m Ω range (HIGH only)




PIN TYPE LEAD L2100
A: 300 mm (11.81 in.), B: 172 mm (6.77 in.), L: 1.4 m (4.59 ft), 1000 V DC



TIP PIN 9772-90
To replace the tip on the pin type lead 9772, L2100/L2110, (one piece)



CLIP TYPE LEAD L2101
A: 250 mm (9.84 in.), B: 84 mm (3.31 in.), L: 1.5 m (4.92 ft), 60 V DC



TIP PIN 9770-90
Replacement tip for pin type lead 9770, L2102 (one piece)



TIP PIN 9771-90
Replacement tip for pin type lead 9771, L2103 (one piece)



PROBE KIT L9773
L9773-01, L9773-02, L9773-03 set



PROBE TIPS L9773-01
10 pieces




PROBE TIP SOCKETS L9773-02
10 pieces



PROBE TIP SOCKET ADAPTERS L9773-03
10 pieces

About lead length



A: From junction to probe
B: Probe length
L: Overall length
Note: for L2101 to L2103, length "A" can be extended by roughly 1.1 m (3.61 ft.) by cutting the binding tube.



USB CABLE (A-B) L1002
1 m (3.28 ft.) length



RS-232C CABLE L9637
For external control, double shielding, 9-pin/9-pin, 3 m (9.84 ft.) cord length



LAN CABLE 9642
Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft.) length



MULTIPLEXER UNIT Z3003
4-wire 10ch or 2-wire 21ch input scanning



SWITCH MAINFRAME SW1001
Max. 18 (4-terminal pair) to 66 (2-wire) channels



SWITCH MAINFRAME SW1002
Max. 72 (4-terminal pair) to 264 (2-wire) channels

Basic specifications (Accuracy guaranteed for 1 year)

Resistance range (13 ranges)	[Range, Maximum display value, Resolutions, Testing current (Measurement current)] 1000 $\mu\Omega$: 1200.000 $\mu\Omega$, 1 n Ω , 1 A/500 mA 10 m Ω : 12.000 00 m Ω , 10 n Ω , 1 A/500 mA 100 m Ω : 120.000 0 m Ω , 100 n Ω , 1 A/100 mA 1000 m Ω : 1200.000 m Ω , 1 $\mu\Omega$, 100 mA/10 mA 10 Ω : 12.000 00 Ω , 10 $\mu\Omega$, 10 mA/1 mA 100 Ω : 120.000 0 Ω , 100 $\mu\Omega$, 10 mA/1 mA 1000 Ω : 1200.000 Ω , 1 m Ω , 1 mA 10 k Ω : 12.000 00 k Ω , 10 m Ω , 1 mA 100 k Ω : 120.000 0 k Ω , 100 m Ω , 100 μA 1000 k Ω : 1200.000 k Ω , 1 Ω , 10 μA 10 M Ω : 12.000 00 M Ω , 10 Ω , 1 μA 100 M Ω (100 M Ω range high-precision mode): 120.000 0 M Ω , 100 Ω , 100 nA 1000 M Ω : 1200.0 M Ω , 100 k Ω , 1 μA or less
Representative accuracy (high mode, OVC function enabled, SLOW2, no zero adjustment)	1000 $\mu\Omega$ range: $\pm 0.045\%$ rdg $\pm 0.010\%$ f.s. 10 m Ω range: $\pm 0.045\%$ rdg $\pm 0.001\%$ f.s. 100 m Ω range: $\pm 0.045\%$ rdg $\pm 0.001\%$ f.s. 1000 m Ω range: $\pm 0.012\%$ rdg $\pm 0.001\%$ f.s. 1000 Ω range: $\pm 0.006\%$ rdg $\pm 0.001\%$ f.s.
Testing current (Measurement current)	High mode: 1000 μA (1 A) to 1000 M Ω (up to 1 μA) Low mode: 100 m Ω (100 mA) to 100 Ω (1 mA)
Measurement speed	Representative value: FAST (2.3 ms) / MED (50 Hz: 22 ms, 60 Hz: 19 ms) / SLOW1 (102 ms) / SLOW2 (202 ms) PR10 m Ω range*: FAST (21 ms) / MED (50 Hz: 41 ms, 60 Hz: 37 ms) / SLOW1 (121 ms) / SLOW2 (221 ms)
Path resistance tolerance (reference values)	Range of 100 m Ω or less (Pure Resistance mode off): max. 3.5 Ω Range of 100 m Ω or less (Pure Resistance mode on): max. 9.0 Ω
Maximum open-terminal voltage	Range: 1000 Ω or less: 8.0 V Range: 10 k Ω or greater: 20 V
Temperature measurement	Temperature Sensor (Z2001 [included accessories]): -10.0 $^{\circ}\text{C}$ to 99.9 $^{\circ}\text{C}$ Analog input (Ex: Infrared thermometer): DC 0 V to 2.0 V
Built-in Multiplexer (option)	Multiplexer unit Z3003 Number of installable units: Max. 2 Maximum number of channels: 20 channels (4-wire method), 42 channels (2-wire method) Switching time: 30 ms
External Multiplexer (option)	Switch Mainframe Maximum number of channels (SW1001): 33 channels (4-wire method) Maximum number of channels (SW1002): 132 channels (4-wire method) Switching time: 11 ms
Communication interfaces	LAN (TCP/IP, 10BASE-T/100BASE-TX), RS-232C (Max. 115200 bps, also used as printer interface), USB, EXT I/O (D-sub 37-pin, Analog output (D/A output voltage range: DC 0 V to 1.5 V))
Functions	Contact check, Zero adjustment (within each range $\pm 50\%$ f.s.) *1, Zero-adjustment-free accuracy guaranteed, OVC function, A-OVC function, Contact improvement function (max. applied voltage: 5V; max. applied current: 10 mA), Auto-hold function, Comparator, Temperature measurement function, Temperature correction (TC) function, Advanced Temperature Correction (A-TC) function, Temperature conversion (ΔT) function, Statistical calculation function, Delay function, Averaging function, Saving panels (saving of measurement conditions), Data memory function, Command monitor function (display of send/receive status of commands and queries), LabVIEW [®] Driver compatible*2 *1: Zero adjustment forcibly disabled for 100 M Ω or greater *2: LabVIEW Driver is the trademark or registered trademark of National Instruments.
Power supply	100 V to 240 V AC, 50 Hz/60 Hz, Rated power consumption: 40 VA max.
Normal power consumption (reference value)	20 W
Dimensions and mass	215 mm (8.46 in.) W \times 80 mm (3.15 in.) H \times 306.5 mm (12.07 in.) D (excluding protruding parts), 3.4 kg (119.9 oz.)
Included accessories	Power cord \times 1, Temperature sensor Z2001 \times 1, Male EXT I/O connector \times 1, EXT. I/O connector cover \times 1, Start up guide \times 1, Operating Precautions \times 1

Measurement Leads

PC Communication

Multichannel Options

Other Options

Z2001 is bundled with the RM3546



TEMPERATURE SENSOR Z2001
1.75 m (5.74 ft.) length



LED COMPARATOR ATTACHMENT L2105
2 m (6.56 ft.) length

Resistance Meters

Market Leading Precision Tests for Testing Every Weld or Connection on Your Production Line

RESISTANCE METER RM3545A



LAN

RS-232C

USB 2.0



- Equipped with advanced features, ensuring precise resistance measurement (OVC, temperature measurement, and correction function)
- 0.045% basic accuracy, 1 nΩ max. resolution, 1A max. testing current
- Measure from 1 nΩ (testing current 1 A) to 1200 MΩ
- The RM3545A-2 can be equipped with up to two optional Z3003 Multiplexer Units, allowing it to measure up to 20 channels (using the 4-terminal method)
- High path resistance tolerance allows seamless integration into an automatic test system, eliminating concerns about wiring or contact resistance

Model No. (Order Code) **RM3545A-1** (Single-channel model)
RM3545A-2 (Support for the multiplexer unit)

Measurement probes not included.

The L2100 is for low resistance measurement. Accuracy is guaranteed only for the following ranges with a measurement current is 100 mA or more. 1000 μΩ range (HIGH, LOW), 10 mΩ range (HIGH, LOW), 100 mΩ range (HIGH, LOW), 1000 mΩ range (HIGH only)




PIN TYPE LEAD L2100
 A: 300 mm (11.81 in.), B: 172 mm (6.77 in.), L: 1.4 m (4.59 ft.), 1000 V DC




TIP PIN 9772-90
 To replace the tip on the Pin type lead 9772, L2100/L2110, (one piece)




CLIP TYPE LEAD L2101
 A: 250 mm (9.84 in.), B: 84 mm (3.31 in.), L: 1.5 m (4.92 ft.), 60 V DC



TIP PIN 9770-90
 Replacement tip for pin type lead 9770, L2102 (one piece)



PIN TYPE LEAD L2102
 A: 250 mm (9.84 in.), B: 178 mm (7.01 in.), L: 1.5 m (4.92 ft.), 60 V DC



TIP PIN 9771-90
 Replacement tip for pin type lead 9771, L2103 (one piece)



PIN TYPE LEAD L2103
 A: 250 mm (9.84 in.), B: 176 mm (6.93 in.), L: 1.5 m (4.92 ft.), 60 V DC



FOUR-POINT ARRAY PROBE RM9010-01
 A: 1215 mm (47.83 in.), B: 73.5 mm (2.89 in.), L: 1.5 m (4.92 ft.)



FOUR-POINT ARRAY PROBE RM9010-02
 A: 1120 mm (44.09 in.), B: 84 mm (3.31 in.), L: 1.5 m (4.92 ft.)

About lead length



Note: for L2101 to L2103, length "A" can be extended by roughly 1.1 m (3.61 ft.) by cutting the binding tube.



RS-232C CABLE L9637
 For external control, double shielding, 9-pin /9-pin, 3 m (9.84 ft.) cord length



USB CABLE (A-B) L1002
 1 m (3.28 ft.) length



LAN CABLE 9642
 Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft.) length



MULTIPLEXER UNIT Z3003
 4-wire 10ch or 2-wire 21ch input scanning



SWITCH MAINFRAME SW1001
 Max. 18 (4-terminal pair) to 66 (2-wire) channels



SWITCH MAINFRAME SW1002
 Max. 72 (4-terminal pair) to 264 (2-wire) channels

Basic specifications (Accuracy guaranteed for 1 year)

Resistance range (13 ranges)	[Range, max. display value, resolutions, testing current (measurement current)] 1000 μΩ: 1200.000 μΩ, 1 nΩ, 1 A 10 mΩ: 12.000 00 mΩ, 10 nΩ, 1 A 100 mΩ: 120.000 0 mΩ, 100 nΩ, 1 A 1000 mΩ: 1200.000 mΩ, 1 μΩ, 100 mA 10 Ω: 12.000 00 Ω, 10 μΩ, 10 mA 100 Ω: 120.000 0 Ω, 100 μΩ, 10 mA 1000 Ω: 1200.000 Ω, 1 mΩ, 1 mA 10 kΩ: 12.000 00 kΩ, 10 mΩ, 1 mA 100 kΩ: 120.000 0 kΩ, 100 mΩ, 100 μA 1000 kΩ: 1200.000 kΩ, 1 Ω, 10 μA 10 MΩ: 12.000 00 MΩ, 10 Ω, 1 μA 100 MΩ (100 MΩ range high-precision mode): 120.000 0 MΩ, 100 Ω, 100 nA 1000 MΩ: 1200.0 MΩ, 100 kΩ, 1 μA or less
Representative accuracy (high mode, OVC function enabled, SLOW2, no zero adjustment)	1000 μΩ range: ±0.045% rdg ±0.010% f.s. 10 mΩ range: ±0.045% rdg ±0.001% f.s. 100 mΩ range: ±0.045% rdg ±0.001% f.s. 1000 mΩ range: ±0.012% rdg ±0.001% f.s. 1000 Ω range: ±0.006% rdg ±0.001% f.s.
Testing current (Measurement current)	High mode: 1000 μΩ (1 A) to 1000 MΩ (up to 1 μA) Low mode: 100 mΩ (100 mA) to 100 Ω (1 mA) Low power mode (LP): Low power measurement with measurement current and open circuit voltage down to 20 mV LP1000 mΩ (1 mA) to LP1000 Ω (5 μA)
Measurement speed	Representative value: FAST (2.3 ms) / MED (50 Hz: 22 ms, 60 Hz: 19 ms) / SLOW1 (102 ms) / SLOW2 (202 ms) Pure Resistance 10 mΩ range: FAST (21 ms) / MED (50 Hz: 41 ms, 60 Hz: 37 ms) / SLOW1 (121 ms) / SLOW2 (221 ms)
Path resistance tolerance (reference values)	Range: 100 mΩ or less (Pure Resistance mode off): 2.6 Ω Range: 100 mΩ or less (Pure Resistance mode on): 3.5 Ω
Path resistance between SOURCE B and SOURCE A (other than measurement target)	Range: 1000 mΩ: 15 Ω Range: 10 Ω: 150 Ω Range: 100 Ω: 100 Ω Range: 10 kΩ: 500 Ω Range: 100 kΩ or greater: 1 kΩ
Maximum open-terminal voltage	Range: 1000 Ω or less: 8.0 V Range: 10 kΩ or greater: 20 V
Temperature measurement	Temperature Sensor (Z2001 [included accessories]): -10.0 °C to 99.9 °C Analog input (Ex: Infrared thermometer): 0 V to 2.0 V DC
Multiplexer (built-in option)* *RM3545A-2 only	Multiplexer unit Z3003 Number of installable units: Max. 2 Max. number of channels: 20 channels (4-wire method), 42 channels (2-wire method) Switching time: 30 ms
Multiplexer (external option)	Switch Mainframe Maximum number of channels (SW1001): 33 channels (4-wire method) Maximum number of channels (SW1002): 132 channels (4-wire method) Switching time: 11 ms
Communication interfaces	LAN (TCP/IP, 10BASE-T/100BASE-TX), RS-232C (Max. 115200 bps, also used as printer interface), USB, EXT I/O (D-sub 37-pin, Analog output (D/A output voltage range: 0 V to 1.5 V DC))
Functions	Contact check, Zero adjustment (within each range ±50% f.s.) ¹ , Zero-adjustment-free accuracy guaranteed, OVC function, Contact improvement function (max. applied voltage: 5V; max. applied current: 10 mA), Low-power mode (maximum open voltage: 20 mV), Auto-hold function, Comparator, Temperature measurement function, Temperature correction (TC) function, Temperature conversion (ΔT) function, Statistical calculation function, Delay function, Averaging function, Saving panels (saving of measurement conditions), Data memory function, Command monitor function (display of send/receive status of commands and queries), LabVIEW® Driver compatible ² 1: Zero adjustment forcibly disabled for 100 MΩ or greater 2: LabVIEW Driver is the trademark or registered trademark of National Instruments.
Power supply	100 V to 240 V AC, 50 Hz/60 Hz, Rated power consumption: 40 VA max.
Normal power consumption (reference value)	16 W (testing current 1 A, LCD on)
Dimensions	215 mm (8.46 in.) W × 80 mm (3.15 in.) H × 306.5 mm (12.07 in.) D,
Mass	RM3545A-1: 2.7 kg (95.2 oz.), RM3545A-2: 3.4 kg (119.9 oz.)
Included accessories	Power cord ×1, Temperature sensor Z2001 ×1, Male EXT I/O connector ×1, EXT. I/O connector cover ×1, Spare fuse (F1.6AH 250 V) ×1, Start up guide ×1, Operating Precautions ×1, Instruction manual ×1

Measurement Leads

PC Communication

Multichannel Options

Z2001 is bundled with the RM3545A.



Resistance Meters

Resistance Meters

The Versatile Standard Model Designed for Every Step, from R&D to Production

RESISTANCE METER RM3545-01



- 0.006% basic accuracy, 10 nΩ max. resolution, 1A max. testing current
- Measure from 0.00 μΩ (testing current 1 A) to 1200 MΩ
- Low-power resistance measurement with an open voltage not exceeding 20 mV
- High-speed, comprehensive productivity support delivers decisions in as little as 2.0 ms from start to finish
- Compatible with GP-IB communication for automated measurement and control

Model No. (Order Code) **RM3545-01** (Built-in GP-IB interface)

Basic specifications (Accuracy guaranteed for 1 year)

Resistance range	10 mΩ (12.00000 mΩ display max., 10 nΩ resolution) to 1000 MΩ range (1200.0 MΩ display max., 100 kΩ resolution), 12 steps [LP ON] 1000 mΩ (1200.00 mΩ display max., 10 μΩ resolution) to 1000 Ω range (1200.00 Ω display max., 10 mΩ resolution), 4 steps Measurement accuracy: ±0.006% rdg ±0.001% f.s.
Testing current	1 A DC to 100 nA DC [LP ON] 1 mA to 5 μA DC
Open-terminal voltage	20 V DC max. (10 kΩ range or more), 5.5 V DC max. (1000 Ω range or less) [LP ON] 20 mV DC max.
Temperature measurement	-10.0°C to 99.9°C, accuracy: ±0.5 °C (Temperature Sensor Z2001 and RM3545-01 combined accuracy), -99.9°C to 999.9°C (analog input)
Measurement speed	FAST (2.0ms) / MED (50Hz: 22ms, 60Hz: 19ms) / SLOW1 (102ms) / SLOW2 (202ms) * Measurement speed is different at each range, 2.0 ms is the fastest value
Functions	Temperature correction, temperature conversion, offset voltage compensation (OVC), comparator (ABS/REF%), BIN, key-lock (OFF, menu lock, all lock), display digit count selection function (7-digit/6-digit/5-digit), automatic power supply frequency settings (AUTO/50Hz/60Hz), scaling, judgment sound setting, auto hold, averaging, statistical calculations, panel store/panel load, D/A output.
Communication interfaces	Select from GP-IB, RS-232C, PRINTER (RS-232C), or USB. Remote function, communications monitor function, data output function, memory (50)
Power supply	100 V to 240 V AC, 50 Hz/60 Hz, Rated power consumption: 40 VA max.
Dimensions and mass	215 mm (8.46 in.) W × 80 mm (3.15 in.) H × 306.5 mm (12.07 in.) D, 2.5 kg (88.2 oz.)
Included accessories	Power cord ×1, Clip type lead L2101 ×1, Temperature sensor Z2001 ×1, Male EXT I/O connector ×1, Instruction manual ×1, USB cable (A-to-B type) ×1, Spare fuse ×1

The L2101, Z2001 are bundled with the RM3545-01.

The L2100 is for low resistance measurement. Accuracy is guaranteed only for the following ranges with a measurement current is 100 mA or more. 10 mΩ range, 100 mΩ range (HIGH, LOW), 1000 mΩ range (HIGH only)

CLIP TYPE LEAD L2101
A: 250 mm (9.84 in.), B: 84 mm (3.31 in.), L: 1.5 m (4.92 ft.)

TIP PIN 9770-90
Replacement tip for pin type lead 9770, L2102

PIN TYPE LEAD L2102
A: 250 mm (9.84 in.), B: 178 mm (7.01 in.), L: 1.5 m (4.92 ft.)

TIP PIN 9771-90
Replacement tip for pin type lead 9771, L2103

PIN TYPE LEAD L2103
A: 250 mm (9.84 in.), B: 176 mm (6.93 in.), L: 1.5 m (4.92 ft.)

FOUR-POINT ARRAY PROBE RM9010-01
A: 1215 mm (47.83 in.), B: 73.5 mm (2.89 in.), L: 1.5 m (4.92 ft.)

FOUR-POINT ARRAY PROBE RM9010-02
A: 1120 mm (44.09 in.), B: 84 mm (3.31 in.), L: 1.5 m (4.92 ft.)

PIN TYPE LEAD L2100
A: 300 mm (11.81 in.), B: 172 mm (6.77 in.), L: 1.4 m (4.59 ft.), 1000 V DC max.

TIP PIN 9772-90
To replace the tip on the Pin type lead 9772, L2100/L2110, (one piece)

TEMPERATURE SENSOR Z2001
1.75 m (5.74 ft.) length

LED COMPARATOR ATTACHMENT L2105
2 m (6.56 ft.) length

RS-232C CABLE 9637
For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length

GP-IB CONNECTOR CABLE 9151-02
2m (6.56 ft.) length

FUSE SET Z5056
Replacement fuse set (1.6 A/250 V, 5 pieces)

About lead length

A: From junction to probe
B: Probe length
L: Overall length

Note: for L2101 to L2103, length "A" can be extended by roughly 1.1 m (3.61 ft.) by cutting the binding tube.

Long-Selling Model for Low Resistance Measurement

RESISTANCE METER RM3544



- 0.02% basic accuracy, 1 μΩ max. resolution, 300 mA max. measurable current
- Measure from 0.000 mΩ (testing current 300 mA) to 3.5 MΩ
- Probe for guard jack use and increased measurement current yield an instrument that's more resistant to noise
- Optional LED COMPARATOR ATTACHMENT and high-volume judgment tones combine to ensure PASS/FAIL judgments are communicated reliably in the noisy environment of the production floor
- EXT I/O interface with NPN/PNP support can accommodate a variety of automated production lines (-01 model)

Model No. (Order Code) **RM3544** (No interfaces)
RM3544-01 (Built-in EXT I/O, RS-232C, USB)

Basic specifications (Accuracy guaranteed for 1 year)

Resistance range	30 mΩ (35.000 mΩ display max., 1 μΩ resolution) to 3 MΩ range (3.5000 MΩ display max., 100 Ω resolution), 9 steps Measurement accuracy: ±0.020% rdg ±0.007% f.s.
Testing current	[at 30 mΩ range] 300 mA DC to [at 3 MΩ range] 500 nA DC
Open-terminal voltage	5.5 V DC max.
Temperature measurement	-10.0 °C to 99.9°C, accuracy: ±0.5 °C (Temperature Sensor Z2001 and RM3544 combined accuracy)
Measurement speed	FAST (50Hz: 21ms, 60Hz: 18ms) / MED (101ms) / SLOW (401ms)
Display refresh rate	N/A
Functions	Temperature correction, comparator (ABS/REF%), key-lock (OFF, menu lock, all lock), display digit count selection function (5 digits/ 4 digits), automatic power supply frequency settings (AUTO/50Hz/60Hz), scaling, judgment sound setting, auto hold, averaging, panel store/panel load
Memory storage	N/A
Communication interfaces	[Only RM3544-01] Select from RS-232C, PRINTER (RS-232C), or USB Remote function, communications monitor function, data output function
Power supply	100 V to 240 V AC, 50 Hz/60 Hz, Rated power consumption: 15 VA max.
Dimensions and mass	215 mm (8.46 in.) W × 80 mm (3.15 in.) H × 166 mm (6.54 in.) D [RM3544] 0.9 kg (31.7 oz.), [RM3544-01] 1.0 kg (35.3 oz.)
Included accessories	[RM3544] Power cord ×1, Clip type lead L2101 ×1, Instruction manual ×1, Spare fuse ×1 [RM3544-01] Power cord ×1, Clip type lead L2101 ×1, Male EXT I/O connector ×1, Instruction manual ×1, USB cable (A-to-B type) ×1, Spare fuse ×1

CLIP TYPE LEAD L2101
A: 250 mm (9.84 in.), B: 84 mm (3.31 in.), L: 1.5 m (4.92 ft.)

TIP PIN 9770-90
Replacement tip

PIN TYPE LEAD L2102
A: 250 mm (9.84 in.), B: 178 mm (7.01 in.), L: 1.5 m (4.92 ft.)

TIP PIN 9771-90
Replacement tip

PIN TYPE LEAD L2103
A: 250 mm (9.84 in.), B: 176 mm (6.93 in.), L: 1.5 m (4.92 ft.)

TEMPERATURE SENSOR Z2001
1.75 m (5.74 ft.) length

LED COMPARATOR ATTACHMENT L2105
2 m (6.56 ft.) length

RS-232C CABLE 9637
For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length

FUSE SET Z5051
Replacement fuse set (0.5 A/250 V, 5 pieces)

About lead length

A: From junction to probe
B: Probe length
L: Overall length

Note: for L2101 to L2103, length "A" can be extended by roughly 1.1 m (3.61 ft.) by cutting the binding tube.

Resistance Meters

Resistance Meter for Ultra-low and Low Shunt Resistance

RESISTANCE HiTESTER RM3543



GP-IB
RM3543-01
RS-232C



- Advanced enough to measure 0.1 mΩ shunts with room to spare at ±0.16% accuracy & 0.01 μΩ resolution performance
- Superb repeatable measurement accuracy
- Advanced contact-check, comparator, and data export functions
- Intuitive user interface and strong noise immunity are ideal for automated systems

Model No. (Order Code) **RM3543**
RM3543-01 (Built-in GP-IB interface)

Test fixtures are not supplied with the unit. Select an optional test fixture when ordering.

Basic specifications (Accuracy guaranteed for 1 year)

Measurement method	Four-terminal, constant-current DC
Resistance range	10 mΩ (max. 12.00000 mΩ, 0.01 μΩ resolution) to 1000 Ω range (max. 1200.000 Ω, 1 mΩ resolution), 6 steps
Display	Monochrome graphic LCD 240 × 64 dot, white LED backlight
Measurement accuracy	[at 10 mΩ range, with SLOW mode, average 16 times settings] ±0.060% rdg ±0.001% f.s.
Testing current	[at 10 mΩ range] 1 A DC to [at 1000 Ω range] 1 mA DC
Open-terminal voltage	20 V DC max. Note: voltage when not measuring is 20 mV or less, with current mode set at PULSE and Contact Improver Setting set at OFF/PULSE (measured with a voltmeter having 10 MΩ)
Sampling rate	FAST, MEDIUM, SLOW, 3 settings
Integration time	[at 10 mΩ range, default value] FAST 2.0 ms, MED 5.0 ms, SLOW 1 PLC, Setting range: 0.1 ms to 100.0 ms, or 1 to 5 PLC at 50 Hz, 1 to 6 PLC at 60 Hz Note: PLC = one power line cycle (mains wave-form period)
Other functions	Comparator (compare setting value with measurement value), Delay, OVC (offset voltage compensation), Average, Measurement fault detection, Probe short-circuit detection, Improve contact, Current mode setting (A pulse application function that applies current only during measurement), Auto-memory, Statistical calculations, Settings monitor (when using two instruments, a difference in settings causes warning notification), Retry, Trigger function, etc.,
Interfaces	External I/O, RS-232C, Printer (RS-232C), GP-IB (Model RM3543-01)
External I/O	Trigger, Hold input, Comparator output, Settings monitor terminal, Service power output +5V, +12V, etc.
Power supply	100 V to 240 V AC, 50 Hz/60 Hz, 40 VA max.
Dimensions and mass	260 mm (10.24 in.) W × 88 mm (3.46 in.) H × 300 mm (11.81 in.) D, 3.0 kg (105.8 oz.)
Included accessories	Power cord ×1, EXT I/O male connector ×1, Instruction manual ×1, Operation guide ×1

Probe and Test Fixtures		4-TERMINAL PROBE 9500 DC to 1 MHz, 1 m (3.28 ft.) length		4-TERMINAL PROBE 9140 DC to 100 kHz, 1 m (3.28 ft.) length, impedance characteristics of 75 Ω		TEST FIXTURE 9262 Direct connection type, DC to 8 MHz, measurable conductor diameter: ø0.3 (0.01 in.) to 2 mm (0.08 in.)		SMD TEST FIXTURE 9263 Direct connection type, DC to 8 MHz, Test sample dimensions: 1 mm (0.04 in.) to 10 mm (0.39 in.)	PC Communication		RS-232C CABLE 9637 For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length		GP-IB CONNECTOR CABLE 9151-02 2m (6.56 ft.) length
-------------------------	--	--	--	---	--	--	--	--	------------------	--	---	--	--

For Automated In-Line Inspection of Chip Resistors and Ferrite Beads

RESISTANCE METER RM3542C

New



GP-IB
RM3542C-2
RS-232C



- 0.9 ms fastest measurement speed
- Low-stress measurement for 0201-size ultra-small components
- Shorten jumper resistor inspection time by up to 76%
- Avoid damaging delicate devices and eliminate contact errors
- BIN Measurement performs judgments and automatic grading into 0-6 categories (up to 7 bins)(RM3542C-3 only)
- ΔR Function (cross-stage auto-judgment) increases inspection reliability and overall taping machine efficiency (RM3542C-3 only)

Model No. (Order Code) **RM3542C-1** Standard model
RM3542C-2 Standard model (GP-IB compatible)
RM3542C-3 Advanced model

Test fixtures are not supplied with the unit. Please select an optional test fixture when ordering.

Basic specifications (Accuracy guaranteed: 1 year, only RM3542C-3 has 90-day accuracy)

Resistance range	[at Low Power OFF] 100 mΩ range (Max. 120.0000 mΩ, 0.1 μΩ* resolution) to 100 MΩ range (Max. 120.0000 MΩ, 100 Ω resolution), 16 steps *Additional range for RM3542C-3: 10 mΩ (Max. 12.00000 mΩ, 0.01 μΩ resolution) [at Low Power ON] 1000 mΩ range (Max. 1200.000 mΩ, 1 μΩ resolution) to 1000 Ω range (Max. 1200.000 Ω, 1 mΩ resolution), 6 steps
Display	Monochrome graphic LCD 240 × 64 dot, white LED backlight
Measurement accuracy	[with SLOW mode, at 100 mΩ range] ±0.015 % rdg. ±0.002 % f.s. [with SLOW mode, at 1000 Ω range] ±0.006 % rdg. ±0.001 % f.s. 90-day accuracy (RM3542C-3 only): [with SLOW mode, at 100 mΩ range] ±0.012 % rdg. ±0.002 % f.s. [with SLOW mode, at 1000 Ω range] ±0.005 % rdg. ±0.001 % f.s.
Testing current	[at 100 mΩ range] 100 mA DC to [at 100 MΩ range] 100 nA DC
Open-terminal voltage	20 V DC max. (with applied voltage limit function enabled: max. 5 V DC)
Sampling rate	FAST, MEDIUM, SLOW, 3 settings
Measurement times	[at 100 Ω / 300 Ω / 1000 Ω ranges, with Low Power OFF] FAST: 0.9 ms, MED: 3.6 ms, SLOW: 17 ms (minimum time)
Integration time	0.1 ms to 100.0 ms, or 1 to 5 PLC at 50 Hz, 1 to 6 PLC at 60 Hz Note: PLC = one power line cycle (mains wave-form period)
Other functions	Comparator (set-value vs. measured-value comparison), BIN Measurement (RM3542C-3), Low-power Resistance Measurement, Delay Setting, Offset Voltage Compensation (OVC), Integration Time Setting, Average (RM3542C-3), Faulty Measurement Detection, Probe Short-Circuit Detection, Contact Improvement, Current Mode Setting, Stage Mismatch Prevention, Scaling, Retry, Applied Voltage Limiter Function, Jumper Resistance Measurement Support, Preset, ΔR (RM3542C-3), Memory, Statistical Calculation, Settings Monitor, Trigger Source Setting, Printer Function
Interfaces	RS-232C, Printer (RM-232C), GP-IB (Model RM3542C-2)
External I/O	Trigger, Hold input, Comparator output and other, Settings monitor terminal
Power supply	100 to 240 V AC, 50/60 Hz, 30 VA max.
Dimensions and mass	260 mm (10.24 in.) W × 88 mm (3.46 in.) H × 300 mm (11.81 in.) D, 2.9 kg (102.3 oz.)
Included accessories	Power cord ×1, EXT I/O male connector ×1, Instruction manual ×1, Operation guide ×1

Other options: refer to the detailed catalog

Probe and Test Fixtures		4-TERMINAL PROBE 9140-10 Cable length 1 m (3.28 ft.), DC to 200 kHz, 50 Ω, measurable conductor diameter: ø0.3 mm (0.01 in.) to 5 mm (0.20 in.)		SMD TEST FIXTURE IM9100 Direct connection type, For measuring SMDs with electrodes on the bottom, DC to 8 MHz, Measurable sample sizes: 01005 to 0402 (EIA), 0402 to 1005 (JIS)		TEST FIXTURE 9262 Direct connection type, DC to 8 MHz, measurable conductor diameter: ø0.3mm (0.01 in.) to 2 mm (0.08 in.)		SMD TEST FIXTURE 9263 Direct connection type, DC to 8 MHz, Test sample dimensions: 1 mm (0.04 in.) to 10 mm (0.39 in.)	PC Communication		RS-232C CABLE 9637 For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length		GP-IB CONNECTOR CABLE 9151-02 2m (6.56 ft.) length
-------------------------	--	---	--	---	--	--	--	--	------------------	--	---	--	--

Resistance Meters

Simplify Precision Resistance Measurements with User-friendly Design and Instant Connectivity

RESISTANCE METER RM3548-50



Basic specifications (Accuracy guaranteed for 1 year)


Measurement parameters	Resistance measurement, temperature measurement
Measurement method	Resistance: DC four-terminal method, Temperature: thermistor
Resistance range	3 mΩ (3.5000 mΩ display max., 0.1 μΩ resolution) to 3 MΩ range (3.5000 MΩ display max., 100 Ω resolution), 10 steps Measurement accuracy: ±0.020% rdg ±0.007% f.s.
Temperature measurement	-10.0°C to 99.9°C, accuracy: ±0.5°C (Temperature Sensor Z2002 and RM3548-50 combined accuracy)
Operating temperature and humidity range	0°C to 40°C (32°F to 104°F), 80% RH or less (non-condensing)
Storage temperature and humidity range	-10°C to 50°C (14°F to 122°F), 80% RH or less (non-condensing)
Applicable standards	EN61010 (safety), EN61326 (EMC)
Circuit protection	The circuit is protected until 42.4 V peak AC, 60 V DC is reached
Memory storage	Number of recordable data points: up to 1,000 for manual/auto, up to 6,000 for interval; interval: 0.2 s to 10.0 s (0.2 s step); acquisition of data from memory: display, USB mass storage (CSV, TXT files)
Communication functions	USB, wireless communications via Bluetooth® (Z3210 is necessary)
Power supply	LR6 alkaline battery × 8 or HR6 nickel-metal hydride battery × 8
Maximum rated voltage	5 VA
Continuous operating time	Approx. 10 hours (when eight fresh LR6 alkaline batteries or eight HR6 nickel-metal hydride batteries are used)
Dimensions and weight	Approx. 199 W × 132 H × 60.6 D mm (7.83 W × 5.20 H × 2.39 D in.), Approx. 890 g (31.4 oz.)
Included accessories	Clip Type Lead L2107 × 1, Temperature Sensor Z2002 × 1, Protector Z5041 × 1, LR6 alkaline battery × 8, instruction manual × 1, USB cable (A to mini-B) × 1, strap × 1, spare fuse

- 0.02% basic accuracy, 0.1 μΩ max. resolution, 1 A max. testing current
- Measure from 0.1 μΩ (testing current 1 A) to 3.5 MΩ
- Automatic temperature correction ensures accurate results & faster testing
- Advanced Connectivity: seamlessly integrate data with Excel® and a mobile app to manage & analyze data efficiently (Wireless Adapter Z3210 is necessary)
- Protections for safe operation: halts operation & triggers alerts when incorrect voltage inputs are detected
- Versatile Applications: Ideal for EV, aircraft, & motor/transformer maintenance with various probe options

Model No. (Order Code) **RM3548-50**

* L2107 and Z2002 are bundled with the RM3548-50

Measurement Leads



A: From junction to probe
B: Probe length
L: Overall length


TEST LEADS L2140
B: 177 mm (6.97 in.) red, L: 1840 mm (72.44 in.) red, 3160 mm (124.41 in.) black, 60 V DC

PIN TYPE LEAD L2141
A: 1832 mm (72.13 in.) red, 1832 mm (72.13 in.) black, B: 168 mm (6.61 in.), L: 3000 mm (118.11 in.) red, 1000 V DC


PIN TYPE LEAD L2142
A: 1832 mm (72.13 in.) red, 1832 mm (72.13 in.) black, B: 168 mm (6.61 in.), L: 3000 mm (118.11 in.) red, 1000 V DC

PIN TYPE LEAD 9465-10
A: (red) 45 mm (1.77 in.), (black) Max. 400 mm (15.75 in.), B: 177 mm (6.97 in.), L: 1925 mm (6.32 ft.) (red)

TIP PIN 9465-90
To replace the tip on the 9465-10, 9465-11, L2140 (one piece)



PIN TYPE LEAD 9465-11
A: (red) 45 mm (1.77 in.), (black) 1970 mm (6.46 ft.), B: 177 mm (6.97 in.), L: (red) 1980 mm (6.5 ft.), (black) 3900 mm (12.8 ft.)



PIN TYPE LEAD 9772
A: (red) 45 mm (1.77 in.), (black) Max. 400 mm (15.75 in.), B: 173 mm (6.81 in.), L: 1921 mm (6.30 ft.) (red)

TIP PIN 9772-90
To replace the tip on the 9772 (one pin)



LARGE CLIP TYPE LEAD 9467
A: 300 mm (11.81 in.), B: 131 mm (5.16 in.), L: 1350 mm (4.43 ft.), tip φ 28 mm (1.10 in.), 50 V DC



CLIP TYPE LEADS L2107
A: 130 mm (5.12 in.), B: 84 mm (3.31 in.), L: 1.1 m (3.61 ft.), 60 V DC



TEST LEAD (RED) L2140-01
L2140 red lead



TEST LEAD (BLACK) L2140-02
L2140 black lead

TEMPERATURE SENSOR Z2002
100 mm (3.94 in.) length

LED COMPARATOR ATTACHMENT L2105
2 m (6.56 ft.) length

ZERO ADJUSTMENT BOARD 9454
For 9465-10 and 9465-11

0 ADJ BOARD Z5038
For 9465-10 and 9772

Z5041 is bundled with the RM3548-50

Other



PROTECTOR Z5041



WIRELESS ADAPTER Z3210
Bluetooth® for additional wireless communication functions



CARRYING CASE C1015
For the RM3548-50

Battery Testers

All-in-one Solution for Powder Material Evaluation of Solid-state Batteries & Dry Processes in a Glove Box Environment

Powder Impedance Measurement System




Basic specifications

Frequency at which measurements can be made	DC to 5 MHz (Three types of measuring instruments used)
Load application method	Manual operation (constant control of load is not possible)
Load range (compressing range)	0 to 60 kN (0 to 764 MPa, when using the SA9004-01 Test Fixture electrode ϕ 10 mm)
Load measurement accuracy	\pm 3% f.s.
Thickness measurement error	\pm 10 μ m (under a constant temperature environment, after calibration is performed) (within a load range of 10 kN to 60 kN, only with increasing load)
Electrode size	ϕ 10 mm (SA9004-01)
Powder filling section size	ϕ 10 mm, depth: 7 mm
Operating temperature and humidity range	23°C \pm 5°C (73°F \pm 9°F), 80% RH or less (non-condensing)
Rated supply voltage	100 V to 240 V AC (SA2654, IM3570, IM3533, RM3545A)
Dimensions and weight	SA9003: 300 mm (11.81 in.) W \times 322 mm (12.68 in.) H \times 300 mm (11.81 in.) D SA2654: 180 mm (7.09 in.) W \times 120 mm (4.72 in.) H \times 245 mm (9.65 in.) D Weight: SA9003 approx. 20.7 kg (45.6 lb.), SA2654 approx. 2.3 kg (5.1 lb.)

- Simultaneously control powder press unit (pressure, thickness) while measuring impedance
- Accurate analysis: calculate bulk density and ionic conductivity with precision
- All-in-one glove box operation: from loading to pressing & measuring, all tasks are completed safely inside
- Enhanced safety: prevents hydrogen sulfide gas leakage & preserves material integrity
- Time-saving efficiency: no sample removal required—streamline the entire process
- Optimized testing: continually measure multiple conditions on a single sample

Model No. (Order Code)	SA2653	Measurement software for obtaining data and viewer
	SA2654	Sensor unit for displaying pressure and displacement
	SA9003	Unit for pressing powder and sensing pressure/thickness
	SA9004	Container for powder and measurement electrode
	SA9005	Jig for releasing the hardened powder sample

*An optional measuring instrument and connection cable must be combined with the system to perform measurements. Please purchase the optional measuring instruments and connection cables separately according to your purpose of measurement.

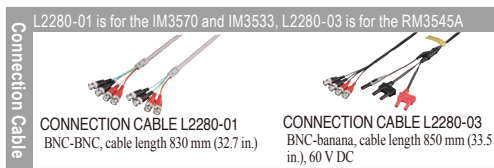


Cut your measurement time dramatically compared to older methods

Conventional methods


Every time you want to measure:

- With a different pressure, you must refill the test cell with a new sample
- You must take the cell in and out of the glove box

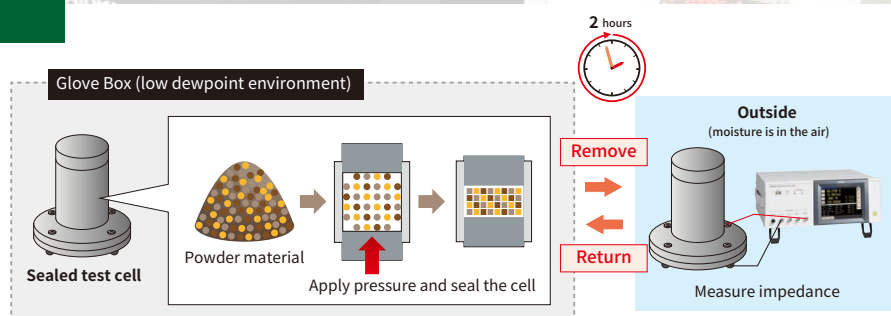

Hioki Powder Impedance Measurement System's method


You can measure impedance while repeatedly changing pressure on the same sample and in the glove box. This dramatically reduces work time, cost, and toxic gas risk.

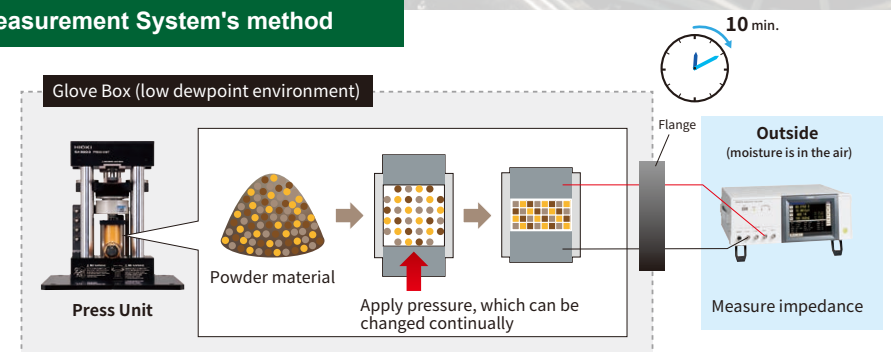

Quantitative Evaluation of LIB Electrode Slurry


Slurry Analytical System

Battery Testers

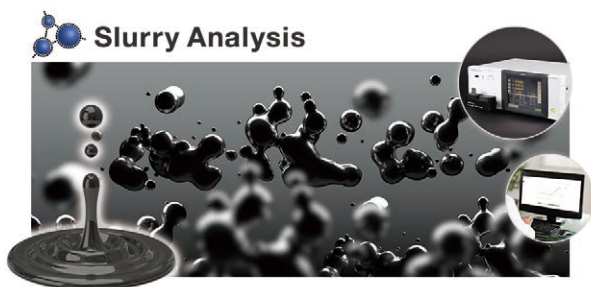

- Dedicated measuring instruments & software designed for impedance measurement of LIB slurry
- Automatic analysis function without the need for equivalent circuit creation or initial value setting
- Quantitative evaluation of electronic conductivity using DCR, Rratio, and Uniformity

Model No. (Order Code)	SA2634	Analytical software
	SA9001	Electrode cells, sold in lots of 50, for NMP solvents
	SA9001-01	Electrode cells, sold in lots of 50, for aqueous solvents
	SA9002	SA9001(-01) dedicated test fixture
	IM3536	LCR meter, measurement frequency: DC, or 4 Hz to 8 MHz

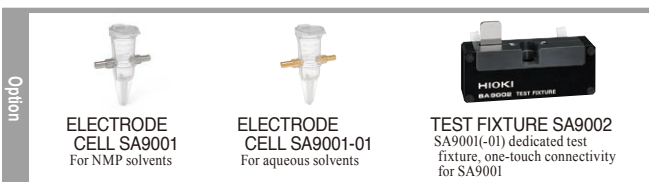

Basic specifications (Analytical Software SA2634)

System requirements (computer)	OS: Windows 10, Windows 11 RAM: 8 GB or more Storage: 1 GB or more of available space Display: resolution 1920 × 1080 or more is recommended Interface: USB 2.0 / 3.0, LAN .NET Framework: 4.7.2 or more
Instrument to be controlled	LCR Meter IM3536
License authentication	Authentication method: USB license key (included accessory)
Language	English, Japanese
Measurement	Sweep frequency setting: 4 Hz to 8 MHz (when connected to IM3536) Measurement signal level: 10 mV to 1 V (constant voltage [CV] mode) Nyquist plot display
Analysis	Analysis method: Equivalent circuit analysis of impedance data Calculation parameters: DCR, Rratio of each relaxation, uniformity of each relaxation

Basic specifications (Electrode Cell SA9001, SA9001-01)

Dimensions and weight	Approx. 27W × 42H × 37D mm (1.1W × 1.7H × 1.5D in.) (including the electrode), approx. 2.3 g (0.1 oz.)
Material	Container: polypropylene (PP), electrode: brass (base metal)
Capacity	Approx. 1 mL
Electrode pin	Diameter (Area where liquid to be measured comes in contact): 3 mm ±0.1 mm Electrode interval: 6 mm ±0.3 mm Electrode surface treatment: nickel plating(SA9001), gold plating(SA9001-01)
Operating temperature and humidity range	23°C ±5°C (73°F ±9°F), 80% RH or less (non-condensing)
Storage temperature and humidity range	-10°C to 50°C (14°F to 122°F), 80% RH or less (non-condensing)
Operating environment	Indoors, altitude up to 2000 m (6562 ft.)
Quantity	50

Basic specifications (Test Fixture SA9002)

Measurable frequency	DC to 10 MHz
Connectable sample	Electrode Cell SA9001, SA9001-01
Residual impedance	Residual resistance during short circuit 200 mΩ or less (reference for 100 Hz) Inter-electrode stray capacitance 0.2 pF or less (reference for 1 MHz)
Dimensions and mass	Approx. 98W × 38H × 24D mm (3.86"W × 1.50"H × 0.94"D) (excluding protruding parts), approx. 210 g (7.4 oz.)
Included accessory	Shorting plate for compensation

Quantify Composite Layer Resistance and Interface Resistance in Li-ion Battery Electrode Sheets

ELECTRODE RESISTANCE MEASUREMENT SYSTEM RM2610



Basic specifications

Measurement target	Positive and negative electrode sheets for rechargeable lithium-ion batteries
Measurement parameters	Composite resistivity [Ωcm] Interface resistance (contact resistance) between the composite layer and current collector [Ωcm ²]
Computation method	Inverse problem analysis of potential distribution using the finite volume method
Information necessary for computation	• Composite layer thickness [μm] (for 1 side) • Current collector thickness [μm] • Current collector volume resistivity [Ωcm]
Measurement time	- Contact check + potential measurement : approx. 30 sec. - Calculation : approx. 35 sec. (on a PC with Intel core i5-7200U CPU) The measurement time may vary depending on the measurement target and the processing capacity of the PC.
Measurement current	1 μA (min.) to 10 mA (max.)
Number of probes	46
Recommended PC specifications	CPU: 4 or more threads RAM: 8 GB or greater (4 GB required) Operating system: Windows 11
Temperature measurement function	Measures temperature near the test fixture
Included accessories	TEMPERATURE SENSOR Z2001 ×1, USB cable ×1, USB license key ×1, Probe check board ×1, Power cord ×1, Instruction manual ×1

*The RM2611 Electrode Resistance Meter requires regular calibration. For more information about calibration, please contact your Hioki distributor

- Isolate and quantify composite layer resistance and interface resistance* in positive- and negative-electrode sheets used in lithium-ion batteries.
- Composite layer resistance values and interface resistance* values are helping LIBs to evolve and improve.

* Contact resistance of current collector and material layer.

- Verify the uniformity of LIB electrode sheets.
- Visualize variations in composite layer resistance and interface resistance caused by differences in materials, composition, and manufacturing conditions.

Model No. (Order Code) **RM2610** (System product)



Packed with Features to Ensure Accuracy in Multi-channel Battery Testing


SWITCH MAINFRAME SW1001, SW1002



- Switch between voltmeter and battery tester while testing
 - SW1001: max. 66 channels (2-wire) to max. 18 channels (4-terminal pair)
 - SW1002: max. 264 channels (2-wire) to max. 72 channels (4-terminal pair)
 - Circuit-design-friendly for impedance measurements that minimize errors between channels (Effect: 0.01% f.s.*)
- * For BT4560 100 mΩ range, R measurements, and a measurement frequency of 1 kHz
- For OCV measurement, internal resistance measurement, and external potential measurement of battery cells
 - Measure battery modules up to 60 V DC

Model No. (Order Code)	SW1001	(3 slots)
	SW1002	(12 slots)

Note: Multiplexer Modules not included with the Switch Mainframe SW1001 / SW1002. Modules must be purchased separately.

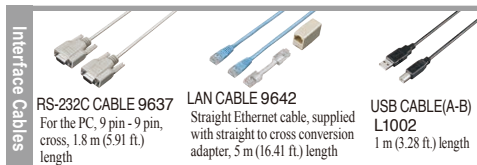


Basic specifications

	SW1001	SW1002
Slots	3 slots	12 slots
Supported modules	Multiplexer Module SW9001 (2-wire/4-wire) Multiplexer Module SW9002 (4-terminal pair)	
Connectable instruments	Max. 2 units, 2-wire × 1 + 4-wire × 1, or 2-wire × 1 + 4-terminal pair × 1	
Max. input voltage	60 V DC (Cannot connect to battery packs in excess of 60 V DC), 30 V AC rms, 42.4 V peak, Maximum rated voltage to ground: 60 V DC	
Communication I/F	LAN, USB, RS-232C (for host, for measurement instruments)	
Functions	Channel switching, wiring method, scan function, communication command transmission, etc.	
Power supply	100 to 240 V AC / 30 VA (50/60 Hz)	
Dimensions and mass	215 mm (8.46 in.) W × 132 mm (5.20 in.) H × 420 mm (16.54 in.) D, 3.7 kg (130.5 oz.)	430 mm (16.93 in.) W × 132 mm (5.20 in.) H × 420 mm (16.54 in.) D, 6.0 kg (211.6 oz.)
Included accessories	Power cord × 1, instruction manual × 1, usage precautions × 1	

Basic specifications for MULTIPLEXER MODULE

	SW9001	SW9002
Wiring method	2-wire or 4-wire	4-terminal pair (6-wire) or 2-wire
No. of channels	22 channels (2-wire) / 11 channels (4-wire)	6 channels (4-terminal pair) / 6 channels (2-wire)
Contact method	Armature relays	
Channel switching time	11 ms (excluding measurement time)	
Max. allowable voltage	60 V DC, 30 V AC rms, 42.4 V peak	
Max. allowable current	1 A DC, 1 A AC rms	1 A DC, 1 A AC rms (Sense), 2 A DC, 2 A AC rms (Source, Return)
Max. allowable power	30 W (resistive load)	
Max. rated voltage to ground	60 V DC	
Dimensions and mass	25.5 mm (1.00 in.) W × 110 mm (4.33 in.) H × 257 mm (10.12 in.) D, 210 g (7.4 oz.)	25.5 mm (1.00 in.) W × 110 mm (4.33 in.) H × 257 mm (10.12 in.) D, 196 g (6.9 oz.)
Included accessories	Instruction manual × 1	

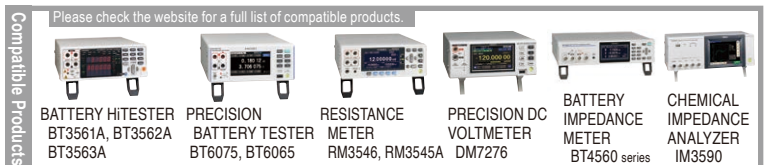

Battery Testers

Efficiently and Safely Validate Battery Management Systems

BATTERY CELL VOLTAGE GENERATOR SS7081-50



- Build a highly accurate BMS* validation environment easily and safely (*BMS : Battery Management System)
- Use as voltage generator or simulated battery in place of actual batteries and power supplies to establish an efficient testing environment

Model No. (Order Code)	SS7081-50
------------------------	------------------

Control PC, control software, BMS wiring, etc., not included.

Basic specifications (Accuracy guaranteed for 1 year)

Number of channels	12 ch
Maximum in-series connections	In-series connections of instrument up to and including a maximum in-series output voltage of 1000 V
Output range	DC voltage: 0.0000 V to 5.0250 V (set independently for all channels) Maximum output current: ±1.00000 A (set independently for all channels)
Measurement range	DC voltage: -0.00100 V to 5.10000 V DC current (2-range architecture): ±1.20000 A (1 A range), ±120.0000 μA (100 μA range)
Integration time	1 PLC (50 Hz: 20 ms; 60 Hz: 16.7 ms) × number of smoothing iterations (user-configured)
Voltage output accuracy	±0.0150% of setting ±500 μV
Voltage measurement accuracy	±0.0100% of reading ±100 μV
Current measurement accuracy	1 A range: ±0.0700% of reading ±100 μA 100 μA range: ±0.0350% of reading ±10 nA
Interfaces	LAN
Power supply	Universal (100 V to 240 V AC), 50 Hz / 60 Hz
Dimensions and mass	430 (16.93 in.) W × 132 (5.20 in.) H × 483 (19.02 in.) D, 10.3 kg (363.3 oz.)
Included accessories	User manual × 1, power cord × 1, rack frame × 1

Reliable EIS Measurements of High-capacity Battery Cells for EVs and ESSs (Up to 10 kHz)

BATTERY IMPEDANCE METER BT4560-60



LAN

USB 2.0

RS-232C



- EIS measurement frequency: 0.01 Hz to 10 kHz
- Simultaneous measurement of impedance, voltage, & temperature
- Convenient evaluation application software for R&D use
- Data compatibility with third-party equivalent circuit analysis software
- For production lines
- Scalability with the Switch Mainframe

Model No. (Order Code) **BT4560-60**

Note: this product is not supplied with measurement probes. Please select and purchase the measurement probe options appropriate for your application separately.


Basic specifications (Accuracy guaranteed for 1 year)

Allowable input voltage	Up to 5 V
Measured items	Impedance, voltage, temperature
Impedance measurement	Parameters: R (resistance), X (reactance), Z (impedance), θ (phase angle) Frequency: 0.01 Hz to 10.00 kHz (For the 1.06 kHz to 10.00 kHz range, measurements below 1 m Ω in the 3 m Ω and 10 m Ω ranges, and below 10 m Ω in the 100 m Ω range, are not covered by the accuracy guarantee.) Measurement ranges: 3.0000 m Ω , 10.0000 m Ω , 100.0000 m Ω Measurement current: 3 m Ω range: 1.5 A rms, 10 m Ω range: 500 mA rms, 100 m Ω range: 50 mA rms
Voltage measurement	Measurement range: 5.00000 V (single range), measurement time: 0.1 s (FAST) to 1.0 s (SLOW)
Temperature measurement	Range: -10.0°C to 60.0°C, measurement time: 2.3 s
Basic accuracy	Z: $\pm 0.4\%$ rdg. θ : $\pm 0.1^\circ$, V: $\pm 0.0035\%$ rdg. ± 5 dgt., Temperature: $\pm 0.5^\circ\text{C}$ (at 10.0°C to 40.0°C)
Functions	Comparator, self-calibration, sample delay, average, voltage limit, potential gradient compensation for impedance measurement, charge/discharge prevention during AC signal application, key lock, system test, panel saving and loading (up to 126 condition sets)
Interfaces	LAN, RS-232C, USB, EXT. I/O (NPN/PNP can be switched)
Power supply	Rated supply voltage: 100 V to 240 V AC, Rated supply frequency: 50 Hz/60 Hz, Rated power: 80 VA max
Dimensions and weight	Approx. 330W \times 80H \times 293D mm (12.99W \times 3.15H \times 11.54D in.), approx. 3.8 kg (134.0 oz.)
Included accessories	Power cord \times 1, instruction manual \times 1, zero-adjustment board \times 1, USB cable (A-B type) \times 1

Measurement Probes



CLIP TYPE PROBE L2002
Cable length: 1.5 m (4.92 ft.)



PIN TYPE PROBE L2003
Cable length: 1.5 m (4.92 ft.)



4-TERMINAL PROBE L2000
Ideal for clipping to screw terminal, cable length of 1 m (3.28 ft.), cannot be used with 3 m Ω range when connected to BT4560 series, no combined accuracy defined



TIP PIN 9772-90
To replace the tip on the Pin type lead L2003 (one piece)



TEMPERATURE SENSOR Z2005
Cable length: 1 m (3.28 ft.)

PC Communication



RS-232C CABLE 9637
For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.)



LAN CABLE 9642
5 m (16.4 ft.)

Reliable for EIS Measurement of High-capacity Batteries for EVs & ESSs

BATTERY IMPEDANCE METER BT4560-50



LAN

USB 2.0

RS-232C



- EIS measurement frequency: 0.01 Hz to 1.05 kHz
- Simultaneous measurement of impedance, voltage, & temperature
- Convenient evaluation application software for R&D use
- Data compatibility with third-party equivalent circuit analysis software
- For production lines: LAN interface & advanced multi-channel solutions

Model No. (Order Code) **BT4560-50**

Note: this product is not supplied with measurement probes. Please select and purchase the measurement probe options appropriate for your application separately.

Basic specifications (Accuracy guaranteed for 1 year)

Allowable input voltage	Up to 5 V
Measured items	Impedance, voltage, temperature
Impedance measurement	Parameters: R (resistance), X (reactance), Z (impedance), θ (phase angle) Frequency: 0.01 Hz to 1050 Hz Measurement ranges: 3.0000 m Ω , 10.0000 m Ω , 100.0000 m Ω Measurement current: 3 m Ω range: 1.5 A rms, 10 m Ω range: 500 mA rms, 100 m Ω range: 50 mA rms
Voltage measurement	Measurement range: 5.00000 V (single range), measurement time: 0.1 s (FAST) to 1.0 s (SLOW)
Temperature measurement	Range: -10.0°C to 60.0°C, measurement time: 2.3 s
Basic accuracy	Z: $\pm 0.4\%$ rdg. θ : $\pm 0.1^\circ$, V: $\pm 0.0035\%$ rdg. ± 5 dgt., Temperature: $\pm 0.5^\circ\text{C}$ (at 10.0°C to 40.0°C)
Functions	Comparator, self-calibration, sample delay, average, voltage limit, potential gradient compensation for impedance measurement, charge/discharge prevention during AC signal application, key lock, system test, panel saving and loading (up to 126 condition sets)
Interfaces	LAN, RS-232C, USB, EXT. I/O (NPN/PNP can be switched)
Power supply	100 to 240 V AC (50/60 Hz) (80 VA max)
Dimensions and weight	Approx. 330W \times 80H \times 293D mm (12.99W \times 3.15H \times 11.54D in.), approx. 3.8 kg (134.0 oz.)
Included accessories	Power cord \times 1, instruction manual \times 1, zero-adjustment board \times 1, USB cable (A-B type) \times 1

Measurement Probes



CLIP TYPE PROBE L2002
Cable length: 1.5 m (4.92 ft.)



PIN TYPE PROBE L2003
Cable length: 1.5 m (4.92 ft.)



4-TERMINAL PROBE L2000
Ideal for clipping to screw terminal, cable length of 1 m (3.28 ft.), cannot be used with 3 m Ω range when connected to BT4560 series, no combined accuracy defined



TIP PIN 9772-90
To replace the tip on the Pin type lead L2003 (one piece)



TEMPERATURE SENSOR Z2005
Cable length: 1 m (3.28 ft.)

PC Communication



RS-232C CABLE 9637
For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.)



LAN CABLE 9642
5 m (16.4 ft.)

Precision OCV/IR Testing for Next-gen High-capacity Battery

PRECISION BATTERY TESTER BT6065, BT6075



BT6075

LAN

USB 2.0

RS-232C



- Industry's most accurate & high-speed OCV/IR test performance
- Shorter testing times while maintaining exceptional reproducibility
- Two testers work in tandem without interference
- Channel-specific correction and optional multiplexer
- Supports seamless setup of inspection systems
- High durability and long-term, stable test system operations

Model No. (Order Code) **BT6065** (Max. DC V resolution: 10 μ V)
BT6075 (Max. DC V resolution: 1 μ V)

Measurement Probes and Sensors



CLIP TYPE LEAD L2121
 A: 130 mm (5.1 in.), B: 84 mm (3.3 in.), L: 1.2 m (3.9 ft), 60 V DC




PIN TYPE LEAD L2120
 A: 300 mm (11.8 in.), B: 172 mm (6.8 in.), L: 1.4 m (4.6 ft), 1000 V DC



PIN TYPE LEAD L2100
 A: 300 mm (11.8 in.), B: 172 mm (6.8 in.), L: 1.4 m (4.6 ft), 1000 V DC

About probe length



A: From junction to probe
 B: Probe part
 L: Whole length



TIP PIN 9772-90
 To replace the tip on the Pin type lead L2120, L2100 (one piece)



0 ADJ BOARD Z5038
 For L2100, L2110, L2020, 9465-10, 9772



TEMPERATURE SENSOR Z2005
 Cable length: 1 m (3.28 ft)

PC Communication



RS-232C CABLE L9637
 9-pin/9-pin, cord length 3 m (9.8 ft)



USB CABLE L9510
 USB A-C type, cord length 1 m (3.3 ft)



LAN CABLE 9642
 5 m (16.4 ft)



USB DRIVE Z4006
 16 GB, SLC Flash memory

■ Basic specifications (Accuracy guaranteed for 1 year)

Resistance measurement ranges (HIGH RESOLUTION ON)	[Range (Measurement current), Accuracy (SLOW2), Maximum display value, Resolution] 3 m Ω (300 mA), $\pm 0.08\%$ rdg. $\pm 0.08 \mu\Omega$, 5.10000 m Ω , 0.01 $\mu\Omega$ 3 m Ω (100 mA), $\pm 0.08\%$ rdg. $\pm 0.5 \mu\Omega$, 5.10000 m Ω , 0.01 $\mu\Omega$ 30 m Ω (100 mA), $\pm 0.08\%$ rdg. $\pm 0.5 \mu\Omega$, 51.0000 m Ω , 0.1 $\mu\Omega$ 300 m Ω (10 mA), $\pm 0.08\%$ rdg. $\pm 5 \mu\Omega$, 510.000 m Ω , 1 $\mu\Omega$ 3 Ω (1 mA), $\pm 0.10\%$ rdg. $\pm 50 \mu\Omega$, 5.10000 Ω , 10 $\mu\Omega$ 30 Ω (100 μ A), $\pm 0.15\%$ rdg. $\pm 0.5 \text{ m}\Omega$, 51.0000 Ω , 100 $\mu\Omega$ Measurement-current frequency: 1 kHz ± 0.2 Hz Additional accuracy deterioration Temperature coefficient: add the following value to the measurement accuracy if the temperature is 0°C to 18°C or 28°C to 40°C: (measurement accuracy $\times 0.1$) / °C Addition when resistance measurement MIR mode is enabled: add $\pm 0.01\%$ rdg. to the resistance measurement accuracy.
DC-voltage measurement range	[Product model: Range, SLOW2, Maximum display value, Resolution] BT6065: 10 V, $\pm 0.002\%$ rdg. $\pm 20 \mu\text{V}$, ± 12.00000 V, 10 μV BT6065: 100 V, $\pm 0.004\%$ rdg. $\pm 0.6 \text{ mV}$, ± 120.0000 V, 100 μV BT6075: 10 V, $\pm 0.0012\%$ rdg. $\pm 11 \mu\text{V}$, ± 12.000000 V, 1 μV BT6075: 100 V, $\pm 0.003\%$ rdg. $\pm 0.60 \text{ mV}$, ± 120.00000 V, 10 μV Additional accuracy deterioration Temperature coefficient: add the following value to the measurement accuracy if the temperature is 0°C to 18°C or 28°C to 40°C: (measurement accuracy $\times 0.1$) / °C
Temperature measurement range	Range: -10.0°C to 60.0°C (14°F to 140°F) Accuracy (instrument + Z2005): $\pm 0.5^\circ\text{C}$ (measurement temperature of 10.0°C to 40.0°C), $\pm 1.0^\circ\text{C}$ (measurement temperature of -10.0°C to 9.9°C, 40.1°C to 60.0°C)
Route resistance measurement range	[Resistance range, Measurement current, Maximum display value] 3 m Ω , 300 mA, 10.0 Ω / 3 m Ω , 100 mA, 50.0 Ω / 30 m Ω , 100 mA, 50.0 Ω / 300 m Ω , 10 mA, 50.0 Ω / 3 Ω , 1 mA, 50.0 Ω / 30 Ω , 100 μA , 500 Ω
Sampling time (*1)	[Power frequency, FAST1, FAST2, MEDIUM1(MED1), MEDIUM2(MED2), SLOW1, SLOW2] 50 Hz, 4 ms, 10 ms, 20 ms, 40 ms, 100 ms, 200 ms 60 Hz, 4 ms, 10 ms, 17 ms, 33 ms, 100 ms, 200 ms *1: All common to measurement functions ΩV , Ω , and V.
Response time	Approx. 8 ms (when measuring only resistance and voltage of a 4 V battery)
Functions	Averaging (up to 256 times), contact check, resistance self calibration, DC voltage self-calibration, zero adjustment (528 channels), referential adjustment (528 channels), route resistance monitor, resistance measurement MIR mode, comparator, command compatibility (BT3562A Battery HiTester compatible), panel save (number of savable sets: 6), command monitor, EXT. I/O test
Interface	LAN (10BASE T/100BASE-T, TCP/IP), USB (COM mode, Connector Type-C), USB (MEM mode, Connector Type-A, the Z4006 USB Drive is used), RS-232C (9600 bps, 19200 bps, 38400 bps), EXT. I/O
Power supply	100 V to 240 V AC (50Hz, 60Hz) (40 VA max.)
Dimensions and weight	Approx. 215W \times 88H \times 313D mm (8.5W \times 3.5H \times 12.3D in.), Approx. 3.1 kg (6.8 lb.) (excluding protrusions)
Included accessories	Power cord \times 1, Startup Guide \times 1, Operating Precautions \times 1

Battery Testers

Battery Testers

Fully Automated Production Line Testing of Small Cells for Power Motors or Small Packs of up to 60 V

BATTERY HITESTER BT3561A



LAN

RS-232C



Basic specifications (Accuracy guaranteed for 1 year)

Resistance measurement ranges	30 mΩ (Max. display: 31.000 mΩ, resolution: 1 μΩ, measurement current: 100 mA) 300 mΩ (Max. display: 310.00 mΩ, resolution: 10 μΩ, measurement current: 10 mA) 3 Ω (Max. display: 3.1000 Ω, resolution: 100 μΩ, measurement current: 1 mA) 30 Ω (Max. display: 31.000 Ω, resolution: 1 mΩ, measurement current: 100 μA) 300 Ω (Max. display: 310.00 Ω, resolution: 10 mΩ, measurement current: 10 μA) 3 kΩ (Max. display: 3.1000 kΩ, resolution: 100 mΩ, measurement current: 10 μA)
Voltage measurement ranges	6 V (Max. display: 6.00000 V, resolution: 10 μV) 60 V (Max. display: 60.0000 V, resolution: 100 μV)
Response time	10 ms
Sampling period	Ω or V (60 Hz): 4 ms (EX.FAST), 12 ms (FAST), 35 ms (MEDIUM), 150 ms (SLOW) ΩV (60 Hz): 8 ms (EX.FAST), 24 ms (FAST), 70 ms (MEDIUM), 253 ms (SLOW)
Functions	Contact check, Zero adjustment (±1000 counts), Pulse measurement, Comparator (Hi/IN/Lo), Statistical calculations (Max. 30,000), Delay, Average, Panel saving/loading, Memory storage, LabVIEW® driver
Interfaces	LAN (TCP/IP, 10BASE-T/100BASE-TX) RS-232C (Max. 38.4 kbps, Available as printer I/F) EXT I/O (37-pin Handler interface) Analog output (DC 0 V to 3.1 V)
Power supply	100 to 240 V AC, 50 Hz/60 Hz, 35 VA max.
Dimensions and mass	215 mm (8.46 in.) W × 80 mm (3.15 in.) H × 295 mm (11.61 in.) D, 2.4 kg (84.7 oz.)
Included accessories	Instruction manual ×1, Power cord ×1, Operating Precautions ×1

- Simultaneous measurement of internal resistance and open circuit voltage
- Fully automated production line testing of small cells for power motors or small packs of up to 60 V
- Resistance measurement ranges: 30 mΩ/300 mΩ/3 Ω/30 Ω/300 Ω/3 kΩ
- Voltage measurement ranges: 6 V/60 V
- Equipped with LAN

Model No. (Order Code) **BT3561A**

Note: measurement leads are not included. Purchase the appropriate lead option for your application separately. The male (system side) of the EXT I/O connector is also available. Please contact your authorized Hioki distributor or reseller.

Fully Automated Production Line Testing of Large Cells for xEVs or Mid-sized Packs of up to 100 V

BATTERY HITESTER BT3562A



LAN

RS-232C



Basic specifications (Accuracy guaranteed for 1 year)

Resistance measurement ranges	3 mΩ (Max. display: 3.1000 mΩ, resolution: 0.1 μΩ, measurement current: 100 mA) 30 mΩ (Max. display: 31.000 mΩ, resolution: 1 μΩ, measurement current: 100 mA) 300 mΩ (Max. display: 310.00 mΩ, resolution: 10 μΩ, measurement current: 10 mA) 3 Ω (Max. display: 3.1000 Ω, resolution: 100 μΩ, measurement current: 1 mA) 30 Ω (Max. display: 31.000 Ω, resolution: 1 mΩ, measurement current: 100 μA) 300 Ω (Max. display: 310.00 Ω, resolution: 10 mΩ, measurement current: 10 μA) 3 kΩ (Max. display: 3.1000 kΩ, resolution: 100 mΩ, measurement current: 10 μA)
Voltage measurement ranges	6 V (Max. display: 6.00000 V, resolution: 10 μV) 60 V (Max. display: 60.0000 V, resolution: 100 μV) 100 V (Max. display: 100.000 V, resolution: 1 mV)
Response time	10 ms
Sampling period	Ω or V (60 Hz): 4 ms (EX.FAST), 12 ms (FAST), 35 ms (MEDIUM), 150 ms (SLOW) ΩV (60 Hz): 8 ms (EX.FAST), 24 ms (FAST), 70 ms (MEDIUM), 253 ms (SLOW)
Functions	Contact check, Zero adjustment (±1000 counts), Pulse measurement, Comparator (Hi/IN/Lo), Statistical calculations (Max. 30,000), Delay, Average, Panel saving/loading, Memory storage, LabVIEW® driver
Interfaces	LAN (TCP/IP, 10BASE-T/100BASE-TX) RS-232C (Max. 38.4 kbps, Available as printer I/F) EXT I/O (37-pin Handler interface) Analog output (DC 0 V to 3.1 V)
Power supply	100 to 240 V AC, 50 Hz/60 Hz, 35 VA max.
Dimensions and mass	215 mm (8.46 in.) W × 80 mm (3.15 in.) H × 295 mm (11.61 in.) D, 2.4 kg (84.7 oz.)
Included accessories	Instruction manual ×1, Power cord ×1, Operating Precautions ×1


- Simultaneous measurement of internal resistance and open circuit voltage
- Fully automated production line testing of large cells for xEVs or mid-sized packs of up to 100 V
- Resistance measurement ranges: 3 mΩ/30 mΩ/300 mΩ/3 Ω/30 Ω/300 Ω/3 kΩ
- Voltage measurement ranges: 6 V/60 V/100 V
- Equipped with LAN

Model No. (Order Code) **BT3562A**

Note: measurement leads are not included. Purchase the appropriate lead option for your application separately. The male (system side) of the EXT I/O connector is also available. Please contact your authorized Hioki distributor or reseller.


BT3561A/BT3562A/BT3563A/BT3564/BT3563/BT3562 Series Shared Options

Measurement Leads A (for measuring high voltage batteries)



PIN TYPE LEAD L2100

A:300 mm (11.81 in.),
B:172 mm (6.77 in.),
L:1400 mm (4.59 ft.),
for high voltage battery measurements, 1000 V DC max.



PIN TYPE LEAD L2110

A:750 mm (29.53 in.),
B:215 mm (8.46 in.),
L:1880 mm (6.17 ft.),
for high voltage battery measurements, 1000 V DC max.



TIP PIN 9772-90

To replace the tip on the Pin type lead 9772, L2100/L2110, (one piece)

Battery Testers

Fully Automated Production Line Testing of Large Packs for xEVs or Large Packs of up to 300 V

BATTERY HiTESTER BT3563A



LAN

RS-232C

CE

SP

3 Year Warranty

- Simultaneous measurement of internal resistance and open circuit voltage
- Fully automated production line testing of large packs for xEVs or large packs of up to 300 V
- Resistance measurement ranges: 3 mΩ/30 mΩ/300 mΩ/3 Ω/30 Ω/300 Ω/3 kΩ
- Voltage measurement ranges: 6 V/60 V/300 V
- Equipped with LAN

Model No. (Order Code) **BT3563A**

Note: measurement leads are not included. Purchase the appropriate lead option for your application separately. The male (system side) of the EXT I/O connector is also available. Please contact your authorized Hioki distributor or reseller.

Basic specifications (Accuracy guaranteed for 1 year)

Resistance measurement ranges	3 mΩ (Max. display: 3.1000 mΩ, resolution: 0.1 μΩ, measurement current: 100 mA) 30 mΩ (Max. display: 31.000 mΩ, resolution: 1 μΩ, measurement current: 100 mA) 300 mΩ (Max. display: 310.00 mΩ, resolution: 10 μΩ, measurement current: 10 mA) 3 Ω (Max. display: 3.1000 Ω, resolution: 100 μΩ, measurement current: 1 mA) 30 Ω (Max. display: 31.000 Ω, resolution: 1 mΩ, measurement current: 100 μA) 300 Ω (Max. display: 310.00 Ω, resolution: 10 mΩ, measurement current: 10 μA) 3 kΩ (Max. display: 3.1000 kΩ, resolution: 100 mΩ, measurement current: 10 μA)
Voltage measurement ranges	6 V (Max. display: 6.00000 V, resolution: 10 μV) 60 V (Max. display: 60.0000 V, resolution: 100 μV) 300 V (Max. display: 300.000 V, resolution: 1 mV)
Response time	10 ms
Sampling period	Ω or V (60 Hz): 4 ms (EX.FAST), 12 ms (FAST), 35 ms (MEDIUM), 150 ms (SLOW) ΩV (60 Hz): 8 ms (EX.FAST), 24 ms (FAST), 70 ms (MEDIUM), 253 ms (SLOW) Ω or V (50 Hz): 4 ms (EX.FAST), 12 ms (FAST), 42 ms (MEDIUM), 157 ms (SLOW) ΩV (50 Hz): 8 ms (EX.FAST), 24 ms (FAST), 84 ms (MEDIUM), 259 ms (SLOW)
Functions	Contact check, Zero adjustment (±1000 counts), Pulse measurement, Comparator (Hi/IN/Lo), Statistical calculations (Max. 30,000), Delay, Average, Panel saving/loading, Memory storage, LabVIEW® driver
Interfaces	LAN (TCP/IP, 10BASE-T/100BASE-TX) RS-232C (Max. 38.4 kbps, Available as printer I/F) EXT I/O (37-pin Handler interface) Analog output (DC 0 V to 3.1 V)
Power supply	100 to 240 V AC, 50 Hz/60 Hz, 35 VA max.
Dimensions and mass	215 mm (8.46 in.) W × 80 mm (3.15 in.) H × 295 mm (11.61 in.) D, 2.4 kg (84.7 oz.)
Included accessories	Instruction manual ×1, Power cord ×1, Operating Precautions ×1

Battery Testers

1000 V Maximum Input Voltage, High-Voltage Battery Tester for Measuring EV and PHEV Battery Packs

BATTERY HiTESTER BT3564



GP-IB

RS-232C

CE

SP

3 Year Warranty

- Measure high-voltage battery packs up to 1000 V
- Production line testing of high-voltage battery packs for EV, PHEV
- 0.1 μΩ to 3000 Ω internal resistance range (pack total resistance, bus bar resistance)
- Spark discharge reduction function
- Analog output function
- Optional measurement probe available for 1000 V and high-voltage battery packs


Model No. (Order Code) **BT3564**

Note: measurement leads are not included. Purchase the appropriate lead option for your application separately. The male (system side) of the EXT I/O connector is also available. Please inquire with your Hioki distributor.

Basic specifications (Accuracy guaranteed for 1 year)

Max. applied measurement voltage	± 1000 VDC rated input voltage ± 1000 VDC max. rated voltage to earth
Resistance measurement ranges	3 mΩ (max. display 3.1000 mΩ, resolution 0.1 μΩ) to 3000 Ω (max. display 3100.0 Ω, resolution 0.1 Ω), 7 ranges Accuracy: ±0.5% rdg ±5 dgt (30 mΩ to 3000 Ω range), ±0.5% rdg ±10 dgt (3 mΩ range) to 10 μA (3000 Ω range) Testing source frequency: 1 kHz ±0.2 Hz, testing current: 100 mA (3 mΩ range) to 10 μA (3000 Ω range) Open terminal Voltage: 25 V peak (3/30 mΩ ranges), 7 V peak (300 mΩ range), 4 V peak (3 Ω to 3000 Ω range)
Voltage measurement ranges	10 V DC (resolution: 10 μV) to 1000 V DC (resolution: 1 mV), 3 ranges Accuracy: ±0.01% rdg ±3 dgt
Display	31000 full digits (resistance), 999999 full digits (voltage, 1000 V range: 999999 or 110000), LED
Sampling time	FAST: 12 ms, MEDIUM: 35 ms, SLOW: 253 ms (Typ., sampling time depends on supply frequency settings and function.)
Total measurement time	Response time + sampling time (Response time for both resistance and voltage are reference value of about 700 ms, depends on measurement object.)
Comparator functions	Judgment result: Hi/IN/Lo (resistance and voltage judged independently) Setting: Upper and lower limit, Deviation (%) from reference value Logical ANDed result: PASS/FAIL, calculates the logical AND of resistance and voltage judgment results. Result display, beeper, or external I/O output (open-collector, 35 V, 50 mA DC max.)
Analog output	Measured resistance (displayed value, from 0 to 3.1 V DC)
Interfaces	External I/O, RS-232C, Printer (RS-232C), GP-IB
Power supply	100 to 240 V AC, 50/60 Hz, 30 VA max.
Dimensions and mass	215 mm (8.46 in.) W × 80 mm (3.29 in.) H × 295 mm (12.95 in.) D, 2.4 kg (84.7 oz.)
Included accessories	Instruction manual ×1, Power cord ×1, Operating Precautions ×1


About probe length



BT3561A/BT3562A/BT3563A/BT3564/BT3563/BT3562 Series Shared Options


Measurement Leads B (for measuring batteries up to 60 V)

1.8 mm dia. single-axis type for measuring small electrodes



PIN TYPE LEAD 9770
A: 260 mm (10.24 in.),
B: 140 mm (5.51 in.),
L: 850 mm (2.79 ft.), 60 V DC

0.2 mm parallel pyramid-type pins for measuring at thru holes and sub-millimeter objects



TIP PIN 9770-90
Replacement tip for pin type lead 9770, L2102
A: 260 mm (10.24 in.),
B: 138 mm (5.43 in.),
L: 850 mm (2.79 ft.), 60 V DC

Measurement Leads C (for measuring batteries up to 60 V)



CLIP TYPE LEAD L2107
A: 130 mm (5.12 in.), B: 83 mm (3.27 in.), L: 1100 mm (3.61 ft.), 60 V DC

LARGE CLIP TYPE LEAD 9467
A: 300 mm (11.81 in.), B: 131 mm (5.16 in.), L: 1350 mm (4.43 ft.), tip φ 28 mm (1.10 in.), 50 V DC

Can not be used for PIN TYPE LEAD 9770, 9771

Option



0 ADJ BOARD Z5038
For L2100, L2110, L2020, 9465-10, 9772

PC Communication



RS-232C CABLE 9637
For the PC, 9-pin - 9-pin, cross, 1.8 m (5.91 ft.) length



GP-IB CONNECTOR CABLE 9151-02
2 m (6.56 ft.) length

High-speed Measurement from Large-cell to High-voltage Battery Testing

BATTERY HiTESTER BT3563-01, BT3562-01



GP-IB

RS-232C



- Measure high-voltage battery packs up to 300 V (BT3563-01)
- Measure the voltage of battery packs up to 60 V (BT3562-01)
- Production line testing of high-voltage battery packs and battery modules
- Large (low-resistance) cell testing
- Choice of PC interfaces for full remote operation

Note: the comparison threshold values depend on the battery manufacturer, type, and capacity, and these must be established by the user.

Model No. (Order Code) **BT3563-01** (Built-in GP-IB and analog output)
BT3562-01 (Built-in GP-IB and analog output)

Note: measurement leads are not included. Purchase the appropriate lead option for your application separately. The male (system side) of the EXT I/O connector is also available. Please inquire with your Hioki distributor.

Basic specifications (Accuracy guaranteed for 1 year)

	BT3563-01	BT3562-01
Max. applied measurement voltage	± 300 VDC rated input voltage ± 300 VDC max. rated voltage to earth	± 60 VDC rated input voltage ± 70 VDC max. rated voltage to earth
Resistance measurement ranges	3 mΩ (max. display 3.1000 mΩ, resolution 0.1 μΩ) to 3000 Ω (max. display 3100.0 Ω, resolution 100 mΩ), 7 ranges Accuracy: 30 mΩ to 3000 Ω ranges, ± 0.5% rdg ± 5 dgt (Add ± 3 dgt for EX.FAST, or ± 2 dgt for FAST and MEDIUM) 3 mΩ range, ± 0.5% rdg ± 10 dgt (Add ± 30 dgt for EX.FAST, or ± 10 dgt for FAST, or ± 5 dgt for MEDIUM) Testing source frequency: 1 kHz ± 0.2 Hz, testing current: 100 mA (3 mΩ range) to 10 μA (3000 Ω range) Open terminal Voltage: 25 V peak (3/30 mΩ ranges), 7 V peak (300 mΩ range), 4 V peak (3 Ω to 3000 Ω ranges)	
Voltage measurement ranges	6 VDC (resolution 10 μV) to 300 VDC (resolution 1 mV), 3 ranges Accuracy: ± 0.01% rdg ± 3 dgt (Add ± 3 dgt for EX.FAST, or ± 2 dgt for FAST and MEDIUM)	6 VDC (resolution 10 μV) to 60 VDC (resolution 100 μV), 2 ranges
Display	31000 full digits (resistance), 600000 full digits (voltage), LED	
Sampling rate	Four steps, 4 ms (Extra-FAST), 12 ms (FAST), 35 ms (Medium), 150 ms (Slow) (Typ., sampling time depends on supply frequency settings and function.)	
Measurement time	Response time + sampling rate, approx. 10 ms for measurements (Response time depends on reference values and the measurement object.)	
Comparator functions	Judgment result: Hi/IN/Lo (resistance and voltage judged independently) Setting: Upper and lower limit, Deviation (%) from reference value Logical ANDed result: PASS/FAIL, calculates the logical AND of resistance and voltage judgment results. Result display, beeper, or external I/O output, Open-collector (35 V, 50 mA DC max.)	
Analog output	Measured resistance (displayed value, from 0 to 3.1 V DC)	
Interfaces	External I/O, RS-232C, Printer (RS-232C), GP-IB (-01 suffix models only)	
Power supply	100 to 240 VAC, 50/60 Hz, 30 VA max.	
Dimensions and mass	215 mm (8.46 in.) W × 80 mm (3.15 in.) H × 295 mm (11.61 in.) D, 2.4 kg (84.7 oz.)	
Included accessories	Instruction manual ×1, Power cord ×1	

For the shared options for BT3561A/BT3562A/BT3563A/BT3564/BT3563/BT3562 Series, see page 50 and page 51.

For High-speed Production Line Testing of Small Battery Packs

BATTERY HiTESTER 3561



GP-IB
3561-01

RS-232C



- High-speed testing for production lines of small battery packs for mobile and portable communications devices
- Measure internal resistance and battery voltage
- For process control such as in high-speed automated assembly lines

Note: the comparison threshold values depend on the battery manufacturer, type, and capacity, and these must be established by the user.

Model No. (Order Code) **3561**
3561-01 (Built-in GP-IB interface)


Note: measurement leads are not included. Purchase the appropriate lead option for your application separately. The male (system side) of the EXT I/O connector is also available. Please inquire with your Hioki distributor.

Basic specifications (Accuracy guaranteed for 1 year)

Max. applied measurement voltage	±22 V DC ±60 V DC maximum rated voltage above ground
Resistance measurement ranges	300 mΩ (max. display 310.00 mΩ, resolution 10 μΩ) to 3 Ω (max. display 3.1000 Ω, resolution 100 μΩ), 2 ranges Accuracy: ±0.5% rdg ±5 dgt (Add ±3 dgt for EX.FAST, or ±2 dgt for FAST and MEDIUM) Testing source frequency: 1 kHz ±0.2 Hz, testing current: 10 mA (300 mΩ range), 1 mA (3 Ω range) Open terminal Voltage: 7 V peak
Voltage measurement ranges	DC 20 V, resolution 0.1 mV, Accuracy: ±0.01% rdg ±3 dgt (Add ±3 dgt for EX.FAST, or ±2 dgt for FAST and MEDIUM)
Display	31000 full digits (resistance), 199999 full digits (voltage), LED
Sampling rate	Four steps, 4 ms (Extra-FAST), 12 ms (FAST), 35 ms (Medium), 150 ms (Slow) (Typ., sampling time depends on supply frequency settings and function.)
Measurement time	Response time + sampling rate, approx. 3 ms for measurements (Response time depends on reference values and the measurement object.)
Comparator functions	Judgment result: Hi/IN/Lo (resistance and voltage judged independently) Setting: Upper and lower limit, Deviation (%) from reference value Logical ANDed result: PASS/FAIL, calculates the logical AND of resistance and voltage judgment results. Result display, beeper, or external I/O output, Open-collector (35 V, 50 mA DC max.)
Interfaces	External I/O, RS-232C, Printer (RS-232C), GP-IB (-01 suffix models only)
Power supply	100 to 240 V AC, 50/60 Hz, 30 VA max.
Dimensions and mass	215 mm (8.46 in.) W × 80 mm (3.15 in.) H × 295 mm (11.61 in.) D, 2.4 kg (84.7 oz.)
Included accessories	Instruction manual ×1, Power cord ×1

Measurement Leads B (for measuring batteries up to 60 V)

1.8 mm dia. single-axis type for measuring small electrodes



PIN TYPE LEAD 9770
 A: 260 mm (10.24 in.),
 B: 140 mm (5.51 in.),
 L: 850 mm (2.79 ft.), 60 V DC

TIP PIN 9770-90
 Replacement tip for pin type lead 9770, L2102

0.2 mm parallel pyramid-type pins for measuring at thru holes and sub-millimeter objects



PIN TYPE LEAD 9771
 A: 260 mm (10.24 in.),
 B: 138 mm (5.43 in.),
 L: 850 mm (2.79 ft.), 60 V DC

TIP PIN 9771-90
 Replacement tip for pin type lead 9771, L2103

Measurement Leads C (for measuring batteries up to 60 V)




CLIP TYPE LEAD L2107
 A: 130 mm (5.12 in.), B: 83 mm (3.27 in.), L: 1100 mm (3.61 ft.), 60 VDC



LARGE CLIP TYPE LEAD 9467
 A: 300 mm (11.81 in.), B: 131 mm (5.16 in.), L: 1350 mm (4.43 ft.), tip φ 28 mm (1.10 in.), 50 V DC

About probe length



A: From junction to probe
 B: Probe part
 L: Whole length

PC communication



RS-232C CABLE 9637
 For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length



GP-IB CONNECTOR CABLE 9151-02
 2 m (6.56 ft.) length

Battery Testers

Even Speedier Diagnosis of the Deterioration of Lead-acid Batteries Including UPS

BATTERY TESTER BT3554-50



USB 2.0



Bluetooth

When Z3210 is installed

- Battery measurement can be performed while the battery is connected to its host device, without taking it offline
- Measure and save data in as fast as 2 seconds, a 60% improvement from the legacy 3554
- Instantaneously diagnose battery degradation (PASS, WARNING, FAIL) by measuring internal resistance and voltage*1
- Noise reduction technology improves noise resistance
- Screen and audio*2 guidance simplifies measurement
- Measurement data is linked to site information and saved, reducing management man-hours
- A variety of measurement data can be centrally managed using Hioki's Gennect Cross app*3
- Easily transfer measurement data to your smartphone or tablet by using our free app Gennect Cross or to an Excel® file. (Wireless Adapter Z3210 is necessary)
- New protector delivers better ergonomic hold and durability in the field.

Model No. (Order Code) **BT3554-50** (Pin Type Lead not included)
BT3554-51 (Bundled with Pin Type Lead 9465-10)
BT3554-52 (Bundled with Pin Type Lead L2020)
BT3554-91 (BT3554-51 + Wireless Adapter Z3210)
BT3554-92 (BT3554-52 + Wireless Adapter Z3210)

*1: The thresholds for determining the pass/fail condition of a battery depends on the specifications and standards of the battery manufacturer, battery type, capacity, etc. It is important and necessary to always conduct battery testing against the internal resistance and terminal voltage of a new or reference battery. In some cases, it may be difficult to determine the deterioration state of traditional open type (liquid) lead-acid or alkaline batteries which demonstrate smaller changes in internal resistance than sealed lead acid batteries. *2: Audio generated by Bluetooth®-connected device. *3: Data can be downloaded to tablets and smartphones using Hioki's dedicated apps available from the Google Play or App Store. (When using the Z3210)

■ Data can be downloaded to tablets and smartphones using Hioki's dedicated apps available from the Google Play or App Store. Search for "HIOKI" and download the "GENNECT Cross" app.



*Android, Google Play and the Google Play logo are trademarks of Google Inc.
 *iOS is a registered trademark of Cisco Technology, Inc. and/or its affiliates in the United States and certain other countries.
 *iPhone, iPad, iPad mini, iPad Pro and iPod touch are trademarks of Apple Inc.
 *Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.
 *Microsoft, Windows, Windows Vista, and Excel are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
 *Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.
 *The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license.
 *For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website.

■ Basic specifications (Accuracy guaranteed for 1 year)

	BT3554-50	BT3554-51	BT3554-52
Resistance measurement range	3 mΩ (max. display 3.100 mΩ, resolution 1 μΩ) to 3 Ω (max. display 3.100 Ω, resolution 1 mΩ), 4 ranges Accuracy: ±0.8% rdg ±6 dgt (3 mΩ range: ±1.0% rdg ±8 dgt) Testing source frequency: 1 kHz ±30 Hz With function for avoiding noise frequency enabled: 1 kHz ±80 Hz Testing current: 160 mA (3m/30 mΩ range), 16 mA (300 mΩ range), 1.6 mA (3 Ω range) Open terminal Voltage: 5 V peak		
Voltage measurement range	± 6 V (max. display ±6.000 V, resolution: 1 mV) to ± 60 V (max. display ±60.00 V, resolution: 10 mV), 2 ranges, Accuracy: ±0.08% rdg ±6 dgt		
Temperature measurement accuracy	Measurement range: -10°C to 60°C (14°F to 140°F), Maximum display: 60.0°C (140.0°F), Resolution 0.1°C (0.1°F), Measurement accuracy*: ±1.0°C (±1.8°F) * When using the Clip Type Lead with Temperature Sensor 9460. * When using the Temperature Probe 9451, add ±0.5°C (±0.9°F) (cable length: 1.5 m [59.1"]) * When using the Temperature Probe 9451S, add ±0.5°C (±0.9°F) (cable length: 0.1 m [3.94"]) BT3554-50 standalone accuracy with simulated input: ±0.5°C (±0.9°F)		
Absolute max. input voltage	60 V DC max. (No AC input)		
Measurement time	100 ms		
Response time	Approx. 1.6 sec.		
Comparator	Compares measured values with set threshold values to make judgments and reports them to the user. Judgment notification method: Results are displayed as shown below (segment) and beeping tones sound When the Voltage value (high): Resistance value (low)= PASS, Resistance value (medium)= WARNING, Resistance value (high)= FAIL When the Voltage value (low): Resistance value (low)= WARNING, Resistance value (medium)= WARNING, Resistance value (high)= FAIL If the judgment result is WARNING or FAIL, the audio tone is accompanied by a red backlight. User-selectable voltage judgment method: ABS (absolute value judgment), POL (polarity judgment) Savable settings: 200 tables		
Memory functionality	Operation: Save, load, and delete measurement data, Save and delete profile information, Number of data sets: 6000, Memory architecture: 500 data sets per unit (12 units) Saved data: Saved measurement data is linked to profile information. 1. Measurement data: Data can be saved, loaded, and deleted by operating the instrument. -1. Date and time -2. Resistance value, voltage value, and temperature -3. Comparator threshold value and judgment result 2. Profile information: Profile information can be saved, loaded, and deleted using a supported application (Gennect Cross or Gennect One). -1. Profile numbers: 1 to 100 (Data (2), (3), and (4) below are saved for each profile number) -2. Location: User-defined comment such as location of UPS -3. Device information: User-defined comment such as UPS management number -4. Battery number: 1 to 500 (start number, end number)		
Measurement navigator	Operation: Announces the next battery number to be measured via a screen display and audio guidance. Audio output is generated by a connected mobile device when using the Z3210 and a supported application (Gennect Cross). Preparations: Profile information that's been registered with a supported application (Gennect Cross or Gennect One) must be transferred to the instrument.		
Communication interface	USB, Bluetooth® wireless communications (when Z3210 installed)		
Other functions	Temperature measurement (-10.0 to 60.0 °C), Zero-adjustment, Hold, Auto-hold, Auto-memory, Auto-power-save, Clock		
Power supply	LR6 (size AA) alkaline battery × 8 Rated supply voltage: 1.5 V DC × 8 (Nickel metal hydride batteries may be used. However, the battery life display is not supported in this configuration.) Continuous operating time: Approx. 8.3 hr. (without Z3210 installed), Approx. 8.2 hr. (with Z3210 installed and wireless communications active)		
Dimensions and mass	199 mm (7.83 in.)W × 132 mm (5.20 in.)H × 60.6 mm (2.39 in.)D (with protector), 960 g (33.9 oz.) (including batteries and protector)		
Included accessories	Carrying Case C1014 ×1, Protector Z5041 ×1, Fuse Set Z5050 ×1, 0 Adj Board ×1, Neck strap ×1, USB cable ×1, AA alkaline battery (LR6) ×8, User Manual ×1		
	Instrument only	With Pin Type Lead 9465-10	With Pin Type Lead L2020

Battery Testers

Easy 4-terminal measurement, 2.7 mm dia. single-axis type

PIN TYPE LEAD L2020
A: 70 mm (2.76 in.), (Red), 150 mm (5.91 in.) (Black, up to 630 mm (24.8 in.)), B: 164 mm (6.46 in.), L: 1941 mm (76.42 in.) (red)

TIP PIN 9465-90
To replace the tip on the 9465-10, L2020, (one piece)

PIN TYPE LEAD 9465-10
A: (red) 45 mm (1.77 in.), (black) Max. 400 mm (15.75 in.), B: 177 mm (6.97 in.), L: 1925 mm (6.32 ft.) (red)

Large angle of probe application, 2.5 mm pitch 2-axis pin type

PIN TYPE LEAD 9772
A: (red) 45 mm (1.77 in.), (black) Max. 400 mm (15.75 in.), B: 173 mm (6.81 in.), L: 1921 mm (6.3 ft.) (red)

TIP PIN 9772-90
To replace the tip on the Pin type lead 9772, L2100/L2110, (one piece)

Measurement Leads C

LARGE CLIP TYPE LEAD 9467
A: 300 mm (11.81 in.), B: 131 mm (5.16 in.), L: 1350 mm (4.43 ft.), tip φ 28 mm (1.10 in.), 50 V DC

CLIP TYPE LEAD WITH TEMPERATURE SENSOR 9460
For the 3554, 3540, A: 300 mm (11.81 in.), B: 106 mm (4.17 in.), L: 2268 mm (7.44 ft.)

REMOTE CONTROL SWITCH 9466
Can hold the values while measuring them, for the BT3554 (use with the L2020, 9772, 9465-10)

About probe length

A: From junction to probe
B: Probe part
L: Whole length

TEMPERATURE PROBE 9451S
L: 100 mm (3.94 in.)
Order code **9451-01**

TEMPERATURE PROBE 9451
L: 1500 mm (59.06 in.)

Option

0 ADJ BOARD Z5038
For L2020, 9465-10, and 9772

FUSE SET Z5050
Replacement fuse set (5 pieces), for the BT3554 series

PROTECTOR Z5041
Bundled with BT3554-50 series

CARRYING CASE C1014
Hard case

PC Peripherals

GENNECT One SF4000
Application for Windows

GENNECT Cross SF4071, SF4072
Mobile app for iOS, Android

Super Megohm Testers (High Resistance Meters)

Test System Ideal for MLCC Leakage Current Measurement

SUPER MΩ HiTESTER SM7810



GP-IB

RS-232C

Not CE Marked



- Test the leakage current of MLCCs at the fastest speed of 6.8ms simultaneously over 8 channels
- Conduct high-speed leakage current testing of large-capacity MLCCs in the high current range (1mA)
- Improve testing reliability using the contact check function
- Build a flexible system by making best use of the individual settings of each channel

Model No. (Order Code) **SM7810** (100/110 V AC power supply)
SM7810-20 (220 V AC power supply)

The Super MΩ HiTESTER SM7810 is produced to order. An input/output terminal connection cable*1 is required separately. Please contact your local Hioki representative.

*1 Input/output terminal connector/plug and connection cable

• Current input terminal connector and voltage output terminal plug are not included. Voltage input terminal connector is included.

• Input/output terminal connection cables are available in various lengths to suit Hioki measurement systems. Please consult with your Hioki representative.

Basic specifications (Accuracy guaranteed for 1 year)

Number of channels	8 channels (parallel and simultaneous measurement)
Applied voltage	Supply voltage from external power source (voltage input terminal on the rear panel)
Measurement range	Current: 1 pA to 1 mA, Ranges: 100 pA/ 1 nA/ 10 nA/ 100 nA/ 1 μA/ 10 μA/ 100 μA/ 1 mA Resistance: $1 \times 10^2 \Omega$ to $1 \times 10^{15} \Omega$
Measurement speed INDEX typical time	FAST: 6.8 ms, MED: 26.0 ms, SLOW: 100.0 ms, SLOW2: 320.0 ms
Basic measurement accuracy (1μA range, FAST)	Current accuracy: $\pm(2.0 + (0.5 \mu A / (\text{Measured current value}))) \%$ Resistance accuracy: Current accuracy + Voltage generation accuracy of external power supply
Testing voltage setting	0.1 V to 1000.0 V (Resolution: 0.1 V)
Contact check	Judges the contact state by comparing the measured capacitance to a reference value
Other functions	Trigger delay, averaging, contact check, jig capacity open correction, Measured value comparison and judgment, jig resistance open correction functions
Interfaces	GP-IB, RS-232C, EXT I/O
Power supply	SM7810: AC 100 V/110 V, 50/60 Hz, 30 VA SM7810-20: AC 220 V, 50/60 Hz, 30 VA
Dimensions and mass	425 mm (16.73 in.) W × 99 mm (3.90 in.) H × 488 mm (19.21 in.) D, 10.5 kg (370.4 oz.)
Included accessories	Power cord ×1, Instruction manual ×1, Voltage input connector L.2220 ×1, Spare fuse (built into inlet) ×1, Rubber feet ×4

MEASURING LEAD (RED)	MEASURING LEAD (RED)	MEASURING LEAD (RED)
0GA00019	0GA00021	0GA00027
1 m (3.28 ft.) length	2 m (6.56 ft.) length	5 m (16.41 ft.) length

RS-232C CABLE 9637	GP-IB CONNECTOR CABLE 9151-02
For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length	2 m (6.56 ft.) length

CONNECTOR L2220
Voltage input connector for SM7810

The Power Source Unit Ideal for MLCC Leakage Current Measurement

POWER SOURCE UNIT SM7860 series



GP-IB

RS-232C

Not CE Marked



Combination example of the SM7610

Model No. (Order Code) **SM7860-51, SM7860-52, SM7860-53, SM7860-54, SM7860-55, SM7860-56, SM7860-57, SM7860-58** (100 V AC power supply)
SM7860-61, SM7860-62, SM7860-63, SM7860-64, SM7860-65, SM7860-66, SM7860-67, SM7860-68 (220 V AC power supply)

The Power Source Unit SM7860 is produced to order. An output terminal connection cable*2 is required separately. Please contact your local Hioki representative, or if you need to use a power supply voltage other than 100 V AC or 220 V AC.

*2 Output terminal cable

• Voltage output terminal connection cables are available in various lengths to suit Hioki measurement systems. Please consult with your Hioki representative.

- Support for multi-channel systems up to 32-channel output
- 8-channels or 16-channels dual-line output voltage setting
- Positive and negative polarities required for the MLCC test line included in a single unit
- Output ON/OFF and current limitation can be performed for each channel
- Support for the discharge of the charge capacitor
- Output voltage of 1 kV is available
- Large current output of 50 mA /channel allows for reducing the number of backup charges

* Output voltage of 1 kV is limited to 10 mA/channel

Basic specifications (Accuracy guaranteed for 1 year)

Supported device	Super MΩ HiTester SM7810 Object to which voltage is applied: MLCC (the Multilayer Ceramic Capacitor)
Generation accuracy	Output voltage accuracy: $\pm 2\%$ of set value ± 0.5 V (with no load) Inter-channel error: ± 0.01 V or less (between outputs on the same line with no load)
Interfaces	GP-IB, RS-232C, EXT I/O
Power supply	SM7860-51 to -58: 100 V AC, SM7860-61 to -68: 220 V AC, 50/60 Hz, 860 VA
Dimensions and mass	425 mm (16.73 in.) W × 249 mm (9.80 in.) H × 581 mm (22.87 in.) D, 47 kg (1657.9 oz.) [SM7860-57 / -67]: 34 kg (1199.3 oz.)
Included accessories	Power cable ×1, Instruction manual ×1, Operating precautions ×1

CONNECTOR L2221
Voltage output connector for SM7860

SM7860 Functions & output channel configuration

Model No.	SM7860-51 SM7860-61	SM7860-52 SM7860-62	SM7860-53 SM7860-63	SM7860-54 SM7860-64	SM7860-55 SM7860-65	SM7860-56 SM7860-66	SM7860-57 SM7860-67	SM7860-58 SM7860-68
OUT1 to 4 output content	OUT1 +500V OUT2 +500V OUT3 +500V OUT4 +500V	OUT1 +1kV OUT2 +1kV OUT3 +1kV OUT4 +1kV	OUT1 +500V OUT2 +500V OUT3 -500V OUT4 -500V	OUT1 +1kV OUT2 +1kV OUT3 -1kV OUT4 -1kV	OUT1 +500V OUT2 discharge OUT3 -500V OUT4 discharge	OUT1 +1kV OUT2 discharge OUT3 -1kV OUT4 discharge	OUT1 +10V OUT2 +10V OUT3 +10V OUT4 discharge	OUT1 +500V OUT2 +500V OUT3 +500V OUT4 discharge
Overview (Total number of channels and output voltage)	32ch + 500 V	32ch + 1000 V	32ch ± 500 V	32ch ± 1000 V	32ch ± 500 V, discharge	32ch ± 1000 V, discharge	32ch + 10 V, discharge	32ch + 500 V, discharge
Line A	Number of OUT1 channels	8 ch	8 ch	8 ch	8 ch	8 ch	8 ch	8 ch
	OUT1 output voltage range *2	+1.0 V to +500.0 V	+250.0 V to +1000.0 V	+1.0 V to +500.0 V	+250.0 V to +1000.0 V	+1.0 V to +500.0 V	+250.0 V to +1000.0 V	+1.0 V to +500.0 V
	Number of OUT2 channels	8 ch	8 ch	8 ch	8 ch	8 ch	8 ch	8 ch
	OUT2 output voltage range *2	+1.0 V to +500.0 V	+250.0 V to +1000.0 V	+1.0 V to +500.0 V	+250.0 V to +1000.0 V	discharge	discharge	+1.0 V to +10.0 V
	Current limitation	± 50 mA/ch	± 10 mA/ch	± 50 mA/ch	± 10 mA/ch	± 50 mA/ch	± 10 mA/ch	± 50 mA/ch
Maximum output current *2	430 mA (200 VA)	100 mA (100 VA)	430 mA (200 VA)	100 mA (100 VA)	430 mA (200 VA)	100 mA (100 VA)	430 mA (4 VA)	430 mA (200 VA)
Line B	Number of OUT3 channels	8 ch	8 ch	8 ch	8 ch	8 ch	8 ch	8 ch
	OUT3 output voltage range *2	+1.0 V to +500.0 V	+250.0 V to +1000.0 V	-1.0 V to -500.0 V	-250.0 V to -1000.0 V	-1.0 V to -500.0 V	-250.0 V to -1000.0 V	+1.0 V to +10.0 V
	Number of OUT4 channels	8 ch	8 ch	8 ch	8 ch	8 ch	8 ch	8 ch
	OUT4 output voltage range *2	+1.0 V to +500.0 V	+250.0 V to +1000.0 V	-1.0 V to -500.0 V	-250.0 V to -1000.0 V	discharge	discharge	discharge
	Current limitation	± 50 mA/ch	± 10 mA/ch	± 50 mA/ch	± 10 mA/ch	± 50 mA/ch	± 10 mA/ch	± 50 mA/ch
Maximum output current *3	430 mA (200 VA)	100 mA (100 VA)	430 mA (200 VA)	100 mA (100 VA)	430 mA (200 VA)	100 mA (100 VA)	430 mA (4 VA)	430 mA (200 VA)

*1 SM7860-51 to -58: Power supply 100 V AC, SM7860-61 to -68: Power supply 220 V AC *2 The resolution of the output voltage range is 0.1 V.

*3 Only when the operating conditions as stated in the restriction warnings of the specifications are met.

Super Megohm Testers (High Resistance Meters)

4ch Micro Current Model, Perfect for Automated-Systems Integration

SUPER MEGOHM METER SM7420



USB 2.0

GP-IB

RS-232C

CE

3 Year Warranty

- 300 times better noise resistance
- 6000 ps/minute - ideal for mass production
- Channel-independent low capacity contact check
- Perfect for equipping on automated machines
- Max. $2 \times 10^{19} \Omega$ display
- Min. 0.1 fA resolution
- Built-in EXT I/O, RS-232C, GP-IB and USB
- Ideal for mounting in automated lines, easy to construct MLCC leakage current inspection lines

Model No. (Order Code) **SM7420** (4ch, Dedicated micro current measurement)

Note: measurement leads are not included. Purchase the appropriate lead option for your application separately.

Basic specifications (Accuracy guaranteed for 1 year)

Number of channels	4ch
DC current measurement	20 pA range (0.1 fA resolution), Accuracy: $\pm(2.0\%$ of rdg +30 dgt) 200 pA range (1.0 fA resolution), Accuracy: $\pm(1.0\%$ of rdg +30 dgt) 2 nA range (10 fA resolution), Accuracy: $\pm(0.5\%$ of rdg +20 dgt) 20 nA range (100 fA resolution), Accuracy: $\pm(0.5\%$ of rdg +10 dgt) 200 nA range (1 pA resolution), Accuracy: $\pm(0.5\%$ of rdg +10 dgt) 2 μ A range (10 pA resolution), Accuracy: $\pm(0.5\%$ of rdg +10 dgt) 20 μ A range (100 pA resolution), Accuracy: $\pm(0.5\%$ of rdg +10 dgt) 200 μ A range (1 nA resolution), Accuracy: $\pm(0.5\%$ of rdg +10 dgt) *2 mA range (1 nA resolution), Accuracy: $\pm(0.5\%$ of rdg +30 dgt) (1) Measurement speed SLOW2 (internal integration time 13PLC) (2) At a temperature of 23 °C \pm 5 °C with humidity of 85% rh (3) 2 mA range (Measurement speed FAST only)
Resistance measurement capabilities	50 Ω to $2 \times 10^{19} \Omega$ Note: resistance measurement accuracy is defined by the current range accuracy and voltage setting accuracy.
Measurement time setting	Delay: 0 to 9,999 msec
Functions	CH independent low capacity contact checks, CH independent cable length correction, CH independent jig capacity open compensation, comparator
Display	LCD (8 lines of 30 characters), with backlight, high voltage warning indicator
Interfaces	USB, RS-232C, GP-IB, EXT I/O (NPN/PNP can be switched)
Power supply	100 to 240 V AC, 50/60 Hz, 45 VA
Dimensions and mass	330 mm (12.99 in.)W \times 80 mm (3.15 in.)H \times 450 mm (17.72 in.)D, 6.5 kg (229.3 oz.)
Included accessories	Power cord \times 1, Instruction manual \times 1, EXT I/O male connector \times 1

Super Megohm Testers

Min. 6.4 ms Measurement of Super Megohm or Very Small Current

SUPER MEGOHM METER SM7110, SM7120



USB 2.0

GP-IB

RS-232C

CE

3 Year Warranty

- 300 times better noise resistance
- Max. 2000 V output : SM7120
- Max. 1000 V output : SM7110
- Max. $2 \times 10^{19} \Omega$ display
- Min. 0.1 fA resolution
- Built-in EXT I/O, RS-232C, GP-IB and USB
- Flexible, Multipurpose Design, High Resistance Meter/Electrometer/Picoammeter/IR Meter
- Measure resistance of materials by combining with optional electrode

Model No. (Order Code) **SM7110** (1 ch, 1000 V)
SM7120 (1 ch, 2000 V)

Note: measurement leads are not included. Purchase the appropriate lead option for your application separately.

Basic specifications (Accuracy guaranteed for 1 year)

Number of channels	1 ch
DC current measurement	20 pA range (0.1 fA resolution), Accuracy: $\pm(2.0\%$ of rdg +30 dgt) 200 pA range (1.0 fA resolution), Accuracy: $\pm(1.0\%$ of rdg +30 dgt) 2 nA range (10 fA resolution), Accuracy: $\pm(0.5\%$ of rdg +20 dgt) 20 nA range (100 fA resolution), Accuracy: $\pm(0.5\%$ of rdg +10 dgt) 200 nA range (1 pA resolution), Accuracy: $\pm(0.5\%$ of rdg +10 dgt) 2 μ A range (10 pA resolution), Accuracy: $\pm(0.5\%$ of rdg +10 dgt) 20 μ A range (100 pA resolution), Accuracy: $\pm(0.5\%$ of rdg +10 dgt) 200 μ A range (1 nA resolution), Accuracy: $\pm(0.5\%$ of rdg +10 dgt) *2 mA range (1 nA resolution), Accuracy: $\pm(0.5\%$ of rdg +30 dgt) (1) Measurement speed SLOW2 (internal integration time 13PLC) (2) At a temperature of 23 °C \pm 5 °C with humidity of 85% rh (3) 2 mA range (Measurement speed FAST only)
Resistance measurement capabilities	$1 \times 10^3 \Omega$ to $2 \times 10^{19} \Omega$ Note: resistance measurement accuracy is defined by the current range accuracy and voltage setting accuracy.
Setting voltage range (Accuracy)	0.1 to 100.0 V, 100 mV resolution, Accuracy: $\pm 0.1\%$ of setting $\pm 0.05\%$ f.s. 100.1 to 1000 V, 1 V resolution, Accuracy: $\pm 0.1\%$ of setting $\pm 0.05\%$ f.s. [SM7120 only] 1000 to 2000 V, 1 V resolution, Accuracy: $\pm 0.2\%$ of setting $\pm 0.10\%$ f.s.
Current Limiter	0.1 to 250.0 V: 5/ 10/ 50 mA, 251 to 1000 V: 5/ 10 mA, to 2000 V: 1.8 mA
Measurement time setting	Delay: 0 to 9,999 ms
Functions	Comparator, averaging, self-calibration, jig Capacity open correction, cable length correction, surface resistivity, volume resistivity, voltage monitor, contact check
Program function	10 types of discharge, charge, measure and measurement sequence discharge patterns can be programmed.
Display	LCD (8 lines of 30 characters), with backlight, High voltage warning indicator
Interfaces	USB, RS-232C, GP-IB, EXT I/O (NPN/PNP can be switched)
Power supply	100 to 240 V AC, 50/60 Hz, 45 VA
Dimensions and mass	330 mm (12.99 in.)W \times 80 mm (3.15 in.)H \times 450 mm (17.72 in.)D, 5.9 kg (208.1 oz.)
Included accessories	Power cord \times 1, Instruction manual \times 1, EXT I/O male connector \times 1, Short plug \times 1

Shared options with the SUPER MEGOHM METER SM7110, SM7120 and SM7420

Measurement Leads							Humidity Sensor	
	PIN TYPE LEAD (RED) L2230 1 m (3.28 ft.) length	CLIP TYPE LEAD (RED) L2232 1 m (3.28 ft.) length	OPEN LEAD (RED) L2234 3 m (9.84 ft.) length	PIN TYPE LEAD (BLACK) L2231 1 m (3.28 ft.) length	CLIP TYPE LEAD (BLACK) L2233 1 m (3.28 ft.) length	OPEN LEAD (BLACK) L2235 3 m (9.84 ft.) length		HUMIDITY SENSOR Z2011 1.5 m (4.92 ft.) cord length
	PC Communication			Other				
		RS-232C CABLE 9637 For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length	GP-IB CONNECTOR CABLE 9151-02 2 m (6.56 ft.) length					
			CONVERSION ADAPTER Z5010 (custom order product) Connection between electrode / shielding box and SM7110, SM7120					

Super Megohm Testers (High Resistance Meters)

When connecting electrodes and shield boxes to SM7110/SM7120, note that CONVERSION ADAPTER Z5010 (custom order product) or a change of connectors is required. Please contact your local Hioki distributor for assistance.

Options for Super megohm meters (for surface resistance or volume resistance measurement)

SURFACE/VOLUME RESISTANCE MEASUREMENT ELECTRODE SM9001





Not CE Marked

- Electrodes compliant with the JIS C 2170 and IEC 61340-2-3 standards
- Measurement voltage up to 1000 V, and measurement resistance up to $10^{13} \Omega$
- Surface and volume resistance of sheets and films can be measured just as they are without the need to cut samples
- Measure the surface resistance of antistatic flooring and molded products
- *When used with the SM-8200 series (discontinued), measurement can take full advantage of the instrument's voltage and resistance ranges.

Dimensions: ϕ 100mm (3.94 in.) \times 223 mm (8.78 in.), Mass: 2.5 kg (88.2 oz.)
Cable length: 1 m (3.28 ft.)

Model No. (Order Code) **SM9001**
SM9002

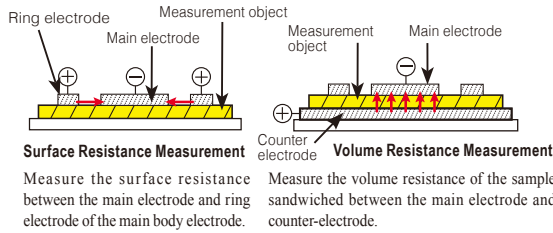

VERIFICATION FIXTURE FOR SURFACE RESISTANCE MEASUREMENT SM9002

The SM9002 Verification Fixture for Surface Resistance Measurement (option) allows you to check the operation of the electrode to increase the reliability of measurement results.

Not CE Marked

Electrode for surface resistance SME-8301



Not CE Marked

Surface resistance can be easily measured by simply pushing the electrode against the specimen. It measures surface resistance of anti-static related goods in combination of mainly Model SM-8213 (discontinued). Measure resistance up to $10^{11} \Omega$.

Dimensions: ϕ 60 mm (2.36 in.) \times 50 mm (1.97 in.)
Lead length 1 m (3.28 ft.)

Model No. (Order Code) **SME-8301**

Electrode for surface resistance SME-8302



Not CE Marked

Electrode for surface resistance of curved samples such as resin and rubber processed goods, TV cathode tubes or small samples. Surface resistance can be measured by pressing the rubber tips at the tip onto the sample. Measure electrodes up to $10^{11} \Omega$ at 10 mm (0.39 in.) intervals or greater.

An electrode distance: 4mm (0.16in.)
Dimensions: ϕ 40 mm (1.57 in.) \times 115 mm (4.53 in.)
Lead length 1 m (3.28 ft.)

Model No. (Order Code) **SME-8302**

Electrode for plate samples SME-8310



Not CE Marked


Sample of 100 mm (3.94 in.) square by up to 8 mm (0.31 in.) in thickness is measurable. The main electrode dia. is 50 mm (1.97 in.) and inner & outer dia. of ring electrode are 70 mm (2.76 in.) & 80 mm (3.15 in.) respectively. Measurement voltage becomes "OFF" while the lid is open to ensure safety. A selector switch allows selection of voltage or surface resistivity.

*A separately purchased interlock cable (DSM8104F) is required in order to use the product with the SM7110/SM7120, and DSM-8104.

Dimensions: 215mm (8.46 in.) W \times 78mm (3.07 in.)
H \times 165mm (6.50 in.)D
Lead length 75cm (2.46 ft.)

Model No. (Order Code) **SME-8310**

Electrode for plates SME-8311



Not CE Marked

Sample of 40 to 100 mm (1.57 to 3.94 in.) square by up to 8 mm (0.31 in.) in thickness is measurable. The main electrode dia. is 19.6 mm (0.77 in.) and inner & outer dia. of ring electrode are 24.1 mm (0.95 in.) & 28.8 mm (1.13 in.) respectively. Measurement voltage becomes "OFF" while the lid is open to ensure safety. The fundamental specifications are the same as SME-8310.

*A separately purchased interlock cable (DSM8104F) is required in order to use the product with the SM7110/SM7120, and DSM-8104.

Dimensions: 215 mm (8.46 in.) W \times 78 mm (3.07 in.) H \times 165 mm (6.50 in.) D
Lead length 75 cm (2.46 ft.)

Model No. (Order Code) **SME-8311**

Weight electrode SME-8320



Not CE Marked

This is an electrode for plate sample for use together with SME-8350 shield box. This electrode enables extremely easy measurement of surface resistivity and volume of sample with coarse surface such as carpets, etc. The main electrode dia. is 50 mm (1.97 in.), and the ring electrode inner-dia. and outer-dia. are 70 mm (2.76 in.) and 80 mm (3.15 in.) respectively.

Photo is Combination with Shield box SME-8350

Model No. (Order Code) **SME-8320**

Note: includes banana plug \times 2

Shield box SME-8350



Not CE Marked

This is used as a sample accommodation box during measurement of a high-insulation resistance samples, or inductive or capacitive samples to perform electromagnetic shielding. When used in combination with mass electrode SME-8320, the electrode can be used as a counter electrode or a guard electrode. When measuring electronic components such as capacitors and transducers, external noise and leakage currents are prevented to ensure stable measurement.

*A separately purchased interlock cable (DSM8104F) is required in order to use the product with the SM7110/SM7120, and DSM-8104.

Dimensions: 250 mm (9.84 in.) W \times 100 mm (3.94 in.) H \times 200 mm (7.87 in.) D
Lead length 80 cm (2.62 ft.)

Model No. (Order Code) **SME-8350**

Note: includes rubber sheet

Standard resistor box SR-2



Not CE Marked

This is a resistor box for calibration of the super megohmmeters.

Max. voltage is 1000 V DC and resistor value covers from 1 M to 10000 M Ω in 24 points.

Dimensions: 270 mm (10.63 in.) W \times 90 mm (3.54 in.) H \times 195 mm (7.68 in.) D

Model No. (Order Code) **SR-2**

Note: includes inspection data sheet

Electrode for liquid samples SME-8330



Not CE Marked

Electrode for liquid samples which is electrically guarded. Total volume is 25 ml. Capacitance between main and counter electrode is approx. 45 pF. Electrode constant is approx. 500 cm (16.41 ft.). Distance between both electrodes is 1 mm (0.04 in.). Outer dia. is 36 mm (1.42 in.), height is approx. 140 mm (5.51 in.). Measure resistance up to $10^{19} \Omega$ (at 1000 V) when used together with Model SM-8220. Electrodes compliant with the JIS C 2101 standard.

Included: Connection cable 60 cm (1.97 ft.) length
(Red) 0GA00029 \times 1
(Black) 0GA00030 \times 1

Dimensions: ϕ 36 mm (1.42 in.) \times 140 mm (5.51 in.)

Model No. (Order Code) **SME-8330**

Note: Includes inspection data sheet

Electrode for chip capacitor SME-8360



Not CE Marked

For measuring the resistance of tip capacitors, with adjustable jig from 0 to 11 mm (0 to 0.43 in.). When connected to the meter by an interlock cable, measurement voltage becomes "OFF" while the lid is open to ensure safety.

The interlock cable must be modified in order to use the product with the SM-8220 series.

Dimensions: 200mm (7.87 in.) W \times 52 mm (2.05 in.)
H \times 150mm (5.91 in.)D
Lead length 85cm (2.79 ft.)

Model No. (Order Code) **SME-8360**

7-1/2 Digit DC Voltmeter for R&D to Production Lines

PRECISION DC VOLTMETER DM7276, DM7275



- High-accuracy model with 1-year 9ppm Accuracy: DM7276
- Basic model with 1-year 20ppm Accuracy: DM7275
- Capacitance contact check (using built-in C-monitor)
- Supports global production with built-in variable power supply
- Built-in EXT I/O, LAN, and USB

Model No. (Order Code)	DM7275-01
	DM7275-02 (Built-in GP-IB)
	DM7275-03 (Built-in RS-232C)
	DM7276-01
	DM7276-02 (Built-in GP-IB)
	DM7276-03 (Built-in RS-232C)

Note: measurement probes are not included. Purchase the probes appropriate for your application separately

Basic specifications (Accuracy guaranteed for 1 year)

	DM7275	DM7276
DC Voltage	100 mV (± 120.00000 mV) to 1000 V (± 1000.0000 V), 5 ranges	
Basic accuracy	10 V range: $\pm 0.0020\%$ rdg ± 12 μ V	10 V range: $\pm 0.0009\%$ rdg ± 12 μ V
Temperature	-10.0°C to 60.0°C (14.0°F to 140°F), combined with sensor Z2001: $\pm 0.5^\circ$ C (5.0°C to 35°C)	
Integration time	Integration time unit: PLC/ms (PLC setting: 0.02/ 0.2/ 1/ 10/ 100, ms setting: 1 ms to 9999 ms)	
Measurement support functions	Smoothing function, null, temperature compensation, scaling, over-range display, self-calibration, auto-hold, contact check	
Management support functions	Comparator, BIN, absolute value judgment, label display, statistics, measurement information, communication monitor, EXT. I/O TEST	
Contact check	Check signal: 10 mV rms, threshold value: 0.5 nF to 50 nF (Cannot use in the 100 V/1000 V ranges), Contact check integration time: 1 ms to 100 ms	
Interfaces	Standard: LAN (100BASE-TX), EXT. I/O, USB flash drive / USB device (USB2.0 Full-Speed) Optional: GP-IB (-02 type only) / RS-232C (-03 type only) / PRINTER (-03 type only)	
Power supply	100 to 240 V AC, 50/60 Hz, 30 VA	
Dimensions and mass	215 mm (8.46 in.) W \times 88 mm (3.46 in.) H \times 232 mm (9.13 in.) D (-01 type); 2.3 kg (81.1 oz.), (-02/-03 type): 2.4 kg (84.7 oz.)	
Included accessories	Instruction manual \times 1, power cord \times 1	

Options for the L9300

TEST LEAD L9300 95 cm (37.4 in.), integrated cap and protective finger guard	CONTACT PIN SET L4933 Attaches to the tip of the Test Lead L9207-10/DT4911, L9206, 60 V DC/ 30 V AC	SMALL ALLIGATOR CLIP SET L4934 Attaches to the tip of the L4932, L9207-10/DT4911, L9206, CAT III 300 V, CAT II 600 V
--	---	--

Options for the L4930. Test Pin Set L4932 is required when using the Small Alligator Clip Set L4934.

CONNECTION CABLE SET L4930 1.2 m (3.94 ft.) length	EXTENSION CABLE SET L4931 Expands the length of the cable with banana plug, 1.5 m (4.92 ft.) length	TEST PIN SET L4932 Attaches to the tip of the banana plug cable, CAT IV 600 V, CAT III 1000 V	SMALL ALLIGATOR CLIP SET L4934 Attaches to the tip of the L4932, L9207-10/DT4911, L9206, CAT III 300 V, CAT II 600 V	ALLIGATOR CLIP SET L4935 Attaches to the tip of the banana plug cable, CAT IV 600 V, CAT III 1000 V	BUS BAR CLIP SET L4936 Attaches to the tip of the banana plug cable, CAT III 600 V	GRABBER CLIP L9243 Attaches to the tip of the banana plug cable, CAT II 1000 V, 185 mm (7.28 in.) length
--	---	---	--	---	--	--

Options for the L9300

TEMPERATURE SENSOR Z2001 1.75 m (5.74 ft.) length	USB CABLE (A-B) L1002 1 m (3.28 ft.) length	GP-IB CONNECTOR CABLE 9151-02 2 m (6.56 ft.) length	RS-232C CABLE 9637 For the PC, 9 pins - 9 pins, cross, 1.8m (5.91 ft.) length	LAN CABLE 9642 Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft.) length
---	---	---	---	--

Introducing a New Digital, Multi-module DMM (Digital-Multi-Module) Station

DMM STATION U8991+MR8740T



DIGITAL VOLTMETER UNIT U8991



- Install in a Memory HiCorder to measure DC voltage with high accuracy and high resolution
- High-precision measurement for applications such as investigating minute voltage fluctuations in sensor output
- The MR8740T is packed with 27 units of U8991 and stores 108ch data at once
- Unlike standard multi-channel scan-type loggers, these instruments can perform simultaneous sampling

Model No. (Order Code)	U8991	(For the MR8740-50)
	MR8740-50	(Max. 108ch, 1GW memory, main unit only)

DMM Unit U8991 Basic specifications (Accuracy guaranteed for 1 year)

Measurement functions	Install into Memory HiCorder MR8740T for use 4 channels of DC voltage measurement
Measurement ranges	1 V f.s. range : -1.000 000 V to 1.000 000 V, 1 μ V resolution, to 100 V f.s. range : -100.0 000 V to 100.0 000 V, 100 μ V resolution, 3 ranges
Measurement accuracy	Basic accuracy: $\pm 0.02\%$ rdg $\pm 0.0025\%$ f.s.
Max. allowable input	100 V DC (upper limit voltage that can be applied between input terminals without damage)
Max. rated voltage to earth	100 V AC/DC (input and instrument are isolated; upper limit voltage that can be applied between input channels or between input channels and chassis without damage)
Max. sampling rate	20 ms (50 samples/s)

Note: it can not be used with the Digital Voltmeter Unit alone. Memory HiCorder body is required. Moreover, input code is not attached.

Other options refer to the detailed catalog

Signal Generators

Output the Signal the Recorder Measured, Which Is Ideal for Abnormality Simulation Test

ARBITRARY WAVEFORM GENERATOR UNIT U8793



- Output arbitrary waveform signals up to 2 channels
- Output problematic waveforms recorded with the Memory Hicorder up to 15 V
- Output customized arbitrary waveform signals up to 15 V
- For use with Hioki Memory Hicorder series (cannot use with 8847 or MR8847)
- Built-in function generator and sweep function
- Isolated between unit and output, and between all channels

Model No. (Order Code) **U8793** (For the MR6000, MR8848, and similar products)

Note: this module must be used with the Memory Hicorder. Output cords are not included. Please purchase them separately.

Basic specifications (Accuracy guaranteed for 1 year)

Output terminal	Number of channels: 2, SMB terminal (Output impedance: 1 Ω or less) Max. rated voltage to ground: 33 V rms AC or 70 V DC
Output voltage range	-10 V to 15 V (Amplitude setting range: 0 V to 20 V p-p, Setting resolution: 1 mV)
Max. output current	10 mA (Allowable load resistance: 1.5 kΩ or more)
Function generator	DC, Sine wave, Square wave, Pulse wave, Triangular wave, Ramp wave, Output frequency: 0 Hz to 100 kHz
Arbitrary waveform generator mode	Waveforms measured by MR8848, etc., generated by Hioki Model 7075, PQ3198, or SF8000, CSV waveforms D/A refresh rate: 2 MHz (using 16-bit D/A)
Sweep function	Frequency, Amplitude, Offset, Duty (Pulse only)
Program function	Max. 128 steps (Number of loops for each step, Number of total loops)
Other	Self-test function (Voltage), External input/output control
Dimensions and mass	106 mm (4.17 in.) W × 19.8 mm (0.78 in.) H × 196.5 mm (7.74 in.) D, 250 g (8.8 oz.)
Included accessories	None

Output Cable		CONNECTION CABLE L9795-01 Max. rated voltage to earth 30 V rms or 60 VDC, SMB to alligator clip, 1.5 m (4.92 ft.) length		CONNECTION CABLE L9795-02 Max. rated voltage to earth 30 V rms or 60 VDC, SMB to BNC terminal, 1.5 m (4.92 ft.) length
	Compatible Models	* Main products are listed below. For more information, please see each product page.		



MR6000



MR8848



MR8827



MR8740T

Related products

For options, please see the product catalog.

WAVEFORM GENERATOR UNIT MR8790



- Output sine waves (20 kHz max.) and DC voltage signals up to 4 channels per unit
- Output signals up to ±10 V or 5mA
- For use with Hioki Memory Hicorder series
- Isolated between unit and output, and between all channels

Model No. (Order Code) **MR8790**

PULSE GENERATOR UNIT MR8791



- Output pulse waves, pattern waves up to 8 channels per unit (output signals of TTL level or open-collector)
- For use with Hioki Memory Hicorder series
- Isolated between unit and output (Not isolated between each channel (common ground))

Model No. (Order Code) **MR8791**

VIR GENERATOR UNIT U8794



- When used as an ECU testing device, generate simulated signals from various sensors, which is indispensable for testing electronic parts and maintaining equipment.
- 8 ch, DC voltage, DC current, resistance (simulated output)
- For use with Hioki Memory Hicorder MR8740T (MR8740-50)
- Isolated between unit and output, and between all channels

Model No. (Order Code) **U8794** (Note: for the MR8740-50)

Dual Partial-discharge Detector with High Noise Resistance for EV Motors

PARTIAL DISCHARGE DETECTOR ST4200



- Dual-mode PD detection: AC PD and surge PD detection
- Noise-resistance through high-frequency CT
- Compatible with the SW2001 High Voltage Multiplexer

Model No. (Order Code) **ST4200-50**

Partial discharge sensor is necessary when not used with the SW2001. Use only Storage Media sold by Hioki.

Options



HIGH VOLTAGE MULTIPLEXER SW2001



PD SENSOR ST9210
For AC partial discharge detection



PD SENSOR ST9211
For surge partial discharge detection



PD FILTER ST9220
For surge partial discharge testing



IMPULSE HIGH VOLTAGE DIVIDER ST1005
For surge partial discharge testing



USB CABLE(A-B) L1002



RS-232C CABLE L9637
For external control, double shielding, 9-pin/9-pin, cord length 3m(9.8 ft.)



SSD UNIT U8332
Specified upon order, internal drive, 256 GB



SD MEMORY CARD Z4001
SD MEMORY CARD Z4003
USB DRIVE Z4006

Basic specifications

AC PD measurement	
Detection method	Discharge charge-quantity measurement method using detected impedance and a band-pass filter in compliance with IEC 60270
Test frequency range	(applied voltage) 45 Hz to 1.1 kHz
Charge quantity measurement range	10 pC ≤ Q ≤ 500 pC (test piece capacitance C: 200 pF ≤ C < 2 nF) 10 pC ≤ Q ≤ 2500 pC (test piece capacitance C: 2 nF ≤ C ≤ 10 nF)
Measurement parameters	[Normal mode] Maximum repeating PD strength (Q max), PD pulse count (m, m+, m-), PD pulse incidence (n), voltage RMS value (U rms), voltage crest value (Up+, Up-), voltage peak-to-peak (Upp), average discharge current (I), discharge power (P), second-order rate (D), PD pulse apparent charge (q), PD pulse phase angle (φ) [PDIV mode] (normal mode parameters plus the following) PD inception voltage (Ui), PD extinction voltage (Ue)
Impulse PD (surge PD) measurement	
Detection method	Discharge current detection using a CT and digital filter in compliance with IEC 61934 Edition 2.0
Sampling rate	200 MS/s
Measurement parameters	[Normal mode] PD peak discharge magnitude (Qpk), pulse sequence PD count (m) [PDIV mode] (normal mode parameters plus the following) PD inception voltage (PDIV), repetitive PD inception voltage (RPDIV), repetitive PD extinction voltage (RPDEV), PD extinction voltage (PDEV), repeating PD peak discharge magnitude (RQpk)
High-voltage source control	
Control description	Cooperative control of withstanding voltage tester and impulse winding tester used as high-voltage generators for partial discharge testing
Compatible instruments (as of Feb. 2025)	Automatic Insulation/Withstanding HiTester 3153, Impulse Winding Tester ST4030A, etc.
Specifications shared by AC PD and impulse PD (surge PD) measurement	
Functions	Graph display function, judgment function
Save destination	SD memory card, USB drive, SSD (Use only storage media sold by Hioki.)
Electromagnetic compatibility	Effects of radiative radio frequency electromagnetic fields: 50 pC or less (at 10 V/m) Effects of conductive radio frequency electromagnetic fields: 50 pC or less (at 10 V) Effects of pulse noise superposed on power supply: 50 pC or less (with pulse noise of 1 kV and pulse width of 50 ns)
Interfaces	LAN, USB, RS-232C* (please use a commercially available USB-serial conversion cable), monitor output, EXT. I/O (measurement start, measurement cancel, overall judgment PASS, overall judgment FAIL) *For connecting to secondary instruments (e.g., Automatic Insulation/Withstanding HiTester 3153)
Power supply	Rated supply voltage: 100 to 240 V AC; rated power: 300 VA
External dimensions	Approx. 353 mm (13.9 in.) W × 235 mm (9.25 in.) H × 154.8 mm (6.09 in.) D (excluding protruding parts)
Weight	Approx. 7.3 kg (257.5 oz.) (with U8332); approx. 7.1 kg (250.4 oz.) (without U8332)
Included accessories	Approx. 353 mm (13.9 in.) W × 235 mm (9.25 in.) H × 154.8 mm (6.09 in.) D (excluding protruding parts)

Safety Testing

Durable Multiplexer for Comprehensive Motor Testing Systems

HIGH VOLTAGE MULTIPLEXER SW2001



SW2001-16



- A single multiplexer that lets you consolidate six different tests
- Safe switching between high-voltage testing and 4-terminal low-voltage measurement
- Reliable multiplexing design with extended operational lifespan
- Up to 16 channels significantly reduce connection man-hours and test time

Model No. (Order Code) **SW2001-04** (4ch)
SW2001-08 (8ch)
SW2001-16 (16ch)

Options

PD SENSOR ST9200
For AC partial discharge detection. Specify at time of order; built into SW2001.

PD SENSOR ST9201-50
For surge partial discharge detection. Specify at time of order; built into SW2001.

CONNECTION CABLE L9218
For connecting the ST4200 and SW2001, 1.5 m

CONNECTION CABLE L2270
Red Hi: For connecting the 3153, 1.5 m

CONNECTION CABLE L2271
Black Low: For connecting the 3153, 1.5 m

CONNECTION CABLE L2255
Red and black set: For connecting the ST4030A, 1.5 m

CONNECTION CABLE L2111
4-terminal: For connecting the RM3545A, 1.5 m

CONNECTION CABLE L2005
4-terminal: For connecting the IM3533, 1.5 m

UNTERMINATED LEAD CABLE L2265
Red Hi: For connecting DUT to SW2001, 3 m

USB CABLE (A-B) L1002
1 m

CONNECTION CABLE L1050-10
For connecting ST1005 to SW2001

Basic specifications

Input channels	2 channels of high-voltage, 2-terminal input: insulation and withstanding voltage tester input, impulse winding tester input 2 channels of low-voltage, 4-terminal input: LCR meter input, resistance meter input
Output channels	CH1 to CH4 (SW2001-04), CH1 to CH8 (SW2001-08), CH1 to CH16 (SW2001-16) SOURCE terminal (or 2-terminal output terminals) and SENSE terminal for each channel
Partial discharge sensor output	AC voltage monitoring, AC partial discharge current, impulse partial discharge current (Current output is available only when equipped with current sensor ST9200 or ST9201-50 which are options that must be specified when ordering.) (Each is output through a BNC terminal.)
Maximum input voltage	Between high-voltage 2-terminal input and withstand voltage tester input terminal: 5 kV AC, 5 kV DC, 7.07 kV peak Between high-voltage 2-terminal input and impulse input terminal: 8 kV peak (impulse) Between low-voltage 4-terminal input and LCR meter input terminal or resistance meter input terminal: 30 V AC rms, 60 V DC, 42.4 V peak
Rated output voltage	5 kV AC rms, 5 kV DC, 8 kV peak (impulse)
Maximum rated terminal-to ground voltage	• Between high-voltage 2-terminal input and withstand voltage tester input terminal: 5 kV AC, 5 kV DC, 7.07 kV peak • Between high-voltage 2-terminal input and impulse input terminal: 8 kV peak (impulse) • Between low-voltage 4-terminal input and LCR meter input terminal or resistance meter input terminal: 30 V AC RMS, 60 V DC, 42.4 V peak
Maximum allowable impulse current	100 A peak
Primary circuit relay service life	Open/close cycles: 5 million or more (reference value, not guaranteed)

General specifications

Functions	Channel switching, interlock, channel delay, settings backup, panel function, communications settings mode switching, protective discharge function, accelerated discharge function
Interfaces	LAN, USB, EXT. I/O
Power supply	Rated supply voltage: 100 to 240 V AC, Rated power: 120 VA
External dimensions	Approx. 439.2 mm (17.29 in.) W × 265.9 mm (10.47 in.) H × 770 mm (30.31 in.) D (excluding protruding parts)
Weight	SW2001-04: approx. 20.5 kg (723.1 oz.); SW2001-08: approx. 22.5 kg (793.7 oz.); SW2001-16: approx. 27.0 kg (952.4 oz.) (All figures do not include weight from factory options ST9200/ST9201-50.) Add 1.2 kg (42.3 oz.) for each ST9200 and add 324 g (11.4 oz.) for each ST9201-50.
Included accessories	Power cord × 1, operating precautions × 1, startup guide × 1, support feet for installation × 4, EXT I/O connector × 1, connector for disengaging EXT I/O interlock × 1

Diagnose the Insulation Quality and Deterioration of Rotor Windings while in Assembled State via Response Waveform Quantification

IMPULSE WINDING TESTER ST4030A



LAN

USB 2.0

GP-IB
option

RS-232C
option



- Identify previously undetectable defects
- Detect waveforms with high precision (200 MHz high speed sampling × high 12-bit resolution)
- Identify single-fault turns via quantification of response waveforms into LC and RC values
- Diagnose defective insulation (pseudo-shorts) between motor windings by testing for microscopic partial discharges hidden in noise (option)

Model No. (Order Code) **ST4030A**

Basic specifications (Accuracy guaranteed for 1 year)

Measurement items	<ul style="list-style-type: none"> Quantification (LC value, RC value) of the response waveform obtained when impulse voltage is applied, pass / fail judgment Waveform judgment using AREA value, Flutter, Laplacian etc. Equipped with dielectric breakdown voltage test function
Applied voltage	100 V to 4200 V (Setting resolution: 10 V steps) Maximum applied energy: approx. 88 mJ
Testable inductance range	10 μH to 100 mH
Sampling	200 M / 100 M / 50 M / 20 M / 10 MHz, Resolution: 12 bits, Number of data: 1001 to 800 points (1000 point steps)
Voltage detection accuracy	[DC accuracy] ± 5% of setting, [AC band] 100 kHz: ± 1 dB
Determination method	LC · RC value judgment, waveform judgment, discharge judgment (when incorporating the ST9000)
Number of test condition tables	255 (test condition setting, judgment condition setting, master waveform)
Test time	About 60 ms (3000 V, 1 pulse, reference value at decision OFF)
Display	8.4-inch SVGA color TFT liquid crystal (800 × 600 dots), touch panel
Interface	Standard: EXT I/O, USB host (memory), USB device (communication), LAN Optional: RS-232C (Z3001), GP-IB (Z3000)
Power supply	100 V to 240 V AC, 50/60 Hz, 80 VA max.
Dimensions and mass	215 mm (8.46 in.)W × 200 mm (7.87 in.)H × 348 mm (13.7 in.)D, 6.7 kg (236.3 oz.)
Included accessories	Power cord ×1, Instruction Manual ×1, Usage notes ×1

Option

DISCHARGE DETECTION UPGRADE
ST9000, ST9000-01, ST9000-03

Highly accurate detection of insulation failure (pseudo short) between motor windings.
ST9000: factory option, ST9000-01: downloadable (license card), ST9000-03: downloadable (digital license)

Input/Output Cords

CLIP TYPE LEAD L2250
Max. rated voltage: 3300 V AC peak, 1.5 m (4.92 ft.) length

UNPROCESSED LEAD CABLE L2252
Max. rated voltage: 4200 V AC peak, 2 m (6.56 ft.) length

Note: effect of cable parasitic component
Vibration waveform changes according to cable length. For consultation on special order products with cable capacity within a certain range, please contact your Hioki distributor.

PC Communication

GP-IB INTERFACE Z3000

GP-IB CONNECTOR CABLE 9151-02
2 m (6.56 ft.) length

RS-232C INTERFACE Z3001

RS-232C CABLE 9637
9 pin - 9 pin, cross, 1.8 m (5.91 ft.) length

Leak Current Measurement, an Essential Part of Electrical Safety (for medical-use electrical devices)

LEAK CURRENT HITESTER ST5540



USB 1.1

RS-232C



- Compliance with IEC 60601-1:2005 Ed 3.0, JIS T 0601-1:2012 for medical-use electrical devices and essential to electrical safety (*Starting on June 1, 2012, medical electrical equipment sold in the EU must comply). Model ST5540 comply with IEC 60601-1:2005+ A1:2012 (Ed 3.1), and IEC 62353 of 2017
- Compliance with Electrical Appliances and Materials Safety Act, JIS, IEC, and UL standards for general-use electrical devices
- Uninterrupted polarity switching function dramatically reduces cycle time
- Support for rated currents up to 20 A gives the instrument more than adequate capability for testing products designed to comply with new standards
- Touch panel features simple, interactive operation
- Communications functionality and external I/O support allow automatic testing on production lines

Model No. (Order Code) **ST5540** (For medical-use and electrical devices)

Note: always use an isolation transformer when measuring leak current for medical-use electrical devices. The ST5540 does not include an isolation transformer. When measuring medical-use electrical devices, use a step-up isolation transformer or similar component operating at 110% of the rated supply voltage as the power supply for the device under test.

ST5540, ST5541 shared options

The L2200 (for ST5540, Red ×2, Black ×1) ×1 set and the 9195 are bundled

TEST LEAD L2200
70 cm (2.30 ft.) length, detachable large alligator clips or needle tips are bundled, CAT IV 600 V, CAT III 1000 V

ENCLOSURE PROBE 9195
For the ST5540 series, 3156/3155

RS-232C CABLE 9637
For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length

FUSE SET Z5057
Replacement fuse set (50 mA/250 V, 5 pieces)

Basic specifications (Accuracy guaranteed for 1 year)

Measurement methods	Measurement of voltage drop across body simulated resistance points, Calculation and display of current values, True rms measurement, Measurement unit floats relative to instrument ground.
Measurement modes	Leak current measurement, voltage measurement, safety conductor current measurement
Standards compliance (NW: Body simulated resistance)	<p>[NW-A] • Electrical Appliances and Materials Safety Act</p> <p>[NW-B1] • Medical electrical equipment: IEC 60601-1:1988+ A1:1993+ A2:1995, JIS T 0601-1:1999</p> <p>[NW-B2] • Medical electrical equipment: IEC 60601-1:2005+ A1:2012, JIS T 0601-1:2012 and complement 1:2014, IEC 62353</p> <p>[NW-C]</p> <ul style="list-style-type: none"> Measurement of touch current and protective conductor current: IEC 60990:2016 Electrical equipment for measurement, control, and laboratory use: IEC 61010-1:2010+ A1:2016 Information technology equipment: IEC 60950-1:2005+ A1:2009+ A2:2013 Audio, video and similar electronic apparatus: IEC 60065:2014 Personnel Protection Systems for EV: UL 2231-1:2012 (Amended 2016), UL-2231-2:2012 (Amended 2016) <p>[NW-D] • For UL: UL 1492:1996 (Amended 2013)</p> <p>[NW-G] • Electrical equipment for measurement, control, and laboratory use; current measurement circuits in damp conditions: IEC 61010-1:2010+ A1:2016</p>
Leak current measurement	Ground leak current, 3 types of contact current, 7 types of patient leak current, patient measurement current, 4 types of total patient leak current, free current measurement, 3 types of enclosure leak current
Measurement current	DC, AC (true rms, 0.1 Hz to 1 MHz), AC+DC (true rms, 0.1 Hz to 1 MHz), AC peak (15 Hz to 1 MHz)
Measurement ranges	DC / AC / AC+DC mode: 50.00 mA/ 5.000 mA/ 500.0 μA/ 50.00 μA AC peak mode: 75.0 mA/ 10.00 mA/ 1.000 mA/ 500.0 μA
Measurement accuracy (current measurement)	DC measurement: ±2.0% rdg ±6 dgt (typ.) AC / AC+DC measurement: ±2.0% rdg ±6 dgt (15 Hz to 100 kHz, typ.) AC peak measurement: ±2.0% rdg ±6 dgt (15 Hz to 10 kHz, typ.)
Interfaces	External I/O, medical device relay output, USB 1.1 (communications), RS-232C
Functionality	110% voltage application, automatic test, data storage for 100 target devices, clock, data backup, printed output (optional), etc.
Power supply	100/120/220/240 V AC (specify at time of order), 50/60 Hz, 30 VA rated power
Target device power supply input	100 to 250 V AC, 50/60 Hz Rated current input from terminal block: 20 A
Target device power supply output	Output from terminal block: 20 A Output from outlet: 15 A
Dimensions and mass	320 mm (12.60 in.)W × 110 mm (4.33 in.)H × 253 mm (9.96 in.)D, 4.5 kg (158.7 oz.)
Included accessories	Test lead L2200 (for ST5540, Red ×2, Black ×1) ×1 set, Enclosure probe 9195 ×1, Power cord ×3, Spare fuse for measurement line ×1, Instruction manual ×1

Leak Current Measurement, an Essential Part of Electrical Safety (for electrical devices)

LEAK CURRENT HITESTER ST5541



USB 1.1

RS-232C

CE

3 Year Warranty

- Compliance with Electrical Appliances and Materials Safety Act, JIS/IEC/UL standards
- Uninterrupted polarity switching function dramatically reduces cycle time
- Support for rated currents up to 20 A gives the instrument more than adequate capability for testing products designed to comply with new standards
- Touch panel features simple, interactive operation
- Communications functionality and external I/O support allow automatic testing on production lines

Model No. (Order Code) **ST5541** (For electrical devices)

Note: for applications involving leak current measurement of medical-use electrical devices, use the ST3540.

ST5540, ST5541 shared options

The L2200 and the 9195 are bundled

TEST LEAD L2200
70 cm (2.30 ft.) length, detachable large alligator clips or needle tips are bundled, CAT IV 600 V, CAT III 1000 V

ENCLOSURE PROBE 9195
For the ST5540 series, 3156/3155

RS-232C CABLE 9637
For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length

FUSE SET Z5057
Replacement fuse set (50 mA/250 V, 5 pieces)

ST5540, ST5541 List of functions

	Item	ST5540	ST5541
Network	Network A (Electrical Appliances and Materials Safety Act)	✓	✓
	Network B (Medical-use electrical devices)	✓	-
	Network C (IEC 60990)	✓	✓
	Network D (UL)	✓	✓
	Network E (General-purpose 1)	✓	✓
	Network F (General-purpose 2)	✓	✓
	Network G (IEC 61010-1)	✓	✓
Major functions	Power on polarity switching function	✓	✓
	Rated current 20 A	✓	✓
	Function for checking for blown fuses	✓	✓
	Frequency band switching	✓	-
	110% voltage output terminal (T3 terminal)	✓	-
	SI0, SI2, SI3, E terminal	✓	-

Basic specifications (Accuracy guaranteed for 1 year)

Measurement methods	Measurement of voltage drop across body simulated resistance points, Calculation and display of current values, True rms measurement, Measurement unit floats relative to instrument ground.
Measurement modes	Leak current measurement, voltage measurement, safety conductor current measurement
Standards compliance (NW: Body simulated resistance)	[NW-A] • Electrical Appliances and Materials Safety Act [NW-C] • Measurement of touch current and protective conductor current: IEC 60990:2016 • Electrical equipment for measurement, control, and laboratory use: IEC 61010-1:2010+ A1:2016 • Information technology equipment: IEC60950-1:2005+ A1:2009+ A2:2013 • Audio, video and similar electronic apparatus: IEC 60065:2014 • Personnel Protection Systems for EV: UL 2231-1:2012 (Amended 2016), UL-2231-2:2012 (Amended 2016) [NW-D] • For UL: UL 1492:1996 (Amended 2013) [NW-G] • Electrical equipment for measurement, control, and laboratory use; current measurement circuits in damp conditions: IEC 61010-1:2010+ A1:2016
Leak current measurement	Ground leak current, 3 types of contact current, free current measurement, 3 types of enclosure leak current
Measurement current	DC, AC (true rms, 15 Hz to 1 MHz), AC+DC (true rms, 15 Hz to 1 MHz), AC peak (15 Hz to 1 MHz)
Measurement ranges	DC / AC / AC+DC mode: 50.00 mA/ 5.000 mA/ 500.0 μA/ 50.00 μA AC peak mode: 75.0 mA/ 10.00 mA/ 1.000 mA/ 500.0 μA
Measurement accuracy (current measurement)	DC measurement: ±2.0% rdg ±6 dgt (typ.) AC / AC+DC measurement: ±2.0% rdg ±6 dgt (15 Hz to 100 kHz, typ.) AC peak measurement: ±2.0% rdg ±6 dgt (15 Hz to 10 kHz, typ.)
Interfaces	External I/O, USB 1.1 (communications), RS-232C
Functionality	Automatic test, data storage for 100 target devices, clock, data backup, printed output (optional), etc.
Power supply	100/120/220/240 V AC (specify at time of order), 50/60 Hz, 30 VA rated power
Target device power supply input	100 to 250 V AC, 50/60 Hz Rated current input from terminal block: 20 A
Target device power supply output	Output from terminal block: 20 A Output from outlet: 15 A
Dimensions and mass	320 mm (12.60 in.)W × 110 mm (4.33 in.)H × 253 mm (9.96 in.)D, 4.5 kg (158.7 oz.)
Included accessories	Test lead L2200 (Red ×1, Black ×1) ×1 set, Enclosure probe 9195 ×1, Power cord ×3, Spare fuse for measurement line ×1, Instruction manual ×1

ST5540, ST5541 List of functions

	Item	ST5540	ST5541
Testing leakage current mode	Earth leakage current	✓	✓
	Touch current	✓	✓
	Patient auxiliary current	✓	-
	Patient leakage current	✓	-
	Total patient leakage current	✓	-
	Free current	✓	✓
	Enclosure - Earth leakage current	✓	✓
	Enclosure - Enclosure leakage current	✓	✓
	Enclosure - Line leakage current	✓	✓
	Patient leakage current I	✓	-
	Patient leakage current II	✓	-
	Patient leakage current III	✓	-

Ensure Insulation Resistance Testing in the Battery Production Processes


BATTERY INSULATION TESTER BT5525



- Ideal for battery production lines
- BDD function for detecting minuscule short-circuits caused by contamination
- Stable insulation resistance testing even in noisy environments
- Contact check function (Prevents errors due to poor contact)
- High cost performance thanks to accessible pricing, high-speed testing, and compact footprint
- Contact check function reduces the number of false negatives caused by equipment issues

Model No. (Order Code) **BT5525**

Note: the instrument is not able to perform measurement by itself. Please purchase optional test leads separately as appropriate for your measurement application. The LOW terminal is a dedicated Hioki connector, so only our optional L2131 or L2133 can be connected.

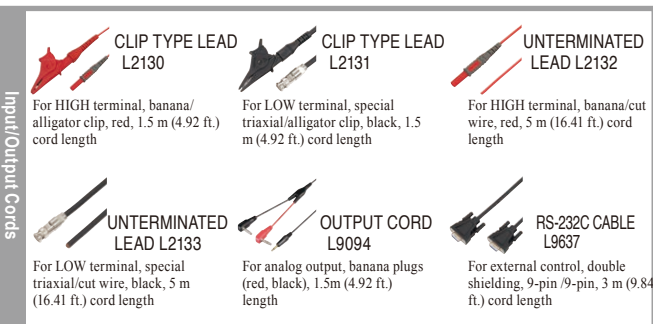

Basic specifications (Accuracy guaranteed for 1 year)

Main functions	Insulation resistance test, Break Down Detect (BDD) function, Contact check function
Output specifications	Output voltage: 25 V to 500 V, Setting resolution 1 V Charging current (current limit function): 50 μA to 50 mA*1*2*3, minimum setting resolution 10 μA Short-circuit current: 60 mA or less Discharge current: 40 mA or greater
Measurement specifications	Resistance value display range: 0.050 MΩ to 9999 MΩ Resistance range: 2 MΩ, 20 MΩ, 200 MΩ, 2000 MΩ, AUTO
Basic specifications	±1.5% rdg ±2 dgt. 25 V ≤ V < 100 V [0.05 MΩ to 2 MΩ], 100 V ≤ V ≤ 500 V [0.2 MΩ to 20 MΩ] Test time: 0.050 s to 999.999 s, OFF Comparator delay time: 0.001 s to 999.999 s, AUTO Display update speed: 1 PLC Sampling time: 1 PLC to 100 PLC
Time specifications	Panel save function: Saves up to 15 sets of measurement conditions
Memory functions	Measured value memory function: Saves up to 999 measured values in the instrument's internal memory Test modes: Continuous test, PASS STOP, FAIL STOP
Judgment functions	Comparator function: UPPER_FAIL: Measured value > upper limit value PASS: Upper limit value ≥ measured value ≥ lower limit value LOWER_FAIL: Measured value < lower limit value
Various functions	Break Down Detect function (BDD): Detecting minuscule insulation defects caused by contamination Contact check function: 2-terminal capacitance measurement method Automatic data output function: Automatic output of measurement results via communication interface after completion of test Command monitor function: Screen display of commands being sent and received External I/O monitor function: Screen display of output signal ON/OFF and input signal status Analog output function: Converts measured values to 0 to 4 V DC and outputs
Interfaces	USB, LAN, RS-232C, EXT. I/O
Power supply	100 V to 240 V AC
Maximum rated power	100 VA
Dimensions and mass	Approx. 215 mm (8.46 in.) W × 80 mm (3.15 in.) H × 306.5 mm (12.07 in.) D (excluding protruding parts), Approx. 2.8 kg (98.8 oz.)
Included accessories	Power cord ×1, EXT. I/O male connector ×1, EXT. I/O connector cover ×1, EXT. I/O interlock cancellation jig ×1, Startup Guide ×1

*1: Constraints involving the output generator will result in an error making measurement impossible, if a capacitive load of approximately 50 μF or greater is connected while using a current limit setting of 3.1 mA or greater.
*2: When using a current limit setting of 5.1 mA or greater, measurement will be forcibly stopped if the output voltage is not at least 20 V at 200 ms after the start of measurement. Measurement will be possible 1 s after forcibly stopped.
*3: If the set current limit value is from 5.1 mA to 50.0 mA, the current will be limited to 5 mA after the output voltage reaches the set voltage.

Industry's Fastest Insulation Tester Assesses in as Fast as 50 ms


INSULATION TESTER ST5520



- Rapidly assess in as fast as 50 ms
- Quick discharge of residual voltage
- Freely configurable test voltage (Set from 25 V to 1000 V, 1 V resolution)
- Contact check function (Prevents errors due to poor contact)
- Short-circuit check function (Stops potential defects from reaching the market)
- Ideal for battery production lines


Model No. (Order Code) **ST5520** (Built-in external I/O output)
ST5520-01 (Built-in BCD output)

Note: the ST5520 and ST5520-01 cannot be operated alone. Please select and purchase the optional test leads to accommodate your application.

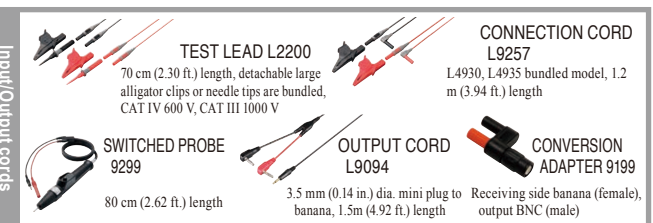

Basic specifications (Accuracy guaranteed for 1 year)

Measurement items	Insulation resistance (Applied DC voltage method)
Testing voltage	(Measurement range: AUTO/MANUAL setting is possible) 25 V ≤ V < 100 V (2.000/20.00/200.0 MΩ), 100 V ≤ V < 500 V (2.000/20.00/200.0 MΩ), 500 V ≤ V ≤ 1000 V (2.000/20.00/200.0/4000 MΩ)
Basic accuracy	±2% rdg ±5 dgt. 25 V ≤ V < 100 V [0 to 20 MΩ], 100 V ≤ V < 500 V [0 to 20 MΩ], 500 V ≤ V ≤ 1000 V [0 to 20 MΩ]
Measurement speed	Fast: 30 ms/time, Slow: 500 ms/time (selectable)
Display	LCD (service life: 100,000 hours), 4-level backlight
Internal memory	Saved items: rated measurement voltage, comparator upper limit /lower limit values, test mode, beep sound to distinguish the result, test time, response time, resistance range, measurement speed Memory capacity: up to 10 items (can be saved/loaded)
Comparator setting	UPPER_FAIL: Measured value ≥ upper limit value PASS: Upper limit value > measured value > lower limit value LOWER_FAIL: Measured value ≤ lower limit value
Judgement process	Beep sound, PASS / U.FAIL/L. FAIL: light up on LED display, When UL_FAIL, U.FAIL / L.FAIL light up simultaneously, EXT.I/O output, judgement result can be obtained via RS-232C
Test duration	Definition of test duration: Test duration = Response time + Measurement time Function: Set the time from voltage application until pass/fail assessment Configuration range: 0.045 s to 999.999 s (0.001 s resolution)
Response time timer	After the start of the test, comparator judgment operation can be prohibited until a set interval from 0.005 sec. to 999.999 sec. (at 0.001 sec. resolution) has passed.
Analog output	DC +4 V f.s.
Interface	RS-232C (standard), External I/O (External control input, Judgment result) BCD output (ST5520-01 only)
Power supply	100 to 240 V AC, 50/60 Hz, 25 VA max.
Dimensions and mass	215 mm (8.46 in.)W × 80 mm (3.15 in.)H × 166 mm (6.54 in.)D, 1.1 kg (38.8 oz.)
Included accessories	Instruction Manual ×1, Power cord ×1, EXT. I/O Connector ×1, Connector Cover ×1



Ensure Insulation and Withstand Voltage with Contact Check

AC AUTOMATIC INSULATION/WITHSTANDING HI TESTER 3174



RS-232C



- Continuous testing of insulation (500/1000 V) and withstand voltage (100 VA transformer capacity)
- Full remote operation when used in combination with the Safety Test Data Management Software 9267
- Save up to 8 test settings each for the withstanding and insulation testing modes
- Precise test voltage without power voltage dependency is generated using the PWM method

Model No. (Order Code) **3174** (Insulation/Withstanding Voltage [AC])

Note: to perform contact checks, please purchase another High Voltage Test Lead 9615 set separately.

Basic specifications (Accuracy guaranteed for 1 year)

[Withstanding test section]

Testing voltage	0.2 V AC to 5.00 kV AC
Voltage setting	Digital setting, Setting resolution: 0.01 kV
Waveform/Frequency	Sine wave (Distortion ratio 5% or less at no load), 50/60 Hz selectable
Current measurement	0.01 mA to 20.0 mA, True RMS rectified (digital display)
Measurement range	10 mA (0.01 mA resolution), 20 mA (0.1 mA resolution)
Voltage meter	Accuracy: $\pm 1.5\%$ rdg (1000 V or more), $\pm 15\%$ V (less than 1000 V), True RMS rectified
Judgment function	Window comparator method (Digital setting)

[Insulation test section]

Testing voltage	500 V DC, 1000 V DC
Unloaded voltage	1 to 1.2 times rated voltage
Rated testing current	1 to 1.2 mA, Shorted current: 4 to 5 mA (at 500 V), 2 to 3 mA (at 1000 V)
Measurement range, Accuracy	0.5 M Ω to 999 M Ω (at 500 V), and 1 M Ω to 999 M Ω (at 1000 V): $\pm 4\%$ rdg, 1000 M Ω to 2000 M Ω : $\pm 8\%$ rdg
Judgment function	Window comparator method (Digital setting)

[Timer section] *Test times may differ from set timer times depending on the load.

Setting range	0.3 to 999 s
Ramp, Delay	Testing voltage ramp-up, or down, Insulation test delay: 0.1 to 99.9 s

[General section]

Functions	Saving 8 testing conditions, hold, buzzer, contact check
Monitor function	Output voltage, detected current, insulation resistance, Refresh rate: 2 times/s
Power supply	100 to 240 V AC, (50/60 Hz), 200 VA max.
Dimensions and mass	320 mm (12.60 in.)W \times 155 mm (6.10 in.)H \times 395 mm (15.55 in.)D, 15 kg (529.1 oz.)
Included accessories	H.V. Test lead 9615 (high voltage side and return, 1 each) \times 1, Power cord \times 1, Instruction manual \times 1, Disconnection prevention plate \times 1

*The 9615 is bundled

Input/Output cords



H.V. TEST LEAD 9615
Red, Black each 1, 1.5 m
(4.92 ft.) length



REMOTE CONTROL BOX (SINGLE) 9613
For Start/Stop control, 1.5m (4.92 ft.) cord length

REMOTE CONTROL BOX (DUAL) 9614
For Start/Stop control, 1.5m (4.92 ft.) cord length

PC Communication



SAFETY TEST DATA
MANAGEMENT
SOFTWARE 9267
For PC control application
software



RS-232C CABLE 9637
For the PC, 9pin - 9pin, cross,
1.8m (5.91 ft.) length

Safety Testing

All-in-one Model that Combines Withstand Voltage and Insulation Resistance (AC/DC)

AUTOMATIC INSULATION / WITHSTANDING HIESTER 3153



GP-IB

RS-232C



- Programmable insulation (50 to 1200 V DC) and dielectric strength (AC/DC) testing
- Program up to 32 files of test types, test points (50 steps), and measurement settings
- Optional scanner for multipoint automatic testing
- Uses the PWM method to generate accurate test voltages that do not depend on the supply voltage
- Ramp timer function for increasing or decreasing the applied voltage during dielectric strength testing at user-specified times

Model No. (Order Code) **3153** (Insulation, AC/DC Withstanding Voltage)

Basic specifications (Accuracy guaranteed for 1 year)

[Withstanding test section]	
Testing voltage	0.2 kV to 5.00 kV AC, 500 VA (max. 30 minutes), 0.2 kV to 5.00 kV DC, 50 VA (continuance)
Voltage setting	Digital setting (0.01 kV setting resolution)
Waveform/Frequency	Sine wave (5% or less distortion, unloaded), 50/60 Hz selectable
Current measurement	0.01 mA to 100.0 mA, Average rectified display (Digital)
Measurement range	10 mA (0.01 mA resolution), 100 mA (0.1 mA resolution)
Voltmeter	Digital: accuracy $\pm 1.5\%$ f.s. (f.s.=5.00 kV) (Average rectified display)
Decision method	Window comparison (digital settings)
[Insulation test section]	
Rated testing voltage	50 to 1,200 V DC (in 1 V steps)
Rated testing current	1 mA, Short-circuit current: 200 mA or less
Measurement range / accuracy	0.10 to 9999 M Ω , 4 ranges, $\pm 4\%$ rdg (representative values for 0.5 M Ω to 1,000 M Ω)
Decision method	Window comparison (digital settings)
[Timer section] *Test times may differ from set timer times depending on the load.	
Setting range	0.3 to 999 s
Ramp, Delay	Testing voltage ramp-up, or down, Insulation test delay: 0.1 to 99.9 s
[General section]	
Functions	Program up to 32 files of 50 step test settings. 10 sets each of dielectric strength and insulation test settings, hold, buzzer
Monitor functions	Output voltage, detected current, measured resistance, Refresh rate: 2 times/s
Power supply	100 to 120 V, 200 to 240 V AC, (50/60 Hz), 1000 VA max.
Dimensions and mass	320 mm (12.60 in.)W \times 155 mm (6.10 in.)H \times 480 mm (18.9 in.)D, 18 kg (634.9 oz.)
Included accessories	H.V. Test lead 9615 (high voltage side and return, 1 each) \times 1, Power cord \times 1, Instruction manual \times 1, Spare fuse \times 1

Safety Testing

The 9615 is bundled

Input/Output cords

- H.V. TEST LEAD 9615
Red, Black each 1, 1.5 m (4.92 ft.) length
- REMOTE CONTROL BOX (SINGLE) 9613
For Start/Stop control, 1.5m (4.92 ft.) cord length
- REMOTE CONTROL BOX (DUAL) 9614
For Start/Stop control, 1.5m (4.92 ft.) cord length

PC Communication


- SAFETY TEST DATA MANAGEMENT SOFTWARE 9267
For PC control application software
- RS-232C CABLE 9637
For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length
- GP-IB CONNECTOR CABLE 9151-02
2 m (6.56 ft.) length

Other

- HIGH VOLTAGE SCANNER 3930
Automatic multipoint testing of high voltages

For Multi-point, High-voltage Automatic Testing and Automation of Insulation and Dielectric Strength Testing

HIGH VOLTAGE SCANNER 3930

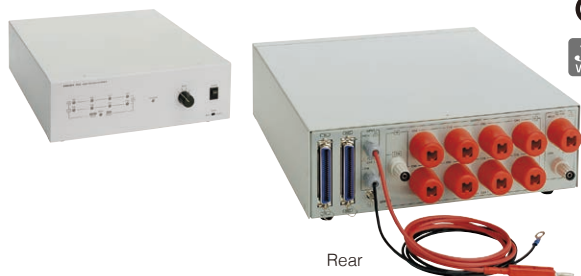

- Output of the input high voltage from a user-selected channel
- 8 ch per unit (single mode), with up to 32 ch (4 connected units)
- Isolated high-voltage I/O, control signal lines, and power supply
- Control using the 3153 program function or with a standard sequencer

Model No. (Order Code) **3930** (For the 3153 and similar products)

Basic Specifications

Operation modes	Multi-mode: Scanning of user-selected points for high 4 ch / low 4 ch Single mode: Common scan of high 8 ch - common
Rated voltage used	5 kV AC / 5 kV DC
Operation indications	Lamps light up when power is supplied and when a specified channel is operating
[Relay area]	
Max. open and closed voltage	5000 V DC, 5000 V AC
Max. open and closed current	1.0 A (open and closed capacity: 50 W)
Contact point indirect contact resistance	500 m Ω or less, with 1 mA AC
Contact point max. capacity	50 W
Time	Operation time: 6 ms or less, Recovery time: 6 ms or less
Power supply	VSCV 24 V DC, $\pm 10\%$ (applied using the control signal input connector), 12 VA max.
Dimensions and mass	316 mm (12.44 in.)W \times 100 mm (3.94 in.)H \times 350 mm (13.78 in.)D, 4.2 kg (148.1 oz.)
Included accessories	Control input connector connection cable \times 1, H.V. Test lead 9615-01 (red) \times 8, H.V. Test lead (black) \times 1, Grounding cable \times 1, Instruction manual \times 1

The 9615-01 is bundled

Options

- H.V. TEST LEAD 9615-01
Red, high voltage side, 1.5 m (4.92 ft.) length

SAFETY TEST DATA MANAGEMENT SOFTWARE 9267



Control insulation, dielectric strength, protective continuity, and leak current testing from a PC

Model No. (Order Code) **9267** CD
9267-01 Downloadable (license card)
9267-03 Downloadable (digital license)

- Control the ST5520*/ST5540 as well as the 3153/3154/3156/3157, 3174, and other instruments from a computer
*Control of the ST5520 is subject to certain limitations.
- Perform automatic insulation and dielectric strength testing of up to 32 points with the High Voltage Scanner 3930

Power Analyzers

Providing the Ultimate Power Analyzer for Use by All Engineers Pursuing Power Conversion Efficiency

POWER ANALYZER PW8001



Basic specifications

(Accuracy guaranteed for 6 months, multiply the 6-month accuracy reading error by 1.5 to obtain the 1-year accuracy.)

Measurement lines	1-phase-2-wire, 1-phase-3-wire, 3-phase-3-wire, 3-phase-4-wire
No. of input units	Max. 8 units (mix and match)
Type of input unit	U7001 2.5 MS/s INPUT UNIT, U7005 15 MS/s INPUT UNIT
Measurement frequency band	U7001: DC, 0.1 Hz to 1 MHz U7005: DC, 0.1 Hz to 5 MHz
Sampling	U7001: 2.5 MHz, 16-bit, U7005: 15 MHz, 18-bit
Data update rate	1 ms, 10 ms, 50 ms, 200 ms
Accuracy for power	± (% of reading + % of range) U7001: (50 Hz/60 Hz) 0.02% + 0.05%, (DC) 0.02% + 0.05%, (50 kHz) 0.4% + 0.1% U7005: (50 Hz/60 Hz) 0.01% + 0.02%, (DC) 0.02% + 0.03%, (50 kHz) 0.15% + 0.05%
Measurement range	Voltage: 6 V/ 15 V/ 30 V/ 60 V/ 150 V/ 300 V/ 600 V/ 1500 V Current: (Probe1) 40 mA to 2 kA, (Probe2) 100 mA to 50 kA (Probe1 : Hioki's high-accuracy current sensor interface supports automatic identification and phase shift. Probe 2: BNC I/F only for U7001)
Measurement parameters	Voltage (U), Current (I), Active power (P), Apparent power (S), Reactive power (Q), Power factor (λ), Phase angle (φ), Voltage frequency (fU), Current frequency (fI), Efficiency (η), Loss (Loss), Voltage ripple factor (Urf), Current ripple factor (Irf), Current integration (Ih), Power integration (WP), Voltage peak (Upk), Current peak (Ipk) - Harmonics measurement : (wideband mode: Max. analysis order 500th, IEC measurement mode) - Waveform recording: recording capacity 5M words × ([voltage/current]) × No. of channels + motor waveforms - Motor analysis (option): voltage, torque, RPM, frequency, slip, motor power power spectrum analysis, IEC harmonics, voltage-fluctuation/flicker measurement
Calculation function	Efficiency-loss calculations, User-defined formula, Delta conversion, Current sensor automatic phase shift
External interface	USB flash drive, LAN, GP-IB, RS-232C, external control, optical link, BNC sync., CAN or CAN FD
Power supply	100 V to 240 V AC, 50 Hz/60 Hz, 230 VA
Dimensions and mass	Approx. 430 mm (16.93 in.) W × 221 mm (8.70 in.) H × 361 mm (14.21 in.) D Approx. 14kg (493.84 oz.)
Included accessories	Power cord ×1, Instruction manual ×1, D-sub 25-pin connector ×1 (PW8001-02, -05, -12, -15 Only)

- World-class measurement accuracy
 - Basic accuracy ±0.03%, DC accuracy ±0.05%, 50 kHz accuracy 0.2%¹
- Accurate frequency distribution of active power with superior noise resistance and Power Spectrum Analysis
 - Sampling performance 18-bit¹; noise resistance (CMRR) 110 dB, 100 kHz¹
- 1 ms data refresh while maintaining maximum accuracy
- Real-time synchronization of two units via optical link
- Maximum number of measurement channels: 16 CH
 - settings and analysis can be performed for each channel²
- Current sensor automatic phase shift function
- Compatible with Gennect Space data integration and analysis software
- Simultaneous analysis of 4 motors (option)
- Integration of measurement data into CAN networks (option)
- Safe evaluation of increasingly high-voltage solar inverters
 - 1500 V DC CAT II / 1000 V DC CAT III³

1: When using the Input Unit U7005

2: BNC synchronization is for data acquisition only

3: When using the Input Unit U7001

Model No. (Order Code)	PW8001-01	(D/A output)
	PW8001-02	(CAN/CAN FD)
	PW8001-03	(Optical link)
	PW8001-04	(D/A output, optical link)
	PW8001-05	(CAN/CAN FD, optical link)
	PW8001-06	(Motor analysis)
	PW8001-11	(Motor analysis, D/A output)
	PW8001-12	(Motor analysis, CAN/CAN FD)
	PW8001-13	(Motor analysis, optical link)
	PW8001-14	(Motor analysis, D/A output, optical link)
	PW8001-15	(Motor analysis, CAN/CAN FD, optical link)
	PW8001-16	(Motor analysis, CAN/CAN FD, optical link)

- Input units must be specified at the time of ordering

- Optional input units, voltage cords, and current sensors are required for measurement.

Input Units

2.5MS/S
INPUT UNIT
U7001

15MS/S
INPUT UNIT
U7005

Direct Current Input

AC/DC CURRENT BOX
PW9100A-3
3 channels, DC to 3.5 MHz,
CMRR 120dB, 50 A AC/DC input,
±0.02% amplitude accuracy, ±0.1°
phase accuracy

AC/DC CURRENT BOX
PW9100A-4
4 channels, DC to 3.5 MHz,
CMRR 120dB, 50 A AC/DC
input, ±0.02% amplitude accuracy,
±0.1° phase accuracy

High-precision, High-voltage Measurement

AC/DC HIGH VOLTAGE DIVIDER VT1005
Divides voltage of up to 5000 V and outputs
Measurement band: DC to 4 MHz (-3 dB)
Measurement accuracy: ±0.08% (DC), ±0.04% (50/60 Hz), ±0.17% (50 kHz)

Voltage Input

VOLTAGE CORD L1025 1500 V DC CAT II, 1 A, 1000 V CAT III, 1 A, banana - banana, alligator clip, 3 m (9.84 ft.) length	VOLTAGE CORD L9438-50 Black/ Red, 3 m (9.84 ft.) length, Alligator clip ×2	VOLTAGE CORD L1000 1000 V specifications, Red/ Yellow/ Blue/ Gray each 1, Black 4, Alligator clip ×8, 3m (9.84 ft.) length	CONNECTION CORD L9257 1000 V CAT III, 10 A, 600 V CAT IV, 10 A, banana-banana (red, black each), alligator clip, 1.2 m (3.94 ft.) length	PATCH CORD L1021-01 Banana branch-banana, Red: 1, Cable length: 0.5 m, for branching from the L9438 series or L1000 series, CAT IV 600 V, CAT III 1000 V	PATCH CORD L1021-02 Banana branch-banana, Black: 1, Cable length: 0.5 m, for branching from the L9438 series or L1000 series, CAT IV 600 V, CAT III 1000 V	GRABBER CLIP L9243 Attaches to the tip of the banana plug cable, Red/Black: 1 each, 185 mm (7.28 in.) length, CAT II 1000 V	CONNECTION CABLE SET L4940 1000 V CAT III, 10 A, 600 V CAT IV, 10 A, banana banana (red, black each), 1.5 m (4.92 ft.) length	ALLIGATOR CLIP SET L4935 1000 V CAT III, 10 A, 600 V CAT IV, 10 A, (red, black each 1)

Connection Options

OPTICAL CONNECTION CABLE L6000 50/125 μm wavelength multimode fiber, 10 m (32.81 ft.) length	LAN CABLE 9642 Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft.) length	RS-232C CABLE 9637 For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length	CONNECTION CABLE 9444 For external control interface, 9 pin - 9 pin, 1.5 m (4.92 ft.) length	GP-IB CONNECTOR CABLE 9151-02 2 m (6.56 ft.) length	D/A OUTPUT CABLE L3000 D-sub 25-pin/BNC (male) 20-channel conversion cable	BNC TERMINAL BOX Z5200 D-sub 25-pin/BNC (female) 20-channel conversion box	CONNECTION CORD 9165 Cord has metallic BNC connectors at both ends, use at metallic terminal, 1.5 m (4.92 ft.) length	CAN CABLE 9713-01 For the MR8904, unprocessed on one end, 1.8 m (5.91 ft.) length	CONNECTION CORD L9217 Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft.) length

Other options

CARRYING CASE C8001 Hard trunk, with casters	RACKMOUNT FITTINGS Z5300 For EIA standard rack	RACKMOUNT FITTINGS Z5301 For JIS standard rack	GENNECT Space SF4300 Measurement data integration software	GENNECT One SF4000 Application for Windows

For the shared current sensors for Power Analyzer series PW8001 and PW4001, see page 68.

Power Analyzers

Portable 4-channel Power Analyzer with $\pm 0.04\%$ Basic Accuracy for Vehicle Power Measurement

POWER ANALYZER PW4001

New



- Portable power analyzer designed for a wide range of measurement scenarios
- Frequency bandwidth: DC, 0.1 Hz to 600 kHz
- Accuracy for power: DC, 50/60 Hz: $\pm 0.03\%$ reading $\pm 0.01\%$ range / 50 kHz: $\pm 0.40\%$ reading $\pm 0.10\%$ range
- Capture transient power changes with high precision
- Reduce setup time in drive range testing
- Operates from -20°C to $+50^{\circ}\text{C}$, ready for harsh environments
- Run on DC power for easy in-vehicle installation (PW4001-04, PW4001-05)
- Use OBD-II CAN bus for safe, real-time vehicle data acquisition
- Compatible with Genect Space data integration and analysis software

Model No. (Order Code)	PW4001-01
	PW4001-02 D/A output
	PW4001-03 Motor analysis
	PW4001-04 External power source
	PW4001-05 D/A output, Motor analysis, External power source

■ Basic specifications (Accuracy guaranteed for 6 months, multiply the 6-month accuracy by 1.5 to obtain the 1-year accuracy.)

Measurement lines	Single-phase 2-wire, single-phase 3-wire, three-phase 3-wire, three-phase 4-wire
Number of channels	4 (4 voltage, 4 current, isolated between each channel)
Measurement frequency bandwidth	DC, 0.1 Hz to 600 kHz
Sampling	16 bit, 2.5 MHz
Data update rate	1 ms, 10 ms, 50 ms, 200 ms
Accuracy for power	DC, 50/60 Hz: $\pm 0.03\%$ reading $\pm 0.01\%$ range 50 kHz: $\pm 0.40\%$ reading $\pm 0.10\%$ range
Voltage measurement range	6 V, 15 V, 30 V, 60 V, 150 V, 300 V, 600 V, 1500 V
Current measurement range	40 mA to 2000 A (depends on current sensor)
Measurement parameters	Voltage (U), current (I), active power (P), apparent power (S), reactive power (Q), power factor (λ), phase angle (ϕ), voltage frequency (fU), current frequency (fI), efficiency (η), loss (L.oss), voltage ripple factor (Urf), current ripple factor (Irf), current integration (Ih), power integration (WP), voltage peak (Upk), current peak (Ipk)
Harmonic measurement	Wideband mode: max. analysis order of 500th
Waveform recording	Recording capacity: up to 5 mega-words for any waveform (current, voltage, motor)
Motor analysis (option)	Voltage, torque, RPM, frequency, slip, motor-power power spectrum analysis
Calculation function	Efficiency-loss calculations, user-defined formula, delta conversion, current sensor automatic phase shift compensation
External interface	USB flash drive, LAN, USB (function), external control, BNC sync., CAN or CAN FD
Power supplies	100 V to 240 V AC, 10.5 V to 28 V DC
Dimensions and weight	361 (W) \times 176 (H) \times 135 (D) mm (14.21 \times 6.93 \times 5.31 in.), 4.6 kg (162.3 oz.)
Included accessories	Startup guide \times 1, power cord \times 1, USB cable \times 1, D-sub connector \times 1 (PW4001-02, PW4001-05), DC power supply connector (PW4001-04, -05)

* To connect to the HIOKI ME15W (12 pin) terminal

Direct Current Input

AC/DC CURRENT BOX PW9100A-3
3 channels, DC to 3.5 MHz, CMRR 120dB, 50 A AC/DC input, $\pm 0.02\%$ amplitude accuracy, $\pm 0.1^{\circ}$ phase accuracy

AC/DC CURRENT BOX PW9100A-4
4 channels, DC to 3.5 MHz, CMRR 120dB, 50 A AC/DC input, $\pm 0.02\%$ amplitude accuracy, $\pm 0.1^{\circ}$ phase accuracy

High-precision, High-voltage Measurement

AC/DC HIGH VOLTAGE DIVIDER VT1005
Safely measure high voltages up to 5000 V
Detect efficiency improvement effects on the order of 0.1%

Voltage Input

VOLTAGE CORD L1000
Red/ Yellow/ Blue/ Gray each 1, Black 4, 3m (9.84 ft.) length, Alligator clip \times 8

PATCH CORD L1021-01
Banana branch-banana, Red: 1, 0.5 m (1.64 ft.) length, for branching from the L9438s or L1000s, CAT IV 600 V, CAT III 1000 V

PATCH CORD L1021-02
Banana branch-banana, Black: 1, 0.5 m (1.64 ft.) length, for branching from the L9438s or L1000s, CAT IV 600 V, CAT III 1000 V

VOLTAGE CORD L1025
1500 V DC CAT II, 1 A, 1000 V CAT III, 1 A, banana - banana (red, black each), alligator clip, approx. 3 m (9.84 ft.) length

VOLTAGE CORD L1050-03
3 m (9.84 ft.) length

GRABBER CLIP L9243
Attaches to the tip of the banana plug cable, Red/ Black: 1 each, 185 mm (7.28 in.) length, CAT II 1000 V

VOLTAGE CORD L9438-50
Black/ Red, 3 m (9.84 ft.) length, Alligator clip \times 2

Connection Options

EXTENSION CABLE CT9902
5 m (16.41 ft.) length, ME15W (12 pin) - ME15W (12 pin) connector

D/A OUTPUT CABLE L3000
D-sub 25-pin/BNC (male) 20-channel conversion cable

ALLICATOR CLIP SET L4935
Attaches to the tip of the L4930/4940, CAT IV 600 V, CAT III 1000 V

CONNECTION CABLE SET L4940
Banana plug - banana plug, 1.5 m (4.92 ft.) length, red/black each

CONNECTION CORD L9217
Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft.) length

CONNECTION CORD L9217-01
Cord has insulated BNC connectors at both ends, 3.0 m (9.84 ft.) length

CONNECTION CORD L9217-02
Cord has insulated BNC connectors at both ends, 10 m (32.81 ft.) length

CONNECTION CORD L9257
1.2 m (3.94 ft.) length

BNC TERMINAL BOX Z5200
D-sub 25-pin/BNC (female) 20-channel conversion box

CONNECTION CORD 9165
Cord has metallic BNC connectors at both ends, use at metallic terminal, 1.5 m (4.92 ft.) length

CAN CABLE 9713-01
Unprocessed on one end, 1.8 m (5.9 ft.)

Carrying Case

CARRYING CASE C4001
Hard trunk type

Other Options

RACKMOUNT FITTINGS Z5302
For EIA standard rack

RACKMOUNT FITTINGS Z5303
For JIS standard rack

PC Software

Available for free download from Hioki website.

GENNECT Space SF4300
Measurement data integration software

GENNECT One SF4000
Application for Windows

For the shared current sensors for Power Analyzer series PW8001 and PW4001, see page 68.

Power Analyzers

Direct Current Measurement Element that Delivers a Wide Bandwidth and Superior Accuracy

AC/DC CURRENT BOX PW9100A



Basic specifications (Accuracy guaranteed for 1 year)

Measurement line type	Isolated input, DCCT input
Rated primary current	50 A AC/DC
Number of input channels	PW9100A-3: 3 channels, PW9100A-4: 4 channels
Maximum input current	60 A, within derating. However, up to ± 200 A peak is allowable if within 20 ms (design value)
Amplitude and Phase accuracy	DC ($\pm 0.02\%$ rdg $\pm 0.007\%$ f.s.) 45 Hz < f \leq 65 Hz ($\pm 0.02\%$ rdg $\pm 0.005\%$ f.s., Phase: ± 0.1 deg.) Accuracy is defined to 1 MHz
Output voltage	2 V/50 A
Measurement terminals	Terminal block (with safety cover), M6 screws
Input resistance	1.5 m Ω or less (50 Hz/60 Hz)
Input capacitance	Between measurement terminals and case (secondary side), 40 pF or less, defined at 100 kHz
Operating temperature and humidity	Temperature: 0°C to 40°C (32°F to 104°F), Humidity: 80% RH or less (no condensation)
Power supply	Power supply from PW8001, PW4001
Dimensions and mass	430 mm (16.93 in.) W \times 88 mm (3.46 in.) H \times 260 mm (10.24 in.) D, Cable length: 0.8 m (2.62 ft.) PW9100A-3: 3.7 kg (130.5 oz.), PW9100A-4: 4.3 kg (151.7 oz.)
Included accessory	Instruction Manual \times 1

- Combined accuracy with Hioki power analyzer PW8001 and PW4001 is specified (DC, 45 Hz \leq f \leq 65 Hz). For details of combined accuracy, refer to the instruction manual.
- World-leading measurement bands and accuracy
- Wide-band DC to 3.5MHz, 50A AC/DC rated input
- $\pm 0.055\%$ power accuracy in combination with PW8001 (using U7005, 45 Hz < f \leq 65 Hz)
- 120dB CMRR (100 kHz)
- Full-rack size suitable for test/evaluation benches
- Current measurement option for power analyzers

Model No. (Order Code) **PW9100A-3** (For the PW8001/PW4001, 3 ch)
PW9100A-4 (For the PW8001/PW4001, 4 ch)

Only 1 unit of CT9902 can be used at any one time.

Option		EXTENSION CABLE CT9902 5 m (16.41 ft.) length, ME15W (12 pin) - ME15W (12 pin) connector	Rack mount hardware Made-to-order, for EIA/JIS Contact your local Hioki distributor for more information
--------	--	--	---

Power Analyzers

Accurately Measure High Voltages up to 5000V, Ideal for Measuring the Efficiency of High-voltage Inverters

AC/DC HIGH VOLTAGE DIVIDER VT1005



Basic specifications (Accuracy guaranteed for 1 year)

Maximum rated voltage	5000 V rms, ± 7100 V peak (within the frequency derating range)
Maximum rated voltage (line-to-ground)	No measurement category: 5000 V AC/DC ^{(*)1} Measurement category II: 2000 V AC/DC ^{(*)4} Measurement category III: 1500 V AC/DC ^{(*)5}
Measurement accuracy	$\pm 0.08\%$ (DC), $\pm 0.04\%$ (50/60 Hz), $\pm 0.17\%$ (50 kHz)
Frequency flatness	Band where amplitude falls within $\pm 0.1\%$ range: 200 kHz (typical) Band where phase falls within $\pm 0.1^\circ$ range: 500 kHz (typical) ^{(*)2}
Measurement bandwidth	DC to 4 MHz (amplitude and phase accuracy specified up to 1 MHz)
Voltage dividing ratio	1000 : 1
Common-mode voltage rejection ratio (CMRR)	50 Hz/60 Hz: 90 dB (typical) 100 kHz: 80 dB (typical)
Measurement method	Differential input
Operating temperature and humidity range	-10°C to 50°C (14°F to 122°F), 80% RH or less (non-condensing)
Power supply	100 V to 240 V AC (50/60 Hz)
Dimensions and mass	Approx. 195.0 mm (7.68 in.) W \times 83.2 mm (3.28 in.) H \times 346.0 mm (13.62 in.) D mm, approx. 2.2 kg (77.6 oz.)
Included accessory	L1050-01 Voltage Cord (1.6 m/ 5.25 ft.) \times 1, L9217 Connection Cord (insulated BNC, 1.6 m/ 5.25 ft.) \times 1, 9704 Conversion Adapter (insulated-female BNC-to-banana plug) \times 1, Power cord \times 1

- Divides high voltage by 1000:1 and outputs
Max. Input 5000 V ^{(*)1}, 2000 V CAT II, 1500 V CAT III
- Measure the efficiency of high-efficiency inverters with a high degree of precision
Measurement accuracy: $\pm 0.08\%$ (DC), $\pm 0.04\%$ (50/60 Hz), $\pm 0.17\%$ (50 kHz)
Frequency flatness: $\pm 0.1\%$ amplitude band 200 kHz typical,
 $\pm 0.1^\circ$ phase band 500 kHz typical ^{(*)2}

Measurement band: DC to 4 MHz (-3 dB)
Noise resistance: CMRR 80 dB typical (100 kHz), differential input method

^{(*)1}: ± 7100 V peak, no measurement category, anticipated transient overvoltage of 0 V
^{(*)2}: After phase correction by the power analyzer

^{(*)2}: After phase correction by the power analyzer
^{(*)3}: ± 7100 V peak, anticipated transient overvoltage 0 V
^{(*)4}: Anticipated transient overvoltage 12000 V
^{(*)5}: Anticipated transient overvoltage 10000 V

Model No. (Order Code) **VT1005**

Options						
	VOLTAGE CORD L1050-01 1.6 m (5.25 ft.) length	VOLTAGE CORD L1050-03 3.0 m (9.84 ft.) length	CONNECTION CORD L9217 Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft.) length	CONNECTION CORD L9217-01 Cord has insulated BNC connectors at both ends, 3.0 m (9.84 ft.) length	CONNECTION CORD L9217-02 Cord has insulated BNC connectors at both ends, 10 m (32.81 ft.) length	CONVERSION ADAPTER 9704 Receiving side BNC (female), output banana (male)

Shared optional current sensors for PW8001 and PW4001

Up to 20 A (High precision)



AC/DC CURRENT PROBE CT6830, CT6831
 CT6830: DC to 100 kHz, 2 A input, $\pm 0.3\%$ amplitude accuracy, $\pm 0.1^\circ$ phase accuracy, ϕ 5 mm (0.20 in.), ME15W terminal
 CT6831: DC to 100 kHz, 20 A input, $\pm 0.3\%$ amplitude accuracy, $\pm 0.1^\circ$ phase accuracy, ϕ 5 mm (0.20 in.), ME15W terminal



AC/DC CURRENT PROBE CT6841A
 DC to 1 MHz, 20 A input, $\pm 0.2\%$ amplitude accuracy, $\pm 0.1^\circ$ phase accuracy, ME15W terminal

Up to 50 A (High precision)



AC/DC CURRENT SENSOR CT6872
 High accuracy pass-through, DC to 10 MHz, 50 A input, $\pm 0.03\%$ amplitude accuracy, $\pm 0.05^\circ$ phase accuracy, ME15W terminal



AC/DC CURRENT SENSOR CT6862-05
 High-precision pull-through type, DC to 1 MHz, 50 A input, $\pm 0.05\%$ amplitude accuracy, $\pm 0.2^\circ$ phase accuracy, ME15W terminal

Up to 200 A (High precision)



AC/DC CURRENT SENSOR CT6873
 High accuracy pass-through, DC to 10 MHz, 200 A input, $\pm 0.03\%$ amplitude accuracy, $\pm 0.05^\circ$ Phase accuracy, ME15W terminal



AC/DC CURRENT SENSOR CT6863-05
 High-precision pull-through type, DC to 500 kHz, 200 A input, $\pm 0.05\%$ amplitude accuracy, $\pm 0.2^\circ$ phase accuracy, ME15W terminal



AC/DC CURRENT PROBE CT6843A
 DC to 500 kHz, 200 A input, $\pm 0.2\%$ amplitude accuracy, $\pm 0.1^\circ$ phase accuracy, ME15W terminal



AC/DC CURRENT PROBE CT6834
 DC to 50 kHz, 200 A input, $\pm 0.07\% + 0.007\%$ amplitude accuracy, $\pm 0.1^\circ$ phase accuracy, ME15W terminal



CLAMP ON SENSOR 9272-05
 1 Hz to 100 kHz, 20/200 A switching input, $\pm 0.3\%$ amplitude accuracy, $\pm 0.2^\circ$ phase accuracy, ME15W terminal

Up to 500 A (High precision)



AC/DC CURRENT SENSOR CT6904A
 High-precision pull-through type, DC to 4 MHz, 500 A input, $\pm 0.02\%$ amplitude accuracy, $\pm 0.08^\circ$ phase accuracy, ME15W terminal



AC/DC CURRENT SENSOR CT6875A
 High-precision pull-through type, DC to 2 MHz, 500 A input, $\pm 0.04\%$ amplitude accuracy, $\pm 0.08^\circ$ phase accuracy, ME15W terminal



AC/DC CURRENT PROBE CT6844A
 DC to 200 kHz, 500 A input, $\pm 0.2\%$ amplitude accuracy, $\pm 0.1^\circ$ phase accuracy, ME15W terminal



AC/DC CURRENT PROBE CT6845A
 DC to 100 kHz, 500 A input, $\pm 0.2\%$ amplitude accuracy, $\pm 0.1^\circ$ phase accuracy, ME15W terminal



AC/DC CURRENT PROBE CT6834
 DC to 50 kHz, 500 A input, $\pm 0.07\% + 0.007\%$ amplitude accuracy, $\pm 0.1^\circ$ phase accuracy, ME15W terminal

Up to 1000 A (High precision)



AC/DC CURRENT SENSOR CT6876A
 High-precision pull-through type, DC to 1.5 MHz, 1000 A input, $\pm 0.04\%$ amplitude accuracy, $\pm 0.08^\circ$ phase accuracy, ME15W terminal



AC/DC CURRENT PROBE CT6846A
 DC to 100 kHz, 1000 A input, $\pm 0.2\%$ amplitude accuracy, $\pm 0.1^\circ$ phase accuracy, ME15W terminal

Up to 2000 A (High precision)



AC/DC CURRENT SENSOR CT6877A
 High-precision pull-through type, DC to 1 MHz bandwidth, 2000 A input, $\pm 0.04\%$ amplitude accuracy, $\pm 0.08^\circ$ phase accuracy, ME15W terminal



AC/DC CURRENT SENSOR CT6847A
 DC to 70 kHz, 2000 A DC / 1400 A AC input, $\pm 0.15\%$ amplitude accuracy, $\pm 0.1^\circ$ phase accuracy, ME15W terminal

Up to 8000 A (High precision)

Aggregate and measure large currents in multi-cable circuits

Use multiple AC/DC Current Sensor CT6877A units with the Sensor Unit CT9557 to measure currents of up to 8000 A in multi-cable circuits. Requires 1 connection cable to connect the PW8001/PW4001 to the CT9557.



SENSOR UNIT CT9557
 Power supply for current sensors (4ch, with Waveform/Total Waveform/Total RMS output)



CONNECTION CABLE CT9904
 ME15W (12 pin) terminal to ME15W (12 pin) terminal, 1 m (3.28 ft.) length (for connecting CT9557 total output to PW8001 only)



AC/DC CURRENT SENSOR CT6877A
 High-precision pull-through type, DC to 1 MHz bandwidth, 2000 A input, $\pm 0.04\%$ amplitude accuracy, $\pm 0.08^\circ$ phase accuracy, ME15W terminal ($\pm 0.1\%$ amplitude accuracy, $\pm 0.18^\circ$ phase accuracy in case of the addition wave output)



CONVERSION CABLE CT9900
 Convert PL23 (10-pin) terminal to ME15W (12-pin) terminal
 *When using a PL23 terminal sensor, Conversion Cable CT9900 must be used to connect to ME15W terminal.



CONVERSION CABLE CT9920
 Convert PL14 terminal to ME15W terminal
 Required to connect the PW4001 or other instrument's ME15W terminal to a current sensor with a PL14 output connector.

Accurately Measure Devices Up to 1000 V 65 A AC/DC with Direct Input

POWER METER PW3337



- Compatible with the SPECpower® benchmark for server power consumption
SPECpower® is a registered trademark of Standard Performance Evaluation Corporation
- Measure DC, and single-phase 2-wire to 3-phase 4-wire with 3-channel input
- For development and production of motors, inverters, power conditioners, power supplies, and other devices
- High-precision basic accuracy of $\pm 0.1\%$ (*)
(*) For complete details, please refer to the specifications
- Wide frequency bandwidth of 0.1 Hz to 100 kHz or DC
- High-current measurement up to 65 A of direct input
- Harmonic measurement up to the 50th order according to IEC 61000-4-7
- High-accuracy measurement, even with a low power factor for no-load testing of transformers and motors
- Built-in external sensor input terminals to measure up to 5000 A AC
- Synchronize up to 8 units for multi-unit measurement
- Create a 6-channel power meter by synchronizing two PW3337 units and using the free PC application

Model No. (Order Code)	PW3337	(3ch)
	PW3337-01	(3ch, built-in GP-IB)
	PW3337-02	(3ch, built-in D/A output)
	PW3337-03	(3ch, built-in GP-IB, D/A output)

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement lines	Single-phase 2-wires, single-phase 3-wires, 3-phase 3-wires, 3-phase 4-wires (voltage / current measurement range set for each wiring mode)
Measurement items	Voltage, Current, Active power, Apparent power, Reactive power, Power factor, Phase angle, Frequency, Efficiency, Current integration, Active power integration, Integrated time, Voltage waveform peak value, Current waveform peak value, Voltage crest factor, Current crest factor, Time average current, Time average active power, Voltage ripple factor, Current ripple factor
Harmonic parameters	Synchronization frequency range: 10 Hz to 640 Hz, Analysis order up to 50th Harmonic voltage rms value, harmonic current rms value, harmonic active power, Total harmonic voltage distortion, total harmonic current distortion, voltage fundamental waveform, current fundamental waveform, active power fundamental waveform, apparent power fundamental waveform, reactive power fundamental waveform, power factor fundamental waveform (displacement power factor), voltage current phase difference fundamental waveform, interchannel voltage fundamental wave phase difference, interchannel current fundamental wave phase difference, harmonic voltage content%, harmonic current content%, harmonic active power content% (The following parameters can be downloaded as data during PC communication but not displayed: harmonic voltage phase angle, harmonic current phase angle, harmonic voltage current phase difference)
Measurement range(*)	[Voltage] 0.15 V to 1000 V AC/DC, [Current] Direct input: 2 mA to 65 A AC/DC For AC/DC measurement using the CT6877A as an example: 4 A to 2000 A AC/DC (typical accuracy $\pm 0.348\%$) For AC measurement using the CT9667-01 as an example: 10 A to 5000 A AC (typical accuracy $\pm 2.6\%$)
Integration measurement (Integration time up to 10,000 hours)	[Current] No. of displayed digits: 6 digits (from 0.00000 mAh, Polarity-independent integration and Sum value) [Active power] No. of displayed digits: 6 digits (from 0.00000 mWh, Polarity-independent integration and Sum value)
Input resistance (50/60 Hz)	[Voltage] 2 M Ω , [Current] 1 m Ω or less (direct input)
Basic accuracy (Active power)	$\pm 0.1\%$ rdg $\pm 0.1\%$ f.s. (DC) $\pm 0.1\%$ rdg $\pm 0.05\%$ f.s. (45 Hz to 66 Hz, at Input < 50% f.s.) $\pm 0.15\%$ rdg (45 Hz to 66 Hz, at 50% f.s. \leq Input)
Display refresh rate	5 times/s to 20 seconds (depends on average times settings)
Frequency characteristics	DC, 0.1 Hz to 100 kHz
D/A output (-02/-03 model only)	16 channels (selectable from following items): Level output DC ± 2 V, Waveform output 1 V f.s. Level output, instantaneous waveform output (voltage, current, active power), Level output (apparent power, reactive power, power factor, or other), High-speed active power level output
Functions	[Rectification method] AC+DC, AC+DC Umn, AC, DC, FND, Auto-range, Average, VT or CT ratio settings, Synchronized control, MAX/MIN, or other functions
Interfaces	RS-232C / LAN standard, (-01/-03 model also includes GP-IB)
Power supply	100 to 240 V AC, 50/60 Hz, 40 VA max.
Dimensions and mass	305 mm (12.01 in.)W \times 132 mm (5.20 in.)H \times 256 mm (10.08 in.)D, 5.6 kg (197.5 oz.)
Included accessories	Instruction manual $\times 1$, Measurement guide $\times 1$, Power cord $\times 1$

(*) MIN./MAX. current values and accuracy will vary depending on the current sensor used.

Accurately Measure Devices Up to 1000 V 65 A AC/DC with Direct Input

POWER METER PW3336



- Compatible with the SPECpower® benchmark for server power consumption
SPECpower® is a registered trademark of Standard Performance Evaluation Corporation
- Measure DC and single-phase 2-wire to 3-phase 3-wire with 2-channel input
- For development and production of motors, inverters, power conditioners, power supplies, and other devices
- High-precision basic accuracy of $\pm 0.1\%$ (*)
(*) For complete details, please refer to the specifications
- Wide frequency bandwidth of 0.1 Hz to 100 kHz or DC
- High-current measurement up to 65 A of direct input
- Harmonic measurement up to the 50th order according to IEC 61000-4-7
- High-accuracy measurement, even with a low power factor for no-load testing of transformers and motors
- Built-in external sensor input terminals to measure up to 5000 A AC
- Synchronize up to 8 units for multi-unit measurement

Model No. (Order Code)	PW3336	(2ch)
	PW3336-01	(2ch, built-in GP-IB)
	PW3336-02	(2ch, built-in D/A output)
	PW3336-03	(2ch, built-in GP-IB, D/A output)

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement lines	Single-phase 2-wires, single-phase 3-wires, 3-phase 3-wires, (voltage / current measurement range set for each wiring mode)
Measurement items	Voltage, Current, Active power, Apparent power, Reactive power, Power factor, Phase angle, Frequency, Efficiency, Current integration, Active power integration, Integrated time, Voltage waveform peak value, Current waveform peak value, Voltage crest factor, Current crest factor, Time average current, Time average active power, Voltage ripple factor, Current ripple factor
Harmonic parameters	Synchronization frequency range: 10 Hz to 640 Hz, Analysis order up to 50th Harmonic voltage RMS value, Harmonic current RMS value, Harmonic active power, Total harmonic voltage distortion, Total harmonic current distortion, Voltage fundamental waveform, Current fundamental waveform, Active power fundamental waveform, Apparent power fundamental waveform, Reactive power fundamental waveform, Power factor fundamental waveform (displacement power factor), Voltage current phase difference fundamental waveform, Interchannel voltage fundamental wave phase difference, Interchannel current fundamental wave phase difference, Harmonic voltage content%, Harmonic current content%, Harmonic active power content% (The following parameters can be downloaded as data during PC communication but not displayed: Harmonic voltage phase angle, Harmonic current phase angle, Harmonic voltage current phase difference)
Measurement range(*)	[Voltage] 0.15 V to 1000 V AC/DC, [Current] Direct input: 2 mA to 65 A AC/DC For AC/DC measurement using the CT6877A as an example: 4 A to 2000 A AC/DC (typical accuracy $\pm 0.348\%$) For AC measurement using the CT9667-01 as an example: 10 A to 5000 A AC (typical accuracy $\pm 2.6\%$)
Integration measurement (Integration time up to 10,000 hours)	[Current] No. of displayed digits: 6 digits (from 0.00000 mAh, Polarity-independent integration and Sum value) [Active power] No. of displayed digits: 6 digits (from 0.00000 mWh, Polarity-independent integration and Sum value)
Input resistance (50/60 Hz)	[Voltage] 2 M Ω , [Current] 1 m Ω or less (direct input)
Basic accuracy (Active power)	$\pm 0.1\%$ rdg $\pm 0.1\%$ f.s. (DC) $\pm 0.1\%$ rdg $\pm 0.05\%$ f.s. (45 Hz to 66 Hz, at Input < 50% f.s.) $\pm 0.15\%$ rdg (45 Hz to 66 Hz, at 50% f.s. \leq Input)
Display refresh rate	5 times/s to 20 seconds (depend on average times settings)
Frequency characteristics	DC, 0.1 Hz to 100 kHz
D/A output (-02/-03 model only)	16 channels (selectable from following items): Level output DC ± 2 V, Waveform output 1 V f.s. Level output, instantaneous waveform output (voltage, current, active power), Level output (apparent power, reactive power, power factor, or other), High-speed active power level output
Functions	[Rectification method] AC+DC, AC+DC Umn, AC, DC, FND, Auto-range, Average, VT or CT ratio settings, Synchronized control, MAX/MIN, or other functions
Interfaces	RS-232C / LAN standard, (-01/-03 model also includes GP-IB)
Power supply	100 to 240 V AC, 50/60 Hz, 40 VA max.
Dimensions and mass	305 mm (12.01 in.)W \times 132 mm (5.20 in.)H \times 256 mm (10.08 in.)D, 5.2 kg (183.4 oz.)
Included accessories	Instruction manual $\times 1$, Measurement guide $\times 1$, Power cord $\times 1$

(*) MIN./MAX. current values and accuracy will vary depending on the current sensor used.

The shared options for the Power Meter PW3337, PW3336, and PW3335 series are listed on page 70.

Measure AC/DC Standby Power Up to Large Power Loads

POWER METER PW3335



- Compatible with the SPECpower® benchmark for server power consumption
SPECpower® is a registered trademark of Standard Performance Evaluation Corporation
- High-precision ±0.1% basic accuracy (For complete details, please refer to the specifications)
- Wide 1mA to 20A measurement range, max. continuous input of 30 A
- Wide frequency bandwidth of 0.1 Hz to 100 kHz or DC
- Measure harmonic and standby power consumption according to IEC62301
- Achieve superior accuracy even with a low power factor for no-load testing of transformers and motors
- Synchronized control using up to 8 instruments
- Built-in external sensor input terminals to measure up to 5000 A AC (PW3335-03, PW3335-04 only)

Model No. (Order Code)	PW3335	(Built-in LAN, RS-232C)
	PW3335-01	(Built-in LAN, GP-IB)
	PW3335-02	(Built-in LAN, RS-232C, D/A output)
	PW3335-03	(Built-in LAN, RS-232C, external sensor terminal)
	PW3335-04	(Built-in LAN, RS-232C, GP-IB, D/A output, external sensor terminal)

Basic specifications (Accuracy guaranteed for 1 year)

Measurement lines	Single-phase/ two-wires
Measurement items	Voltage, current, active power, apparent power, reactive power, power factor, phase angle, frequency, maximum current ratio, current integration, active power integration, integration time, voltage waveform peak value, current waveform peak value, voltage crest factor, current crest factor, time average current, time average active power, voltage ripple rate, current ripple rate
Harmonic parameters	Synchronization frequency range : 10 Hz to 640 Hz Maximum analysis order : 50th Harmonic voltage RMS value, harmonic current RMS value, harmonic active power, total harmonic voltage distortion, total harmonic current distortion, fundamental wave voltage, fundamental wave current, fundamental wave active power, fundamental wave apparent power, fundamental wave reactive power, fundamental wave power factor (displacement power factor), fundamental wave voltage current phase difference, harmonic voltage content percentage, harmonic current content percentage, harmonic active power content percentage (The following parameters can be downloaded as data with only PC communications : Harmonic voltage phase angle, harmonic current phase angle, harmonic voltage current phase difference)
Measurement ranges	[Voltage] AC/DC 6 V to 1000 V, 8 ranges [Current] AC/DC 1 mA to 20 A, 14 ranges [Power] 6.0000 mW to 20.000 kW (Depends on combination of voltage and current range) Effect of power factor : ±0.1% f.s. or less (45 to 66 Hz, at power factor = 0)
Integration measurement (Integration time up to 10,000 hours)	Switchable between fixed-range integration and auto-range integration. [Current] No. of displayed digits: 6 digits (from 0.00000 mAh, polarity-independent integration and sum value) [Active power] No. of displayed digits: 6 digits (from 0.00000 mWh, polarity-independent integration and sum value)
Input resistance (50/60 Hz)	[Voltage input terminal] 2 MΩ [Current input terminal] 520 mΩ or less (at 1 mA to 100 mA range), 15 mΩ or less (at 200 mA to 20 A range)
Basic accuracy (Active power)	±0.1% rdg ±0.1% f.s. (DC) ±0.1% rdg ±0.05% f.s. (45 Hz to 66 Hz, at input < 50% f.s.) ±0.15% rdg (45 Hz to 66 Hz, at 50% f.s. ≤ input)
Display refresh rate	5 times/s to 20 seconds (depend on average times settings)
Frequency characteristics	DC, 0.1 Hz to 100 kHz
D/A output (-02/-04 models only)	7 channels (selectable from the following items): level output DC ±2 V f.s. or 5 V f.s., waveform output 1 V f.s., level output, instantaneous waveform output (voltage, current, active power), level output (apparent power, reactive power, power factor, or other), high-speed level output (voltage, current, active power)
Functions	[Rectification method] AC+DC, AC+DC Umm, AC, DC, FND, Auto-range, Average, VT or CT ratio settings, Synchronized control, MAX/MIN, and more
Interfaces	LAN (all models), RS-232C (except -01 model, for communication, GP-IB -01, -04 models only)
Power supply	100 V to 240 V AC, 50/60 Hz, 30 VA max.
Dimensions and mass	210 mm (8.27 in.)W × 100 mm (3.94 in.)H × 245 mm (9.65 in.)D, 3 kg (105.8 oz.)
Included accessories	Instruction manual ×1, power cord ×1, voltage and current input terminal safety cover ×2, safety cover installation screws (M3 × 6 mm) ×4

Shared options for the Power Meter PW3337, PW3336, and PW3335 series

(*PW3335 is available only for models with external current sensor input terminals, current sensor can be used)

Current sensors are compatible only with versions of Model PW3335 that include the external current sensor terminal. Can be connected to the current sensor input terminals (1 sensor necessary for single-phase measurement, and 2 or 3 sensors required for 3-phase measurements)

	CLAMP ON SENSOR 9660 100A AC rated current, φ 15 mm (0.59 in.) core dia., 3 m (9.84 ft.) length		CLAMP ON SENSOR 9661 500A AC rated current, φ 46 mm (1.81 in.) core dia., 3 m (9.84 ft.) length		FLEXIBLE CLAMP ON SENSOR CT9667-01/-02/-03 5000/500 A AC rated current, φ 100 mm (3.94 in.) to 254 mm (10.0 in.) core dia., Cable length: Between sensor - box 2 m (6.56 ft.), Output cable 1 m (3.28 ft.)		CLAMP ON SENSOR 9669 1000A AC rated current, φ 55 mm (2.17 in.) core dia., 3 m (9.84 ft.) length
--	---	--	---	--	--	--	--

*Current sensors are compatible only with versions of Model PW3335 that include the external current sensor terminal.
*To use, requires Sensor Unit CT9555 and Connection Cord L9217.
*1 sensor necessary for single-phase measurement, 2 or 3 sensors required for 3-phase measurements. The same number of power supply and connection cord as the sensor is necessary.

High-Precision Current Sensors	Up to 50 A (High precision)	AC/DC CURRENT SENSOR CT6872 High accuracy pass-through, DC to 10 MHz, 50 A input, ±0.03% amplitude accuracy, ±0.05° phase accuracy, ME15W terminal	AC/DC CURRENT SENSOR CT6862-05 High-precision pull-through type, DC to 1 MHz, 50 A input, ±0.05% amplitude accuracy, ±0.2° phase accuracy, ME15W terminal	AC/DC CURRENT PROBE CT6841A DC to 1 MHz, 20 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal
	Up to 200 A (High precision)	AC/DC CURRENT SENSOR CT6873 High accuracy pass-through, DC to 10 MHz, 200 A input, ±0.03% amplitude accuracy, ±0.05° phase accuracy, ME15W terminal	AC/DC CURRENT SENSOR CT6863-05 High-precision pull-through type, DC to 500 kHz, 200 A input, ±0.05% amplitude accuracy, ±0.2° phase accuracy, ME15W terminal	AC/DC CURRENT PROBE CT6843A DC to 500 kHz, 200 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal
	Up to 500 A (High precision)	AC/DC CURRENT SENSOR CT6904A High-precision pull-through type, DC to 4 MHz, 500 A input, ±0.02% amplitude accuracy, ±0.08° phase accuracy, ME15W terminal	AC/DC CURRENT SENSOR CT6875A High-precision pull-through type, DC to 2 MHz, 500 A input, ±0.04% amplitude accuracy, ±0.08° phase accuracy, ME15W terminal	AC/DC CURRENT PROBE CT6844A DC to 200 kHz, 500 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal
	Up to 1000 A (High precision)	AC/DC CURRENT SENSOR CT6876A High-precision pull-through type, DC to 1.5 MHz, 1000 A input, ±0.04% amplitude accuracy, ±0.08° phase accuracy, ME15W terminal	AC/DC CURRENT PROBE CT6845A DC to 100 kHz, 500 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal	
	Up to 2000 A (High precision)	AC/DC CURRENT SENSOR CT6877A High-precision pull-through type, DC to 1 MHz bandwidth, 2000 A input, ±0.04% amplitude accuracy, ±0.08° phase accuracy, ME15W terminal		
	Power supply for sensors	SENSOR UNIT CT9555 1ch, with waveform output	CONNECTION CORD L9217 Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft.) length	
	PL23 (10 pin) - ME15W (12 pin) conversion	CONVERSION CABLE CT9900 Convert PL23 (10-pin) terminal to ME15W (12-pin) terminal		
	Discontinuation scheduled			

PC Communication	LAN CABLE 9642 Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft.) length	RS-232C CABLE 9637 For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length
	GP-IB CONNECTOR CABLE 9151-02 2m (6.56 ft.) length	

Other Options	Synchronize Multiple Units
	CONNECTION CORD 9165 Cord has metallic BNC connectors at both ends, use at metallic terminal, 1.5 m (4.92 ft.) length

Clamp-on Power Meters

Quickly Check Current, Voltage, Power, and Power Factor

AC CLAMP POWER METER CM3286-50



- Display four parameters simultaneously
- A handheld power meter that measures from 5 W of power and 60 mA of current
- Measure power ranging from 5 W at a low current of 60 mA to 360 kW
- In addition to current, voltage, and power, measure simple integral power consumption and phase sequence
- Features and functions deliver fast and efficient testing
- Easily transfer measurement data to your smartphone or tablet by using our free app Gennect Cross or to an Excel® file (Wireless Adapter Z3210 is necessary)
- Harmonic analysis from 1st to 30th order with Gennect Cross (Wireless Adapter Z3210 is necessary)

CE
CAT IV 600 V
CAT III 1000 V

True RMS

3 Year Warranty

Bluetooth
When Z3210 is installed

Model No. (Order Code) **CM3286-50** (Wireless Adapter Z3210 not included)
CM3286-90 (Bundled with the Wireless Adapter Z3210)

Basic specifications (Accuracy guaranteed for 1 year)

Measurement line	Single-phase, Three-phase (balanced with no distortion)
Measurement items	Voltage, Current, Voltage/ current peak, Active/ reactive/ apparent power, Power factor, Phase angle *1, Frequency, Simple Active Energy Consumption (Single-phase) [With Z3210 installed (*2)] Voltage/ current harmonics
AC voltage range	[Measurement range] 80.0 V to 600.0 V, Single range, Basic accuracy 45 - 66 Hz: $\pm 0.7\%$ rdg ± 3 dgt (Frequency characteristics: 45 - 1 kHz, True RMS)
AC current range	[Measurement range] 0.060 A to 600.0 A, 3 range, Basic accuracy: $\pm 1.3\%$ rdg ± 3 dgt (Frequency characteristics: 45 - 1 kHz, True RMS)
Power range	[Single phase] 0.005 kW to 360.0 kW Basic accuracy: $\pm 2.0\%$ rdg ± 7 dgt (50/ 60 Hz, Power factor=1) [Balanced three-phase 3-wire] 0.020 kW to 623.5 kW Basic accuracy: $\pm 3.0\%$ rdg ± 10 dgt (50/ 60 Hz, Power factor=1) [Balanced three-phase 4-wire] 0.040 kW to 1080 kW Basic accuracy: $\pm 2.0\%$ rdg ± 3 dgt (50/ 60 Hz, Power factor=1)
Harmonic levels	[With Z3210 installed (*2)] Voltage/ current harmonic levels up to 30th, Content factor, Total harmonic distortion ratio
Other functions	[Phase angle (*1)] lead -180.0° to lag 179.9°, [Power factor] -1.000 to 1.000 [Frequency] 45.0 Hz to 999.9 Hz, PEAK, Phase detection, Max / Min / Avg value display, Auto hold, electric meter comparison, unbalanced 3-phase power estimate display, etc.
Dustproof and waterproof	IP20 (Voltage measurement in a completely dry condition. When jaw closes) IP50 (While in storage)
Power supply	L R03 Alkaline battery $\times 2$, Continuous use: approx. 25 hr (without Z3210 installed), approx. 18 hr. (with Z3210 installed and using wireless communications) Other conditions: 100 A AC measurement, backlight off, 23°C reference value
Core jaw dia.	ϕ 46 mm (1.81 in.), Jaw dimensions: 92 mm (3.62 in.) W \times 18 mm (0.71 in.) D mm
Dimensions and mass	65 mm (2.56 in.) W \times 241 mm (9.49 in.) H \times 35 mm (1.38 in.) D, 450 g (15.9 oz.)
Included accessories	Connection Cord L9257 $\times 1$, L R03 Alkaline battery $\times 2$, Carrying Case C0203 $\times 1$, Instruction Manual $\times 2$, Operating Precautions $\times 1$

*1) Phase angle obtained from zero cross of current / voltage.

*2) Harmonics can be displayed with our free app Gennect Cross.

Bundled Accessories

CONNECTION CORD L9257
L4930, L4935 bundled model, 1.2 m (3.94 ft.) length

CARRYING CASE C0203

Test Lead

TEST LEAD L9300
95 cm (37.4 in.), Integrated cap and protective finger guard

Clamp Adapter

CLAMP ON ADAPTER 9290-10
CT for 1000A AC, secondary current 1/10 of primary

Options for the L4930. Test Pin Set L4932 is required when using the Small Alligator Clip Set L4934. * accepts only rated currents under 10 A.

<p>CONNECTION CABLE SET L4930 1.2 m (3.94 ft.) length, CAT IV 600 V, CAT III 1000 V</p>	<p>EXTENSION CABLE SET L4931 Expands the length of the L4930/ L4940, 1.5 m (4.92 ft.) length</p>	<p>TEST PIN SET L4932 Attaches to the tip of the L4930/ L4940, CAT IV 600 V, CAT III 1000 V</p>	<p>SMALL ALLIGATOR CLIP SET L4934* Attaches to the tip of the L4932, L9207-10/DT4911, L9206, CAT III 300 V, CAT II 600 V</p>	<p>ALLIGATOR CLIP SET L4935 Attaches to the tip of the L4930/L4940, CAT IV 600 V, CAT III 1000 V</p>	<p>BUS BAR CLIP SET L4936* Attaches to the tip of the L4930/L4940, CAT III 600 V</p>
<p>MAGNETIC ADAPTER SET L4937* Attaches to the tip of the L4930/L4940, CAT III 1000 V</p>	<p>MAGNETIC ADAPTER 9804* Attaches to the tip of voltage cord, ϕ11 mm (0.43 in.), compatible M6 pan screws</p>	<p>TEST PIN SET L4938 Attaches to the tip of the L4930/L4940, CAT III 600 V</p>	<p>BREAKER PIN SET L4939 Attaches to the tip of the L4930/L4940, CAT III 600 V</p>	<p>GRABBER CLIP L9243* Attaches to the tip of the L4930/L4940, CAT III 1000 V, 185 mm (7.28 in.) length</p>	

Bundled accessory for the CM3286-90.

WIRELESS ADAPTER Z3210
Simply plug in the Z3210 wireless adapter and your compatible Hioki device is Bluetooth® ready

When using Z3210.

PC Peripherals

GENNECT Cross SF4071, SF4072
Mobile app for iOS, Android

Investigate Power Characteristics and Analyze the Causes of Problems

POWER QUALITY ANALYZER PQ3198



Current sensors: Sold separately



- Verify power problems in accordance with the IEC61000-4-30 Class A standard
- High accuracy and continuous gapless recording
(V: $\pm 0.1\%$ of nominal voltage, A: $\pm 0.1\%$ rdg $\pm 0.1\%$ f.s., W: $\pm 0.2\%$ rdg $\pm 0.1\%$ f.s.)
- Broadband voltage range lets you measure even high-order harmonic (supraharmonic) components of up to 80 kHz
- Maximum 6000 V peak transient voltage up to 700 kHz
- Measure up to 6000 A AC
- Two systems of power measurement and efficiency calculation for (ch 1, ch 2, ch 3) and ch 4
- Make simple measurements of inverters with 40 to 70 Hz fundamental frequency and max. 20 kHz carrier frequency
- Easily create reports with PQ ONE application software (free to download)
- IEEE 519 compliance harmonics measurement
- Optional GPS BOX for synchronizing multiple devices

Model No. (Order Code) **PQ3198** (Main unit, current sensor is sold separately)

Note: an optional current sensor is necessary to measure current or power parameters. Select from Value Kits for added savings.

POWER QUALITY ANALYZER PQ3198 VALUE KITS :

Model No. (Order Code) (Note)

PQ3198-92 (Kit includes 600 A sensor \times 4 and other options)

Kit contents: Main unit, AC Current sensor CT17136 (600 A) \times 4, Patch Cord L1021-02 \times 3, Carrying Case C1009

PQ3198-94 (Kit includes 6000 A sensor \times 4 and other options)

Kit contents: Main unit, AC Current sensor CT17045 (6000 A) \times 4, Patch Cord L1021-02 \times 3, Carrying Case C1009

Basic specifications (Accuracy guaranteed for 1 year)

Measurement line type	Single-phase 2-wire, Single-phase 3-wire, Three-phase 3-wire or Three-phase 4-wire plus one extra input channel for voltage, current, power measurement (AC or DC measurement)
Voltage ranges	Voltage measurement: 600.00 V rms Transient measurement 6.0000 kV peak
Current ranges	500.00 mA to 5.0000 kA AC (depends on current sensor in use)
Power ranges	300.00 W to 3.0000 MW (determined automatically based on voltage and current range in use)
Basic accuracy	Voltage: $\pm 0.1\%$ of nominal voltage Current: $\pm 0.1\%$ rdg $\pm 0.1\%$ f.s. + current sensor accuracy Active power: $\pm 0.2\%$ rdg $\pm 0.1\%$ f.s. + current sensor accuracy
Measurement items	1. Transient voltage : 2 MHz sampling 2. Frequency cycle : Calculated as one cycle, 40 to 70 Hz 3. Voltage (1/2) RMS: one cycle calculation refreshed every half cycle Current (1/2) RMS: half-cycle calculation 4. Voltage swell, Voltage dips, Voltage interruption 5. Inrush current 6. Voltage waveform comparison 7. Instantaneous flicker value: As per IEC61000-4-15 8. 200 ms frequency: Calculated as 10 or 12 cycles, 40 to 70 Hz 9. 10 sec frequency: Calculated as the whole-cycle time during the specified 10 s period, 40 to 70 Hz 10. Voltage waveform peak, Current waveform peak 11. Voltage, Current, Active power, Apparent power, Reactive power, Active energy, Reactive energy, Power factor, Displacement power factor, Voltage unbalance factor, Current unbalance factor, and efficiency 12. High-order harmonic (supraharmonic) component (voltage/ current): 2 kHz to 80 kHz 13. Harmonic/ Harmonic phase angle (voltage/ current), Harmonic power: 0th to 50th orders 14. Harmonic voltage-current phase angle: 1th to 50th orders 15. Total harmonic distortion factor (voltage/ current) 16. Inter harmonic (voltage/ current): 0.5 th to 49.5 th order 17. K Factor (multiplication factor) 18. IEC Flicker, Δ V10 Flicker 19. Mains signaling voltage
Record	Repeated ON: 1 year, Maximum recording event: 9999 \times 366 days (up to 9999 events per day) Repeated off: 35 days, maximum recording event: 9999 events
Interfaces	SD/SDHC memory card, LAN (HTTP server function / FTP function), USB2.0 (for communication)
Display	6.5-inch TFT color LCD (640 \times 480 dots)
Power supply	AC adapter Z1002 (100 V to 240 V AC, 50/60 Hz, rated current 1.7 A), Battery Pack Z1003 (Continuous use: 180 minutes, Charging time: Max. 5 hr 30 m with AC adapter)
Dimensions and mass	300 mm (11.81 in.)W \times 211 mm (8.31 in.)H \times 68 mm (2.68 in.)D, 2.6 kg (91.7 oz.) (including Battery Pack Z1003)
Included accessories	Instruction manual \times 1, Measurement guide \times 1, Voltage Cord L1000 \times 1 set (Red/ Yellow/ Blue/ Gray each 1, Black 4, 3 m (9.84 ft.) length, Alligator clip \times 8), Color clip, AC Adapter Z1002 \times 1, Strap \times 1, USB cable (1 m 3.28 ft. length) \times 1, Battery pack Z1003 \times 1, SD Memory Card 2GB Z4001 \times 1

Quick and Simple Power Quality Testing, Record and Analyze Power Supply Issues with a Single Instrument

POWER QUALITY ANALYZER PQ3100



Current sensors : Sold separately



- Record data including voltage, current, power, harmonics, and flicker simultaneously along a single time axis
- Measure up to 6000 A AC
- Capture all power anomalies, including instantaneous outages, voltage drops, and frequency fluctuations, while simultaneously recording trend data
- Quick Set: Easy-to-understand on-screen guide for measurement procedures
- PQ ONE application software (free to download) makes it easy to create reports
- Record waveforms for up to 1 second before and 10 seconds after an anomaly occurs
- Accurately measure DC currents over extended periods of time (with an AC/DC auto-zero current sensor)
- Directly supply power to connected current sensors

Model No. (Order Code) **PQ3100** (Main unit, clamp sensor is sold separately)

Note: an optional current sensor is necessary to measure current or power parameters. Select from Value Kits for added savings.

POWER QUALITY ANALYZER PQ3100 VALUE KITS :

Model No. (Order Code) (Note)

PQ3100-91 (Kit includes 600 A sensor \times 2 and other options)

Kit contents: AC Current sensor CT17136 (600 A) \times 2, PQ3100 main unit, SD Memory card 2GB Z4001, Carrying case C1009

PQ3100-92 (Kit includes 600 A sensor \times 4 and other options)

Kit contents: AC Current sensor CT17136 (600 A) \times 4, PQ3100 main unit, SD Memory card 2GB Z4001, Carrying case C1009

PQ3100-94 (Kit includes 6000 A sensor \times 4 and other options)

Kit contents: AC Flexible current sensor CT17045 (6000 A) \times 4, PQ3100 main unit, SD Memory card 2GB Z4001, Carrying case C1009



PQ3100-91 Value Kit

Basic specifications (Accuracy guaranteed for 1 year)

Measurement line type	Single-phase 2-wire, Single-phase 3-wire, Three-phase 3-wire or Three-phase 4-wire plus one extra input channel CH4 for voltage/current, (all channels AC/DC measurement)
Voltage ranges	Voltage measurement: 1000.0 V rms or DC, Transient measurement 2.200 kV peak
Current ranges	50.000 mA AC to 5.0000 kA AC, 10.000 A DC to 2.0000 kA DC (depends on current sensor in use)
Power ranges	50.000 W to 6.0000 MW (determined automatically based on current range in use)
Basic accuracy	Voltage: $\pm 0.2\%$ of nominal voltage, Current: $\pm 0.1\%$ rdg $\pm 0.1\%$ f.s. + current sensor accuracy, Active power: DC $\pm 0.5\%$ rdg $\pm 0.5\%$ f.s. + current sensor accuracy, AC $\pm 0.2\%$ rdg $\pm 0.1\%$ f.s. + current sensor accuracy
Measurement items	1. Transient over voltage : 200 kHz sampling 2. Frequency cycle : Calculated as one cycle 3. Voltage (1/2) RMS, Current (1/2) RMS: one cycle calculation refreshed every half cycle 4. Voltage swell, Voltage dips, Voltage interruption, RVC (Ver. up) : Voltage (1/2) RMS calculation 5. Inrush current : half-cycle calculation: Calculated as the current RMS value for current waveform data sampled every half-cycle. 6. Frequency 200 ms: Calculated as 10 or 12 cycles 7. 10-sec frequency: Calculated as the whole-cycle time during the specified 10 s period 8. Voltage waveform peak, Current waveform peak 9. Voltage, Current, Active power, Apparent power, Reactive power, Active energy, Apparent energy, Reactive energy, Energy cost, Power factor, Displacement power factor, Voltage unbalance factor, Current unbalance factor 10. Voltage crest factor, Current crest factor 11. Harmonic/ Harmonic phase angle (voltage/ current), Harmonic power: 0 th to 50 th orders 12. Harmonic voltage-current phase angle: 1 th to 50 th orders 13. Total harmonic distortion factor (voltage/ current) 14. Inter harmonic (voltage/ current): 0.5 th to 49.5 th orders 15. K Factor (multiplication factor) 16. IEC Flicker, Δ V10 Flicker
Record	Maximum recording interval: 1 year, Maximum number of recordable events: 9999 \times 365 days
Interfaces	SD/SDHC memory card, RS-232C (for communication), LAN (HTTP server/ FTP / Send e-mail), USB 2.0 (for communication)
Display	6.5-inch TFT color LCD (640 \times 480 dots)
Power supply	AC adapter Z1002 (100 V to 240 V AC, 50/60 Hz, rated current 1.7 A), Battery pack Z1003 (Continuous use: 8 hr, Charging time: Max. 5 hr 30 m with AC adapter)
Dimensions and mass	300 mm (11.81 in.)W \times 211 mm (8.31 in.)H \times 68 mm (2.68 in.)D, 2.5 kg (88.2 oz.) (including battery pack)
Included accessories	Instruction manual \times 1, Measurement guide \times 1, Voltage cord L1000-05 \times 1 set (Red/Yellow/Blue/Gray/Black, Alligator clip \times 5, Spiral tube \times 5), Color clip (for identifying clamp sensor color) \times 1 set, Spiral tube \times 5, AC adapter Z1002 \times 1, Strap \times 1, USB cable (1 m 3.28 ft length) \times 1, Battery pack Z1003 \times 1

Power Quality Analyzers

Shared options for the PQ3198 / PQ3100

<p>For power or load current measurement (1 sensor necessary for single-phase measurements, and 2 or 3 sensors required for 3-phase measurements)</p>						<p>*For leak current measurement (not capable of power measurement)</p>
<p>Current Input</p> <p>AC CURRENT SENSOR CT7126 60 A AC, φ15 mm (0.59 in.), 2.5 m (8.20 ft.) cord length</p> <p>AC CURRENT SENSOR CT7131 100 A AC, φ15 mm (0.59 in.), 2.5 m (8.20 ft.) cord length</p> <p>AC CURRENT SENSOR CT7136 600 A AC, φ46 mm (1.81 in.), 2.5 m (8.20 ft.) cord length</p> <p>AC FLEXIBLE CURRENT SENSOR CT7044 6000 A AC, φ100 mm (3.94 in.), 2.5 m (8.20 ft.) cord length</p> <p>AC FLEXIBLE CURRENT SENSOR CT7045 6000 A AC, φ180 mm (7.09 in.), 2.5 m (8.20 ft.) cord length</p> <p>AC FLEXIBLE CURRENT SENSOR CT7046 6000 A AC, φ254 mm (10.00 in.), 2.5 m (8.20 ft.) cord length</p>	<p>Leak Current Input</p> <p>AC LEAKAGE CURRENT SENSOR CT7116 6 A AC, φ40 mm (1.57 in.), 2.5 m (8.20 ft.) cord length</p>					
<p>AC/DC AUTO-ZERO CURRENT SENSORS</p> <p>AC/DC AUTO-ZERO CURRENT SENSOR CT7731 100 A AC/DC, φ33 mm (1.30 in.), 2.5 m (8.20 ft.) cord length</p> <p>AC/DC AUTO-ZERO CURRENT SENSOR CT7736 600 A AC/DC, φ33 mm (1.30 in.), 2.5 m (8.20 ft.) cord length</p> <p>AC/DC AUTO-ZERO CURRENT SENSOR CT7742 2000 A AC/DC, φ55 mm (2.17 in.), 2.5 m (8.20 ft.) cord length</p>						<p>*The Z4001 is bundled to PQ3198 only</p> <p>Storage Media</p> <p>SD MEMORY CARD 2GB Z4001 2 GB capacity 8GB Z4003 8 GB capacity</p> <p>SD Card Precaution Use only the SD Card sold by Hioki. Compatibility and performance are not guaranteed for SD cards made by other manufacturers. You may be unable to read from or save data to such cards.</p>
<p>EXTENSION CABLES</p> <p>EXTENSION CABLE L0220-01 2 m (6.56 ft.) length</p> <p>EXTENSION CABLE L0220-02 5 m (16.41 ft.) length</p> <p>EXTENSION CABLE L0220-03 10 m (32.81 ft.) length</p>						<p>PATCH CORD L1021-01 Banana branch-banana, Red: 1, Cable length: 0.5 m, For branching from the L9438 series or L1000 series, CAT IV 600 V, CAT III 1000 V</p> <p>PATCH CORD L1021-02 Banana branch-banana, Black: 1, Cable length: 0.5 m, For branching from the L9438 series or L1000 series, CAT IV 600 V, CAT III 1000 V</p>
<p>For PQ3100 only *The L1000-05 is bundled with PQ3100</p> <p>VOLTAGE CORD L1000-05 Red/ Yellow/ Blue/ Gray/ Black each 1, 3 m (9.84 ft.) length, Alligator clip ×5</p>		<p>For PQ3198 only *The L1000 is bundled with PQ3198</p> <p>VOLTAGE CORD L1000 Red/ Yellow/ Blue/ Gray each 1, Black 4, 3m (9.84 ft.) length, Alligator clip ×8</p>		<p>WIRING ADAPTER PW9000 When three-phase 3-wire (3P3W3M) connection, the voltage cord to be connected can be reduced from 6 to 3</p> <p>WIRING ADAPTER PW9001 When three-phase 4-wire (3P4W) connection, the voltage cord to be connected can be reduced from 6 to 4</p>		
<p>Shared options for the PQ3100 / PQ3198</p> <p>GRABBER CLIP L9243 Attaches to the tip of the banana plug cable, Red/ Black: 1 each, 185 mm (7.28 in.) length, CAT II 1000 V</p> <p>MAGNETIC ADAPTER 9804-01 Attaches to the tip of cord, red ×1, φ11 mm (0.43 in.)</p> <p>MAGNETIC ADAPTER 9804-02 Attaches to the tip of cord, black ×1, φ11 mm (0.43 in.)</p>		<p>*The Z1002, Z1003 are bundled</p> <p>Power Supply</p> <p>AC ADAPTER Z1002 For main unit, 100 to 240 V AC</p> <p>BATTERY PACK Z1003 NiMH, Charges while installed in the main unit</p>		<p>Other Options</p> <p>LAN CABLE 9642 Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft.) length</p> <p>CONVERSION CABLE L9910 Used to connect the current sensors with BNC terminal to PL14 terminal (example the PQ3100)</p>		
<p>Shared options for the PQ3100 / PQ3198</p> <p>PC Peripherals</p> <p>GENNECT One SF4000 Application for Windows</p>		<p>For PQ3100 only</p> <p>PC Peripherals</p> <p>RS-232C CABLE 9637 For the PC, 9 pin - 9 pin, cross, 1.8 m (5.91 ft.) length</p>		<p>When using with PQ3100 / PQ3198, suspend the main body on the metal surface using two Z5020 powerful type. Z5004 hang the cords on the metal surface.</p> <p>Hands-free Options</p> <p>MAGNETIC STRAP Z5020 Heavy-duty</p> <p>MAGNETIC STRAP Z5004</p>		
<p>Cases</p> <p>CARRYING CASE C1002 Hard trunk type, includes compartment for options</p> <p>CARRYING CASE C1009 Bag type, includes compartment for options</p>		<p>Waterproof Box For outdoor installation; IP65 compliant, contact Hioki for a quotation.</p>		<p>For PQ3198 only</p> <p>Time Synchronization</p> <p>GPS BOX PW9005 To synchronize the PQ3198 clock to UTC</p> <p><i>Discontinuation scheduled</i></p>		

Eliminate the Risk of Short-Circuits and Electrical Accidents

CLAMP ON POWER LOGGER PW3365



True RMS

* Current sensors: sold separately
* Voltage sensors: bundled



* For PW3365

- Voltage measurement from the top of the cable, zero risk of short circuit
- Supports single to three-phase, 4-wire circuits
- Measure between 90 V to 520 V
- Display harmonics up to the 13th order
- Slim, compact design that can be placed anywhere
- Store months of data on SD cards
- The QUICK SET function guides you in making the right connections

Model No. (Order Code) **PW3365-20** (English model, main unit only)

Note: Clamp On Power Logger PW3365-20 by itself does not support current and power measurements. Current and power measurements require clamp on sensors, sold separately. Use only Hioki SD cards guaranteed to work for saving measurement data (options, sold separately).

SAFETY VOLTAGE SENSOR PW9020 Specifications

Compatible conductor types	Insulated wires*, in door PVC or metal parts *Shielded wires cannot be measured. The product may not be able to accurately measure multi-core cables or cables that have thick insulation.
Compatible conductor diameters	Finished outer diameter ϕ 6 mm to ϕ 30 mm
Effective measurement range	90 V rms to 520 V rms
Cord length	3 m (9.84 ft.)

Basic specifications (Accuracy guaranteed for 1 year)

Measurement line & number of circuits	50/60 Hz, Single phase 2 wires (1/2/3 circuits), Single phase 3 wires (1 circuit), Three phases 3 wires (1 circuit), Three phases 4 wires (1 circuit), Current only: 1 to 3 channels
Measurement items	Voltage RMS, current RMS, voltage fundamental wave value, current fundamental wave value, voltage fundamental wave phase angle, current fundamental wave phase angle, frequency (UI), voltage waveform peak (absolute value), current waveform peak (absolute value), active power, reactive power, apparent power, power factor (with lag/lead display) or displacement power factor (with lag/lead display), active energy (consumption, regeneration), reactive energy (lag, lead), energy cost display, active power demand quantity (consumption, regeneration), reactive power demand quantity (lag, lead), active power demand value (consumption, regeneration), reactive power demand value (lag, lead), power factor demand
Harmonic	Harmonic voltage, harmonic current, voltage total harmonic distortion (THD-F or THD-R), current total harmonic distortion (THD-F or TDH-R), up to 13th order
Voltage ranges	400 V AC (Effective measurement range: 90.0 V to 520.0 V)
Current ranges	500.00 mA to 5.0000 kA AC (depends on current sensor in use), 50.0000 mA to 5.0000 A AC (Leak clamp on sensor only)
Power ranges	200.00 W to 6.0000 MW (depends on voltage/current combination and measured line type)
Basic accuracy	Voltage : $\pm 1.5\%$ rdg $\pm 0.2\%$ f.s.(combined accuracy with PW3365-20 + PW9020) Current : $\pm 0.3\%$ rdg $\pm 0.1\%$ f.s. + clamp sensor accuracy Active power : $\pm 2.0\%$ rdg $\pm 0.3\%$ f.s. + clamp sensor accuracy (at power factor = 1)
Display update rate	0.5 sec (except when accessing SD card or internal memory, or during LAN/USB communication)
Save destination	SD/SDHC Memory card, or internal memory at real time
Data save interval	1 sec to 30 sec, 1 minute to 60 minutes, 14 selections
Save items	Measurement value save: Average only / Average, Maximum, Minimum value Screen copy: BMP form (saved every 5 min. at minimum interval time) Waveform save: Binary waveform data
Interfaces	SD/SDHC memory card, LAN 100BASE-TX: HTTP server function, remote settings via communication program, data download, USB 2.0: When connected to a PC, the SD Card and internal memory are recognized as removable storage devices, remote settings via communication program, data download
Functions	Connection check, Quick Set navigation guide, clock
Power supply	AC adapter Z1008: (100 to 240 V AC, 50/60 Hz), 45 VA (including AC adapter) Battery pack 9459: (DC 7.2 V, 3 VA, charging time 6 hr 10 m), 3 hours of continuous use (with back light off)
Dimensions and mass	180 mm (7.09 in.)W \times 100 mm (3.94 in.)H \times 48 mm (1.89 in.)D, 540 g (19 oz.) without PW9002 180 mm (7.09 in.)W \times 100 mm (3.94 in.)H \times 68 mm (2.68 in.)D, 820 g (28.9 oz.) with PW9002
Included accessories	Safety Voltage Sensor PW9020 \times 1 set, AC adapter Z1008 \times 1, USB cable \times 1, Instruction manual \times 1, Measurement guide \times 1, Color clip (red, yellow, blue and white each \times 4), Spiral tubes in black (cord bundling for current sensors and voltage sensors) \times 10

Identify Your Power Condition to Reveal Energy Saving Ideas

CLAMP ON POWER LOGGER PW3360



Current sensors: Sold separately



- Supports single to three-phase, 4-wire circuits
- Measure between 90 V to 780 V
- Simultaneously measure up to three single-phase, 2-wire circuits (in the same power system)
- Slim, compact design that can be placed anywhere
- Store months of data on SD cards
- The QUICK SET function guides you in making the right connections
- Choose PW3360-21 for harmonic measurements up to the 40th order

Model No. (Order Code) **PW3360-20** (English model, main unit only)

PW3360-21 (English model, with harmonic analysis function)

Note: at least one optional current sensor is necessary to measure current or power parameters. To store measurement data, use only the guaranteed SD cards sold by Hioki.

Basic specifications (Accuracy guaranteed for 1 year)


Measurement line & number of circuits	50/60 Hz, Single phase 2 wires (1/2/3 circuits), Single phase 3 wires (1 circuit), Three phases 3 wires (1 circuit), Three phases 4 wires (1 circuit), Current only: 1 to 3 channels
Measurement items	Voltage RMS, current RMS, voltage fundamental wave value, current fundamental wave value, voltage fundamental wave phase angle, current fundamental wave phase angle, frequency (UI), voltage waveform peak (absolute value), current waveform peak (absolute value), active power, reactive power (with lag/lead display), apparent power, power factor (with lag/lead display) or displacement power factor (with lag/lead display), active energy (consumption, regeneration), reactive energy (lag, lead), energy cost display, active power demand quantity (consumption, regeneration), reactive power demand quantity (lag, lead), active power demand value (consumption, regeneration), reactive power demand value (lag, lead), power factor demand, pulse input [PW3360-21 only]: Harmonic voltage level, harmonic current level, harmonic power level, content percentage, phase angle, total harmonic distortion (THD-F or THD-R), up to 40th order
Voltage ranges	600 V AC (Effective measurement range: 90.00 V to 780.00 V)
Current ranges	500.00 mA to 5.0000 kA AC (depends on current sensor in use), 50.0000 mA to 5.0000 A AC (Leak clamp on sensor only)
Power ranges	300.00 W to 9.0000 MW (depends on voltage/current combination and measured line type)
Basic accuracy	Voltage : $\pm 0.3\%$ rdg $\pm 0.1\%$ f.s Current : $\pm 0.3\%$ rdg $\pm 0.1\%$ f.s. + clamp sensor accuracy Active power : $\pm 0.3\%$ rdg $\pm 0.1\%$ f.s. + clamp sensor accuracy (at power factor = 1)
Display update rate	0.5 sec (except when accessing SD card or internal memory, or during LAN/USB communication)
Save destination	SD Memory card, or internal memory at real time
Data save interval	1 sec to 30 sec, 1 minute to 60 minutes, 14 selections
Save items	Measurement value save: Average only / Average, Max./Min. value, [PW3360-21 only]: Harmonic data save: Average only / average, max./min. value in binary format, Screen copy: BMP form (saved every 5 min. at minimum interval time), Waveform save: Binary waveform data
Interfaces	SD/SDHC memory card, LAN 100BASE-TX: HTTP server function, USB 2.0: When connected to a PC, the SD Card and internal memory are recognized as removable storage devices, remote settings via communication program, data download, Pulse output: proportional to active power consumption when measuring integral power consumption, Isolated open-collector signal
Functions	Connection check, Quick Set navigation guide, clock, pulse input
Power supply	AC adapter Z1006: (100 to 240 V AC, 50/60 Hz), 40 VA (including AC adapter), Battery pack 9459: (DC 7.2 V, 3 VA, charging time 6 hr 10 m), 6 hours of continuous use (with back light off)
Dimensions and mass	180 mm (7.09 in.)W \times 100 mm (3.94 in.)H \times 48 mm (1.89 in.)D, 550 g (19.4 oz.) without PW9002 180 mm (7.09 in.)W \times 100 mm (3.94 in.)H \times 67.2 mm (2.65 in.)D, 830 g (29.3 oz.) with PW9002
Included accessories	Voltage cord L9438-53 \times 1 set, AC adapter Z1006 \times 1, USB cable \times 1, Instruction manual \times 1, Measurement guide \times 1, Color clip \times 1 set: red, yellow, blue, white/two each, for color-coding clamp sensors, Spiral tubes for grouping clamp sensor cords \times 5

Power Quality Analyzers


Shared options for PW3360, PW3365

Voltage Input for PW3360


*L9438-53 is bundled with the PW3360-20/-21




VOLTAGE CORD L9438-53
Black/ Red/ Yellow/ Blue, 3 m (9.84 ft.) length, Alligator clip x4




MAGNETIC ADAPTER 9804-01
Attaches to the tip of cord, red x1, ϕ 11 mm



MAGNETIC ADAPTER 9804-02
Attaches to the tip of cord, black x1, ϕ 11 mm




PATCH CORD L1021-01
Banana branch-banana, Red: 1, Cable length: 0.5 m. For branching from the L9438 series or L1000 series, CAT IV 600 V, CAT III 1000 V




PATCH CORD L1021-02
Banana branch-banana, Black: 1, Cable length: 0.5 m. For branching from the L9438 series or L1000 series, CAT IV 600 V, CAT III 1000 V

Storage Media



SD MEMORY CARD 2GB Z4001
2 GB capacity



SD MEMORY CARD 8GB Z4003
8 GB capacity

SD Card Precaution
Use only the SD Card sold by Hioki. Compatibility and performance are not guaranteed for SD cards made by other manufacturers. You may be unable to read from or save data to such cards.

Voltage Input for PW3365


*PW9020 x4 pieces are bundled, additional single sensors also available




SAFETY VOLTAGE SENSOR PW9020
For PW3365, 3 m (9.84 ft.) length

Shared Power Supply

The 9459 is a replacement battery pack included with the Battery Set PW9002.




BATTERY SET PW9002
Battery case and Battery Pack 9459 Set




BATTERY PACK 9459
NiMH, Charges while installed in the main unit

Power Supply for PW3360

Z1006 is bundled with the PW3360



AC ADAPTER Z1006
100 to 240 V AC



VOLTAGE LINE POWER ADAPTER PW9003
For PW3360s, supplies power from measurement lines, up to 240 V AC

Power Supply for PW3365

*Z1008 is bundled with the PW3365



AC ADAPTER Z1008
100 to 240 V AC

Shared Case, Other

Z5004 hang the cords on the metal surface. C1005 store Current sensor x2, Voltage sensor x3 pieces



CARRYING CASE C1005
For PW3360/3365 series, for storing options




MAGNETIC STRAP Z5004

Shared Case




CARRYING CASE C1008
For PW3365 series, for storing Current sensor x3, Voltage sensor x4 pieces


PC Peripherals



POWER LOGGER VIEWER SF1001
Easy graphical processing of measurement data saved with the PW3360/PW3365 series on a PC
SF1001: CD
SF1001-01: Downloadable (license card)
SF1001-03: Downloadable (digital license)




GENNECT One SF4000
Application for Windows




LAN CABLE 9642
Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft.) length

Shared optional current sensors for PW3360, and PW3365


For power or load current measurement (1 sensor necessary for single-phase measurements, and 2 or 3 sensors required for 3-phase measurements)




CLAMP ON SENSOR 9694
5A AC rated current, ϕ 15 mm (0.59 in.) core dia., 3 m (9.84 ft.) length




CLAMP ON SENSOR 9660
100A AC rated current, ϕ 15 mm (0.59 in.) core dia., 3 m (9.84 ft.) length




CLAMP ON SENSOR 9661
500A AC rated current, ϕ 46 mm (1.81 in.) core dia., 3 m (9.84 ft.) length




FLEXIBLE CLAMP ON SENSOR CT9667-01/-02/-03
5000/500 A AC rated current, ϕ 100 mm (3.94 in.) to 254 mm (10.0 in.) core dia., Cable length: Between sensor - box 2 m (6.56 ft.), Output cable 1 m (3.28 ft.)




CLAMP ON SENSOR 9669
1000A AC rated current, ϕ 55 mm (2.17 in.) core dia., 3 m (9.84 ft.) length



CLAMP ON SENSOR 9695-02
50A AC rated current, ϕ 15 mm (0.59 in.) core dia., Requires the Connection cord 9219




CLAMP ON SENSOR 9695-03
100A AC rated current, ϕ 15 mm (0.59 in.) core dia., Requires the Connection cord 9219




CONNECTION CORD 9219
Connect with the 9695-02/-03, Output BNC terminal

Shared options for PW3360 and PW3365


For leak current measurement (not capable of power measurement)
*Up to 5 A when using with power meters



CLAMP ON LEAK SENSOR 9675
10A AC rated current, ϕ 30 mm (1.18 in.) core dia., 3 m (9.84 ft.) length



CLAMP ON LEAK SENSOR 9657-10
10A AC rated current, ϕ 40 mm (1.57 in.) core dia., 3 m (9.84 ft.) length



Clamp sensor adapter

CLAMP ON ADAPTER 9290-10
CT for 1000A AC, secondary current 1/10 of primary

Power Quality Analyzers

www.hioki.com 75

Capture Inrush, Micro and High-Speed Currents with a Single Probe

CURRENT PROBE CT6710, CT6711



CT6710


- 3 ranges in a single probe - 30 A, 5 A, 0.5 A. Observe a wide current range from micro currents to 30 A.
- Wide band: [CT6710] DC to 50 MHz (-3 dB), [CT6711] DC to 120 MHz (-3 dB)
- High S/N ratio and 10 times output rate: Observe waveforms at 100 μ A/div at oscilloscope maximum voltage sensitivity setting of 1 mV/div
- Directly connect to an oscilloscope's BNC input terminal *1

*1: Connecting the probe's metal BNC terminal to a Memory HiCorder's plastic BNC terminal may distort or damage the plastic terminal. To avoid damage, please connect and disconnect the probe cable straight to the BNC terminal of the waveform monitoring equipment.


Model No. (Order Code)	CT6710	(From 200 μ A, 50MHz bandwidth)
	CT6711	(From 200 μ A, 120MHz bandwidth)

Note: if power cannot be supplied from the Memory HiCorder, an optional power supply 3269 is required. Please pay attention to offset drift during continuous, long-term measurement.

■ (Typical characteristics example)



■ (Typical characteristics example)



■ Basic specifications (Accuracy guaranteed for 1 year)

	CT6710	CT6711
Frequency bandwidth	DC to 50 MHz (-3 dB)	DC to 120 MHz (-3 dB)
Rise time	7.0 ns or shorter	2.9 ns or shorter
Delay time (Typical)	30 A range: 12 ns, 5 A range: 12 ns, 0.5 A range: 13 ns (Delay time relative to rising waveform of input signal 1 ns)	
Noise level	75 μ A rms max (at 0.5 A range, using 20 MHz band measuring instrument)	
Max. rated current	30 A range: 30 A rms, 5 A range: 5 A rms, 0.5 A range: 0.5 A rms (DC, and sine wave, requires derating at frequency)	
Max. allowable peak current	30 A range: \pm 50 A peak (within the input limit time 2 s) 5 A range: \pm 7.5 A peak, 0.5 A range: \pm 0.75 A peak (< 10 MHz), \pm 0.3 A peak (\geq 10 MHz)	
Amplitude accuracy	30 A range: \pm 3.0% rdg \pm 1 mV, (Typical) \pm 1.0% rdg \pm 1 mV (\leq 10 A rms, DC, 45 to 66 Hz sine wave, within the maximum peak current of each range) 5 A range: \pm 3.0% rdg \pm 1 mV, (Typical) \pm 1.0% rdg \pm 1 mV (DC, 45 to 66 Hz sine wave, within the maximum peak current of each range) 0.5 A range: \pm 3.0% rdg \pm 10 mV, (Typical) \pm 1.0% rdg \pm 10 mV (DC, 45 to 66 Hz sine wave, within the maximum peak current of each range)	
Output rate	30 A range: 0.1 V/A, 5 A range: 1 V/A, 0.5 A range: 10 V/A (The output of this probe is internally terminated)	
Measurable conductors	ϕ 5 mm (0.20 in.), Insulated conductor	
Power supply	Supplied from Power Supply 3269, Probe Power Unit Z5021	
Cable length	Sensor cable (between relay box and sensor): 1.5 m (4.92 ft.) Power cable: 1.0 m (3.28 ft.) (Power plug: FFA.0S.304.CLAC37Y / LEMO inc.)	
Dimensions and mass	Sensor: 155 mm (6.10 in.)W \times 18 mm (0.71 in.)H \times 26 mm (1.02 in.)D Relay box section: 45 mm (1.77 in.)W \times 120 mm (4.72 in.)H \times 25 mm (0.98 in.)D Terminator section: 29 mm (1.14 in.)W \times 83 mm (3.27 in.)H \times 40 mm (1.57 in.)D mm, 370 g (13.1 oz.)	
Included accessories	Instruction manual \times 1, Carrying case \times 1	



Current Probes

Clearly Observe Even 1 mA Waveforms

CURRENT PROBE CT6700, CT6701



CT6700


- Wide band: [CT6700] DC to 50 MHz (-3 dB), [CT6701] DC to 120 MHz (-3 dB)
- High S/N characteristic ideal for ultra low 1 mA order current waveforms
- Connect directly to an oscilloscope's BNC input terminal *1

*1: Connecting the probe's metal BNC terminal to a Memory HiCorder's plastic BNC terminal may distort or damage the plastic terminal. To avoid damage, please connect and disconnect the probe cable straight to the BNC terminal of the waveform monitoring equipment.


Model No. (Order Code)	CT6700	(From 1mA, 50MHz bandwidth)
	CT6701	(From 1mA, 120MHz bandwidth)

Note: use optional Power Supply 3269 or 3272 to drive the current probe when power from the Memory HiCorder or oscilloscope is not available. Exercise care concerning offset drift when performing continuous measurement over extended periods of time.

■ (Typical characteristics example)




■ (Typical characteristics example)



■ Basic specifications (Accuracy guaranteed for 1 year)

	CT6700	CT6701
Frequency bandwidth	DC to 50 MHz (-3 dB)	DC to 120 MHz (-3 dB)
Rise time	7.0 ns or shorter	2.9 ns or shorter
Noise level	60 μ A rms typical, 75 μ A rms max (for 30 MHz band measuring instrument)	
Continuous allowable input	5 A rms (DC, and sine wave, requires derating at frequency)	
Max. allowable peak input	\pm 7.5 A peak (non-continuous)	
Amplitude accuracy	Typ.: \pm 1% rdg \pm 1 mV (DC, 45 to 66 Hz sine wave, 0 to 5 A rms) Guaranteed: \pm 3% rdg \pm 1 mV (DC, 45 to 66 Hz sine wave, 0 to 5 A rms)	
Output rate	1 V/A (The output of this probe is internally terminated)	
Measurable conductors	Insulated conductor	
Core diameter	ϕ 5 mm (0.20 in.)	
Power supply	\pm 12 V \pm 0.5 V, 3.2 VA	
Dimensions and mass	Sensor: 155 mm (6.10 in.)W \times 18 mm (0.71 in.)H \times 26 mm (1.02 in.)D, Terminator: 29 mm (1.14 in.)W \times 83 mm (3.27 in.)H \times 40 mm (1.57 in.)D mm, Mass: 250 g (8.8 oz.), Sensor cable BNC terminal: 1.5 m (4.92 ft.), Power cable: 1 m (3.28 ft.), Power plug: FFA.0S.304.CLAC37Y / LEMO inc.	
Included accessories	Instruction manual \times 1, Carrying case \times 1	

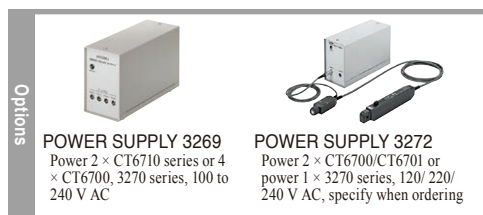

Wide-Band Current Probe Allows Direct Input to Oscilloscope

CLAMP ON PROBE 3273-50, 3274, 3275, 3276




- Waveform observation across a wide band from DC to MHz
- Connects directly to oscilloscope or Memory HiCorder BNC input terminal *1
- High S/N characteristics enable the measurement of 10 mA order current waveforms (3273-50, 3276)

*1: Connecting the probe's metal BNC terminal to a Memory HiCorder's plastic BNC terminal may distort or damage the plastic terminal. To avoid damage, please connect and disconnect the probe cable straight to the BNC terminal of the waveform monitoring equipment.

Model No. (Order Code)	3273-50	(DC to 50 MHz, 30 A rms)
	3274	(DC to 10 MHz, 150 A rms)
	3275	(DC to 2 MHz, 500 A rms)
	3276	(DC to 100 MHz, 30 A rms)

Frequency response (Characteristics Example)

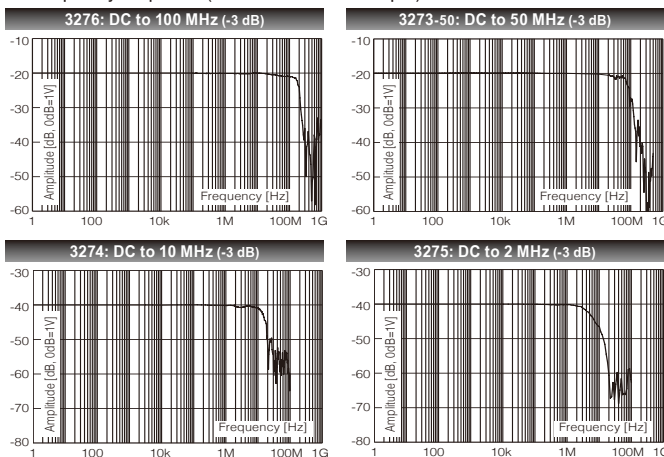

Note: use the Power Supply 3269/3272 for general measurements or when power is not available from the Memory HiCorder. When performing continuous measurements, be aware of offset voltage drift.

Options

POWER SUPPLY 3269
Power 2 × CT6710 series or 4 × CT6700, 3270 series, 100 to 240 V AC

POWER SUPPLY 3272
Power 2 × CT6700/CT6701 or power 1 × 3270 series, 120/220/240 V AC, specify when ordering

Connecting Wideband Sensors to Other Devices

Below are the options necessary for connecting wide-bandwidth sensors to measurement devices.

Current sensor model No.	Memory HiCorder, Oscilloscope
3273-50 3274 3275 3276 CT6700 CT6701	- Dedicated extension cable (synthetic resin BNC or metal BNC conversion cable) is recommended - POWER SUPPLY 3269 or 3272 is required - When using a recorder, the PROBE POWER UNIT Z5021 is also available.
CT6710 CT6711	When using a recorder, the Probe Power Unit Z5021 supports the use of up to 4 sensors.



When using the High-speed Analog Unit U8976 (Frequency range: DC to 30 MHz)



Z5021 PROBE POWER UNIT

Connect up to four CT6710/CT6711 probes.

Current Probes

Basic specifications (Accuracy guaranteed for 1 year)

	3276	3273-50	3274	3275
Frequency bandwidth	DC to 100 MHz (-3 dB)	DC to 50 MHz (-3 dB)	DC to 10 MHz (-3 dB)	DC to 2 MHz (-3 dB)
Rise time	3.5 ns or shorter	7 ns or shorter	35 ns or shorter	175 ns or shorter
Noise level	2.5 mA rms max. (bandwidth limited to 20 MHz)		25 mA rms max. (bandwidth limited to 20 MHz)	
Continuous allowable input	30 A rms (requires derating at frequency)		150 A rms (requires derating at frequency)	500 A rms (requires derating at frequency)
Max. allowable peak input	50 A peak (non continuous)		300 A peak (non continuous) 500 A peak (pulse width: 30 μs or shorter)	700 A peak (non continuous)
Amplitude accuracy (30 min. after power-on, after degaussing and zero-adjustment)	±1.0% rdg ±1 mV f.s. (DC, 45 to 66 Hz, 0 to 30 A rms) ±2% rdg (DC, 45 to 66 Hz, 30 A rms to 50 A peak)		±1.0% rdg ±1 mV f.s. (DC, 45 to 66 Hz, 0 to 150 A rms) ±2.0% rdg (DC, 45 to 66 Hz, 150 A to 300 A peak)	±1.0% rdg ±5 mV f.s. (DC, 45 to 66 Hz, 0 to 500 A rms) ±2.0% rdg (DC, 45 to 66 Hz, 500 A to 700 A peak)
Output rate	0.1 V/A (The output of this probe is internally terminated)		0.01 V/A (The output of this probe is internally terminated)	
Measurable conductors	Insulated conductor		Insulated conductor	
Core diameter	φ 5 mm (0.20 in.)		φ 20 mm (0.79 in.)	
Power supply	±12 V ±0.5 V, 5.3 VA max.	±12 V ±0.5 V, 5.6 VA max.	±12 V ±1 V, 5.5 VA max.	±12 V ±0.5 V, 7.2 VA max.
Dimensions and mass	175 mm (6.89 in.)W × 18 mm (0.71 in.)H × 40 mm (1.57 in.)D, 240 g (8.5 oz.)	175 mm (6.89 in.)W × 18 mm (0.71 in.)H × 40 mm (1.57 in.)D, 230 g (8.1 oz.)	176 mm (6.93 in.)W × 69 mm (2.72 in.)H × 27 mm (1.06 in.)D, 500 g (17.6 oz.)	176 mm (6.93 in.)W × 69 mm (2.72 in.)H × 27 mm (1.06 in.)D, 520 g (18.3 oz.)
Included accessories	Instruction manual ×1, Carrying case ×1	Instruction manual ×1, Soft case ×1	Instruction manual ×1, Carrying case ×1	Instruction manual ×1, Carrying case ×1

Power Supply for Current Probes

POWER SUPPLY 3269, 3272



Combination example of the 3272 + Clamp-on probe

- Power supply for the Clamp on probe 3273-50 - 3276, CT6700 series
- Supplies power when connected to a general-purpose instrument such as a recorder.

Model No. (Order Code)	3269	(For the CT6700 series/3270 series, up to 4)
	3272	(For the CT6700 series/3270 series, up to 1 or 2)

Note: these products cannot be used alone. To measure current, a compatible current sensor is required.

Basic specifications

	3269	3272
Compatible sensors	The CT6710, CT6711: up to 2 units The CT6700, CT6701, 3273-50, 3274, 3275 or 3276: up to 4 units Note: also up to 4 units for the discontinued Model 3273	The CT6700, CT6701: up to 2 units Note: when measuring the maximum peak current, only one unit The 3273-50, 3274, 3275 or 3276: up to 1 unit Note: may be used with up to 2 units of Model 3273 (not -50 type), and up to 2 units of Models 3273-50, 3274, 3275 or 3276 on condition that the measurement current is sufficiently low. Note: the CT6710, CT6711 cannot be used
Number of power supply connectors	4	2
Output	±12 V ±0.5 V, ±2.5 A (sum total of all channels)	±12 V ±0.5 V, 600 mA (sum total of all channels)
Power supply	100 V to 240 V AC (free) 50/60 Hz 170 VA max.	100 V or 120/220/240 V AC (specify when ordering), 50/60 Hz 20 VA max.
Dimensions and mass	80 mm (3.15 in.)W × 119 mm (4.69 in.)H × 200 mm (7.87 in.)D, 1.1 kg (38.8 oz.)	73 mm (2.87 in.)W × 110 mm (4.33 in.)H × 186 mm (7.32 in.)D, 1.1 kg (38.8 oz.)
Included accessories	Instruction manual ×1, Power cord ×1	Power cord ×1, Instruction manual ×1, Spare fuse ×1

Best-in-class Measurement Bandwidth with High Accuracy

AC/DC CURRENT SENSOR CT6904A



CE
CAT III 1000 V
3 Year Warranty

Other Options
Please contact your Hioki distributor or subsidiary for more information.
• Metal fittings

HIOKI ME15W
(12-pin terminal)

- Combined accuracy with Hioki power analyzer PW8001 and PW4001 is specified (DC, 45 Hz ≤ f ≤ 65 Hz). For details of combined accuracy, refer to the instruction manual.
- 500 A (rms) or 800A (rms) rated for measurement of large currents
- Wide measurement frequency range: DC to 4 MHz (CT6904A, CT6904A-2)
- ±5 ppm excellent linearity (CT6904A, CT6904A-1)
- 120 dB (100 kHz) high Common-Mode Rejection Ratio (CMRR)

Model No. (Order Code)

CT6904A	(500 A AC/DC, HIOKI ME15A terminal, cable length: 3 m [9.84 ft.])
CT6904A-1	(Build-to-order, 500 A AC/DC, HIOKI ME15A terminal, cable length: 10 m [32.81 ft.])
CT6904A-2	(Build-to-order, 800 A AC/DC, HIOKI ME15A terminal, cable length: 3 m [9.84 ft.])
CT6904A-3	(Build-to-order, 800 A AC/DC, HIOKI ME15A terminal, cable length: 10 m [32.81 ft.])

Basic specifications (Accuracy guaranteed for 1 year)

	CT6904A, CT6904A-1	CT6904A-2, CT6904A-3
Rated current	500 A AC/DC	800 A AC/DC
Max. allowable input	±1000 A peak Within the derating range, design value, within 20 ms and 40°C (104°F) or less	±1200 A peak
Frequency characteristics	Amplitude: DC to 4 MHz (CT6904A-1, CT6904A-3: DC to 2MHz) Phase: DC to 1 MHz	
Linearity	±5 ppm Typical (23°C [73°F])	±12.5 ppm Typical (23°C [73°F])
Offset voltage	±10 ppm Typical (23°C (73°F), no input)	
Basic accuracy	DC (Amplitude: ±0.025% rdg. ±0.007% f.s., no phase specification) 45 Hz ≤ f ≤ 65 Hz (Amplitude: ±0.02% rdg. ±0.007% f.s., Phase: ±0.08°)	DC (Amplitude: ±0.030% rdg. ±0.009% f.s., no phase specification) 45 Hz ≤ f ≤ 65 Hz (Amplitude: ±0.025% rdg. ±0.007% f.s., Phase: ±0.08°)
Output voltage rate	4 mV / A rated	2 mV / A rated
Max. rated voltage to earth	1000 V CAT III	
Core diameter	φ 32 mm (1.26 in.)	
Operating temperature, humidity	-10°C to 50°C (14°F to 122°F) 80% RH or less (with no condensation)	
Power supply	Power supplied via the Power Analyzer PW8001, PW4001, or Sensor Unit CT9555, CT9556, CT9557	
Max. rated power	7 VA Max. (500 A/55 Hz measurement, with a power supply of ±12 V)	
Dimensions and mass	139 mm (5.47 in.)W × 120 mm (4.72 in.)H × 52 mm (2.05 in.)D CT6904A: 1.05 kg (37 oz.), cable length 3 m (9.84 ft.) CT6904A-1: 1.35 kg (47.6 oz.), cable length 10 m (32.81 ft.)	CT6904A-2: 1.15 kg (40.6 oz.), cable length 3 m (9.84 ft.) CT6904A-3: 1.45 kg (51.1 oz.), cable length 10 m (32.81 ft.)
Included accessories	Instruction manual ×1, Carrying case ×1, Color labels (for channel identification) ×1	

Supports Current Measurement of Inverters with High Current and High Speed

AC/DC CURRENT SENSOR CT6875A, CT6876A, CT6877A



CE
CAT III 1000 V
3 Year Warranty

CT6875A
HIOKI ME15W
(12-pin terminal)

- Combined accuracy with Hioki power analyzer PW8001 and PW4001 is specified (DC, 45 Hz ≤ f ≤ 66 Hz). For details of combined accuracy, refer to the instruction manual.
- Meet a wide range of applications from measuring battery charge/discharge to the secondary side of inverters in photovoltaic power generation and fuel cell evaluation, etc.
- Monitor waveforms when paired with oscilloscopes or Memory HiCorders and Sensor Unit
- Measures high-current up to 2000 A for EV, HEV and other electric vehicles (CT6877A)
- Improved noise resistance performance through a stronger shield lets you accurately measure current buried in noise
- High accuracy measurement realized through flat frequency characteristics and CMRR performance
- More enhanced environmental resistance performance than ever before lets you measure in -40 to 85°C situations
- Superior frequency characteristics
CT6875A: DC to 2 MHz (amplitude), CT6876A: DC to 1.5 MHz (amplitude), CT6877A: DC to 1 MHz (amplitude)

Model No. (Order Code)

CT6875A	(500 A AC/DC, ME15W terminal, 3 m (9.84 ft.) cable length)
CT6875A-1	(500 A AC/DC, ME15W terminal, 10 m (32.81 ft.) cable length)
CT6876A	(1000 A AC/DC, ME15W terminal, 3 m (9.84 ft.) cable length)
CT6876A-1	(1000 A AC/DC, ME15W terminal, 10 m (32.81 ft.) cable length)
CT6877A	(2000 A AC/DC, ME15W terminal, 3 m (9.84 ft.) cable length)
CT6877A-1	(2000 A AC/DC, ME15W terminal, 10 m (32.81 ft.) cable length)

Basic specifications (Accuracy guaranteed for 1 year)

	CT6875A, CT6875A-1	CT6876A, CT6876A-1
Rated current	500 A AC/DC	1000 A AC/DC
Max. allowable input	Within the derating range, up to ±1500 A peak (design value) allowed at 40°C or less for 20 ms or less	Within the derating range, up to ±1800 A peak (design value) allowed at 40°C or less for 20 ms or less
Frequency bandwidth	Amplitude: DC to 2 MHz (CT6875A), DC to 1.5 MHz (CT6875A-1) Phase: DC to 1 MHz	Amplitude: DC to 1.5 MHz (CT6876A), DC to 1.2 MHz (CT6876A-1) Phase: DC to 1 MHz
Basic accuracy	(DC, 45 Hz ≤ f ≤ 66 Hz) Amplitude: ±0.04% rdg ±0.008% f.s., Phase: ±0.1°	(DC, 45 Hz ≤ f ≤ 66 Hz) Amplitude: ±0.04% rdg ±0.008% f.s., Phase: ±0.1°
Output voltage rate	4 mV / A rated	2 mV / A rated
Max. rated voltage to earth	1000 V AC/DC (50/60 Hz, CAT III)	
Core diameter	φ 36 mm (1.42 in.)	
Operating temperature, humidity	-40°C to +85°C (-40°F to 185°F), 80% RH or less (with no condensation)	
Power supply	Power supplied via the Power Analyzer PW8001, PW4001, Sensor Unit CT9555, CT9556, CT9557, or 3CH CURRENT UNIT U8977	
Max. rated power	7 VA max. (at 500 A/55 Hz)	7.5 VA max. (at 1000 A/55 Hz)
Dimensions and mass	160 mm (6.30 in.)W × 112 mm (4.41 in.)H × 50 mm (1.97 in.)D, CT6875A: 850 g (30 oz.), cable length 3 m (9.84 ft.), CT6875A-1: 1150 g (40.6 oz.), cable length 10 m (32.81 ft.)	160 mm (6.30 in.)W × 112 mm (4.41 in.)H × 50 mm (1.97 in.)D, CT6876A: 970 g (34.2 oz.), cable length 3 m (9.84 ft.), CT6876A-1: 1300 g (45.9 oz.), cable length 10 m (32.81 ft.)
Included accessories	Instruction manual ×1, Mark bands ×6, Operating precautions ×1	

CT6877A, CT6877A-1	
Rated current	2000 A AC/DC
Max. allowable input	Within the derating range, (within the specified range up to ±3200 A peak)
Frequency characteristics	Amplitude: DC to 1 MHz, Phase: DC to 700 kHz
Linearity	±10 ppm Typical (23°C [73°F])
Offset voltage	±5 ppm Typical (23°C (73°F), no input)
Basic accuracy	(DC, 45 Hz ≤ f ≤ 66 Hz) Amplitude: ±0.04% rdg ±0.008% f.s., Phase: ±0.08°
Output voltage rate	1 mV / A rated (This device outputs AC+DC voltage via the Sensor Unit.)
Max. rated voltage to earth	1000 V AC/DC (50/60 Hz, CAT III)
Core diameter	φ 80 mm (3.15 in.)
Operating temperature, humidity	-40°C to +85°C (-40°F to 185°F), 80% RH or less (with no condensation)
Power supply	Power supplied via the Power Analyzer PW8001, PW4001, Sensor Unit CT9555, CT9556, CT9557, or 3CH CURRENT UNIT U8977
Max. rated power	9.5 VA max. (at 2000 A/55 Hz, ±12 V power requirement)
Dimensions and mass	229 mm (9.02 in.)W × 232 mm (9.13 in.)H × 112 mm (4.41 in.)D, CT6877A: 5 kg (176.4 oz.), cable length 3 m (9.84 ft.), CT6877A-1: 5.3 kg (186.9 oz.), cable length 10 m (32.81 ft.)
Included accessories	Instruction manual ×1, Mark bands ×6, Operating precautions ×1

Low-current Model of 50 A or 200A rating, with Wideband and High Accuracy

AC/DC CURRENT SENSOR CT6872, CT6873



CE
CAT III 1000 V
3 Year Warranty

- Combined accuracy with Hioki power analyzer PW8001 and PW4001 is specified (DC, 45 Hz ≤ f ≤ 66 Hz). For details of combined accuracy, refer to the instruction manual.
- Wide-bandwidth DC to 10 MHz excellent frequency characteristics
- Applications in the fields of electric and hybrid electric vehicles
- Wide operating temperature range(-40°C to 85°C) fit for automobile applications
- Ideal for evaluation of solar power generation and fuel cells to measure battery charge and discharge and the secondary side of inverters
- For observing waveforms to be used with the oscilloscopes or Memory HiCorders (use with Sensor Unit)

Model No. (Order Code)	CT6872	(50 A AC/DC, ME15W terminal, 3 m (9.84 ft.) cable length)
	CT6872-01	(50 A AC/DC, ME15W terminal, 10 m (32.81 ft.) cable length)
	CT6873	(200 A AC/DC, ME15W terminal, 3 m (9.84 ft.) cable length)
	CT6873-01	(200 A AC/DC, ME15W terminal, 10 m (32.81 ft.) cable length)

Note: these products cannot be used alone. The optional SENSOR UNIT is required in order to supply power and connect the clamp to a Memory HiCorder or other instrument. Products can be directly connected to the compatible Power Meters.

Basic specifications (Accuracy guaranteed for 1 year)

	CT6872, CT6872-01	CT6873, CT6873-01
Rated current	50 A AC/DC	200 A AC/DC
Max. allowable input	Up to ±150 A peak	Up to ±420 A peak
Frequency bandwidth	Amplitude: DC to 10 MHz, Phase: DC to 1 MHz	
Linearity	±2 ppm Typical (23°C [73°F])	
Offset voltage	±5 ppm Typical (23°C (73°F), no input)	
Basic accuracy	DC (±0.03% rdg. ±0.002% f.s., no phase specification) 45 Hz ≤ f ≤ 66 Hz (±0.03% rdg. ±0.007% f.s., ±0.05°) Specified up to 1 MHz	
Output voltage rate	40 mV/A rated	10 mV/A rated
	This device outputs AC+DC voltage via the Sensor Unit	
Max. rated voltage to earth	1000 V CAT III	
Core diameter	φ 24 mm (0.94 in.)	
Operating temperature, humidity	-40°C to +85°C (-40°F to 185°F), 80% RH or less (with no condensation)	
Power supply	Power supplied via the Power Analyzer PW8001, PW4001, Sensor Unit CT9555, CT9556, CT9557, or 3CH CURRENT UNIT U8977	
Max. rated power	4 VA max. (at 50 A/55 Hz, ±12 V power requirement)	6 VA max. (at 200 A/55 Hz, ±12 V power requirement)
Dimensions and mass	70 mm (2.76 in.)W × 100 mm (3.94 in.)H × 53 mm (2.09 in.)D, CT6872, CT6873: 370 g (13.1 oz.), cable length: 3 m (9.84 ft.), CT6872-01, CT6873-01: 690g (24.3 oz.), cable length 10 m (32.81 ft.)	
Included accessories	Instruction Manual ×1, Mark bands ×6, Operating Precautions ×1	

Delivering Wide Operating Temperature Range and High-precision Current Measurement

AC/DC CURRENT SENSOR CT6862-05, CT6863-05



CE
CAT III 1000 V
3 Year Warranty

- Super high precision
- Wide-bandwidth DC to 1 MHz (CT6862-05) excellent frequency characteristics
- Applications in the fields of electric and hybrid electric vehicles
- Wide operating temperature range(-30 °C to 85 °C) fit for automobile applications
- Ideal for evaluation of solar power generation and fuel cells to measure battery charge and discharge and the secondary side of inverters
- For observing waveforms to be used with the oscilloscopes or Memory HiCorders (use with SENSOR UNIT)

Model No. (Order Code)	CT6862-05	(50 A AC/DC, ME15W terminal)
	CT6863-05	(200 A AC/DC, ME15W terminal)

Note: these products cannot be used alone. The optional SENSOR UNIT is required in order to supply power and connect the clamp to a Memory HiCorder or other instrument. Products can be directly connected to the compatible Power Meters.

Basic specifications (Accuracy guaranteed for 1 year)

	CT6862-05	CT6863-05
Rated current	50 A AC/DC	200 A AC/DC
Max. allowable input	100 A rms (requires derating)	400 A rms (requires derating)
Frequency characteristics	Amplitude: DC to 1 MHz Phase: DC to 300 kHz	Amplitude: DC to 500 kHz Phase: DC to 300 kHz
Amplitude and Phase accuracy	DC ±0.05% rdg ±0.01% f.s. (Phase: Not defined) 16 Hz ≤ f ≤ 400 Hz ±0.05% rdg ±0.01% f.s. (Phase: ±0.2°) Defined to 1 MHz (CT6862-05) Defined to 500 kHz (CT6863-05)	
Output voltage	2 V /rated current value (This device outputs AC+DC voltage via the Sensor Unit.)	
Max. rated voltage to earth	1000 V AC/DC (50/60 Hz, CAT III)	
Core diameter	φ 24 mm (0.94 in.)	
Operating temperature, humidity	-30°C to +85°C (-22°F to 185°F), 80% RH or less (with no condensation)	
Power supply	Power supplied via the Power Analyzer PW8001, PW4001, or Sensor Unit CT9555, CT9556, CT9557, or 3CH CURRENT UNIT U8977	
Power consumption	5 VA max. (at 50 A/55 Hz, ±12 V power requirement)	6 VA max. (at 200 A/55 Hz, ±12 V power requirement)
Dimensions and mass	70 mm (2.76 in.)W × 100 mm (3.94 in.)H × 53 mm (2.09 in.)D, 340 g (12.0 oz.), cord length: 3 m (9.84 ft.)	70 mm (2.76 in.)W × 100 mm (3.94 in.)H × 53 mm (2.09 in.)D, 350 g (12.3 oz.), cord length: 3 m (9.84 ft.)
Included accessories	Instruction manual ×1, Mark bands ×6	

Current Sensors

Shared options for CT6904A, CT6875A, CT6876A, CT6877A, CT6872, CT6873, CT6862, and CT6863

options A						options B		options D	
	SENSOR UNIT CT9555 Power supply for current sensors (1ch, with waveform output)	SENSOR UNIT CT9556 Power supply for current sensors (1ch, with waveform / RMS output)	SENSOR UNIT CT9557 Power supply for current sensors (4ch, with waveform / total waveform / total RMS output)	CONNECTION CORD L9217 Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft.) length	CONNECTION CORD 9165 Cord has metallic BNC connectors at both ends, use at metallic terminal, 1.5 m (4.92 ft.) length		EXTENSION CABLE CT9902 5 m (16.41 ft.) length, HIOKI ME15W (12 pin) - HIOKI ME15W (12 pin) connector		CONVERSION CABLE 9318 To connect HIOKI PL23 (10 pin) connector to the 8971/40/51, 38 cm (14.96 in.) length

Compatible models	CT6904A	CT6875A	CT6876A	CT6877A	CT6872	CT6873	CT6862-05	(CT6862)	CT6863-05	(CT6863)
PW8001	✓	✓	✓	✓	✓	✓	✓	▲(Requires the CT9900)	✓	▲(Requires the CT9900)
PW4001	✓	✓	✓	✓	✓	✓	✓	▲(Requires the CT9900)	✓	▲(Requires the CT9900)
U8977	✓	✓	✓	✓	✓	✓	✓	▲(Requires the CT9900)	✓	▲(Requires the CT9900)

High-precision Current Testing (Rated Current 2000 A DC/1400 A AC, 1000 A AC/DC, 500 A AC/DC)

AC/DC CURRENT PROBE CT6845A, CT6846A, CT6847A



- Combined accuracy with Hioki Power Analyzer PW8001 and PW4001 is specified (DC, 45 Hz \leq f \leq 66 Hz). For details of combined accuracy, refer to the instruction manual.
- Frequency bandwidth: DC to 200 kHz (CT6845A), DC to 100 kHz (CT6846A), DC to 70 kHz (CT6847A),
- Ideal for use in environmental testing with broad -40°C to 85°C temperature range
- Single-handed operation and robust locking mechanism
- Large jaw for clamping thick and paired wires
- Power supplied via the measurement instrument (when connecting Hioki Power Analyzer or Memory HiCorder)
- Ideal for EV inverter evaluation and PV power generation PCS evaluation

Model No. (Order Code)	CT6845A	(500 A AC/DC, ME15W terminal)
	CT6846A	(1000 A AC/DC, ME15W terminal)
	CT6847A	(2000 A DC /1400 A AC , ME15W terminal)

Note: these products cannot be used alone. The optional SENSOR UNIT is required in order to supply power and connect the clamp to a Memory HiCorder or other instrument. Products can be directly connected to the compatible Power Meters.

Basic specifications (Accuracy guaranteed for 1 year)

	CT6845A	CT6846A	CT6847A
Rated current	500 A AC/DC	1000 A AC/DC	2000 A DC 1400 A AC
Frequency bandwidth	DC to 200 kHz	DC to 100 kHz	DC to 70 kHz
Core diameter	Max. ϕ 50 mm (1.97 in.)		
Max. allowable input	\pm 1500 A peak (Within 20 ms in an environment of 40°C/104°F or less)	\pm 1900 A peak (Within 20 ms in an environment of 40°C/104°F or less)	\pm 2400 A peak (Within 1 cycle at 40°C (104°F) or less, for waveforms with a period of 10 ms or more)
Output voltage	4 mV/A	2 mV/A	1 mV/A
Output resistance	50 Ω \pm 10 Ω		
Accuracy (amplitude) \pm (% of reading + % of full scale)	DC: 0.2% + 0.02% DC < f \leq 100 Hz: 0.2% + 0.01%	DC: \pm 0.2% rdg + 0.02% f.s., DC < f \leq 100 Hz: \pm 0.2% rdg + 0.01% f.s.	DC: 0.15% + 0.01%, DC < f \leq 16 Hz: 0.2% + 0.01%, 16 Hz < f \leq 100 Hz: 0.15% + 0.01%
Linearity	\pm 20 ppm Typical		
Common-Mode Voltage Rejection Ratio (CMRR)	DC to 1 kHz: 150 dB or greater 1 kHz to 10 kHz: 130 dB or greater 10 kHz to 100 kHz: 100 dB or greater (effect on output voltage and common mode voltage)	DC to 1 kHz: 150 dB or greater 1 kHz to 10 kHz: 130 dB or greater 10 kHz to 50 kHz: 100 dB or greater (effect on output voltage and common mode voltage)	DC to 1 kHz: 130 dB or greater 1 kHz to 10 kHz: 120 dB or greater 10 kHz to 50 kHz: 100 dB or greater (effect on output voltage and common mode voltage)
Automatic phase correction	Automatically performs phase correction when connected to a compatible Hioki power analyzer		
Operating temperature, humidity	-40 °C to +85 °C (-40 °F to 185 °F), 80% RH or less		
Standards	Safety IEC 61010 EMC IEC 61326		
Withstand voltage	AC 4,260 V		
Power supply	Power supplied from compatible Hioki power analyzers, sensor units, or current units		
Max. rated power	7 VA or less (When measuring 500 A/55 Hz with \pm 12 V power supply)	7 VA or less (When measuring 1000 A/55 Hz with \pm 12 V power supply)	7 VA or less (When measuring 1000 A/55 Hz with \pm 12 V power supply)
Dimensions and mass	Approx. 238 mm W \times 116 mm H \times 35 mm D (approx. 9.37 in. W \times 4.57 in. H \times 1.38 in. D), 860 g (30.3 oz.)	Approx. 238 mm W \times 116 mm H \times 35 mm D (approx. 9.37 in. W \times 4.57 in. H \times 1.38 in. D), 990 g (34.9 oz.)	Approx. 238 mm W \times 116 mm H \times 35 mm D (approx. 9.37 in. W \times 4.57 in. H \times 1.38 in. D), 1040 g (36.7 oz.)
Cable length	Approx. 3 m (9.84 ft.)		
Included accessories	Instruction manual \times 1, Mark bands \times 6, Carrying Case \times 1		

High-precision Current Testing (Rated Current 500 A AC/DC, 200 A AC/DC, 20 A AC/DC)

AC/DC CURRENT PROBE CT6841A, CT6843A, CT6844A



- Combined accuracy with Hioki Power Analyzer PW8001 and PW4001 is specified (DC, 45 Hz \leq f \leq 66 Hz). For details of combined accuracy, refer to the instruction manual.
- Frequency bandwidth: DC to 2 MHz (CT6841A), DC to 700 kHz (CT6843A), DC to 500 kHz (CT6844A),
- Ideal for use in environmental testing with broad -40°C to 85°C temperature range
- Single-handed operation and robust locking mechanism
- Power supplied via the measurement instrument (when connecting Hioki Power Analyzer or Memory HiCorder)
- Ideal for EV inverter evaluation and PV power generation PCS evaluation

Model No. (Order Code)	CT6841A	(20 A AC/DC, ME15W terminal)
	CT6843A	(200 A AC/DC, ME15W terminal)
	CT6844A	(500 A AC/DC, ME15W terminal)

Note: these products cannot be used alone. The optional SENSOR UNIT is required in order to supply power and connect the clamp to a Memory HiCorder or other instrument. Products can be directly connected to the compatible Power Meters.

Basic specifications (Accuracy guaranteed for 1 year)

	CT6841A	CT6843A	CT6844A
Rated current	20 A AC/DC	200 A AC/DC	500 A AC/DC
Frequency characteristics	DC to 2 MHz	DC to 700 kHz	DC to 500 kHz
Core diameter	ϕ 20 mm (0.79 in.)		
Max. allowable input	\pm 60 A peak (Within 20 ms in an environment of 40°C/104°F or less)	\pm 600 A peak (Within 20 ms in an environment of 40°C/104°F or less)	\pm 800 A peak (Within 20 ms in an environment of 40°C/104°F or less)
Output voltage	100 mV/A	10 mV/A	4 mV/A
Output resistance	50 Ω \pm 10 Ω		
Accuracy (amplitude) \pm (% of reading + % of full scale)	DC: 0.2% + 0.05% DC < f \leq 100 Hz: 0.2% + 0.01%	DC: 0.2% + 0.02% DC < f \leq 100 Hz: 0.2% + 0.01%	DC: 0.2% + 0.02% DC < f \leq 100 Hz: 0.2% + 0.01%
Linearity	\pm 20 ppm Typical		
Common-Mode Voltage Rejection Ratio (CMRR)	DC to 1 kHz: 140 dB or greater 1 kHz to 10 kHz: 125 dB or greater 10 kHz to 100 kHz: 100 dB or greater 100 kHz to 1 MHz: 80 dB or greater (effect on output voltage and common mode voltage)	DC to 1 kHz: 150 dB or greater 1 kHz to 10 kHz: 135 dB or greater 10 kHz to 100 kHz: 115 dB or greater 100 kHz to 500 kHz: 95 dB or greater (effect on output voltage and common mode voltage)	DC to 1 kHz: 150 dB or greater 1 kHz to 10 kHz: 135 dB or greater 10 kHz to 100 kHz: 120 dB or greater 100 kHz to 300 kHz: 100 dB or greater (effect on output voltage and common mode voltage)
Automatic phase correction	Automatically performs phase correction when connected to a compatible Hioki power analyzer.		
Operating temperature, humidity	-40 °C to +85 °C (-40 °F to 185 °F), 80% RH or less		
Standards	Safety IEC 61010 EMC IEC 61326		
Withstand voltage	AC 4,260 V		
Power supply	Power supplied from compatible Hioki power analyzers, sensor units, or current units.		
Max. rated power	5 VA max. (at 20 A/55 Hz, \pm 12 V power requirement)	6 VA max. (at 200 A/55 Hz, \pm 12 V power requirement)	7 VA or less (When measuring 500 A/55 Hz with \pm 12 V power supply)
Dimensions and mass	153 mm (6.02 in.)W \times 67 mm (2.64 in.)H \times 25 mm (0.98 in.)D CT6841A: 370 g (13.05 oz.), CT6843A: 380 g (13.4 oz.)		
Cable length	Approx. 3 m (9.84 ft.)		
Included accessories	Instruction manual \times 1, Mark bands \times 6, Carrying Case \times 1		

High-precision Current Testing (Rated Current 500 A AC/DC, 200 A AC/DC)

AC/DC CURRENT PROBE CT6833, CT6834



- The slim design ensures easy installation even in tight spaces
- Rated current 200 A AC/DC(CT6833, CT6833-01), 500 A AC/DC(CT6834, CT6834-01)
- Frequency bandwidth: DC to 50 kHz
- Measurement accuracy DC: $\pm 0.07\%$ rdg. $\pm 0.01\%$ f.s.
- Operating temp range: -40°C to 85°C , perfect for vehicle testing
- Ideal for vehicle fuel & energy efficiency testing—compliant with international standard WLTP

Model No. (Order Code)	CT6833	(200 A AC/DC, ME15W terminal, 5m cable length)
	CT6833-01	(200 A AC/DC, ME15W terminal, 10m cable length)
	CT6834	(500 A AC/DC, ME15W terminal, 5m cable length)
	CT6834-01	(500 A AC/DC, ME15W terminal, 10m cable length)

■ Basic specifications (Accuracy guaranteed for 1 year)

	CT6833, CT6833-01	CT6834, CT6834-01
Rated current	200 A AC/DC	500 A AC/DC
Frequency bandwidth	DC to 50 kHz	
Diameter of measurable conductor	Max. $\phi 20$ mm (0.79 in.)	
Maximum peak current	Up to ± 600 A peak are permitted at a temperature of 40°C (104°F) or less and within 1 period of a periodic waveform of 10 ms or more (design value, out of guaranteed accuracy range)	Up to ± 800 A peak are permitted at a temperature of 40°C (104°F) or less and within 1 period of a periodic waveform of 10 ms or more (design value, out of guaranteed accuracy range)
Output voltage	10 mV/A	4 mV/A
Measurement accuracy	DC : $\pm 0.07\%$ rdg. $\pm 0.01\%$ f.s.	
Operating temperature and humidity range	Sensor, cable: -40°C to 85°C (-40°F to 185°F), 80% RH or less (non-condensing) Relay box: -25°C to 50°C (-13°F to 122°F), 80% RH or less (non-condensing)	
Temperature coefficient	The following numerical values are added to the measurement accuracy according to the temperature difference with the upper and lower limits of the guaranteed accuracy temperature range (18°C or 28°C [64°F or 82°F]) if operating temperatures are outside the guaranteed accuracy temperature range ($23^{\circ}\text{C} \pm 5^{\circ}\text{C}$ [$73^{\circ}\text{F} \pm 9^{\circ}\text{F}$]). - Sensor Amplitude accuracy: ± 4 ppm of reading/ $^{\circ}\text{C}$ (± 0.8 ppm of reading/ $^{\circ}\text{C}$ Typical) Offset voltage: ± 3 ppm of full scale/ $^{\circ}\text{C}$ (± 0.5 ppm of full scale/ $^{\circ}\text{C}$ Typical) - Relay box Amplitude accuracy: ± 15 ppm of reading/ $^{\circ}\text{C}$ (± 5 ppm of reading/ $^{\circ}\text{C}$ Typical) Offset voltage: ± 1 ppm of full scale/ $^{\circ}\text{C}$ (± 0.3 ppm of full scale/ $^{\circ}\text{C}$ Typical)	
Effects of conductor position	(For a conductor with an outer diameter of 10 mm) DC: $\pm 0.03\%$ of reading or less ($\pm 0.01\%$ of reading Typical) 50 Hz/60 Hz: $\pm 0.04\%$ of reading or less ($\pm 0.015\%$ of reading Typical) 1 kHz: $\pm 0.1\%$ of reading or less ($\pm 0.04\%$ of reading Typical) 10 kHz: $\pm 1\%$ of reading or less ($\pm 0.3\%$ of reading Typical)	
Power supply	Use Hioki instruments with an ME15W connector	
Dimensions (excluding protrusions and cable)	Sensor: approx. $149\text{W} \times 46\text{H} \times 16.5\text{D}$ mm ($5.9\text{W} \times 1.8\text{H} \times 0.6\text{D}$ in.) Relay box: approx. $126\text{W} \times 57\text{H} \times 20.5\text{D}$ mm ($5.0\text{W} \times 2.2\text{H} \times 0.8\text{D}$ in.)	
Weight	CT6833: approx. 500 g (17.6 oz.) CT6833-01: approx. 710 g (25.0 oz.)	CT6834: approx. 500 g (17.6 oz.) CT6834-01: approx. 710 g (25.0 oz.)
Output cable length (including relay box)	CT6833: approx. 5 m (16.4 ft.) CT6833-01: approx. 10 m (32.8 ft.)	CT6834: approx. 5 m (16.4 ft.) CT6834-01: approx. 10 m (32.8 ft.)
Included accessories	Color labels (for channel identification) $\times 1$, Carrying Case $\times 1$, Instruction Manual $\times 1$, Current Sensor Operating Precautions $\times 1$	

One of the Industry's Smallest Current Sensors (Rated Current 20 A AC/DC, 2 A AC/DC)

AC/DC CURRENT PROBE CT6830, CT6831



- Exceptional performance in a compact package
- Easy to install in confined locations with complex wiring
- High accuracy: $\pm 0.3\%$ rdg. $\pm 0.1\%$ f.s.
- Decreased offset drift that comes from temperature changes

Model No. (Order Code)	CT6830	(2 A AC/DC, ME15W terminal)
	CT6831	(20 A AC/DC, ME15W terminal)

Note: these products can be used with PW8001, PW4001, CT9555, CT9556, CT9557, and U8977.

■ Basic specifications (Accuracy guaranteed for 1 year)

	CT6830	CT6831
Rated measurement current	2 A AC/DC	20 A AC/DC
Max. allowable input	3 A rms continuous (± 4.3 Ap)	30 A rms continuous (± 43 Ap)
Bandwidth	DC to 100 kHz	
Core diameter	$\phi 5$ mm or less	
Output connectors	HIOKI ME15W	
Operating temperature range	Sensor: -40°C to 85°C , 80% RH or less (non-condensing) Multiplexer: -25°C to 50°C , 80% RH or less (non-condensing)	
Dimensions	Sensor: $76.5\text{W} \times 23.4\text{H} \times 14.2\text{D}$ mm (excluding protrusions and the cable) Multiplexer: $80\text{W} \times 20\text{H} \times 26.5\text{D}$ mm (excluding protrusions and the cable)	
Weight	140 g	
Output cable length	4 m (between sensor and multiplexer) 0.2 m (between multiplexer and output connector)	
Included accessories	Colored labels (for channel identification), Carrying case, Instruction Manual, Operating Precautions	

Shared options for CT6845A, CT6846A, CT6847A, CT6841A, CT6843A, CT6844A, CT6833, CT6834, CT6830 and CT6831

Option A	SENSOR UNIT CT9555 Power supply for current sensors (1ch, with waveform output)	SENSOR UNIT CT9556 Power supply for current sensors (1ch, with waveform / RMS output)	SENSOR UNIT CT9557 Power supply for current sensors (4ch, with waveform / total waveform / total RMS output)	CONNECTION CORD L9217 Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft.) length	CONNECTION CORD 9165 Cord has metallic BNC connectors at both ends, use at metallic terminal, 1.5 m (4.92 ft.) length	Option C	EXTENSION CABLE CT9902 5 m (16.4 ft.) length, HIOKI ME15W (12 pin) - HIOKI ME15W (12 pin) connector	Option D	CONVERSION CABLE 9318 To connect HIOKI PL23 (10 pin) connector to the 8971/40/51, 38 cm (14.96 in.) length
	<p>The CT9902 connects up to 2 cables in series.</p> <p>For connecting to the F/V Unit 8940 or Current Unit 8971</p> <p>Discontinuation scheduled</p>								

Compatible models	CT6845A	CT6846A	CT6847A	CT6841A	CT6843A	CT6844A	CT6833	CT6834	CT6830	CT6831
PW8001	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PW4001	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
U8977	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Power Supply for 4ch High-Precision Current Sensors Capable of Adding Current Waveforms

SENSOR UNIT CT9557



HIOKI ME15W (12-pin terminal)



- Power supply for high-precision current sensors with waveform output functionality
- Channel-specific waveform output, total waveform output, total RMS output
- Ideal for measuring multi-cable circuits

Model No. (Order Code) **CT9557** (For the CT6841A, etc., ME15W terminal)

Basic specifications (Accuracy guaranteed for 1 year)

Connectable current sensors	Current sensors with a Hioki ME15W (male) output connector (CT6872, CT6841A, etc.) *The separately available Conversion Cable CT9900 is required in order to use a current sensor equipped with a PL23 (10-pin) terminal
Output Terminal	BNC Terminal
Output voltage	Waveform output/ Total waveform output: 2 V f.s. Total RMS output: 2 V DC f.s. Waveform output (4CH), total waveform output and total RMS output can be used simultaneously
Output resistance	50 Ω
Operating temperature range	-10 °C to 50 °C (14 °F to 122 °F)
Power supply	AC Adapter Z1002 (100 to 240 V AC, 50/60 Hz, maximum rated power when used with sensors: 155 VA) External power supply (10 to 30 V DC; maximum rated power: 60 VA)
Dimensions and mass	116 mm (4.57 in.)W × 67 mm (2.64 in.)H × 132 mm (5.20 in.)D (excluding protruding parts), 420 g (14.8 oz.)
Included accessories	AC Adapter Z1002 ×1, Power cord ×1, Instruction manual ×1

Power Supplies for High-Precision Current Sensors

SENSOR UNIT CT9555, CT9556



HIOKI ME15W (12-pin terminal)



- Power supply for high-precision current sensors with waveform output functionality (CT9555)
- Power supply for high-precision current sensors with waveform output/RMS output functionality (CT9556)

Model No. (Order Code) **CT9555** (For the CT6841A, etc., ME15W connector)
CT9556 (For the CT6841A, etc., ME15W connector)

Basic specifications (Accuracy guaranteed for 1 year)

	CT9555	CT9556
Connectable current sensors	Current sensors with a Hioki ME15W (male) output connector (CT6872, CT6841A, etc.) *The separately available Conversion Cable CT9900 is required in order to use a current sensor equipped with a PL23 (10-pin) terminal	
Output Terminal	BNC Terminal	
Output voltage	Waveform output: 2 V f.s.	Waveform output: 2 V f.s. RMS output: 2 V DC f.s. Waveform output and RMS output can be used simultaneously
Output resistance	50 Ω	
Operating temperature range	-10 °C to 50 °C (14 °F to 122 °F)	
Power supply	AC Adapter Z1008 (100 to 240 V AC, 50/60 Hz, maximum rated power when used with sensors: 45 VA) External power supply (10 to 30 V DC; maximum rated power: 15 VA)	
Dimensions and mass	33 mm (1.30 in.)W × 67 mm (2.64 in.)H × 132 mm (5.20 in.)D (excluding protruding parts), 200 g (7.1 oz.)	
Included accessories	AC Adapter Z1008 ×1, Power cord ×1, Instruction manual ×1	

Shared options for CT9555, CT9556 and CT9557

Options				
				Discontinuation scheduled

Ideal for Measuring AC Current with Low Frequencies such as Inverter Control Devices

CLAMP ON SENSOR 9272



HIOKI ME15W (12-pin terminal)



CAT III 600 V

- Superior low frequency and phase characteristics suitable for testing the current and power of inverter control devices
- Wide 1 Hz to 100 kHz frequency bandwidth perfect for harmonic analysis, FFT analysis and waveform monitoring (AC only)

Model No. (Order Code) **9272-05** (20/200 A AC, ME15W terminal)

Note: this product cannot be used alone. The optional Sensor Unit is required in order to supply power and connect the clamp to a Memory HiCorder or other instrument. The clamp can be directly connected to a compatible Power Meters.



Basic specifications (Accuracy guaranteed for 1 year)

Rated current	20 A AC, or 200 A AC (selectable)
Max. allowable input	50 A rms (at 20 A range), 300 A rms (at 200 A range)
Frequency characteristics	1 Hz (±2% rdg ±0.1% f.s.) to 100 kHz (±30% rdg ±0.1% f.s.)
Amplitude and Phase accuracy	Amplitude: ±0.3% rdg ±0.01% f.s. Phase: ±0.2° (45 to 66 Hz)
Output voltage	2 V/20 A rated current range, or 2 V/200 A rated current range (This device outputs AC+DC voltage via the Sensor Unit.)
Max. rated voltage to earth	600 V rms (CAT III)
Core diameter	φ 46 mm (1.81 in.)
Power supply	Power supplied via the Power Analyzer PW8001, PW4001, Sensor Unit CT9555, CT9556, CT9557, or 3CH CURRENT UNIT U8977
Power consumption	5 VA Max. (when measuring 200 A)
Dimensions and mass	78 mm (3.07 in.)W × 188 mm (7.40 in.)H × 35 mm (1.38 in.)D, 430 g (15.2 oz.), cord length: 3 m (9.84 ft.)
Included accessories	Carrying case 9355 ×1, Instruction manual ×1, Mark bands ×6

Options A					
Options C					Options D

Accurate, Long-term Recording and Easy Output Settings

AC/DC AUTO-ZERO CURRENT SENSOR CT7700 series



- Accurately measure and record even when the temperature changes
- Ideal for site inspections by using detachable Display Unit
- Four output formats to output data to loggers or other devices (via Display Unit) WAVE, RMS, PEAK, Hz

Model No. (Order Code)	CT7742 (2000 A AC/DC, ϕ 55 mm (2.17 in.))
	CT7736 (600 A AC/DC, ϕ 33 mm (1.30 in.))
	CT7731 (100 A AC/DC, ϕ 33 mm (1.30 in.))

Note: CT7700 series cannot be used alone. Use with the Display Unit CM7290 to connect with Data Loggers and Memory HiCorders. When used in combination with CM7290, the frequency band of current display and waveform output becomes narrow.

Basic specifications (Accuracy guaranteed for 3 years)

	CT7742	CT7736	CT7731
Rated measurement current	2000 A AC/DC	600 A AC/DC	100 A AC/DC
Max. measurement current	2000 A (requires derating at frequency)	600 A (requires derating at frequency)	100 A (requires derating at frequency)
Max. allowable peak input	2840 A peak	900 A peak	150 A peak
Bandwidth	DC to 5 kHz (-3dB) (When used in combination with CM7290: DC 3 Hz to 1 kHz)		
Typical accuracy	± 2.3 deg. (DC < $f \leq 66$ Hz)	± 1.8 deg. (DC < $f \leq 66$ Hz)	± 1.8 deg. (DC < $f \leq 66$ Hz)
Output rate	0.1 mV/A	1 mV/A	1 mV/A
Max. rated voltage to earth	600 V AC/DC (CAT IV) 1000 V AC/DC (CAT III)	600 V AC/DC (CAT IV) 1000 V AC/DC (CAT III)	600 V AC/DC (CAT IV)
Core diameter	ϕ 55 mm (2.17 in.) or less	ϕ 33 mm (1.30 in.) or less	ϕ 33 mm (1.30 in.) or less
Output connectors	HIOKI PL 14		
Operating temperature range	-25 °C to 65 °C (-13 °F to 149 °F)		
Dust and water resistance *	Jaws and barriers: IP50 (when jaw closes)/Grip: IP54 (when measuring insulated conductors only. Do not use when wet.)		IP40 (when jaw closes)
Dimensions and mass	64 mm (2.52 in.)W × 195 mm (7.68 in.)H × 34 mm (1.34 in.)D, 510 g (18.0 oz.), Cable length 2.5 m (8.20 ft.)	64 mm (2.52 in.)W × 160 mm (6.30 in.)H × 34 mm (1.34 in.)D, 320 g (11.3 oz.), Cable length 2.5 m (8.20 ft.)	58 mm (2.28 in.)W × 132 mm (5.20 in.)H × 18mm (0.71 in.)D, 250 g (8.8 oz.), Cable length 2.5 m (8.20 ft.)
Included accessory	None		

* Waterproof characteristics intended to maintain measurement function; measuring energized parts while instrument is wet will increase risk of electric shock.

Accurate, Instantaneous Waveforms Recording and Easy Output Settings

AC/DC CURRENT SENSOR CT7600 series



- Ideal for observing instantaneous waveforms in laboratories and other temperature-controlled environments
- Ideal for site inspections by using detachable Display Unit
- Four output formats to output data to loggers or other devices (via Display Unit) WAVE, RMS, PEAK, Hz

Model No. (Order Code)	CT7642 (2000 A AC/DC, ϕ 55 mm (2.17 in.))
	CT7636 (600 A AC/DC, ϕ 33 mm (1.30 in.))
	CT7631 (100 A AC/DC, ϕ 33 mm (1.30 in.))

Note: CT7600 series cannot be used alone. Use with the Display Unit CM7290 to connect with Data Loggers and Memory HiCorders. When used in combination with CM7290, the frequency band of current display and waveform output becomes narrow.

Basic specifications (Accuracy guaranteed for 3 years)

	CT7642	CT7636	CT7631
Rated measurement current	2000 A AC/DC	600 A AC/DC	100 A AC/DC
Max. measurement current	2000 A (requires derating at frequency)	600 A (requires derating at frequency)	100 A (requires derating at frequency)
Max. allowable peak input	2840 A peak	900 A peak	150 A peak
Bandwidth	DC to 10 kHz (-3dB) (When used in combination with CM7290: DC 3 Hz to 1 kHz)		
Typical accuracy	± 2.3 deg. (DC < $f \leq 66$ Hz)	± 1.8 deg. (DC < $f \leq 66$ Hz)	± 1.8 deg. (DC < $f \leq 66$ Hz)
Output rate	0.1 mV/A	1 mV/A	1 mV/A
Max. rated voltage to earth	600 V AC/DC (CAT IV) 1000 V AC/DC (CAT III)	600 V AC/DC (CAT IV) 1000 V AC/DC (CAT III)	600 V AC/DC (CAT IV)
Core diameter	ϕ 55 mm (2.17 in.) or less	ϕ 33 mm (1.30 in.) or less	ϕ 33 mm (1.30 in.) or less
Output connectors	HIOKI PL 14		
Operating temperature range	-25 °C to 65 °C (-13 °F to 149 °F)		
Dust and water resistance *	Jaws and barriers: IP50 (when jaw closes)/Grip: IP54 (when measuring insulated conductors only. Do not use when wet.)		IP40 (when jaw closes)
Dimensions and mass	64 mm (2.52 in.)W × 195 mm (7.68 in.)H × 34 mm (1.34 in.)D, 510 g (18.0 oz.), Cable length 2.5 m (8.20 ft.)	64 mm (2.52 in.)W × 160 mm (6.30 in.)H × 34 mm (1.34 in.)D, 320 g (11.3 oz.), Cable length 2.5 m (8.20 ft.)	58 mm (2.28 in.)W × 132 mm (5.20 in.)H × 18mm (0.71 in.)D, 250 g (8.8 oz.), Cable length 2.5 m (8.20 ft.)
Included accessory	None		

* Waterproof characteristics intended to maintain measurement function; measuring energized parts while instrument is wet will increase risk of electric shock.

One of the Industry's Smallest Current Sensors

AC/DC CURRENT SENSOR CT7812, CT7822



- Exceptional performance in a compact package
- Easy to install in confined locations with complex wiring
- High accuracy: $\pm 0.3\%$ rdg. $\pm 0.1\%$ f.s.
- Decreased offset drift that comes from temperature changes

Model No. (Order Code)	CT7812 (2 A AC/DC)
	CT7822 (20 A AC/DC)

Note: these products can be used with U8556 and LR8536 and cannot be used with PQ3198, PQ3100.

Basic specifications (Accuracy guaranteed for 1 year)

	CT7812	CT7822
Rated measurement current	2 A AC/DC	20 A AC/DC
Max. allowable input	3 A rms continuous (± 4.3 Ap)	30 A rms continuous (± 4.3 Ap)
Bandwidth	DC to 100 kHz	
Core diameter	ϕ 5 mm or less	
Output connectors	HIOKI PL 14	
Operating temperature range	Sensor: -40°C to 85°C, 80% RH or less (non-condensing) Multiplexer: -25°C to 50°C, 80% RH or less (non-condensing)	
Dimensions	Sensor: 76.5W × 23.4H × 14.2D mm (excluding protrusions and the cable) Multiplexer: 80W × 20H × 26.5D mm (excluding protrusions and the cable)	
Weight	140 g	
Output cable length	4 m (between sensor and multiplexer) 0.2 m (between multiplexer and output connector)	
Included accessories	Colored labels (for channel identification), Carrying case, Instruction Manual, Operating Precautions	

Multi-functional Display Unit to Use Right on the Field or Output to Advanced Recorder or Logger

DISPLAY UNIT CM7290



- Power supply and signal output for Current Sensor CT7000 series
- Simultaneous dual display of the measured values, frequency, and output rate
- Four output formats to output data to loggers or other devices (via Display Unit)
- Supports AC adapter, AA alkaline batteries, and external power supply

Model No. (Order Code) **CM7290** (For the CT7000 series)

Note: CM7290 cannot be used alone. Use with CT7000 series. When used in combination with the CT7000 sensor series, the frequency band for current display and waveform output is narrower than the sensor band.

Basic specifications (Accuracy guaranteed for 3 years)

Sensor	CT7642, 7742	CT7636, 7736	CT7631, 7731
Measurement parameters	DC, AC, DC+AC, Hz		
Crest factor	3 at 5000 count or 2.5 at 6000 count for AC and DC+AC		
Output method	WAVE, RMS, PEAK, FREQ		
Input connectors	HIOKI PL 14		
Output update time	PEAK--- FAST: 0.02 s / NORMAL: 0.2 s / SLOW: 1 s FREQ--- FAST: FAST: 0.2 s / NORMAL: 0.2 s / SLOW: 3.0 s (WAVE, RMS: analog output)		
PEAK sensing duration	2 ms or greater (during PEAK MAX/PEAK MIN and PEAK output)		
Other functions	Auto range, Zero adjustment at power-up, Analysis display, Filter, Output amplification, Display value hold, Backlight, Auto-power save, Save settings, Keypad lock		
Typical accuracy (WAVE output DC)	±2.0% rdg ±10.8 mV (60.00 A range)	±2.5% rdg ±30.8 mV (60.00 A range)	±1.5% rdg ±5.8 mV (60.00 A range)
Typical accuracy (RMS output AC)	±2.3% rdg ±10.8 mV (60.00 A range)	±2.8% rdg ±30.8 mV (60.00 A range)	±1.8% rdg ±5.8 mV (60.00 A range)
Power supply	LR6 alkaline batteries (AA) ×2, Continuous use: 16 h (backlight OFF and WAVE or RMS output, when used with CT7600 series), Rated power 2.5 VA or AC adapter 9445-02/03 (100 to 240 V AC), or 5 to 15 V DC external power supply, Rated power 2.5 VA		
Dust and water resistance *	IP54 (with sensor connected and caps fitted to AC adapter and power connector)		
Dimensions and mass	52 mm (2.05 in.)W × 163 mm (6.42 in.)H × 37 mm (1.46 in.)D, 220 g (7.8 oz.) (including protector and battery)		
Included accessories	LR6 alkaline batteries ×2, Protector (attached to unit) ×1, Instruction manual ×1		

* Waterproof characteristics intended to maintain measurement function; measuring energized parts while instrument is wet will increase risk of electric shock.

Connectable sensor	AC/DC AUTO-ZERO CURRENT SENSOR CT7742	AC/DC AUTO-ZERO CURRENT SENSOR CT7736	AC/DC AUTO-ZERO CURRENT SENSOR CT7731	AC/DC CURRENT SENSOR CT7642	AC/DC CURRENT SENSOR CT7636	AC/DC CURRENT SENSOR CT7631	AC FLEXIBLE CURRENT SENSOR CT7046	AC FLEXIBLE CURRENT SENSOR CT7045	AC FLEXIBLE CURRENT SENSOR CT7044
	2000 A AC/DC, φ 55 mm (2.17 in.), 2.5 m (8.20 ft.) cord length	600 A AC/DC, φ 33 mm (1.30 in.), 2.5 m (8.20 ft.) cord length	100 A AC/DC, φ 33 mm (1.30 in.), 2.5 m (8.20 ft.) cord length	2000 A AC/DC, φ 55 mm (2.17 in.), 2.5 m (8.20 ft.) cord length	600 A AC/DC, φ 33 mm (1.30 in.), 2.5 m (8.20 ft.) cord length	100 A AC/DC, φ 33 mm (1.30 in.), 2.5 m (8.20 ft.) cord length	600/6000 A AC, φ 254 mm (10.00 in.)	600/6000 A AC, φ 180 mm (7.09 in.)	600/6000 A AC, φ 100 mm (3.94 in.)
Connectable sensor 2	AC LEAKAGE CURRENT SENSOR CT7116	AC CURRENT SENSOR CT7126	AC CURRENT SENSOR CT7131	AC CURRENT SENSOR CT7136	Output cord			Other options	
	6 A AC, φ 40 mm (1.57 in.), 2.5 m (8.20 ft.) cord length	60 A AC, φ 15 mm (0.59 in.), 2.5 m (8.20 ft.) cord length	100 A AC, φ 15 mm (0.59 in.), 2.5 m (8.20 ft.) cord length	600 A AC, φ 46 mm (1.81 in.), 2.5 m (8.20 ft.) cord length	OUTPUT CORD L9094	OUTPUT CORD L9095	OUTPUT CORD L9096	AC ADAPTER 9445-02	MAGNETIC STRAP Z5004
					Connect to Banana terminal, 1.5 m (4.92 ft.) length	Connect to BNC terminal, 1.5 m (4.92 ft.) length	Connect to terminal block, 1.5 m (4.92 ft.) length	100 to 240 V AC	

Shared options for CT7000 series

DISPLAY UNIT CM7290 Power supply for the CT7000 series single drive, Measure, Display, Signal output function	EXTENSION CABLE L0220-01 2 m (6.56 ft.) length	EXTENSION CABLE L0220-02 5 m (16.41 ft.) length	EXTENSION CABLE L0220-03 10 m (32.81 ft.) length	EXTENSION CABLE L0220-04 20 m (65.62 ft.) length	EXTENSION CABLE L0220-05 30 m (98.43 ft.) length	EXTENSION CABLE L0220-06 50 m (164.06 ft.) length	EXTENSION CABLE L0220-07 100 m (328.11 ft.) length	CARRYING CASE C0220 For storing sensor ×1, CM7290 ×1, AC adapter ×1, and output cord	CARRYING CASE C0221 For storing sensor ×3, CM7290 ×1, AC adapter ×1, output cord, and 30 m extension cable
---	--	---	--	--	--	---	--	--	--

Easy to Loop Around, Even in Confined Spaces

AC FLEXIBLE CURRENT SENSOR CT7040 series



CAT IV 600 V
CAT III 1000 V

- Thinner cables are easier to use in confined spaces and with complicated wiring
- Supports large current measurements up to 6000 A
- Wide 10 Hz to 50 kHz band with excellent frequency characteristics
- Choose from three conductor diameter sizes
- Ideal for site inspections by using detachable Display Unit
- Four output formats to output data to loggers or other devices (via Display Unit) WAVE, RMS, PEAK, Hz

Model No. (Order Code) **CT7046** (6000 A, φ254 mm (10.00 in.))
CT7045 (6000 A, φ180 mm (7.09 in.))
CT7044 (6000 A, φ100 mm (3.94 in.))

Note: CT7040 series cannot be used alone. Use with the Display Unit CM7290 to connect with Data Loggers and Memory HiCorders. When used in combination with CM7290, the frequency band of current display and waveform output becomes narrow. CT7046, CT7045, and CT7044 are a flexible current sensor for measuring large currents. It is not suitable for measuring minute current such as leakage current.

Basic specifications (Accuracy guaranteed for 1 year)


	CT7046	CT7045	CT7044
Rated measurement current	6000 A AC		
Internal Measurement range	600A AC/ 6000A AC (Range is controlled by main device)		
Max. allowable input	10000 A continuous (at 6000 A range, 45 to 66 Hz, requires derating)		
Bandwidth	10 Hz to 50 kHz (±3dB) (When used in combination with CM7290: 10 Hz to 1 kHz)		
Amplitude and phase accuracy	±1.5% rdg ±0.25% f.s. (f.s. is internal range, 45 to 66 Hz), ±1 deg		
Output rate	1 mV/A (600 A*), 0.1 mV/A (6000 A) *Selectable only when used with CM7290, PQ3100		
Max. rated voltage to earth	600 V AC (CAT IV), 1000 V AC (CAT III)		
Loop diameter	φ 254 mm (10.00 in.) or less	φ 180 mm (7.09 in.) or less	φ 100 mm (3.94 in.) or less
Dustproof, waterproof	IP54* (When sensor is connected to a compatible instrument.) * Do not use when met.		
Output connectors	HIOKI PL 14		
Operating temperature range	-25 °C to 65 °C (-13 °F to 149 °F)		
Dust and water resistance *	IP54 (when connected to a supported instrument, Do not make measurements when wet.)		
Dimensions	Flexible loop cable diameter: φ7.4 mm (0.29 in.), Cable length: Between flexible loop and battery box: 2.3 m (7.55 ft.), Output cable: 20 cm (0.66 ft.), Battery box 25 mm (0.98 in.)W × 72 mm (2.83 in.)H × 20 mm (0.79 in.)D		
Mass	186 g (6.6 oz.)	174 g (6.1 oz.)	160 g (5.6 oz.)
Included accessory	Instruction manual ×1		

* Waterproof characteristics intended to maintain measurement function; measuring energized parts while instrument is wet will increase risk of electric shock.

DISPLAY UNIT CM7290
 Display of current sensor, signal output

Easy to Loop Around, Even in Confined Spaces

AC FLEXIBLE CURRENT SENSOR CT9667 series

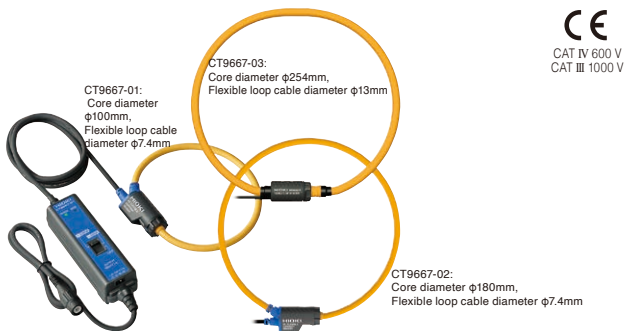

- Thinner cables are easy to use in confined spaces and with complicated wiring (-01, -02)
- Shaped so that it's easy to route through complex wiring
- Easily supports large current measurements up to 5000 A
- Wide 10 Hz to 20 kHz band with excellent frequency characteristics
- Choose from three conductor diameter sizes
- Combine with Hioki Power Meters or Memory HiCorders (with BNC input terminals)

Model No. (Order Code)	CT9667-01 (φ100 mm (0.30 in.))
	CT9667-02 (φ180 mm (7.09 in.))
	CT9667-03 (φ254 mm (10.00 in.))

Note: these current sensors may also be used with Hioki power quality analyzers, power meters or Memory HiCorders. CT9667 is a flexible current sensor for measuring large currents. It is not suitable for measuring minute current such as leakage current.

Basic specifications (Accuracy guaranteed for 1 year)

	CT9667-01	CT9667-02	CT9667-03
Rated input current	5000 A AC/ 500 A AC		
Max. allowable input	10000 A continuous (45 to 66 Hz, requires derating at frequency)		
Bandwidth	10 Hz to 20 kHz (±3dB)		
Amplitude and phase accuracy	±2% rdg ±0.3% f.s. (45 to 66 Hz, at center of flexible loop) Phase: ±1 deg (45 to 66 Hz)		
Output voltage	500 mV AC/f.s. (0.1 mV AC/A) at 5000 A range 500 mV AC/f.s. (1 mV AC/A) at 500 A range		
Max. rated voltage to earth	1000 V AC (CAT III), 600 V AC (CAT IV)		
Core diameter	φ 100 mm (3.94 in.)	φ 180 mm (7.09 in.)	φ 254 mm (10.00 in.)
Output terminal	BNC		
Operating temperature	-25 °C to +65 °C (-13 °F to 149 °F)	-25 °C to +65 °C (-13 °F to 149 °F)	-10 °C to +50 °C (14 °F to 122 °F)
Power supply	LR6 (AA) alkaline batteries ×2, Continuous use : 7 days (rated power 35 mVA), or AC adapter 9445-02/03 (rated power 0.2 VA), or External power supply 5 to 15 V DC (rated power 0.2 VA)		
Dust and water resistance	Flexible loop only: IP54		N/A
Dimensions and mass	Flexible loop cable diameter: φ7.4 mm (0.29 in.), Cable length: Between flexible loop and battery box: 2 m (6.56 ft.), Output cable: 1 m (3.28 ft.), Battery box: 35 mm (1.38 in.)W × 120.5 mm (4.74 in.)H × 34 mm (1.34 in.)D, 280 g (9.9 oz.)		Flexible loop cable diameter: φ13 mm (0.51 in.), Cable length: Between flexible loop and battery box: 2 m (6.56 ft.), Output cable: 1 m (3.28 ft.), Battery box: 35 mm (1.38 in.)W × 120.5 mm (4.74 in.)H × 34 mm (1.34 in.)D, 470 g (16.6 oz.)
Included accessories	LR6 (AA) alkaline batteries ×2, Instruction manual ×1		



Simply Connect to a Tester or Recorder to Easily Measure Large Currents

CLAMP ON PROBE 9132-50, 9010-50




- Economical clamp sensors for waveform recording with Memory HiCorders
- Choose from up to six general-purpose ranges

Order Code	9132-50 (BNC output terminal)
	9010-50 (BNC output terminal)

Note: for commercial power lines, 50/60 Hz (separate power supply not required).

Basic specifications (Accuracy guaranteed for 1 year)

	9132-50	9010-50
Rated current	20 A to 1000 A AC, 6 ranges	10 A to 500 A AC, 6 ranges
Accuracy	±3% rdg ±0.2% f.s. (45 to 66 Hz)	±2% rdg ±1% f.s. (45 to 66 Hz)
Frequency characteristics	Add to amplitude accuracy for frequencies from 40 to 1 kHz: ± 1% rdg	Add to amplitude accuracy for frequencies from 40 to 1 kHz: ± 6% rdg (at 10 A and 20 A range) ± 3% rdg (for 50 A range and above)
Output rate	0.2 V AC f.s. (f.s. = setting rage) (Connect to a voltage input device providing a high input impedance of 1 MΩ)	
Max. allowable input	1000 A rms continuous (all ranges) (For 40 Hz to 500 Hz: 100%, and for 500 Hz to 1 kHz: within 90% of derating)	150 A rms continuous (10/20/50 A ranges) 400 A rms continuous (100/200 A ranges) 650 A rms continuous (500 A range) (For 40 Hz to 100 Hz: 100%, and for 100 Hz to 1 kHz: within 50% of derating)
Max. rated voltage to earth	600 V rms (50/60 Hz, CAT III)	
Core diameter	φ55 mm (2.17 in.), or 20 mm (0.79 in.) × 80 mm (3.15 in.) busbar	φ46 mm (1.81 in.)
Dimensions and mass	100 mm (3.94 in.)W × 224 mm (8.82 in.)H × 35 mm (1.38 in.)D, 600 g (21.2 oz.), cord length: 3 m (9.84 ft.)	78 mm (3.07 in.)W × 188 mm (7.40 in.)H × 35 mm (1.38 in.)D, 420 g (14.8 oz.), cord length: 3 m (9.84 ft.)
Included accessory	Instruction manual ×1	



Superior Phase Characteristics Let You Record Waveforms Accurately

CLAMP ON PROBE 9018-50




- Choose from up to six general-purpose ranges
- Accurately record and analyze waveforms and harmonic signals

Order Code	9018-50 (BNC output terminal)
------------	--------------------------------------

Note: for commercial power lines, 50/60 Hz (separate power supply not required).

Basic specifications (Accuracy guaranteed for 1 year)

Rated current	10 A to 500 A AC, 6 ranges
Accuracy	±1.5% rdg ±0.1% f.s. (45 to 66 Hz)
Frequency characteristics	Add to amplitude accuracy : ± 1% rdg Add to phase accuracy : ± 2.5 ° for frequencies from 40 Hz to 3 kHz
Output rate	0.2 V AC f.s. (f.s. = setting rage) (Connect to a voltage input device providing a high input impedance of 1 MΩ)
Max. allowable input	150 A rms continuous (10/20/50 A ranges) 400 A rms continuous (100/200 A ranges) 650 A rms continuous (500 A range) (For 40 Hz to 100 Hz: 100%, and for 100 Hz to 1 kHz: within 50% of derating)
Max. rated voltage to earth	600 V rms (50/60 Hz, CAT III)
Core diameter	φ46 mm (1.81 in.)
Dimensions and mass	78 mm (3.07 in.)W × 188 mm (7.40 in.)H × 35 mm (1.38 in.)D, 420 g (14.8 oz.), cord length: 3 m (9.84 ft.)
Included accessory	Instruction manual ×1






Sensors for Master to Branch Circuits

f.s. is the sensor's rated measurement current value.





For load currents: for the PQ3100/PQ3198, CM7290 and similar products (PL14 terminal)

Basic specifications (Accuracy guaranteed for 1 year)

Model No. (Order Code)	CT7126	CT7131	CT7136
			
Rated measurement current	60 A AC	100 A AC	600 A AC
Max. measurement current	Continuous 60 A (45 to 66 Hz)	Continuous 130 A (45 to 66 Hz)	Continuous 600 A (45 to 66 Hz)
Output rate	10 mV/A	1 mV/A	1 mV/A
Amplitude accuracy (45 to 66 Hz)	±0.3% rdg ±0.01% f.s.	±0.3% rdg ±0.02% f.s.	±0.3% rdg ±0.01% f.s.
Phase accuracy	±2° (45 Hz to 5 kHz)	±1° (45 Hz to 5 kHz)	±0.5° (45 Hz to 5 kHz)
Amplitude frequency characteristics	Within ±2.04% at 40 Hz - 20 kHz	Within ±2.05% at 40 Hz - 20 kHz	Within ±2.54% at 40 Hz - 20 kHz
Max. rated voltage to earth	300 V AC rms or less		1000 V AC rms or less
Measurable conductor diameter	φ 15 mm (0.59 in.) or less		φ 46 mm (1.81 in.) or less
Operating temperature and humidity	-10°C to 50°C (14°F to 122°F), 80% RH or less (no condensation)		
Dustproofness and waterproofness	IP40 (EN60529) (with sensor connected and jaw closed)		
Dimensions and mass	46 mm (1.81 in.)W × 135 mm (5.31 in.)H × 21 mm (0.83 in.)D, 190 g (6.7 oz.) Cable length 2.5 m (8.20 ft.) (there is an optional extension cable), Output terminal: PL14		78 mm (3.07 in.)W × 152 mm (5.98 in.)H × 42 mm (1.65 in.)D, 350 g (12.3 oz.)

For load currents: for the PW3360 series, PW3198, MR8800 series and similar products (BNC terminal)




Basic specifications (Accuracy guaranteed for 1 year)

Model No. (Order Code)	9694	9660	9661	9669
				
Rated measurement current	5 A AC	100 A AC	500 A AC	1000 A AC
Max. measurement current	Continuous 50 A (45 to 66 Hz)	Continuous 130 A (45 to 66 Hz)	Continuous 550 A (45 to 66 Hz)	Continuous 1000 A (45 to 66 Hz)
Output rate	10 mV AC/A	1 mV AC/A	1 mV AC/A	0.5 mV AC/A
Amplitude accuracy (45 to 66 Hz)	±0.3% rdg ±0.02% f.s.		±0.3% rdg ±0.01% f.s.	±1.0% rdg ±0.01% f.s.
Phase accuracy	±2° (45 Hz to 5 kHz)	±1° (45 Hz to 5 kHz)	±0.5° (45 Hz to 5 kHz)	±1° (45 Hz to 5 kHz)
Amplitude frequency characteristics	Within ±1% at 40 Hz - 5 kHz (deviation from amplitude accuracy)			Within ±2% at 40 Hz - 5 kHz (deviation from accuracy)
Max. rated voltage to earth	300 V AC rms or less		600 V AC rms or less	
Measurable conductor diameter	φ 15 mm (0.59 in.) or less		φ 46 mm (1.81 in.) or less	φ 55 mm (2.17 in.) or less 80 × 20 mm, Bus bars
Operating temperature and humidity	0°C to 50°C (32°F to 122°F) 80% RH or less (no condensation)		0°C to 50°C (32°F to 122°F) 80% RH or less (no condensation)	
Dustproofness and waterproofness	N/A		N/A	
Dimensions and mass	46 mm (1.81 in.)W × 135 mm (5.31 in.)H × 21 mm (0.83 in.)D, 230 g (8.1 oz.)		78 mm (3.07 in.)W × 152 mm (5.98 in.)H × 42 mm (1.65 in.)D, 380 g (13.4 oz.) 99.5 mm (3.92 in.)W × 188 mm (7.40 in.)H × 42 mm (1.65 in.)D, 590 g (20.8 oz.)	

Cord length 3 m (9.84 ft.), Output terminal: BNC



For leak currents: for the PQ3100 (PL14 terminal) and similar products (BNC terminal)

Basic specifications (Accuracy guaranteed for 1 year)

Model No. (Order Code)	CT7116	9675	9657-10
			
Rated measurement current	6 A AC	10 A AC (for leak current measurement, 50/60 Hz)	
Max. measurement current (45 to 66 Hz)	Continuous 10 A	Continuous 10 A	Continuous 30 A
Output rate	100 mV AC/A	100 mV AC/A	100 mV AC/A
Amplitude accuracy (45 to 66 Hz)	±1.0% rdg ±0.05% f.s.	±1.0% rdg ±0.05% f.s.	±1.0% rdg ±0.05% f.s.
Phase accuracy (50 Hz or 60 Hz)	±3° or less	±5° or less	±3° or less
Amplitude frequency characteristics	40 Hz to 5 kHz	40 Hz to 5 kHz: ±5%	40 Hz to 5 kHz: ±3°
Residual current characteristics	Max. 5 mA (in 100 A go and return electric wire)	Max. 1 mA (in 10 A go and return electric wire)	Max. 5 mA (in 100 A go and return electric wire)
Effect of external magnetic field (400 A/m, 50 Hz / 60 Hz)	Corresponding to 5 mA / 7.5 mA max.	7.5 mA max.	Corresponding to 5 mA / 7.5 mA max.
Measurable conductor diameter	φ 40 mm (1.57 in.) or less (Insulated conductor)	φ 30 mm (1.18 in.) or less	φ 40 mm (1.57 in.) or less
Operating temperature and humidity	-25°C to 65°C (-13°F to 149°F), 80% RH or less (no condensation)	0°C to 50°C (32°F to 122°F), 80% RH or less (no condensation)	
Dustproof, waterproof	IP40 (with sensor connected and jaw closed)	No regulation	
Dimensions and mass	74 mm (2.91 in.)W × 145 mm (5.71 in.)H × 42 mm (1.65 in.)D, 340 g (12.0 oz.) Cord length: 2.5 m (8.20 ft.) Output terminal: PL14	60 mm (2.36 in.)W × 112.5 mm (4.43 in.)H × 23.6 mm (0.93 in.)D, 160 g (5.6 oz.) Cord length: 3 m (9.84 ft.) Output terminal: BNC	74 mm (2.91 in.)W × 145 mm (5.71 in.)H × 42 mm (1.65 in.)D, 380 g (13.4 oz.) Cord length: 3 m (9.84 ft.) Output terminal: BNC

For load currents: for the PW3360 and PW3365 (requires the 9219)

Basic specifications (Accuracy guaranteed for 1 year)

Model No. (Order Code)	9695-02	9695-03
		
Rated measurement current	50 A AC	100 A AC
Max. measurement current	Continuous 60 A (45 to 66 Hz)	Continuous 130 A (45 to 66 Hz)
Output rate	10 mV AC/A	1 mV AC/A
Amplitude accuracy (45 to 66 Hz)	±0.3% rdg ±0.02% f.s.	
Phase accuracy	±2° (45 Hz to 5 kHz)	±1° (45 Hz to 5 kHz)
Amplitude frequency characteristics	Within ±1% at 40 Hz - 5 kHz (deviation from amplitude accuracy)	
Max. rated voltage to earth	300 V AC rms or less (Insulated conductor)	
Measurable conductor diameter	φ 15 mm (0.59 in.) or less	
Operating temperature and humidity	0°C to 50°C (32°F to 122°F), 80% RH or less (no condensation)	
Dimensions and mass	50.5 mm (1.99 in.)W × 58 mm (2.28 in.)H × 18.7 mm (0.74 in.)D, 50 g (1.8 oz.) Output terminal: M3 terminal (outside 3 mm, 0.12 inch diameter) Option: Connection cable 9219 (3 m, 9.84 ft length)	

f.s. is the sensor's rated measurement current value.


9695 OPTION CONNECTION CABLE 9219

Connect with the 9695-02/-03, Output BNC terminal, 3 m (9.84 ft.) length



Clamp-type CT that enables measurement in excess of 1000 A (clamp ammeter option/AC use only)

CLAMP ON ADAPTER 9290-10

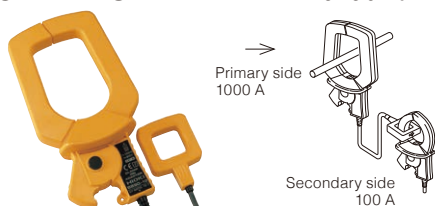

- Outputs large currents of 1000 A AC continuously (1500 A for 5 minutes) at a CT ratio of 10:1
- Expands the measurement range of normal clamp ammeters
- Excellent phase characteristics; also used to expand power meter measurement ranges

Basic specifications (Accuracy guaranteed for 1 year)

Rated primary current	AC 1000 A continued (Maximum 1500 A for 5 minutes or shorter)
Rated secondary current	AC 100 A (10 : 1 CT ratio)
Amplitude accuracy	±1.5% rdg
Phase accuracy	±1.0° or less
Frequency characteristics	Amplitude: 20 Hz to 5 kHz: ±2.0% rdg (deviation from accuracy) Phase: 20 Hz to 5 kHz: ±1.0° or less (deviation from accuracy)
Max. rated voltage to earth	600 V AC rms (insulated wire)
Core jaw dia.	φ55 mm (2.17 in.) or 80 mm (3.15 in.) × 20 mm (0.79 in.) bus-bar
Dimensions and mass	99.5 mm (3.92 in.)W × 188 mm (7.40 in.)H × 42 mm (1.65 in.)D, 580 g (20.5 oz.), cord length 3 m (9.84 ft.)
Included accessories	Instruction manual ×1, Mark band ×6

Digital Multimeters/Testers

World's Premier Digital Multimeter! Superior Accuracy and High Response, Topped with Safety Terminal Shutters

DIGITAL MULTIMETER DT4281, DT4282



USB 2.0
Option

CE
CAT IV 600 V
CAT III 1000 V

Drop
proof

True RMS

3 Year
Warranty

DT4281

DT4282

- 60000 count, 5-digit display, high-resolution measurements
- $\pm 0.025\%$ DC V basic accuracy, wide 20 Hz to 100 kHz AC V frequency characteristics
- Low-pass filter cuts high harmonics (when measuring inverter fundamental waveforms)
- Includes multiple measurement functions such as DC+ACV, temperature, capacitance, and frequency
- Terminal shutter mechanism (prevents erroneous test lead insertion)
- Measures large currents with optional clamp probe (only for DT4281, which has no 10 A terminal for accident prevention)
- Measure up to 10A with direct input (DT4282 only)
- Dual display lets you check voltage and frequency simultaneously
- Magnetic strap (Optional)
- Rear kickstand
- Store probes at the back of the tester
- Identify excessively high input with a red screen backlight
- Robust design capable of withstanding a drop from a height of 1 m
- USB communications function supports PC measurements (optional)
- Broad -15 (5°F) to 55°C (131°F) operating temperature range

Model No. (Order Code) **DT4281** (Direct and current clamp input terminals)
DT4282 (10 A direct input)

Regarding DMM Accuracy Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalogs for detailed accuracy information.

Basic specifications (Accuracy guaranteed for 1 year)

	DT4281	DT4282
DC Voltage range	60.000 mV to 1000.0 V, 6 ranges, Basic accuracy: $\pm 0.025\%$ rdg ± 2 dgt	
AC Voltage* range	60.000 mV to 1000.0 V, 6 ranges, Frequency characteristics: 20 Hz - 100 kHz Basic accuracy 45 - 65 Hz: $\pm 0.2\%$ rdg ± 25 dgt (True RMS, crest factor 3)	
DC + AC Voltage* range	6.0000 V to 1000.0 V, 4 ranges, Frequency characteristics: 20 Hz - 100 kHz Basic accuracy 45 - 65 Hz: $\pm 0.3\%$ rdg ± 30 dgt (True RMS, crest factor 3)	
Resistance range	60.000 Ω to 600.0 M Ω , 8 ranges, (Conductance: 600.00 nS, DT4282 only) Basic accuracy: $\pm 0.03\%$ rdg ± 2 dgt	
DC Current range	600.00 μ A to 600.00 mA, 4 ranges	600.00 μ A to 10.000 A, 6 ranges
	Basic accuracy: $\pm 0.05\%$ rdg ± 5 dgt	
AC Current* range	600.00 μ A to 600.00 mA, 4 ranges	600.00 μ A to 10.000 A, 6 ranges
	Basic accuracy 45 - 65 Hz: $\pm 0.6\%$ rdg ± 5 dgt (True RMS, crest factor 3) Frequency characteristics: 20 Hz - 20 kHz (at 600 μ A to 600 mA range)	
AC Current* range (use with Clamp on probes)	10.00 A to 1000 A, 7 ranges Add the Clamp on probe accuracy to Basic accuracy 40 - 65 Hz: $\pm 0.6\%$ rdg ± 2 dgt (True RMS, crest factor 3)	N/A
Peak	DC V measurement: Signal width 4 msec or more (single), 1 msec or more (repeated) AC V, DC/AC A measurement: Signal width 1 msec or more (single), 250 μ sec or more (repeated)	
Capacitance range	1.000 nF to 100.0 mF, 9 ranges, Basic accuracy: $\pm 1.0\%$ rdg ± 5 dgt	
Continuity check	Continuity threshold: 20/50/100/500 Ω , Response time: 10 ms or more	
Diode test	Open terminal voltage: 4.5 V or less, Testing current 1.2 mA or less, Threshold of forward voltage: 0.15 V to 3 V, seven stages	
Frequency range	AC V, DC+AC V, AC A measurement, at pulse width 1 μ s or more (50% duty ratio) 99.999 Hz (0.5 Hz or more) to 500.0 kHz, 5 ranges, $\pm 0.005\%$ rdg ± 3 dgt	
dB conversion	Standard impedance setting (dBm), 4 Ω to 1200 Ω , 20 stages Display dB conversion value of AC voltage (dBV)	
Temperature (thermocouples)	K: -40.0 $^{\circ}$ C to 800.0 $^{\circ}$ C (-40.0 $^{\circ}$ F to 1472.0 $^{\circ}$ F) Add accuracy of the Thermocouple probe to main unit accuracy: $\pm 0.5\%$ rdg ± 3 $^{\circ}$ C	
Other functions	Filter function (Remove harmonic noise, use only at 600 VAC, 1000 VAC ranges), Display value hold, Auto hold, Max/Min value display, Sampling select, Relative display, Measurement memory (400 data), Auto-power save, USB communication (option), 4-20 mA % conversion	
Display	Main and Sub displays: 5-digits LCD, max. 60000 digits	
Display refresh rates	5 times/s (Capacitance measurement: 0.05 to 2 times/s, depending on measured value, Temperature: 1 time/s)	
Power supply	LR6 (AA) alkaline batteries $\times 4$, Continuous use: 100 hours	
Dimensions and mass	93 mm (3.66 in.)W \times 197 mm (7.76 in.)H \times 53 mm (2.09 in.)D, 650 g (22.9 oz.) (including test leads holder and batteries)	
Included accessories	Test lead L9300, Instruction manual $\times 1$, LR6 alkaline battery $\times 4$	

* Zero-suppression: For small inputs below the guarantee range, zero is effectively displayed

DMM Testers

Shared options for the DT4280 series, DT4261, DT4250 series

*: accepts only rated currents under 10A.

L9300 is bundled

TEST LEAD L9300
95 cm (37.4 in.), integrated cap and protective finger guard

Slide the guard of L9300 and attach as measurement category II.

CONTACT PIN SET L4933*
Attaches to the tip of the Test Lead L9207-10/L9300/DT4911/L9206, 60 V DC/30 V AC

SMALL ALLIGATOR CLIP SET L4934*
Attaches to the tip of the L4932/L9207-10/L9300/DT4911/L9206, CAT III 300 V, CAT II 600 V

For DT4281/DT4261/DT4253/DT4255/DT4256 (Note: use with the Conversion Adapter 9704)

CLAMP ON PROBE 9010-50
10 to 500 AAC, $\phi 46$ mm ($\phi 1.81$ in.), 3 m (9.84 ft.) length

CLAMP ON PROBE 9018-50
Wide-band type, 10 to 500 AAC, $\phi 46$ mm ($\phi 1.81$ in.), 3 m (9.84 ft.) length

CLAMP ON PROBE 9132-50
20 to 1000 AAC, $\phi 55$ mm ($\phi 2.17$ in.) or 80×20 mm (3.15 \times 0.79 in.), 3 m (9.84 ft.) length

CONVERSION ADAPTER 9704
Receiving end: Female BNC; Output end: Male banana-plug. Not compatible with older generation Memory HiCorders with banana input terminals

Options for the L4930, Test Pin Set L4932 is required when using the Small Alligator Clip Set L4934

CONNECTION CABLE SET L4930
1.2 m (3.94 ft.) length, CAT IV 600 V, CAT III 1000 V

EXTENSION CABLE SET L4931
Expands the length of the L4930/L4940, 1.5 m (4.92 ft.) length

TEST PIN SET L4932
Attaches to the tip of the L4930/L4940, CAT IV 600 V, CAT III 1000 V

SMALL ALLIGATOR CLIP SET L4934*
Attaches to the tip of the L4932, L9207-10/DT4911, L9206, CAT III 300 V, CAT II 600 V

ALLIGATOR CLIP SET L4935
Attaches to the tip of the L4930/L4940, CAT IV 600 V, CAT III 1000 V

BUS BAR CLIP SET L4936*
Attaches to the tip of the L4930/L4940, CAT III 600 V

MAGNETIC ADAPTER SET L4937*
Attaches to the tip of the L4930/L4940, CAT III 1000 V

TEST PIN SET L4938
Attaches to the tip of the L4930/L4940, CAT III 600 V

BREAKER PIN SET L4939
Attaches to the tip of the L4930/L4940, CAT III 600 V

GRABBER CLIP L9243*
Attaches to the tip of the L4930/L4940, CAT II 1000 V, 185 mm (7.28 in.) length

Temperature Measurement

THERMOCOUPLES(K) DT4910
K type, tip exposed, 0.5 mm (0.02 in.) diameter, 80 cm (2.62 ft.) length, -40 to 260 $^{\circ}$ C (-40 to 500 $^{\circ}$ F)

Other Options

DC HIGH VOLTAGE PROBE P2010
CAT III 2000 V

COMMUNICATION PACKAGE(USB) DT4900-01
Compatible to Windows 11, 10

MAGNETIC STRAP Z5020
Extra strength

FUSE SET Z5053
Replacement fuse set for DT4252, DT4256, DT4261, DT4282 (11 A/1000 V, 2 pieces)

FUSE SET Z5054
Replacement fuse set for DT4281, DT4282, DT4255 (630 mA/1000 V, 2 pieces)

FUSE SET Z5055
Replacement fuse set for DT4253 (250 mA/1000 V, 2 pieces)

CARRYING CASE C0207 Bag type

CARRYING CASE C0202

CARRYING CASE C0201 For DT4250 series

Ideal for checking ripple voltage in DC supply systems

DC + ACV Peak measurement function & DC+AC voltage measurement

Capture ripple voltage component on direct current signals.

Input waveform:

DC+AC measurement 100 V

-PEAK measurement 85.9 V

+PEAK measurement 114.1 V

Optimized for inverter system measurements

LPF 1kHz Low-pass filter cuts harmonic waveform components

The (1 kHz cutoff) low-pass filter function cuts high harmonic components when measuring the secondary output voltage of an inverter.

Filter off

~231.15 V
48508 Hz

Typical waveform + harmonic components

Filter on

~202.30 V
49973 Hz

Typical waveform component

Analyzing Issues in the Field and Dramatically Improving Work Efficiency

DIGITAL MULTIMETER DT4261



DT4261

USB_{2.0}
Option

CE
CAT IV 600 V
CAT III 1000 V

Drop-
proof

True RMS

3 Year
Warranty

Bluetooth

When Z3210 is
installed

- Capable of measuring up to cat III 2000 V with DC High Voltage Probe P2010*
Dramatically improves the safety of maintenance of large-scale solar power generation facilities
*1: 2000 V is supported only when the optional DC High Voltage Probe P2010 is used.
- Helping personnel analyze issues in the field
- Stop worrying about losing test lead caps
- Boost work efficiency with digitalization (Excel® Direct Input Function)
- Excellent dust and water resistance (compliant with the IP54 international standard)
- Ensuring safety by preventing erroneous test lead insertion (terminal shutters)

Model No. (Order Code) **DT4261** (Wireless Adapter Z3210 not included)
DT4261-90 (Bundled with the Wireless Adapter Z3210)

Data can be downloaded to tablets and smartphones using Hioki's dedicated apps available from the Google Play or App Store. Search for "HIOKI" and download the "GENNECT Cross" app.



*Android, Google Play and the Google Play logo are trademarks of Google Inc.
*iOS is a registered trademark of Cisco Technology, Inc. and/or its affiliates in the United States and certain other countries.
*iPhone, iPad, iPad mini, iPad Pro and iPod touch are trademarks of Apple Inc.
*Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.
*Microsoft, Windows, Windows Vista, and Excel are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
*Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.
*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license.
*For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website.

Regarding DMM Accuracy Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalogs for detailed accuracy information.

Basic specifications (Accuracy guaranteed for 1 year)

DC Voltage range	600.0 mV to 1000 V (When using P2010: 600.0 V to 2000 V), 5 ranges, Basic accuracy: ±0.15% rdg. ±2 dgt.
AC Voltage range	6.000 V to 1000 V, 4 ranges, Frequency characteristics: 40 Hz to 1 kHz Basic accuracy 40 Hz - 500 Hz: ±0.9% rdg. ±3 dgt. (True RMS, crest factor 3 or less)
DC + AC Voltage range	6.000 V to 1000 V, 4 ranges, Frequency characteristics: DC, 40 Hz to 1 kHz Basic accuracy DC, 40 Hz - 500 Hz: ±1.0% rdg. ±13 dgt. (True RMS, crest factor 3 or less)
LoZ V	600.0 V, 1 range, Frequency characteristics: DC, 40 Hz to 1 kHz Basic accuracy DC, 40 Hz - 500 Hz: ±1.0% rdg. ±13 dgt. (True RMS, crest factor 3 or less)
Resistance range	600.0 Ω to 60.00 MΩ, 6 ranges, Basic accuracy: ±0.7% rdg. ±3 dgt.
DC Current range	600.0 mA to 10.00 A, 3 ranges Basic accuracy: ±0.5% rdg. ±3 dgt.
AC Current range	600.0 mA to 10.00 A, 3 ranges Basic accuracy 40 Hz - 500 Hz: ±1.4% rdg. ±3 dgt. (True RMS, crest factor 3 or less) Frequency characteristics: 40 Hz to 1 kHz
AC Current range (use with Clamp on probes)	10.00 A to 1000 A, 7 ranges Basic accuracy 40 Hz - 500 Hz: Add the Clamp on probe accuracy to ±0.9% rdg. ±3 dgt. (True RMS, crest factor 3 or less)
Capacitance range	1.000 μF to 10.00 mF, 5 ranges, Basic accuracy: ±1.9% rdg. ±5 dgt.
Continuity Check	Continuity threshold ON : 25 Ω, Continuity threshold OFF : 245 Ω, Response time: 0.5 ms or more
Diode test	Open terminal voltage: 2.0 V or less, Testing current: 0.2 mA or less, Threshold of forward voltage: 0.15 V to 1.8V
Voltage frequency range	99.99 Hz to 99.99 kHz, 4 ranges (Limited by minimum sensitivity voltage) Basic accuracy: ±0.1% rdg. ±1 dgt.
Current frequency range	99.99 Hz to 9.999 kHz, 3 ranges (Limited by minimum sensitivity current) Basic accuracy: ±0.1% rdg. ±1 dgt.
Other functions	Mis-insertion prevention shutters, fuse check function, user setting retention function, filter function, zero-adjustment, display value hold, auto hold, MAX/MIN value display, PEAK value display, auto-power save, USBcommunication (when optional Communication Package DT4900-01 is installed), wireless communication (when optional Wireless Adapter Z3210 is installed)
Display	Main and sub displays: 4-digits LCD, max. 6000 digits (excluding frequency measurement), bar-graph
Display refresh rates	5 times/s (Capacitance measurement: 0.05 to 5 times/s, depending on measured value, Frequency: 1 to 2times/s)
Power supply	LR6 (AA) alkaline batteries × 3, Continuous operating time: 130 hr. (without Z3210 installed), 70 hr. (with Z3210 installed and using wireless communications)
Dimensions and mass	87 mm (3.43 in.) W × 185 mm (7.28 in.) H × 47 mm (1.85 in.) D, 480 g (16.9 oz.) (with test leads holder and batteries)
Included accessories	Test Lead L9300 × 1, Instruction Manual × 1, LR6 (AA) alkaline battery × 3, Operating Precautions ×1

Option

WIRELESS ADAPTER Z3210
Simply plug in the Z3210 wireless adapter and your compatible Hioki device is Bluetooth® ready

When Z3210 is installed

Software


GENNECT Cross SF4071, SF4072
Mobile app for iOS, Android

Shared options for the DMM series are listed on page 87.

Bluetooth® communication with Z3210 attached to DT4261

Refer to the detailed catalog

Install the Wireless Adapter Z3210 to the DT4261 to enable Bluetooth® communications.
With the Z3210, you can transfer data directly to an Excel® file or pair the instrument with Gennect Cross.



Z3210
For more details



Attach to enable Bluetooth® wireless technology

Transport to the Excel® file

Transport to Gennect Cross

General Purpose Testers with Rich Measurement Functions

DIGITAL MULTIMETER DT4252, DT4256



- USB 2.0**
Option
- CE**
CAT IV 600 V
CAT III 1000 V
- Drop-proof**
- True RMS**
- 3 Year Warranty**

- ±0.3% DC V basic accuracy, wide 40 Hz to 1 kHz AC V frequency characteristics
- Measure up to 10 A with direct input
- Dual display lets you check voltage and frequency simultaneously
- Low-pass filter cuts high harmonics (when measuring inverter fundamental waveforms)
- USB communications function supports PC measurements (optional)
- Broad -25°C (-13°F) to 65°C (149°F) operating temperature range (DT4256)

Model No. (Order Code) **DT4252** (10 A direct input)
DT4256 (Multi-functional model, with 10 A direct input)

Shared options for the DMM series are listed on page 87.

Regarding DMM Accuracy Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalogs for detailed accuracy information.

■ Basic specifications (Accuracy guaranteed for 1 year)

	DT4252	DT4256
DC Voltage range	600.0 mV to 1000 V, 5 ranges	
	Basic accuracy: ±0.3% rdg ±5 dgt	Basic accuracy: ±0.3% rdg ±3 dgt
AC Voltage range	6.000 V to 1000 V, 4 ranges, Frequency characteristics: 40 Hz to 1 kHz	
	Basic accuracy 40 - 500 Hz: ±0.9% rdg ±3 dgt (True RMS, crest factor 3)	
AUTO AC/DC V	N/A	Yes
Resistance range	600.0 Ω to 60.00 MΩ, 6 ranges, Basic accuracy: ±0.7% rdg ±5 dgt	600.0 Ω to 60.00 MΩ, 6 ranges, Basic accuracy: ±0.7% rdg ±3 dgt
DC Current range	6.000 A / 10.00 A, 2 ranges, Basic accuracy: ±0.9% rdg ±5 dgt	60.00 mA to 10.00 A, 4 ranges, Basic accuracy: ±0.9% rdg ±3 dgt
AC Current range	6.000 A / 10.00 A, 2 ranges, Basic accuracy 40 - 500 Hz: ±1.4% rdg ±3 dgt (True RMS, crest factor 3, 40 Hz to 1 kHz)	600.0 mA to 10.00 A, 3 ranges, Basic accuracy 40 - 500 Hz: ±1.4% rdg ±3 dgt (True RMS, crest factor 3, 40 Hz to 1 kHz)
AC Current range (use with Clamp on probes)	N/A	10.00 A to 1000 A, 7 ranges, Add the Clamp on probe accuracy to basic accuracy 40 - 1 kHz: ±0.9% rdg ±3 dgt (True RMS, crest factor 3)
Voltage detection (50/60 Hz)	N/A	Hi: AC40 V to 600 V, Lo: AC80 V to 600 V
Capacitance range	1.000 μF to 10.00 mF, 5 ranges, Basic accuracy: ±1.9% rdg ±5 dgt	
Frequency range	99.99 Hz (5 Hz or more) to 99.99 kHz, 4 ranges (limited by the minimum detectable voltage and current), Basic accuracy: ±0.1% rdg ±1 dgt	
Continuity check	Continuity threshold [ON]: 25 Ω or less (Indicate buzzer sound, red LED), [OFF]: 245 Ω or more, Response time: 0.5 ms or more	
Diode test	Open terminal voltage: 5.0 V or less, Testing current 0.5 mA or less, Threshold of forward voltage: 0.15 V to 1.5 V	
Other functions	Filter function, Display value hold, Auto hold, Max/Min/Average value display, Relative display, Auto-power save, USB communication (option)	
Display	Main and Sub displays: 4-digits LCD, max. 6000 digits, bar graph	
Display refresh rates	5 times/s (Capacitance measurement: 0.05 to 5 times/s, depending on measured value, Frequency: 1 to 2 time/s, Temperature: 1 time/s)	
Power supply	LR03 alkaline batteries ×4, Continuous use: 130 hours (backlight OFF)	
Dimensions and mass	84 mm (3.31 in.)W × 174 mm (6.85 in.)H × 52 mm (2.05 in.)D, 390 g (13.8 oz.) (including batteries and holster)	
Included accessories	Test lead L9300, Holster ×1, Instruction manual ×1, LR03 alkaline battery ×4	

Application-Specific Testers to Meet Your Needs

DIGITAL MULTIMETER DT4253, DT4255



- USB 2.0**
Option
- CE**
CAT IV 600 V
CAT III 1000 V
- Drop-proof**
- True RMS**
- 3 Year Warranty**

- Ideal for measuring currents ranging from instrumentation signals (4 to 20 mA) to flame currents (μA) with built in high-sensitivity current ranges (DT4253)
- Prevents short-circuit accidents with a fast-blow fuse and current-limiting resistor (DT4255)
- Prevents accidents with clamp-on sensor-based current measurement (DT4255)
- Voltage detection function (DT4255)
- Low-pass filter cuts high harmonics (when measuring inverter fundamental waveforms)
- Broad -25°C (-13°F) to 65°C (149°F) operating temperature range (DT4255)
- Dual display lets you check voltage and frequency simultaneously

*1 Your instrument can be used to measure voltages in excess of 1000 V DC if and only if the following conditions are satisfied: 1. The circuit under measurement is isolated from the commercial power grid. 2. The circuit under measurement is isolated from ground.

Model No. (Order Code) **DT4253** (With mA DC, temperature)
DT4255 (With fused measurement terminals)

Shared options for the DMM series are listed on page 87.

Regarding DMM Accuracy Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalogs for detailed accuracy information.

■ Basic specifications (Accuracy guaranteed for 1 year)


	DT4253	DT4255
DC Voltage range	600.0 mV to 1000 V	
	5 ranges, Basic accuracy: ±0.3% rdg ±5 dgt	5 ranges, Basic accuracy: ±0.3% rdg ±3 dgt
AC Voltage range	6.000 V to 1000 V, 4 ranges, Frequency characteristics: 40 Hz to 1 kHz	
	Basic accuracy 40 - 500 Hz: ±0.9% rdg ±3 dgt (True RMS, crest factor 3)	
AUTO AC/DC V	Yes	
Resistance range	600.0 Ω to 60.00 MΩ, 6 ranges, Basic accuracy: ±0.7% rdg ±5 dgt	600.0 Ω to 60.00 MΩ, 6 ranges, Basic accuracy: ±0.7% rdg ±3 dgt
DC Current range	60.00 μA to 60.00 mA, 4 ranges, Basic accuracy: ±0.8% rdg ±5 dgt	N/A
From 4 to 20 mA Percentage conversion display	Yes	N/A
AC Current range (use with Clamp on probes)	10.00 A to 1000 A, 7 ranges, Add the Clamp on probe accuracy to basic accuracy 40 - 1 kHz: ±0.9% rdg ±3 dgt (True RMS, crest factor 3)	
Temperature (thermocouples)	K: -40.0 to 400.0 °C, Add the Temperature probe accuracy to basic accuracy: ±0.5% rdg ±2 °C	N/A
Voltage detection	N/A	
Capacitance range	1.000 μF to 10.00 mF, 5 ranges, Basic accuracy: ±1.9% rdg ±5 dgt	
Frequency range	99.99 Hz to 99.99 kHz, 4 ranges (limited by the minimum detectable voltage), Basic accuracy: ±0.1% rdg ±1 dgt	
Continuity check	Continuity threshold [ON]: 25 Ω or less, [OFF]: 245 Ω or more, Response time: 0.5 ms or more	
Diode test	Open terminal voltage: 5.0 V or less, Testing current 0.5 mA or less, Threshold of forward voltage: 0.15 V to 1.5 V	
Other functions	Filter function, Display value hold, Auto hold, Max/Min/Average value display, Relative display, Auto-power save, USB communication (option)	
Display	Main and Sub displays: 4-digits LCD, max. 6000 digits, bar graph	
Display refresh rates	5 times/s (Capacitance measurement: 0.05 to 5 times/s, depending on measured value, Frequency: 1 to 2 time/s)	
Power supply	LR03 alkaline batteries ×4, Continuous use: 130 hours (backlight OFF)	
Dimensions and mass	84 mm (3.31 in.)W × 174 mm (6.85 in.)H × 52 mm (2.05 in.)D, 390 g (13.8 oz.) (including batteries and holster)	
Included accessories	Test lead L9300, Holster ×1, Instruction manual ×1, LR03 alkaline battery ×4	

Key Point

Absolute prevention of short-circuit accidents (DT4255)

In the event of erroneous operation, a protective circuit functions to prevent a short-circuit. A current-limiting resistor limits the short-circuit current if damage to the tester's circuitry results in a short-circuit condition, and a fast-blow fuse quickly disconnects the circuit to ensure safety.

A: 0.63 A / 1000 V fuse (50 kA [AC] 30 kA [DC] disconnect rating)
B: Circuit current-limiting resistor



Proprietary Protection Function Against Accidental Voltage Input Prevents Power Failure and Fires

DIGITAL MULTIMETER DT4223, DT4224



- Achieving a high level of safety in a compact body and lightweight design
- Circuit breaker false trip prevention function helps avoid accidents resulting from breakers that mistakenly trip due to incorrect input
- Resistance measurement and voltage detection function (DT4223)
- More convenient function: Resistance, Capacitance measurement and diode testing (DT4224)
- Robust design capable of withstanding a drop from a height of 1 m
- Test leads conveniently wrap around the back
- $\pm 0.5\%$ DC V basic accuracy, wide 40 Hz to 1 kHz AC V frequency characteristics
- Low-pass filter cuts high harmonics (when measuring inverter fundamental waveforms)
- Broad -10 (14°F) to 65°C (149°F) operating temperature range
- Display backlight

Model No. (Order Code) **DT4223** (With resistance measurement, for electrical work)
DT4224 (With C/R measurement, for general use)

Regarding DMM Accuracy Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalogs for detailed accuracy information.

Basic specifications (Accuracy guaranteed for 1 year)

	DT4223	DT4224
DC Voltage range	600.0 mV to 600.0 V, 4 ranges, Basic accuracy: $\pm 0.5\%$ rdg ± 5 dgt	
AC Voltage range	6.000 V to 600.0 V, 3 ranges, Frequency characteristics: 40 Hz - 1 kHz Basic accuracy 40 - 500 Hz : $\pm 1.0\%$ rdg ± 3 dgt (True RMS, crest factor 3)	
Resistance range	600.0 Ω to 60.00 M Ω , 6 ranges Basic accuracy: $\pm 0.9\%$ rdg ± 5 dgt	
Capacitance range	N/A	1.000 μ F to 10.00 mF, 5 ranges, Basic accuracy: $\pm 1.9\%$ rdg ± 5 dgt
Frequency range	AC V measurement: 99.99 Hz (5 Hz or more) to 9.999 kHz, 3 ranges Basic accuracy: $\pm 0.1\%$ rdg ± 2 dgt	
Continuity check	Continuity threshold [ON]: 25 Ω or less (buzzer sound), [OFF]: 245 Ω or more Response time: 0.5 ms or more	
Diode test	N/A	Open terminal voltage: 2.5 V or less, Testing current 0.5 mA or less, Threshold of forward voltage: 0.15 V to 1.5 V
Voltage detection	80 V to 600 V AC	N/A
Other functions	Circuit breaker false trip prevention function, Filter function, Display value hold, Relative display, Auto-power save	
Display	Main and Sub displays: 4-digits LCD, max. 6000 digits, bar graph	
Display refresh rates	5 times/s (Capacitance measurement: 0.05 to 5 times/s, depending on measured value, Frequency: 1 to 2 time/s)	
Power supply	LR03 alkaline batteries $\times 1$, Continuous use: 35 hours (backlight OFF)	
Dimensions and mass	72 mm (2.83 in.)W \times 149 mm (5.87 in.)H \times 38 mm (1.50 in.)D, 190 g (6.7 oz.) (including batteries and holster)	
Included accessories	Test lead DT4911 $\times 1$, Holster $\times 1$, Instruction manual $\times 1$, LR03 alkaline battery $\times 1$	



Pencil-type DMM with LED Light

PENCIL HITESTER 3246-60



- Test lead and main unit in a single body
- Overload protection to 600 V at resistance or continuity functions
- LED light brightly illuminates test points

Model No. (Order Code) **3246-60**

Regarding DMM Accuracy Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalogs for detailed accuracy information.

Basic specifications (Accuracy guaranteed for 1 year)

DC Voltage range	419.9 mV to 600 V, 5 ranges, Basic accuracy: $\pm 1.3\%$ rdg ± 4 dgt
AC Voltage range	4.199 V to 600 V, 4 ranges, Basic accuracy 50 - 500 Hz : $\pm 2.3\%$ rdg ± 8 dgt (Average rectified)
Resistance range	419.9 Ω to 41.99 M Ω , 6 ranges, Basic accuracy: $\pm 2.0\%$ rdg ± 4 dgt
Continuity buzzer	Detection level 50 Ω ± 40 Ω
Diode check	Judges the right direction only, Open terminal voltage: 3.4 V or less, Testing current: 800 μ A or less
Auto power save	Available (cancel selectable)
Display	Digital LCD, max. 4199 digits
Sampling rate	2.5 times/sec
Power supply	Coin type lithium battery (CR2032) $\times 1$, Continuous use: 150 hours (at DC V function), 30 hours (with light turned on for 10 seconds and off for 20 seconds per cycle and in DC V function)
Dimensions and mass	30 mm (1.18 in.)W \times 182 mm (7.17 in.)H \times 26.5 mm (1.04 in.)D, 80 g (2.8 oz.)
Included accessories	Instruction manual $\times 1$, Coin type lithium battery (CR2032) $\times 1$ (for trial purposes only), Sleeves (Red/ Black each 1)

Compact! Palm Size Body, Less Than 1 cm Thin!

CARD HiTESTER 3244-60



Rugged external case C0204 protects the DMM Standard accessory.

Not CE Marked

CAT III 300 V
CAT II 600 V


3 Year Warranty

Removable test pin sleeves prevent short-circuits

Regarding DMM Accuracy Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalogs for detailed accuracy information.

Basic specifications (Accuracy guaranteed for 1 year)

DC Voltage range	419.9 mV to 500 V, 5 ranges, Basic accuracy: $\pm 0.7\%$ rdg ± 4 dgt
AC Voltage range	4.199 V to 500 V, 4 ranges, Basic accuracy 50 - 500 Hz : $\pm 2.3\%$ rdg ± 8 dgt (Average rectified)
Resistance range	419.9 Ω to 41.99 M Ω , 6 ranges, Basic accuracy: $\pm 2.0\%$ rdg ± 4 dgt
Continuity buzzer	Detection level 50 Ω ± 40 Ω , Diode check: Not available
Auto power save	Available (cancel selectable)
Display	Digital LCD, max. 4199 digits
Sampling rate	2.5 times/sec
Power supply	Coin type lithium battery (CR2032) $\times 1$, Continuous use: 150 hours
Dimensions and mass	55 mm (2.17 in.)W \times 109 mm (4.29 in.)H \times 9.5 mm (0.37 in.)D, 60 g (2.1 oz.)
Included accessories	Instruction manual $\times 1$, Carrying case $\times 1$, Coin type lithium battery (CR2032) $\times 1$ (for trial purposes only), Sleeves (Red/ Black each 1)



- Better contact test leads with 15 mm gold-plated tip pin
- Only 9.5 mm(0.37 in.) thick and 60 g(2.1 oz.) in weight
- Full auto-ranging function and automatic power saving function
- Overload protection to 500 V at resistance or continuity functions

Model No. (Order Code) **3244-60**

A LAN Cable Tester Capable of Identifying the Location of Wire Breaks

LAN CABLE HiTESTER 3665



CE


3 Year Warranty

Bundled Accessories



Basic specifications (Accuracy guaranteed for 1 year)

Measurable cable	Twisted-pair cable, characteristic impedance: 100 Ω , shielded and unshielded, CAT 3, 4, 5, 5e, 6 and 6A
Compatible connectors	RJ-45 plugs
Wire Map test	Detectable errors: open, short, reversed, transposed, split pairs and other incorrect wiring (Wiring condition and shielding can be confirmed using the Terminator 9690)
Cable length measurement	Measurable lengths: 2 m to 300 m (6.6 ft to 984 ft) Measurement accuracy: $\pm 4\%$ rdg ± 1 m (3.3 ft) (condition of regulation: single wire) Display resolution: 0.1 m (0.3 ft)
Direction measurement	Up to 21 cables can be identified using the supplied Terminator 9690 and optional Models 9690-01 to 9690-04
Power supply	LR6 (AA) alkaline battery $\times 2$, 1.4 VA max., Continuous use : 50 hr (at measurement interval of 1 minute)
Dimensions and mass	85 mm (3.35 in.)W \times 130 mm (5.12 in.)H \times 33 mm (1.30 in.)D, 160 g (5.6 oz.) (without batteries)
Included accessories	Terminator (ID 0) $\times 1$, Carrying case $\times 1$, LR6 (AA) alkaline battery $\times 2$, Instruction manual $\times 1$

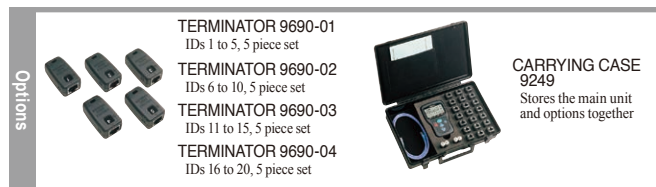

- Wire map check : Detect split pairs with wiring check
- Cable length : Get NVP-Enhanced measurement accuracy
- Direction check : Identify up to 21 cable destinations

Model No. (Order Code) **3665-20** (English model)

Note: for direction checks enabling individual wires to be identified, please purchase optional Terminators 9690-01 to -04.

Non-Contact Infrared Thermometer Featuring Simple, One-Touch Measurement

INFRARED THERMOMETER FT3700, FT3701



Basic specifications (Accuracy guaranteed for 1 year)

	FT3700-20	FT3701-20
Measurement temperature range	-60.0 to 550.0°C (-76 to 1022°F), 0.1°C resolution	-60.0 to 760.0°C (-76 to 1400°F), 0.1°C resolution
Accuracy	-35.0 to -0.1°C (-31.0 to 31.9°F) : ±10%rdg ±2°C 0.0 to 100.0°C (-32.0 to 212.0°F) : ±2°C 100.1 to 500.0°C (212.1 to 932.0°F) : ±2%rdg <i>Note) -60.0 to -35.1°C (-76.0 to -31.1°F), and over 500.1°C (932.0°F) : Accuracy not specified</i>	
Response time	1 sec (90%)	
Measurement wavelength	8 to 14 μm	
Thermal emissivity compensation	ε=0.10 to 1.00 (0.01 step)	
Measurement field diameter	φ 83 mm at 1000 mm (3.27 in at 3.28 ft) (Distance : Spot = 12 : 1)	φ 100 mm at 3000 mm (3.94 in at 9.84 ft) (Distance : Spot = 30 : 1)
Sighting	Two-beam laser marker Max 1 mW (class 2), Red	
Functions	Continuous measurement mode, MAX/ MIN/ DIF (MAX - MIN)/ AVG measurement, Alarm, Backlight, Auto power-off	
Power supply	LR03 (AAA) alkaline battery ×2, 150 mVA, Continuous use of 140 hours (With laser marker, backlight and buzzer are OFF)	
Dimensions and mass	48 mm (1.89 in.)W × 172 mm (6.77 in.)H × 119 mm (4.69 in.)D, 256 g (9.0 oz.), (including batteries)	
Included accessories	Instruction manual ×1, LR03 alkaline battery ×2, Carrying case ×1	

- Pistol design with easy-to-see display
- A full menu of basic measuring functions
- Easily test in difficult locations, moving objects or where there is danger of electric shock



Model No. (Order Code) **FT3700-20** (Long-focus type)
FT3701-20 (Long focus, precise-field type)

Note: Laser Product Caution Notice

A caution label is attached to the thermometer. Be sure to observe the operating precautions on the label.



Measurement field diameter S (mm)



High Reliability Lux Meter Series, Complies with DIN Class B and JIS Class AA, Compatible with LED/OLED Lighting

LUX METER FT3424, FT3425



FT3424



Bluetooth®
FT3425



Sensor unit and main display can be separated. Sold separately

Basic specifications (Accuracy guaranteed for 2 years)

Standards	DIN 5032-7: 1985 class B, JIS C 1609-1: 2006 general AA class
Light receiving element	Silicon photo diode
Range selection	Auto/ Manual
Linearity	±2% rdg (Multiply by 1.5 for display values in excess of 3000 lx.)
Accuracy guarantee for temperature and humidity	21°C to 27°C (69.8°F to 80.6°F), 75% rh or less (non-condensing)
Response time	Auto range: within 5 seconds, Manual range: within 2 seconds
D/A output	Output level: 2 V/range f.s. (2.5 V is output when the range f.s. is exceeded.) Output accuracy: ±1% rdg ±5 mV (at display count)
Functions	Timer hold function, Memory function (Up to 99 measured data can be saved), Hold, Auto power off, Buzzer sound, Backlight, Zero adjustment
Interfaces	USB 2.0 (FT3424/FT3425), Bluetooth® 4.0LE (FT3425 only)
Power supply	LR6 Alkaline battery ×2, Max. rated power 500 mVA, or R6 Manganese battery ×2, or USB bus power (5 VDC)
Continuous battery operation time	300 hours (when using LR6 batteries, with Bluetooth® OFF), 80 hours (when using LR6 batteries, with Bluetooth® ON)
Dimensions and mass (including the batteries)	78 mm (3.07 in.)W × 170 mm (6.69 in.)H × 39 mm (1.54 in.)D, 310 g (10.9 oz., FT3424) / 320 g (11.3 oz., FT3425)
Included accessories	Instruction Manual ×1, AA/LR6 Alkaline battery ×2, Sensor cap (with strap) ×1, Carrying case (soft) ×1, Strap (for instrument) ×1, USB cable (0.9 m/2.95 ft) ×1, Precautions Concerning Use of Equipment that Emits Radio Waves ×1 (only FT3425)

Only FT3425 is equipped with Bluetooth® wireless technology, others are shared specifications

- Measured illuminance data is automatically sent to smartphone or tablet with Bluetooth® wireless technology (FT3425)
- Compatible with LED/OLED lighting
- Complies with DIN 5032-7:1985 class B and JIS C 1609-1:2006 general AA class
- Timer hold function lets you make measurements in remote locations while avoiding the effects of shadows and reflections
- Save up to 99 measured values in the instrument's internal memory and transfer them to a computer later for improved work efficiency

Model No. (Order Code) **FT3424**
FT3425 (Built in Bluetooth(R) wireless technology)

Measurement ranges

Range	Measurement range	Display steps
20 lx	0.00 lx to 20.00 lx	1 count step
200 lx	0.0 lx to 200.0 lx	1 count step
2000 lx	0 lx to 2000 lx	1 count step
20000 lx	0 lx to 20000 lx	10 count step
200000 lx	0 lx to 200000 lx	100 count step

■ Data can be downloaded to tablets and smartphones using Hioki's dedicated apps available from the Google Play or App Store. (FT3425 only) Search for "HIOKI" and download the "GENNECT Cross" app.




Options

Extendible length: 0.5 m (1.64 ft.) to 1.6 m (5.25 ft.)



Mounting method of instrument
EXTENSION CART Z5023
This cart with caster wheels can be easily moved between measurement locations.



CONNECTION CABLE L9820
Use when positioning the sensor unit and display unit separately during use. 2 m (6.56 ft.) length



OUTPUT CORD L9094
3.5 mm (0.14 in.) dia. mini plug to banana, 1.5 m (4.92 ft.) length



OUTPUT CORD L9095
Connect to BNC terminal, 1.5 m (4.92 ft.) length



OUTPUT CORD L9096
Connect to terminal block, 1.5 m (4.92 ft.) length



CARRYING CASE C0202
Soft case



CARRYING CASE C0201
Semi-hard case

C0202: For storing the instrument with the Connection Cable, Output Cord, and USB Cable
C0201: For storing the instrument with Output Cord and USB Cable

Insulation Testers/Megaohm Testers

Quick Response Comparator Offering Reading Stability in High-speed Digital Format

INSULATION TESTER IR4057-50, IR4059



CAT III 600 V



IR4057 only



When Z3210 is installed

- Easily transfer measurement data to your smartphone or tablet by using our free app Gennect Cross or to an Excel® file. (Wireless Adapter Z3210 is necessary)
- 5-range testing voltage of 50 V/100 MΩ to 1000 V/4000 MΩ
- Digital bar graph
- Stable & high-speed digital readings, 0.3 second response time for PASS/ FAIL decisions
- Drop proof onto concrete from 1m (3.28 feet)
- Bright LED, luminous LCD, test lead with bright LED lamp to illuminate near hand (Option L9788-11 or L9788-10)
- Continuity check via 200 mA testing
- Built in AC/DC voltage meter, useful for testing solar power generation systems and electric vehicles

Model No. (Order Code)	IR4057-50	(Wireless Adapter Z3210 not included)
	IR4057-90	(Bundled with the Wireless Adapter Z3210)
	IR4059	(Wireless Adapter Z3210 not included)

Data can be downloaded to tablets and smartphones using Hioki's dedicated apps available from the Google Play or App Store. Search for "HIOKI" and download the "GENNECT Cross" app.



GET IT ON Google Play



Download on the App Store

*Android, Google Play and the Google Play logo are trademarks of Google Inc.
 *IOS is a registered trademark of Cisco Technology, Inc. and/or its affiliates in the United States and certain other countries.
 *iPhone, iPad, iPad mini, iPad Pro and iPod touch are trademarks of Apple Inc.
 *Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.
 *Microsoft, Windows, Windows Vista, and Excel are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
 *Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.
 *The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license.
 *For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website.

Basic specifications (Accuracy guaranteed for 1 year)

Rated output voltage	50 V DC	125 V DC	250 V DC	500 V DC	1000 V DC
Effective maximum indicated value	100 MΩ	250 MΩ	500 MΩ	2000 MΩ	4000 MΩ
Accuracy	±2% rdg ±2 dgt	±2% rdg ±2 dgt	±2% rdg ±2 dgt	±2% rdg ±2 dgt	±2% rdg ±2 dgt
1st effective measuring range MΩ	0.200 - 10.00	0.200 - 25.0	0.200 - 50.0	0.200 - 500	0.200 - 1000
Lower limit resistance	0.05 MΩ	0.125 MΩ	0.25 MΩ	0.5 MΩ	1 MΩ
Overload protection	600 V AC (10s)				660 V AC (10s)
DC voltage range	4.2 V (0.001 V resolution) to 600 V (1 V resolution), 4 ranges, Accuracy: ±1.3% rdg ±4 dgt, Input resistance: 100 kΩ or higher				
AC voltage range	420 V (0.1 V resolution) / 600 V (1 V resolution), 2 ranges, 50/60 Hz, Accuracy: ±2.3% rdg ±8 dgt, Input resistance: 100 kΩ or higher, Average rectifier				
Low resistance range	For checking the continuity of ground wiring, 10 Ω (0.01 Ω resolution) to 1000 Ω (1 Ω resolution), 3 ranges, Basic accuracy: ±3% rdg ±2 dgt, testing current 200 mA or more (at 6 Ω or less)				
Display	Semi-transmissive FSTN LCD with back lighting, bar-graph indicator				
Response time	Approx. 0.3 second for PASS/FAIL decision (based on in-house testing)				
Other functions	Indicate MΩ measurement value after a lapse of one minute, Live circuit indicator, Automatic electric discharge, Automatic DC/AC detection, Comparator, Drop proof, Auto power save				
Power supply	LR6 (AA) alkaline batteries × 4, Continuous use: 20 hours (based on in-house testing) Number of measurements: 1000 times (at 5 s ON, 25 s OFF cycle, insulation measurement of lower limit resistance value to maintain nominal output voltage)				
Dimensions and mass	IR4057-50, IR4057-90: 159 mm (6.26 in.) W × 177 mm (6.97 in.) H × 53 mm (2.09 in.) D, 640 g (22.6 oz.) (including batteries, excluding test leads) IR4059: 160 mm (6.30 in.) W × 98 mm (3.86 in.) H × 46 mm (1.81 in.) D, 536 g (18.9 oz.) (including batteries and protector, excluding test leads)				
Included accessories	Connection cable L4930 ×1, Alligator clip set L4935 ×1, Test pin set L4938 ×1, Neck strap ×1, Instruction manual ×1, LR6 (AA) alkaline batteries ×4, Test lead with remote switch (red) L9788-10 ×1 (included with IR4059 only), Protector Z5042 ×1 (included with IR4059 only)				

Bundled Accessories

CONNECTION CABLE SET L4930 1.2 m (3.94 ft.) length, CAT IV 600 V, CAT III 1000 V	ALLIGATOR CLIP SET L4935 Attaches to the tip of the L4930, CAT IV 600 V, CAT III 1000 V	TEST PIN SET L4938 Attaches to the tip of the L4930, CAT III 600 V

Exclusively for the L9787

L9787 options

TEST LEAD L9787 Bundled with Line/ Earth lead, alligator clip, 1.2 m (3.94 ft.) length	BREAKER PIN L9787-91 For checking breaker terminal, Detachable for tip of the L9787, 48 mm (1.89 in.) length, φ 2.6 mm (0.10 in.)

Exclusively for the L9788-10/ L9788-11

L9788 options

TEST LEAD SET WITH REMOTE SWITCH L9788-11 Bundled with Test Lead with Remote Switch L9788-10/ Earth lead, alligator clip, 1.2 m (3.94 ft.) length	TEST LEAD WITH REMOTE SWITCH (RED) L9788-10 Lighting LED lamp & comparator indicator (Operate only when main unit provides a comparator function), 1.2 m (3.94 ft.) length	TIP PIN L9788-90 Spare parts for tip of the L9788/ L9788-10, Tip length 35 mm (1.38 in.)	BREAKER PIN L9788-92 For checking breaker terminal, Detachable for tip of the L9788-10, 65 mm (2.56 in.) length, φ 2.6 mm (0.10 in.)

Exclusively for the IR4059

Case

CARRYING CASE C0213 Bag type, for the IR4059, EV maintenance manual included (EV maintenance manual can be downloaded from the Hioki website)	PROTECTOR Z5042 Bundled with IR4059, not compatible with IR4057

Option

WIRELESS ADAPTER Z3210 (included with IR4057-90) Simply plug in the Z3210 wireless adapter and your compatible Hioki device is Bluetooth® ready	MAGNETIC ADAPTER 9804-01 Attaches to the tip of cord, red ×1, φ11 mm (0.43 in.)	MAGNETIC ADAPTER 9804-02 Attaches to the tip of cord, black ×1, φ11 mm (0.43 in.)	FUSE SET Z5052 Replacement fuse set for 3490, IR4056, IR4057, IR4059 (0.5 A/1000 V, 2 pieces)

When Z3210 is installed

Software

GENNECT Cross SF4071, SF4072 Mobile app for iOS, Android

Field Measuring Instruments

Our Most Popular Model Offering Reading Stability in Medium-speed Digital Format

INSULATION TESTER IR4056



IR4056-20



IR4056-21



Comparator function
Fail alert with Red LCD illuminator



Test lead L9788-10
Bright LED lamp & comparator indicator (green lamp)



- 5-range testing voltage of 50 V/100 MΩ to 1000 V/4000 MΩ
- Stable & medium-speed digital readings, 0.8 second response time of PASS/ FAIL decisions
- Drop proof onto concrete from 1m (3.28 feet)
- Bright LED, luminous LCD, test lead with bright LED lamp to illuminate near hand (Also available in the IR4056-21)
- Continuity check via 200 mA testing
- Built in AC/DC voltage meter, useful for testing solar power generation systems and electric vehicles

Model No. (Order Code) **IR4056-20** (Economic model)
IR4056-21 (Economic model, Not CE marked)

Basic specifications (Accuracy guaranteed for 1 year)

Rated output voltage	50 V DC	125 V DC	250 V DC	500 V DC	1000 V DC
Effective maximum indicated value	100 MΩ	250 MΩ	500 MΩ	2000 MΩ	4000 MΩ
Accuracy 1st effective measuring range MΩ	±2% rdg ±2 dgt 0.200 - 10.00	±2% rdg ±2 dgt 0.200 - 25.0	±2% rdg ±2 dgt 0.200 - 50.0	±2% rdg ±2 dgt 0.200 - 500	±2% rdg ±2 dgt 0.200 - 1000
Lower limit resistance	0.05 MΩ	0.125 MΩ	0.25 MΩ	0.5 MΩ	1 MΩ
Overload protection	600 V AC (10s)				660 V AC (10s)
DC voltage range	4.2 V (0.001 V resolution) to 600 V (1 V resolution), 4 ranges, Accuracy: ±1.3% rdg ±4 dgt, Input resistance: 100 kΩ or higher				
AC voltage range	420 V (0.1 V resolution) / 600 V (1 V resolution), 2 ranges, 50/60 Hz, Accuracy: ±2.3% rdg ±8 dgt, Input resistance: 100 kΩ or higher, Average rectifier				
Low resistance range	For checking the continuity of ground wiring, 10 Ω (0.01 Ω resolution) to 1000 Ω (1 Ω resolution), 3 ranges, Basic accuracy: ±3% rdg ±2 dgt, testing current 200 mA or more (at 6 Ω or less)				
Display	Semi-transmissive FSTN LCD with back lighting				
Response time	Approx. 0.8 second for PASS/FAIL decision (based on in-house testing)				
Other functions	Live circuit indicator, Automatic electric discharge, Automatic DC/AC detection, Comparator, Drop proof, Auto power save				
Power supply	LR6 (AA) alkaline batteries ×4, Continuous use: 20 hours (Comparator off, back-light off, 500 V range, no load) Number of measurements: 1000 times (at 5 s ON, 25 s OFF cycle, insulation measurement of lower limit resistance value to maintain nominal output voltage)				
Dimensions and mass	159 mm (6.26 in.)W × 177 mm (6.97 in.)H × 53 mm (2.09 in.)D, 600 g (21.2 oz.) (including batteries, excluding test leads)				
Included accessories	[IR4056-20] Test lead L9787 ×1, Neck strap ×1, Instruction manual ×1, LR6 (AA) alkaline batteries ×4 [IR4056-21] Test lead set with remote switch L9788-11 ×1, Neck strap ×1, Instruction manual ×1, LR6 (AA) alkaline batteries ×4				

Measure PV Insulation Resistance Safely, Accurately and Quickly

INSULATION TESTER IR4053



option



TEST LEAD SET WITH REMOTE SWITCH L9788-11
Bundled with Remote switch type test lead L9788-10/ Earth lead, alligator clip, 1.2 m (3.94 ft.) length



- Safely and accurately measure PV insulation resistance even while generating solar power
- Built-in PV dedicated function, display measurements in 4 seconds
- Five ranges (50/125/250/500/1000 V) built in for normal insulation resistance measurement
- Built-in 1000 VDC voltage measurement for open voltage tests of PV systems that support 1000 V
- Built-in comparator function
- Drop proof design withstands drop onto concrete from a height of 1 meter

Model No. (Order Code) **IR4053-10** (Bundled with standard Test Lead L9787)

Basic specifications (Accuracy guaranteed for 1 year)

Rated output voltage	500 V DC	1000 V DC			
Effective maximum indicated value	2000 MΩ	4000 MΩ			
Measuring range/ Accuracy	0.200 to 500 MΩ / ±4% rdg 501 to 2000 MΩ / ±8% rdg	0.200 to 1000 MΩ / ±4% rdg 1010 to 4000 MΩ / ±8% rdg			
Other measuring range / Accuracy	0 to 0.199 MΩ / ±2% rdg ±6 dgt				
Rated output voltage	50 V DC	125 V DC	250 V DC	500 V DC	1000 V DC
Effective maximum indicated value	100 MΩ	250 MΩ	500 MΩ	2000 MΩ	4000 MΩ
Accuracy 1st effective measuring range MΩ	±4% rdg 0.200 to 10.00	±4% rdg 0.200 to 25.0	±4% rdg 0.200 to 50.0	±4% rdg 0.200 to 500	±4% rdg 0.200 to 1000
Lower limit resistance	0.05 MΩ	0.125 MΩ	0.25 MΩ	0.5 MΩ	1 MΩ
Overload protection	600 V AC (10 s)				1200 V DC (10 s)
DC voltage range	4.2 V (0.001 V resolution) to 1000 V (1 V resolution), 4 ranges, Accuracy: ±1.3% rdg ±4 dgt, (Ranges in excess of 1000 V are not guaranteed for accuracy.)				
AC voltage range	420 V (0.1 V resolution)/600 V (1 V resolution), 2 ranges, 50/60 Hz, Accuracy: ±2.3% rdg ±8 dgt, (Ranges in excess of 600 V are not guaranteed for accuracy.)				
Display	Semi-transmissive FSTN LCD with back lighting				
Response time	Insulation resistance range: 1 second, PVQ function: 4 seconds (based on in-house tests)				
Other functions	Live circuit indicator, automatic electric discharge, automatic DC/AC detection, comparator, drop proof, auto power save				
Power supply	AA alkaline batteries (LR6) ×4, Continuous operating time: Approx. 20 hours (based on in-house tests)				
Dimensions and mass	159 mm (6.26 in.) W × 177 mm H (6.97 in.) H × 53 mm (2.09 in.) D, Approx. 600 g (21.2 oz.) (including batteries, excluding test lead)				
Included accessories	Test Lead L9787 ×1, Neck strap ×1, Instruction manual ×1, AA alkaline batteries (LR6) ×4				

Shared options for the Insulation Tester IR4056 and IR4053

Exclusively for the L9787 *The L9787 is bundled (IR4058-20, IR4057-20, IR4056-20, IR4053-10)

L9787 Options

TEST LEAD L9787
Bundled with Line/ Earth lead, alligator clip, 1.2 m (3.94 ft.) length

BREAKER PIN L9787-91
For checking breaker terminal, detachable for tip of the L9787, 48 mm (1.89 in.) length, φ 2.6 mm (0.10 in.)

Exclusively for the L9788-10/ L9788-11 *The L9788-11 is bundled (IR4056-21)

L9788 Options

TEST LEAD SET WITH REMOTE SWITCH L9788-11
Bundled with Test lead with Remote Switch L9788-10/ Earth lead, alligator clip, 1.2 m (3.94 ft.) length

TEST LEAD WITH REMOTE SWITCH (RED) L9788-10
Lighting LED lamp & comparator indicator (Operate only when main unit provides a comparator function), 1.2 m (3.94 ft.) length

TIP PIN L9788-90
Spare parts for tip of the L9788/ L9788-10, tip length 35 mm (1.38 in.)

BREAKER PIN L9788-92
For checking breaker terminal, detachable for tip of the L9788-10, 65 mm (2.56 in.) length, φ 2.6 mm (0.10 in.)

L4930 Options

CONNECTION CABLE SET L4930
1.2 m (3.94 ft.) length

ALLIGATOR CLIP SET L4935
Attaches to the tip of the L4930

Shared Option

MAGNETIC ADAPTER 9804-01
Attaches to the tip of cord, red ×1, φ11 mm (0.43 in.)

MAGNETIC ADAPTER 9804-02
Attaches to the tip of cord, black ×1, φ11 mm (0.43 in.)

For IR4056

FUSE SET

FUSE SET Z5052
Replacement fuse set for 3490, IR4056, IR4057, IM4059 (0.5 A/1000 V, 2 pieces)

Insulation Testers/Megaohm Testers

Maximum 5kV Test Voltage - Up to 10 TΩ of Insulation Resistance Testing

HIGH VOLTAGE INSULATION TESTER IR5050, IR5051



IR5050

IR5051

USB_{2.0}
Option



CAT III 2000 V
CAT IV 1000 V



When Z3210 is installed

- Measure insulation of high-voltage equipment (such as transformers, cables, and motors)
- Wide testing voltage range, up to 5000 V from 250 V DC
- Wide measurement insulation range, up to 10 TΩ
- Automatically calculated and displayed insulation diagnostics (PI, DAR, and DD)
- Data memory functions increase your work efficiency by eliminating human errors from manual reporting
- Selectable interface compatibility: offers both wireless and USB connectivity options
- Compact and lightweight, equipped with an IP65-rated carrying case
- Measure solar PV system insulation resistance safely and accurately while generating (IR5051 only)

Model No. (Order Code)	IR5050
	IR5051 (For solar PV system)
	IR5051-90 (For solar PV system, bundled with Z3210)

■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement parameters	Insulation resistance, leakage current, voltage, capacitance, PV insulation resistance (IR5051 only)
Max. rated voltage	Max. rated voltage to terminals: 1000 V AC, 2000 V DC Max. rated voltage to ground: 1000 V (CAT IV), 2000 V (CAT III)
Dustproof/waterproof	IP40 (with protector attached, excluding terminals) IP65 (CARRYING CASE C0212)
Standards	EN61010 (safety), EN61326 (EMC), IEC 61557-1, IEC 61557-2 (Insulation resistance tester)

Insulation resistance measurement

Test voltage preset	250 V	500 V	1000 V	2500 V	5000 V
Guaranteed accuracy range	0.00 MΩ to 2.50 GΩ ±5% rdg ±5 dgt	0.00 MΩ to 5.00 GΩ ±5% rdg ±5 dgt	0.00 MΩ to 10.0 GΩ ±5% rdg ±5 dgt	0.00 MΩ to 25.0 GΩ ±5% rdg ±5 dgt	0.00 MΩ to 50.0 GΩ ±5% rdg ±5 dgt
Rated current	1 mA to 1.2 mA (short-circuit current: 2 mA or less)				

PV insulation resistance measurement (IR5051 only)

Test voltage preset	500 V	1000 V	1500 V
Guaranteed accuracy range	0.00 MΩ to 5.00 GΩ ±5% rdg ±5 dgt	0.00 MΩ to 10.0 GΩ ±5% rdg ±5 dgt	0.00 MΩ to 20.0 GΩ ±5% rdg ±5 dgt
Rated current	[Test voltage] / [20 MΩ], (short-circuit current: 2 mA or less)		

Leakage current measurement	10 nA to 1 mA, 6 ranges Accuracy ±3% rdg ±3 dgt (guaranteed accuracy range: 1.00 nA to 3 mA) ¹
Voltage measurement	30 V to 1,000 V AC (45 Hz to 65 Hz), ±10 V to ±2,000 V DC Accuracy: ±3% rdg ±3 dgt, Input resistance: 500 kΩ or more (DC, 45 Hz to 65 Hz)
Capacitance measurement	100 nF, 1000 nF, 10 μF (3 ranges) Accuracy: ±10% rdg, ±5 nF (guaranteed accuracy range: 10.0 nF to 25.0 μF) ¹
Other functions	Insulation diagnosis (PI, DAR, DD, SV, Ramp, Timer ²), battery charge indicator, live circuit indicator, automatic power save, automatic discharge, backlight, buzzer, manual recording, logging recording, temperature and humidity input, elapsed time display, clock, filter, hardware filter, data-hold, system reset, USB communication (only when DT4900-01 is installed), wireless communication (only when Z3210 is installed), comparator, resistance gauge display, switching of insulation diagnosis function, breakdown cut-off, negative voltage notification (IR5051 only)
Display	Digital LCD, max. 999 dgt with backlight, Bar graph display
Power supply	• LR6 (AA) alkaline battery × 8 • HR6 (AA) nickel-metal hydride (NiMH) rechargeable battery × 8
Dimensions and mass	195 mm (7.68 in.) W × 254 mm (10 in.) H × 89 mm (3.50 in.) D, 1.7 kg (59.97 oz.) (including batteries)
Included accessories	Test lead L9850-01 ×1, Test lead L9850-02 ×1, Test lead L9850-03 ×1, Alligator clip L9851-01 ×1, Alligator clip L9851-02 ×1, Alligator clip L9851-03 ×1, Carrying Case C0212 ×1, LR6 Alkaline battery ×8, Instruction manual ×1, Operating precautions ×1, Wireless adapter Z3210 (IR5051-90 only)

1: refer to complete catalog for other ranges
2: only for the PV insulation resistance function

Test leads, etc.

TEST LEAD

L9850-01 Red ×1, 3 m (9.84 ft.) length

L9850-02 Black ×1, 3 m (9.84 ft.) length, shielded cable

L9850-03 Blue ×1, 3 m (9.84 ft.) length

L9850-11 Red ×1, 10 m (32.81 ft.) length

L9850-12 Black ×1, 10 m (32.81 ft.) length, shielded cable

L9850-13 Blue ×1, 10 m (32.81 ft.) length

ALLIGATOR CLIP

L9851-01 Red ×1, for L9850

L9851-02 Black ×1, for L9850

L9851-03 Blue ×1, for L9850

TEST PIN SET L9852
Red and black, for L9850

Case

CARRYING CASE C0212
IP65

Communications

COMMUNICATION PACKAGE (USB) DT4900-01
Compatible to Windows 11, 10

WIRELESS ADAPTER Z3210
(included with IR5051-90)
Simply plug in the Z3210 wireless adapter and your compatible Hioki device is Bluetooth[®] ready

Clamp Meters

Innovative Current Sensor Design, Easily Get Into Tight Spaces

AC/DC CLAMP METER CM4375-50



CAT IV 600 V
CAT III 1000 V

When using P2010:
CAT IV 1000 V
CAT III 2000 V



When Z3210
is installed



- Easily get into tight spaces between cables thanks to thin sensor structure
- Automatic AC/DC function helps boost work efficiency, Measure up to 1000 A
- Measure DC voltages of up to 2000 V^(*) for open voltage inspections of solar panels
- Simultaneously measure inrush current in RMS and crest values
- Easily transfer measurement data to your smartphone or tablet by using our free app Gennect Cross or to an Excel® file.⁽²⁾
- Harmonic analysis from 1st to 30th order with Gennect Cross⁽²⁾

^{*} When using the optional DC High Voltage Probe P2010. The clamp meter itself is capable of measuring up to 1000 V DC.

² Wireless Adapter Z3210 is necessary.

Model No. (Order Code)	CM4375-50 (Wireless Adapter Z3210 not included)
	CM4375-90 (Bundled with the Wireless Adapter Z3210)
	CM4375-93 (Bundled with DC High Voltage Probe P2010 and Wireless Adapter Z3210)

Basic specifications (Accuracy guaranteed for 1 year)

DC Current range	1000 A, (Max. display 999.9 A), Basic accuracy: $\pm 1.3\%$ rdg. ± 0.3 A (at 30.1 A - 999.9 A)
AC Current range	1000 A (Max. display 999.9 A, 10 Hz to 1 kHz, True RMS), Basic accuracy 45 - 66 Hz: $\pm 1.8\%$ rdg. ± 0.3 A (at 30.1 A - 900.0 A)
Crest factor	1000 A range: 1.5
DC+AC Current range	1000 A (DC, 10 Hz to 1 kHz, True RMS), Basic accuracy DC, 45-66 Hz: $\pm 1.3\%$ rdg. ± 1.3 A (at 30.1 A - 900.0 A)
DC Power range	0.000 kVA to 1000 kVA (When using P2010: 0 kVA to 2000 kVA) (Automatically switched based on voltage range), Basic accuracy: $\pm 2.0\%$ rdg. ± 20 dgt.
DC Voltage range	600.0 mV to 1000 V (When using P2010: 600.0 V to 2000 V)
AC Voltage range	6.000 V to 1000 V, 4 ranges (15 Hz to 1 kHz, True RMS), Basic accuracy 45 - 66 Hz: $\pm 0.9\%$ rdg. ± 0.003 V (at 6 V)
DC+AC Voltage range	6.000 V to 1000 V, 4 ranges, Basic accuracy DC, 45-66 Hz: $\pm 1.0\%$ rdg. ± 0.013 V (at 6 V)
Resistance range	600.0 Ω to 6.000 M Ω , 5 ranges, Basic accuracy: $\pm 0.7\%$ rdg. ± 0.5 Ω (at 600 Ω)
Capacitance range	1.000 μ F to 1000 μ F, 4 ranges, Basic accuracy: $\pm 1.9\%$ rdg. ± 0.005 μ F (at 1 μ F)
Frequency range	9.999 Hz to 999.9 Hz, 3 ranges, Basic accuracy: $\pm 0.1\%$ rdg. ± 0.003 Hz (at 9.999 Hz)
Temperature (K)	-40.0 to 400.0°C, add temperature probe accuracy to basic accuracy of $\pm 0.5\%$ rdg. ± 3.0 °C
Other functions	Continuity check, Diode check, Automatic AC/DC detection, DC current and DC voltage polarity detection function, MAX/MIN/AVG/ PEAK MAX/PEAK MIN value display, Low-pass filter function, Display value hold, Auto hold, Backlight, Auto power save, Buzzer sound, Zero-adjustment
Dustproof, waterproof	IP20 (Voltage measurement in a completely dry condition. When jaw closes) IP54 (While in storage)
Power supply	LR03 Alkaline battery $\times 2$ Continuous use: approx. 40 hr (without Z3210 installed), approx. 20 hr. (with Z3210 installed and using wireless communications) Other conditions: 100 A AC measurement, backlight off, 23°C reference value
Core jaw diameter	$\phi 34$ mm (1.34 in.)
Smallest dimension of jaw cross-section	9.5 mm (0.37 in.) (Range value of 44 mm (1.73 in.) from the tip of the jaw)
Dimensions and mass	65 mm (2.56 in.) W \times 242 mm (9.53 in.) H \times 35 mm (1.38 in.) D mm, 350 g (12.3 oz.)
Included accessories	Test Lead L9300, Carrying Case C0203, LR03 Alkaline battery $\times 2$, Instruction Manual $\times 2$, Operating Precautions $\times 1$

Shared options for CM4141-50, CM4371-50, CM4373-50 and CM4375-50

True RMS 2000 A AC/DC Clamp Meter for the Toughest Situations With DMM Functions that Deliver Top Safety

AC/DC CLAMP METER CM4373-50



CAT IV 600 V
CAT III 1000 V

When using P2010:
CAT IV 1000 V
CAT III 2000 V



When Z3210
is installed



- Automatic AC/DC function helps boost work efficiency
- Measure DC voltages of up to 2000 V^(*) for open voltage inspections of solar panels
- Simultaneously measure inrush current in RMS and crest values
- Easily transfer measurement data to your smartphone or tablet by using our free app Gennect Cross or to an Excel® file.⁽²⁾
- Harmonic analysis from 1st to 30th order with Gennect Cross⁽²⁾

^{*} When using the optional DC High Voltage Probe P2010. The clamp meter itself is capable of measuring up to 1000 V DC.

² Wireless Adapter Z3210 is necessary.

Model No. (Order Code)	CM4373-50 (Wireless Adapter Z3210 not included)
	CM4373-90 (Bundled with the Wireless Adapter Z3210)
	CM4373-93 (Bundled with DC High Voltage Probe P2010 and Wireless Adapter Z3210)

Basic specifications (Accuracy guaranteed for 1 year)

DC Current range	600.0 A/2000 A, Basic accuracy: $\pm 1.3\%$ rdg. ± 0.3 A (600 A range)
AC Current range	600.0 A/2000 A (10 Hz to 1 kHz, True RMS), Basic accuracy 45 - 66 Hz: $\pm 1.3\%$ rdg. ± 0.3 A (at 600 A)
Crest factor	600.0 A range: 3 or less, 2000 A range: 2.84 or less
DC+AC Current range	600.0 A/2000 A (10 Hz to 1 kHz, True RMS), Basic accuracy DC, 45-66 Hz: $\pm 1.3\%$ rdg. ± 1.3 A (at 600 A)
DC Voltage range	600.0 mV to 1000 V (When using P2010: 600.0 V to 2000 V)
AC Voltage range	6.000 V to 1000 V, 4 ranges (15 Hz to 1 kHz, True RMS), Basic accuracy 45 - 66 Hz: $\pm 0.9\%$ rdg. ± 0.003 V (at 6 V)
DC+AC Voltage range	6.000 V to 1000 V, 4 ranges, Basic accuracy DC, 45 - 66 Hz: $\pm 1.0\%$ rdg. ± 0.013 V (at 6 V)
Resistance range	600.0 Ω to 6.000 M Ω , 5 ranges, Basic accuracy: $\pm 0.7\%$ rdg. ± 0.5 Ω (at 600 Ω)
Capacitance range	1.000 μ F to 1000 μ F, 4 ranges, Basic accuracy: $\pm 1.9\%$ rdg. ± 0.005 μ F (at 1 μ F)
Frequency range	9.999 Hz to 999.9 Hz, 3 ranges, Basic accuracy: $\pm 0.1\%$ rdg. ± 0.003 Hz (at 9.999 Hz)
Temperature (K)	-40.0 to 400.0°C, add temperature probe accuracy to basic accuracy of $\pm 0.5\%$ rdg. ± 3.0 °C
Voltage detection	Hi: 40 V to 600 V AC, Lo: 80 V to 600 V AC, 50/60 Hz
Other functions	DC power, Continuity check, Diode check, Automatic AC/DC detection, Pass/fail judgement function of DC A and DC V, Max/Min/Average/PEAK MAX/PEAK MIN value display, Low-pass filter function, Display value hold, Auto hold, Back light, Auto-power save, Buzzer sounds, Zero-adjustment, etc.
Dustproof, waterproof	IP20 (Voltage measurement in a completely dry condition. When jaw closes) IP54 (While in storage)
Power supply	LR03 Alkaline battery $\times 2$ Continuous use: 40 hr (without Z3210 installed), 24 hr. (with Z3210 installed and using wireless communications) Other conditions: 100 A AC measurement, backlight off, 23°C reference value
Core jaw diameter	$\phi 55$ mm (2.17 in.), Jaw dimension: 92 mm (3.62 in.) W \times 18 mm (0.71 in.) D
Dimensions and mass	65 mm (2.56 in.) W \times 250 mm (9.84 in.) H \times 35 mm (1.38 in.) D mm, 530 g (18.7 oz.)
Included accessories	Test Lead L9300, Carrying Case C0203, LR03 Alkaline battery $\times 2$, Instruction Manual $\times 2$, Operating Precautions $\times 1$

Shared options for CM4141-50, CM4371-50, CM4373-50 and CM4375-50

Clamp Meters

True RMS 600 A AC/DC Clamp Meter for the Toughest Situations With DMM Functions that Deliver Top Safety

AC/DC CLAMP METER CM4371-50



CAT IV 600 V
CAT III 1000 V
When using P2010:
CAT IV 1000 V
CAT III 2000 V



True RMS



When Z3210 is installed



- Automatic AC/DC function helps boost work efficiency
- Measure DC voltages of up to 2000 V (*) for open voltage inspections of solar panels
- Simultaneously measure inrush current in RMS and crest values
- Easily transfer measurement data to your smartphone or tablet by using our free app Gennect Cross or to an Excel® file (**)
- Harmonic analysis from 1st to 30th order with Gennect Cross (**)

*1 When using the optional DC High Voltage Probe P2010. The clamp meter itself is capable of measuring up to 1000 V DC.

**2 Wireless Adapter Z3210 is necessary.

Model No. (Order Code) **CM4371-50** (Wireless Adapter Z3210 not included)

CM4371-90 (Bundled with the Wireless Adapter Z3210)

Basic specifications (Accuracy guaranteed for 1 year)

DC Current range	20.00 A/600.0 A, Basic accuracy: $\pm 1.3\%$ rdg ± 0.08 A (20 A range)
AC Current range	20.00 A/600.0 A (10 Hz to 1 kHz, True RMS), Basic accuracy: $\pm 1.3\%$ rdg ± 0.08 A (at 20 A)
Crest factor	20.00 A range: 7.5, 600.0 A range: 3 or less
DC+AC Current range	20.00 A/600.0 A (10 Hz to 1 kHz, True RMS), Basic accuracy DC, 45-66 Hz: $\pm 1.3\%$ rdg ± 0.13 A (at 20 A)
DC Voltage range	600.0 mV to 1000 V (When using P2010: 600.0 V to 2000 V)
AC Voltage range	6.000 V to 1000 V, 4 ranges (15 Hz to 1 kHz, True RMS), Basic accuracy 45 - 66 Hz: $\pm 0.9\%$ rdg ± 0.003 V (at 6 V)
DC+AC Voltage range	6.000 V to 1000 V, 4 ranges, Basic accuracy DC, 45 - 66 Hz: $\pm 1.0\%$ rdg ± 0.013 V (at 6 V)
Resistance range	600.0 Ω to 6.000 M Ω , 5 ranges, Basic accuracy: $\pm 0.7\%$ rdg ± 0.5 Ω (at 600 Ω)
Capacitance range	1.000 μ F to 1000 μ F, 4 ranges, Basic accuracy: $\pm 1.9\%$ rdg ± 0.005 μ F (at 1 μ F)
Frequency range	9.999 Hz to 999.9 Hz, 3 ranges, Basic accuracy: $\pm 0.1\%$ rdg ± 0.003 Hz (at 9.999 Hz)
Temperature (K)	-40.0 to 400.0°C, add temperature probe accuracy to basic accuracy of $\pm 0.5\%$ rdg ± 3.0 °C
Voltage detection	Hi: 40 V to 600 V AC, Lo: 80 V to 600 V AC, 50/60 Hz
Other functions	DC power, Continuity check, Diode check, Automatic AC/DC detection, Pass/fail judgement function of DC A and DC V, Max/Min/Average/PEAK MAX/PEAK MIN value display, Low-pass filter function, Display value hold, Auto hold, Back light, Auto-power save, Buzzer sounds, Zero-adjustment
Dustproof, waterproof	IP20 (Voltage measurement in a completely dry condition. When jaw closes) IP54 (While in storage)
Power supply	LR03 Alkaline battery $\times 2$ Continuous use: 40 hr (without Z3210 installed), 20 hr. (with Z3210 installed and using wireless communications) Other conditions: 10 A AC measurement, backlight off, 23°C reference value
Core jaw diameter	$\phi 33$ mm (1.30 in.), Jaw dimension: 69 mm (2.72 in.) W \times 14 mm (0.55 in.) D
Dimensions and mass	65 mm (2.56 in.) W \times 215 mm (8.46 in.) H \times 35 mm (1.38 in.) D mm, 340 g (12.0 oz.)
Included accessories	Test Lead L9300, Carrying Case C0203, LR03 Alkaline battery $\times 2$, Instruction Manual $\times 2$, Operating Precautions $\times 1$

Shared options for CM4141-50, CM4371-50, CM4373-50 and CM4375-50

*: accepts only rated currents under 10 A.

Test Leads

L9300 is bundled

TEST LEAD L9300
95 cm (37.4 in.), Integrated cap and protective finger guard

Slide the guard of L9300 and attach as measurement category II.

CONTACT PIN SET L4933*
Attaches to the tip of the Test Lead L9207-10/ L9300/ DT4911/ L9206, 60 V DC/ 30 V AC

SMALL ALLIGATOR CLIP SET L4934*
Attaches to the tip of the L4932/ L9207-10/ L9300/ DT4911/ L9206, CAT III 300 V, CAT II 600 V

High Voltage Probe

DC HIGH VOLTAGE PROBE P2010
CAT III 2000 V, light-weight and improved handling

Temperature Measurement

THERMOCOUPLES(K) DT4910
K type, tip exposed, 0.5 mm (0.02 in.) diameter, 80 cm (2.62 ft.) length, -40 to 260 °C (-40 to 500 °F)

Options for Test Leads

CONNECTION CABLE SET L4930
1.2 m (3.94 ft.) length, CAT IV 600 V, CAT III 1000 V

EXTENSION CABLE SET L4931
Expands the length of the L4930/ L4940, 1.5 m (4.92 ft.) length

TEST PIN SET L4932
Attaches to the tip of the L4930/ L4940, CAT IV 600 V, CAT III 1000 V

SMALL ALLIGATOR CLIP SET L4934*
Attaches to the tip of the L4932, L9207-10/DT4911, L9206, CAT III 300 V, CAT II 600 V

ALLIGATOR CLIP SET L4935
Attaches to the tip of the L4930/ L4940, CAT IV 600 V, CAT III 1000 V

BUS BAR CLIP SET L4936*
Attaches to the tip of the L4930/ L4940, CAT III 600 V

MAGNETIC ADAPTER SET L4937*
Attaches to the tip of the L4930/ L4940, CAT III 1000 V

MAGNETIC ADAPTER 9804*
Attaches to the tip of voltage cord, $\phi 11$ mm (0.43 in.), compatible M6 pan screws

TEST PIN SET L4938
Attaches to the tip of the L4930/ L4940, CAT III 600 V

BREAKER PIN SET L4939
Attaches to the tip of the L4930/ L4940, CAT III 600 V

GRABBER CLIP L9243*
Attaches to the tip of the L4930/ L4940, CAT II 1000 V, 185 mm (7.28 in.) length

Option

CARRYING CASE C0203
Bundled accessory

WIRELESS ADAPTER Z3210
Simply plug in the Z3210 wireless adapter and your compatible Hioki device is Bluetooth® ready

Software

GENNECT Cross SF4071, SF4072
Mobile app for iOS, Android

Field Measuring Instruments

Clamp Meters

Compact & Easy, One-Touch Maintenance on All Types of AC/DC Equipment

CLAMP ON AC/DC HITESTER 3288



3288



True RMS
3288-20



CAT III 600 V (Current)
CAT III 300 V (Voltage)



Basic specifications (Accuracy guaranteed for 1 year)

	3288	3288-20
DC Current range	100.0/ 1000 A, Basic accuracy: $\pm 1.5\%$ rdg ± 5 dgt	
AC Current range	100.0/ 1000 A, (10 Hz to 500 Hz, Average rectified), Basic accuracy: $\pm 1.5\%$ rdg ± 5 dgt	100.0/ 1000 A, (10 Hz to 500 Hz, True RMS), Basic accuracy: $\pm 1.5\%$ rdg ± 5 dgt
DC Voltage range	419.9 mV to 600 V, 5 ranges, Basic accuracy: $\pm 1.3\%$ rdg ± 4 dgt	
AC Voltage range	4,199 V to 600 V, 4 ranges, Basic accuracy: $\pm 2.3\%$ rdg ± 8 dgt (30 to 500 Hz, Average rectified)	4,199 V to 600 V, 4 ranges, Basic accuracy: $\pm 2.3\%$ rdg ± 8 dgt (30 to 500 Hz, True RMS)
Resistance range	419.9 Ω to 41.99 M Ω , 6 ranges, Basic accuracy: $\pm 2\%$ rdg ± 4 dgt	
Crest factor	N/A	3 or less (2 at 1000 A range, 1.5 at Voltage)
Other functions	Continuity: (50 Ω ± 40 Ω) or less buzzer sounds, Data hold, Auto power save, Auto zero (DC A)	
Display	LCD, max. 4199 dgt, Display refresh rate: 2.5 times/s	
Power supply	Coin type lithium battery (CR2032) $\times 1$, Continuous use 60 hours	Coin type lithium battery (CR2032) $\times 1$, Continuous use 35 hours
Core jaw dia.	ϕ 35 mm (1.38 in.)	
Dimensions and mass	57 mm (2.24 in.)W \times 180 mm (7.09 in.)H \times 16 mm (0.63 in.)D, 150 g (5.3 oz.)	
Included accessories	Coin type lithium battery (CR2032) $\times 1$, Carrying case 9398 $\times 1$, Test lead L9208 $\times 1$, Instruction manual $\times 1$	


- Model 3288-20: True RMS
- Use the 3288 for high current measurements such as UPS emergency batteries and train motors
- Voltage, resistance, and continuity check functions

Model No. (Order Code) **3288** (Average rectified)
3288-20 (True RMS)

Bundled
Accessories



Option



Compact & Easy, One-Touch Maintenance on All Types of AC/DC Equipment

CLAMP ON AC/DC HITESTER 3287



CAT III 600 V (Current)
CAT III 300 V (Voltage)



True RMS

- Accurately measure even small currents with 10 A range
- Voltage, resistance, and continuity check functions

Model No. (Order Code) **3287** (True RMS)


Basic specifications (Accuracy guaranteed for 1 year)

DC Current range	10.00/ 100.0 A, Basic accuracy: $\pm 1.5\%$ rdg ± 5 dgt
AC Current range	10.00/ 100.0 A (10 Hz to 1 kHz, True RMS) Basic accuracy: $\pm 1.5\%$ rdg ± 5 dgt
DC Voltage range	419.9 mV to 600 V, 5 ranges, Basic accuracy: $\pm 1.3\%$ rdg ± 4 dgt
AC Voltage range	4,199 V to 600 V, 4 ranges (30 to 500 Hz, True RMS) Basic accuracy: $\pm 2.3\%$ rdg ± 8 dgt
Resistance range	419.9 Ω to 41.99 M Ω , 6 ranges, Basic accuracy: $\pm 2\%$ rdg ± 4 dgt
Crest factor	2.5 or less (150 A, 1000 V max.)
Other functions	Continuity: (50 Ω ± 40 Ω) or less buzzer sounds, Data hold, Auto power save, Auto zero (DC A)
Display	LCD, max. 4199 dgt, Display refresh rate: 2.5 times/s
Power supply	Coin type lithium battery (CR2032) $\times 1$, Continuous use 25 hours
Core jaw dia.	ϕ 35 mm (1.38 in.)
Dimensions and mass	57 mm (2.24 in.)W \times 180 mm (7.09 in.)H \times 16 mm (0.63 in.)D, 170 g (6.0 oz.)
Included accessories	Coin type lithium battery (CR2032) $\times 1$, Carrying case 9398 $\times 1$, Test lead L9208 $\times 1$, Instruction manual $\times 1$

Bundled
Accessories



Option



Clamp Meters

True RMS 2000 A AC Clamp Meter Innovative Current Sensor Design - Easily Get Into Tight Spaces

AC CLAMP METER CM4141-50



CE
CAT IV 600 V
CAT III 1000 V
When using P2010:
CAT IV 1000 V
CAT III 2000 V

3 year Warranty

True RMS

Bluetooth
When Z3210 is installed

- Easily get into tight spaces between cables thanks to thin sensor with a minimum cross-section span of 11 mm
- Measure up to 2000 A AC
- Measure DC voltages of up to 2000 V⁽¹⁾ for open voltage inspections of solar panels
- AC A, AC and DC V, DC+AC V, resistance, frequency, temperature, and more
- Easily transfer measurement data to your smartphone or tablet by using our free app Gennect Cross or to an Excel® file⁽²⁾
- Harmonic analysis from 1st to 30th order with Gennect Cross⁽²⁾

¹ When using the optional DC High Voltage Probe P2010. The clamp meter itself is capable of measuring up to 1000 V DC.

² Wireless Adapter Z3210 is necessary.

Model No. (Order Code) **CM4141-50** (Wireless Adapter Z3210 not included)
CM4141-90 (Bundled with the Wireless Adapter Z3210)

Shared options for CM4141-50, CM4371-50, CM4373-50 and CM4375-50

Basic specifications (Accuracy guaranteed for 1 year)

AC Current range	60.00 A to 2000 A, 3 ranges (45 Hz to 1 kHz, True RMS), Basic accuracy 45-66 Hz: $\pm 1.5\%$ rdg. ± 0.08 A (60 A range)
Crest factor	For the 60.00 A range: 2.5 (greater than 50.00 A and less than or equal to 60.00 A) to 2000 A range: 1.5 (2000 A or less)
DC Voltage range	600.0 mV to 1000 V (When using P2010: 600.0 V to 2000 V)
AC Voltage range	6.000 V to 1000 V, 4 ranges (15 Hz to 1 kHz, True RMS), Basic accuracy 45-66 Hz: $\pm 0.9\%$ rdg. 0.003 V (at 6 V)
DC+AC Voltage range	6.000 V to 1000 V, 4 ranges, Basic accuracy DC, 45-66 Hz: $\pm 1.0\%$ rdg. ± 0.013 V (at 6 V)
Resistance range	600.0 Ω to 6.000 M Ω , 5 ranges, Basic accuracy: $\pm 0.7\%$ rdg. ± 0.5 Ω (at 600 Ω)
Capacitance range	1.000 μ F to 1000 μ F, 4 ranges, Basic accuracy: $\pm 1.9\%$ rdg. ± 0.005 μ F (at 1 μ F)
Frequency range	Voltage: 9.999 Hz to 999.9 Hz 3 ranges, Current: 99.99 Hz to 999.9 Hz 2 ranges, Basic accuracy: $\pm 0.1\%$ rdg. ± 0.01 Hz (at 99.99 Hz)
Temperature (K)	-40.0 to 400.0°C, Basic accuracy: $\pm 0.5\%$ rdg. $\pm 3.0^\circ$ C + temperature probe accuracy
Other functions	Continuity check, Diode check, Automatic AC/DC detection (Voltage check only), Max/Min/AVG/Peak waveform MAX/Peak waveform MIN value display, Low-pass filter function, Display value hold, Backlight, Auto power save, Buzzer sound, Zero-adjustment, and other function
Dustproof, water-proof	IP20 (current measurement of voltage or hazardous live conductors under completely dry condition. Do not use when wet.) IP50 (when measuring resistance, or current of an insulated conductor (completely dry), and in storage)
Power supply	LR03 Alkaline battery $\times 2$ Continuous use: approx. 48 hr (without Z3210 installed), approx. 24 hr. (with Z3210 installed and using wireless communications) Other conditions: 100 A AC measurement, backlight off, 23°C reference value
Core jaw diameter	$\phi 55$ mm (2.17 in.), Jaw dimension: 82 mm (3.23 in.) W \times 11 mm (0.43 in.) D (D dimension is a range value of 44 mm (1.73 in.) from the tip of the jaw)
Smallest dimension of jaw cross-section	11 mm (0.43 in.) (Range value of 44 mm (1.73 in.) from the tip of the jaw)
Dimensions and mass	65 mm (2.56 in.) W \times 247 mm (9.72 in.) H \times 35 mm (1.38 in.) D, 300 g (10.6 oz.)
Included accessories	Test Lead L9300 $\times 1$, Carrying Case C0203 $\times 1$, LR03 Alkaline battery $\times 2$, Instruction Manual $\times 2$, Operating Precautions $\times 1$

Rugged & Compact, Quickly Clamp Wires in Even More Confined Spaces!

AC CLAMP METER 3280-10F, CM3289



3280-10F



CM3289

CE
CAT IV 300 V (Current)
CAT III 600 V (Current)
CAT III 300 V (Voltage)

Drop proof

3 year Warranty

True RMS

- The CM3289 is the successor to the popular 3280-20F with a redesigned thinner sensor to help you get into the tightest spaces.
- New redesigned sensor for even easier clamping (CM3289)
- Expanded -25 °C to 65 °C operating temperature range
- Model CM3289: Measure even harmonic waveform components using the True RMS method
- Model 3280-10F: Measure the fundamental waveform component using the average rectified method
- Connect the CT6280 flexible sensor to measure up to 4199 A in thick or paired wires

Model No. (Order Code) **3280-10F** (Average rectified)
3280-70F (3280-10F, CT6280 bundled model)
CM3289 (True RMS)

Note: the 3280-70F includes both the meter and an AC Flexible Current Sensor.

1: AC CLAMP METER 3280-10F $\times 1$

2: AC FLEXIBLE CURRENT SENSOR CT6280 $\times 1$ 3: CARRYING CASE C0205 $\times 1$

Basic specifications (Accuracy guaranteed for 1 year)

	3280-10F	CM3289
AC Current range	42.00 to 1000 A, 3 ranges (50 to 60 Hz, Average rectified), Basic accuracy: $\pm 1.5\%$ rdg ± 5 dgt	42.00 to 1000 A, 3 ranges (40 Hz to 1 kHz, True RMS), Basic accuracy: $\pm 1.5\%$ rdg ± 5 dgt
DC Voltage range	420.0 mV to 600 V, 5 ranges, Basic accuracy: $\pm 1.0\%$ rdg ± 3 dgt	
AC Voltage range	4.200 V to 600 V, 4 ranges (45 to 500 Hz, Average rectified), Basic accuracy: $\pm 1.8\%$ rdg ± 7 dgt	4.200 V to 600 V, 4 ranges (45 to 500 Hz, True RMS), Basic accuracy: $\pm 1.8\%$ rdg ± 7 dgt
Crest factor	N/A	2.5 or less at 2500 counts (Linearly decreases to 1.5 or less at 4200 count)
Resistance range	420.0 Ω to 42.00 M Ω , 6 ranges, Basic accuracy: $\pm 2\%$ rdg ± 4 dgt	
Other functions	Continuity: Buzzer sounds at 50 Ω ± 40 Ω or less, Data hold, Auto power save, Drop-proof from height of 1 meter	
Display	LCD, max. 4199 dgt, Display refresh rate: 400 ms	
Power supply	Coin type lithium battery (CR2032) $\times 1$, Continuous use 120 hours	Coin type lithium battery (CR2032) $\times 1$, Continuous use 70 hours
Core jaw dia.	$\phi 33$ mm (1.30 in.)	
Dimensions and mass	57 mm (2.24 in.) W \times 175 mm (6.89 in.) H \times 16 mm (0.63 in.) D, 100 g (3.5 oz.)	57 mm (2.24 in.) W \times 181 mm (7.13 in.) H \times 16 mm (0.63 in.) D, 100 g (3.5 oz.)
Included accessories	CARRYING CASE 9398 $\times 1$, TEST LEAD L9208 $\times 1$, Coin type lithium battery (CR2032) $\times 1$, Instruction manual $\times 1$	

CT6280 Basic specifications (Accuracy guaranteed for 1 year)

Core jaw dia.	$\phi 130$ mm (5.12 in.) Cable cross-section diameter: 5 mm (0.20 in.), tip cap diameter: 7 mm (0.28 in.)
AC Current	419.9 A / 4199 A, 2 ranges ($\pm 3.0\%$ rdg ± 5 dgt)
Cable length	800 mm (31.5 in.)

Bundled Accessories

The 9398 is a bundled accessory for the 3280-10F, the CM3289.

TEST LEAD L9208
70 cm (2.30 ft.) length

CARRYING CASE 9398

Options

The C0205 is a bundled accessory for the CT6280, 3280-70F.

AC FLEXIBLE CURRENT SENSOR CT6280
Includes C0205 and attachment

CARRYING CASE C0205
The CT6280, L9208, and tester can be stored

TEST LEADS HOLDER 9209
Secures one end of each test lead to the rear of the meter

Attach L9208 with the cap removed.

CONTACT PIN SET L4933
Attaches to the tip of the Test Lead L9208, 60 V DC / 30 V AC

SMALL ALLIGATOR CLIP SET L4934
Attaches to the tip of the L9208, CAT III 300 V, CAT II 600 V

Field Measuring Instruments

Clamp Meters

Large Jaw Lets You Clamp with Ease, Measure Thick Cables Right at the Terminal

AC CLAMP METER CM3281, CM3291



True RMS
CM3291

- AC only, measure up to 2000 AAC
- -25 °C to 65 °C operating temperature range
- Also measure resistance, continuity, AC and DC voltage

Model No. (Order Code) **CM3281** (Average rectified)
CM3291 (True RMS)

Basic specifications (Accuracy guaranteed for 1 year)

	CM3281	CM3291
AC Current range	42.00 to 2000 A, 3 ranges (50 Hz to 60 Hz, Average rectified), Basic accuracy 50-60 Hz: $\pm 1.5\%$ rdg ± 5 dgt	42.00 to 2000 A, 3 ranges (40 Hz to 1 kHz, True RMS), Basic accuracy 45-66 Hz: $\pm 1.5\%$ rdg ± 5 dgt
DC Voltage range	420.0 mV to 600 V, 5 ranges, Basic accuracy: $\pm 1.0\%$ rdg ± 3 dgt (at 4.2 V range)	
AC Voltage range	4.200 V to 600 V, 4 ranges (45 to 500 Hz, Average rectified), Basic accuracy 45-66 Hz: $\pm 1.8\%$ rdg ± 7 dgt (at 4.2 V range)	4.200 V to 600 V, 4 ranges (45 to 500 Hz, True RMS), Basic accuracy 45-66 Hz: $\pm 1.8\%$ rdg ± 7 dgt (at 4.2 V range)
Crest factor	N/A	For 2500 counts or less: 2.5 Reduces linearly to 1.5 or less at 4200 counts But, 1.5 or less for 2000 A ACA range
Resistance range	420.0 Ω to 42.00 M Ω , 6 ranges, Basic accuracy: $\pm 2.0\%$ rdg ± 4 dgt (at 420.0 Ω range)	
Other functions	Continuity check: Buzzer sounds at 50 Ω ± 40 Ω or less, Data hold, Auto power save, Drop-proof from height of 1 meter	
Power supply	Coin type lithium battery (CR2032) $\times 1$, Continuous use 120 hours	Coin type lithium battery (CR2032) $\times 1$, Continuous use 70 hours
Core jaw diameter	ϕ 46 mm (1.81 in.), Jaw dimension: 65 mm (2.56 in.) W \times 13 mm (0.51 in.) D	
Dimensions and mass	57 mm (2.24 in.) W \times 198 mm (7.80 in.) H \times 16 mm (0.63 in.) D, 103 g (3.6 oz.)	
Included accessories	Carrying case $\times 1$, TEST LEAD L9208 $\times 1$, Coin type lithium battery CR2032 (for trial purposes only) $\times 1$, Instruction manual $\times 1$, Download guide $\times 1$, Operating precautions $\times 1$	

CT6280 Basic specifications (Accuracy guaranteed for 1 year)

Core jaw dia.	ϕ 130 mm (5.12 in.) (Cable cross-section diameter: 5 mm (0.20 in.); tip cap diameter: 7 mm (0.28 in.))
AC Current	419.9 A / 4199 A, 2 ranges ($\pm 3.0\%$ rdg ± 5 dgt)
Cable length	800 mm (31.5 in.)

Shared options for the CM3281, CM3291

Bundled Accessories			Options			
	TEST LEAD L9208 70 cm (2.30 ft.) length	Carrying case C0205 Hard type, 222 mm (8.74 in.) W \times 115 mm (4.53 in.) H \times 46 mm (1.81 in.) D		AC FLEXIBLE CURRENT SENSOR CT6280 Includes carrying case C0205	CONTACT PIN SET L4933 Attaches to the tip of the Test Lead L9208, 60 V DC / 30 V AC	SMALL ALLIGATOR CLIP SET L4934 Attaches to the tip of the L9208, CAT III 300 V, CAT II 600 V

For Large Diameter and Large Current Measurement in Combination with AC Clamp Meter

AC FLEXIBLE CURRENT SENSOR CT6280



- Large-diameter loop is ideal for measuring large wires and pairs of wires.
- In small spaces
- Freely bendable

Model No. (Order Code) **CT6280** (For the CM3291/89, 3280-10F and similar products)

CT6280 Basic specifications (Accuracy guaranteed for 1 year)

Maximum input current	4200 A AC, continuous (50 Hz to 60 Hz)
Core jaw dia.	ϕ 130 mm (5.12 in.) (Cross-section diameter of sensor cable: ϕ 5 mm (0.20 in.); Sensor-tip cap diameter: ϕ 7 mm (0.28 in.))
Dimensions and mass	42 mm (1.65 in.) W \times 65 mm (2.56 in.) H \times 18 mm (0.71 in.) D (excluding the flexible loop and output cable), 71 g (2.5 oz.)
Cable length	800 mm (31.5 in.)
Included accessory	Carrying case C0205 $\times 1$

Note: CT6280 is a flexible current sensor for measuring large currents. It is not suitable for measuring minute current such as leakage current.



Essential equipment for professional electricians (AC FLEXIBLE CURRENT SENSOR CT6280/option)

Thin and strong clamp meter

AC FLEXIBLE CURRENT SENSOR
 ϕ 130 mm (5.12")
4200 A AC

Use with an AC Clamp Meter to measure large wires and currents.

Large diameter loop is ideal for measuring large wires and pairs of wires.

Large current measurement

In small spaces

Tip is fixed in an L-shape for easy manipulation in confined spaces

Note: CT6280 is a flexible current sensor for measuring large currents. It is not suitable for measuring minute current such as leakage current.

Freely bendable

CARRYING CASE C0205

Clamp Meters/Leak Current

Leakage Current Meter with Remarkable Ease of Use. Double Your Work Speed with Innovative Jaw Design.

AC LEAKAGE CLAMP METER CM4001



Slim jaws,
Core jaw diameter:φ24 mm



- Slim jaws let you work with ease
- Measure everything from leakage to load
- Identify intermittent GFCI and RCD trips to prevent unplanned equipment downtime by testing for earth leakage current
- Find issues faster with comparator function
- Wireless support. Transfers measurements to your smartphone or tablet and allows you to quickly create reports with field photos and drawings. (Optional Wireless Adapter Z3210 is necessary)

Model No. (Order Code) **CM4001** (Wireless Adapter Z3210 not included)
CM4001-90 (Bundled with the Wireless Adapter Z3210)

■ Basic specifications (Accuracy guaranteed for 1 year)

AC Current range	60.00 mA/ 600.0 mA/ 6.000 A/ 60.00 A/ 600.0 A, 5 ranges (40 Hz to 1 kHz, True RMS) Basic accuracy (45-66 Hz): ±1.5% rdg ±5 dgt (60.00 mA to 6.000 A), ±2.5% rdg ±5 dgt (60.00 A to 600.0 A) Guaranteed accuracy: from 0.60 mA to 600.0A
AC Voltage range	N/A
Frequency range	40.0 Hz to 999.9 Hz
Crest factor	4.5 (4000 counts or less) 3 (more than 4000 counts, 6000 counts or less)
Filter function	Cut off frequency: 180 Hz ±30 Hz at filter ON (-3 dB)
Output function	N/A
Other functions	Comparator function, record Max/Min/Avg value, backlight, data hold, auto power off, AC inrush function
Display	Display refresh rate: 5 times/s
Power supply	LR03 alkaline battery × 1; 32 hours of continuous use
Core jaw diameter	φ 24 mm (0.94 in.)
Dimensions and mass	37 mm (1.46 in.) W × 160 mm (6.30 in.) H × 27 mm (1.06 in.) D, 115 g (4.1 oz.)
Included accessories	Carrying case × 1, Strap × 1, Instruction manual × 1, Operating Precautions × 1, LR03 alkaline battery × 1



Prevent Unexpected Downtime! Identify Potential Problems and Avoid Large Problems

AC LEAKAGE CLAMP METER CM4002, CM4003



CM4002

CM4003




- Easily transfer measurement data to your smartphone or tablet by using our free app Gennect Cross or to an Excel® file. (Wireless Adapter Z3210 is necessary)
- Detect minuscule leakage currents with a newly designed sensor. (Core jaw diameter up to φ 40 mm)
- Broad measurement range extending from leakage currents to load currents
- Complies with the performance standard set forth in IEC/EN 61557-13, an international standard on leak clamp meters
- Solve GFCI and RCD problems quickly
- Speed up pass/fail judgments with the built-in comparator function
- Output function (waveform/RMS): use with a recorder to record waveforms and fluctuations (CM4003 only)
- External power supply: use an optional AC adapter for continuous, long-term measurement (CM4003 only)

Model No. (Order Code) **CM4002** (Wireless Adapter Z3210 not included)
CM4002-90 (Bundled with the Wireless Adapter Z3210)
CM4003 (Wireless Adapter Z3210 not included)
CM4003-90 (Bundled with the Wireless Adapter Z3210)

■ Basic specifications (Accuracy guaranteed for 1 year)

	CM4002	CM4003
AC Current range	6.000 mA, 60.00 mA, 600.0 mA, 6.000 A, 60.00 A, 200.0 A, 6 ranges, True RMS Basic accuracy 45 Hz - 400 Hz: ±1.0% rdg ±5 dgt (60.00 mA to 6.000 A), ±1.5% rdg ±5 dgt (60.00 A, 200.0 A) Basic accuracy 15 Hz - 45 Hz, 400 Hz - 2 kHz: ±2.0% rdg ±5 dgt Defined accuracy range: 0.060 mA to 200.0 A	
AC Voltage range	N/A	
Frequency range	15.0 Hz to 2000 Hz	
Crest factor	3 (other than 200.0 A range), 1.5 (200.0 A range)	
Filter function	Cut off frequency: 180 Hz ±30 Hz at filter ON (-3 dB)	
Output function	N/A	RMS (RMS value output), WAVE (waveform output)
Other functions	Max/ Min/ AVG/ PEAK MAX/ PEAK MIN value display, Display value hold and auto hold; Backlight, Auto power save, Buzzer sound, Event count display, Comparator, Simple event recording, Rush current measurement	
Display	Display refresh rate: 5 times/s	
Power supply	AA-size alkaline battery (LR6) × 2; Continuous operating time: 48 hr. (without Z3210 installed), 30 hr. (with Z3210 installed and using wireless communications)	AC Adapter Z1013 (5 V DC, 2.6 A)
Core jaw diameter	φ 40 mm (1.57 in.)	
Dimensions and mass	64 mm (2.52 in.) W × 233 mm (9.17 in.) H × 37 mm (1.46 in.) D, 400 g (14.1 oz.)	
Included accessories	Carrying case C0203 × 1, Instruction manual × 1, Operating Precautions × 1, AA-size alkaline battery (LR6) × 2	

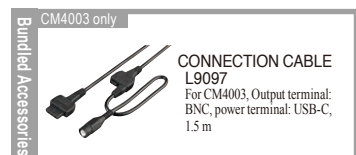

Field-capable, Fast-working, Extensive Measurement Functionality

EARTH TESTER FT6041



Bluetooth®
When Z3210 is installed



DESIGN AWARD 2025

- Compatible with 4-pole method
- Measure ground resistance without disconnecting ground electrodes
- IP67 protected, built tough to withstand use at harsh sites
- Make measurements, even on concrete by using Earth Nets Module
- Fast measurement! Cord rewinding that doesn't tangle or twist
- Clamp sensor (optional) to fit both narrow and wide bus bars
- Easily transfer measurement data to your smartphone or tablet by using our free app Gennect Cross or to an Excel® file (Wireless Adapter Z3210 is necessary)

Model No. (Order Code) **FT6041**

FT6041-91 (Includes clamp sensors FT9847 and CT9848)

Basic specifications (Accuracy guaranteed for 1 year)

Measurement parameters	<ul style="list-style-type: none"> • Ground resistance measurement: 4-pole method, 3-pole method, 2-pole method, MEC¹ function, clamp-on measurement (two clamps) • Soil resistivity measurement: 4-pole method • Low-resistance measurement: 4-terminal method, 2-terminal method • Ground potential measurement
Ground potential	0 to 30.0 V RMS, accuracy: ±2.3% rdg. ±8 dgt. (50/60 Hz), ±1.3% rdg. ±4 dgt. (DC)
Functions	Live wire warning, auto power save, soil resistivity display (4-pole method only), zero-adjustment, auto-hold, continuous measurement mode, wireless communication (only when Z3210 is connected), buzzer sound, comparator, switching the display, ground potential overload display (when measuring ground resistance)
Operating temperature and humidity	-25°C to 65°C ² (non-condensing)
Storage temperature and humidity	-25°C to 65°C: 80% RH or less (non-condensing)
Dustproof and waterproof	IP65, IP67 (EN60529)
Standards	EN61010 (safety), EN61326 (EMC), EN61557-1/EN61557-10/EN61557-4 (low-resistance measurement, earth testers), EN61557-5 (earth testers)
Power supply	HR6 nickel-metal hydride battery x 4 or LR03 alkaline battery x 4
Number of measurements per battery charge ³	500 times (3-pole method, without Z3210 installed) 400 times (3-pole method, with Z3210 installed and using wireless communication)
Dimensions and weight	Approx. 189 mm (7.44 in.)W × 148 mm (5.83 in.)H × 48 mm (1.89 in.)D, approx. 765 g (26.98 oz.) (including battery, protector)
Included accessories	Auxiliary Earthing Rod L9840 (2 piece set) × 2, Measurement Cable L9845-31 × 1, Measurement Cable L9845-33 × 1, Measurement Cable L9845-52 × 1, Measurement Cable L9841 × 1, Test Lead L9787 × 1, Earth Nets Module L9846 × 2, Carrying Case C0208 × 1, Carrying Case C0209 × 1, Protector × 1, LR6 Alkaline battery × 4, Instruction manual × 1, Operating precautions × 1

1: Measuring Earth resistance using a Clamp

2: -25°C to 40°C, -13°F to 104°F (80% RH or less), 40°C to 45°C, 104°F to 113°F (60% RH or less), 45°C to 50°C, 113°F to 122°F (50% RH or less), 50°C to 55°C, 122°F to 131°F (40% RH or less), 55°C to 60°C, 131°F to 140°F (30% RH or less), 60°C to 65°C, 140°F to 149°F (25% RH or less)

3: NiMH battery x 4 (reference value at 23°C)

Ground resistance measurement: 4-pole method, 3-pole method, 2-pole method

Measurement principle	Apply voltage and measure voltage and current (measures effective resistance by synchronous detection)				
Ground resistance range	3 Ω (0 to 3.000 Ω)	30 Ω (0 to 30.00 Ω)	300 Ω (30.0 Ω to 300.0 Ω)	3000 Ω (300 Ω to 3000 Ω)	30.0 k Ω (3.00 k Ω to 30.00 k Ω)
Accuracy	-	±1.5% rdg. ±6 dgt.	±1.5% rdg. ±4 dgt.		
Allowable resistance of auxiliary grounding electrode	5 k Ω		50 k Ω	100 k Ω	
Allowable ground potential	30 V RMS or 42.4 V peak				

MEC function: 4-pole method with clamp sensor, 3-pole method with clamp sensor

Measurement principle	Apply voltage and measure voltage and current (measures effective resistance by synchronous detection)				
Ground resistance range	30 Ω (0.00 to 30.00 Ω)	300 Ω (30.0 Ω to 300.0 Ω)	3000 Ω (300 Ω to 3000 Ω)	30.0 k Ω (3 k Ω to 30.00 k Ω)	
Accuracy	±5% rdg. ±6 dgt.		±5% rdg. ±3 dgt.		

Ground resistance measurement: 2-clamp method

Measurement principle	Apply voltage and measure voltage and current (measures effective resistance by synchronous detection)		
Ground resistance range	20 Ω (0.02 Ω to 20.00 Ω)	200 Ω (20.0 Ω to 200.0 Ω)	500 Ω (200 Ω to 500 Ω)
Accuracy	±7% rdg. ±3 dgt.		±35% rdg.

Ground resistance measurement: 2-clamp method

Open-circuit voltage	4.0 V to 6.9 V		
Measuring current	200 mA or more		
Measurement range	30 Ω (0.00 to 30.00 Ω)	300 Ω (30.0 Ω to 300.0 Ω)	3000 Ω (300 Ω to 3000 Ω)
Accuracy	±3 dgt. (0.00 to 0.19 Ω) ±2% rdg. ±2 dgt. (0.20 Ω to 10.00 Ω)		±2% rdg. ±2 dgt.

Field Measuring Instruments

Bundled Accessories

To ensure safety, use the Test Lead L9787 when making measurements using the two-pole method.



TEST LEAD L9787
Bundled with alligator clip, 1.2 m (3.94 ft.) length



AUXILIARY EARTHING ROD L9840
2 piece set, stainless steel



MEASUREMENT CABLE L9841
Black alligator clip, 4 m (13.12 ft.) length



MEASUREMENT CABLE L9845-31
Yellow, 25 m (82.02 ft.), equipped with winder



MEASUREMENT CABLE L9845-33
Blue, 25 m (82.02 ft.), equipped with winder



MEASUREMENT CABLE L9845-52
Red, 50 m (164.04 ft.), equipped with winder



EARTH NETS MODULE L9846
Use with measuring cord set, built-in grounding/earth nets



CARRYING CASE C0208
For storing main unit of measuring instrument and clamp sensors, hard type



CARRYING CASE C0209
For storing measurement cables, soft type

Options



SIGNAL INDUCTION CLAMP FT9847
For signal induction, including resistance check loop, φ52 mm (2.05 in.) or less, 78 mm (3.07 in.) × 20 mm (0.79 in.) bus-bar



CLAMP ON SENSOR CT9848
For detection, φ52 mm (2.05 in.) or less, 78 mm (3.07 in.) × 20 mm (0.79 in.) bus-bar



PIN TYPE LEAD 9772
For low-resistance measurement by 4-terminal method, 60 V DC



LARGE CLIP TYPE LEAD 9467
For low-resistance measurement by 4-terminal method, tip φ 28 mm (1.10 in.), 50 V DC



EARTH NETS 9050
Set of two, 30 cm (11.81 in.) × 30 cm (11.81 in.)



MEASUREMENT CABLE L9844
Red/yellow/black 1.2 m (3.94 ft.) length



MEASUREMENT CABLE L9842-11
Yellow, 10 m (32.81 ft.), equipped with winder



MEASUREMENT CABLE L9842-22
Red, 20 m (65.62 ft.), equipped with winder



MEASUREMENT CABLE L9843-51
Yellow, 50 m (164.04 ft.) length, equipped with flat cable winder



MEASUREMENT CABLE L9843-52
Red, 50 m (164.04 ft.) length, equipped with flat cable winder



FUSE SET Z5052
Replacement fuse set (0.5 A/1000 V, 2 pieces)



WIRELESS ADAPTER Z3210
Simply plug in the Z3210 wireless adapter and your compatible Hioki device is Bluetooth® ready



GENNECT Cross SF4071, SF4072
Mobile app for iOS, Android

Earth Testers

Tough and Ready for the Field, IP67 Dustproof and Waterproof

EARTH TESTER FT6031-50



- Wireless support. Transfers measurements to your smartphone or tablet and allows you to quickly create reports with field photos and drawings. (Optional Wireless Adapter Z3210 is necessary)
- Excellent noise resistance
- IP67 protected – top of the industry
- Test all ground types from Class A to Class D with a single meter
- Wide 0Ω to 2000Ω measurement range
- Minimize cabling time with innovative earthing rods and cable winder

Model No. (Order Code) **FT6031-50** (Wireless Adapter Z3210 not included)
FT6031-90 (Bundled with the Wireless Adapter Z3210)

Basic specifications (Accuracy guaranteed for 1 year)

Measurement system	Two-electrode method/three-electrode method (switchable)		
Measurement range	20 Ω (0 to 20.00 Ω)	200 Ω (0 to 200.0 Ω)	2000 Ω (0 to 2000 Ω)
Accuracy	±1.5%rdg ±8 dgt	±1.5%rdg ±4 dgt	±1.5%rdg ±4 dgt
Earth voltage	0 to 30.0 V rms Accuracy: ±2.3% rdg ±8 dgt (50 Hz/60 Hz), ±1.3% rdg ±4 dgt (DC)		
Allowable earth potential	25.0 V rms (DC or sine wave)		
Dustproof and waterproof	IP65/IP67 (EN60529)		
Power supply	LR6 Alkaline battery ×4, Possible number of measurements: 500 times (measurement conditions: three-electrode method, measuring 10 Ω at 10-second intervals without Z3210 installed)		
Functions	Live wire warning, zero-adjustment, continuous measurement mode, wireless communication (only when Z3210 is connected), and comparator		
Dimensions and mass	185 mm (7.28 in.)W × 111 mm (4.37 in.)H × 44 mm (1.73 in.)D, 570 g (20.1 oz.) (including batteries and protector, excluding terminal covers and other accessories)		
Included accessories	Auxiliary Earthing Rod L9840 (2 piece set) ×1, Measurement Cable L9841 (black 4 m) ×1, Measurement Cable L9842-11 (yellow 10 m, equipped with winder) ×1, Measurement Cable L9842-22 (red 20 m, equipped with winder) ×1, Carrying Case C0106 ×1, Protector ×1, LR6 Alkaline battery ×4, Instruction manual ×1		

To ensure safety, use the optional Test Lead L9787 when making measurements using the two-electrode method.

Software	When Z3210 is installed GENNECT Cross SF4071, SF4072 Mobile app for iOS, Android	Bundled Accessories	MEASUREMENT CABLE L9842-11 Yellow, 10 m (32.81 ft.), equipped with winder	MEASUREMENT CABLE L9842-22 Red, 20 m (65.62 ft.), equipped with winder	MEASUREMENT CABLE L9841 Black alligator clip, 4 m (13.12 ft.) length	AUXILIARY EARTHING ROD L9840 2 piece set, stainless steel	CARRYING CASE C0106 Soft type, includes compartment for options
	Options		L9844: for earthing terminal board, L9787: for two-electrode method, indoor use only	WIRELESS ADAPTER Z3210 Simply plug in the Z3210 wireless adapter and your compatible Hioki device is Bluetooth® ready	EARTH NETS 9050 Set of two, 30 cm (11.81 in.) × 30 cm (11.81 in.)	TEST LEAD L9787 Bundled with alligator clip, 1.2 m (3.94 ft.) length	MEASUREMENT CABLE L9844 Red/yellow/black 1.2 m (3.94 ft.) length

Earth Tester/Voltage Detector

Easy Pole Clamp-On Ground Resistance Tester with Super Slim Jaw

CLAMP ON EARTH TESTER FT6380-50



When Z3210 is installed

- Easily transfer measurement data to your smartphone or tablet by using our free app Gennect Cross or to an Excel® file. (Wireless Adapter Z3210 is necessary)
- Earth resistance measurement for multi-grounded systems
- Measure leak current with absolute certainty with highly sensitive 0.01 mA resolution (at 20.00 mA range)
- Measure load current up to 60.0 A range
- Clamp at the narrowest point

Model No. (Order Code) **FT6380-50** (Wireless Adapter Z3210 not included)
FT6380-90 (Bundled with the Wireless Adapter Z3210)

Basic specifications (Accuracy guaranteed for 1 year)

Measurement principle	Instrument has two cores for voltage injection and current measurement. From the defined voltage and measured current, the total circuit loop resistance is calculated Note: for multi grounded systems only. In a multi-grounded system, the larger the number of grounding poles, the more accurate the measured value.
Earthing resistance range	0.20 Ω (0.01 Ω resolution) to 1600 Ω (20 Ω resolution), 10 ranges, Zero suppression: Less than 0.02 Ω, Accuracy: ±1.5% rdg. ±0.02 Ω
AC Current range	20.00 mA (0.01 mA resolution) to 60.0 A (0.1 A resolution), 5 ranges, Zero suppression: Less than 0.05 mA, Accuracy: ±2.0% rdg. ±0.05 mA (30 Hz to 400 Hz, True RMS), Crest factor 5.0 or less (for the 60 A range, 1.7 or less)
Maximum input current (Current measurement)	100 A AC continuous, AC 200 A for 2 minutes or shorter (at 50 Hz/60 Hz, requires derating at frequency)
Maximum rated terminal-to-ground voltage	600 VAC measurement category IV (anticipated transient overvoltage 8000 V)
Memory function	2000 data
Alarm function	For resistance measurement and current measurement, Beeps when measured value is less than or greater than threshold.
Other functions	Data hold, Backlight, Filter, Auto power save, Wireless communication (without Z3210 installed)
Display	LCD, Max. 2,000 count Display refresh rate: Approx. 2 times/sec.
Dust-proof and waterproof	IP40 (EN60529) With Jaws Closed
Power supply	LR6 alkaline battery × 2
Continuous operating time	Approx. 40 hours (25 Ω measurement, backlight off, without Z3210 installed) Approx. 35 hours (25 Ω measurement, backlight off, with Z3210 installed and using wireless communications)
Maximum measurable conductor diameter	φ 32 mm (1.26 in.)
Dimensions and mass	73 mm (2.87 in.) W × 218 mm (8.58 in.) H × 43 mm (1.69 in.) D, 620 g (21.9 oz.)
Included accessories	Carrying case, Resistance check loop (1 Ω±2%, 25Ω±1%), Strap, LR6 alkaline battery × 2, Instruction manual



Non-Metallic Contact Voltage Detector with LED Light

VOLTAGE DETECTOR 3481



White LED light illuminates dim locations.



- Non-contact detection of AC voltage from 40 V to 600 V with bright LED light
- Pen-style, compact detector with pocket clip
- Both visual and audible voltage detection indication
- Meets safety standards for CAT IV 600 V environments
- Prevent dead batteries with battery self-check function and auto power-off function

Model No. (Order Code) **3481-20**

Basic specifications

Measurement function	Voltage detection
Operating voltage range	40 V to 600 V AC (When brought into contact with a 2 mm ² insulated cable equivalent to 600 V polyvinyl chloride insulated wire) Maximum sensitivity variable range 40 V to 80 V AC (80 V at the time of shipment)
Operating frequency	50 Hz/ 60 Hz
Pilot light	Red LED lights up and the buzzer sounds when the wire is live
Battery check	White LED is dim or out when the batteries are low.
Auto power off	The power will be turned off automatically if the instrument remains idle for 3 minutes after the power is turned on.
Power supply	LR44 button alkaline batteries ×3, Continuous use: 5 hr (Power ON standby state)
Dimensions and mass	20 mm (0.79 in.)W× 126 mm (4.96 in.)H× 15 mm (0.59 in.)D (excluding projections), 30 g (1.1 oz.) (including LR44 button alkaline batteries)
Included accessories	Instruction manual ×1, LR44 button alkaline batteries ×3 (for trial purposes only)

Phase Detector

Digital Phase Rotation Meter with Three-Phase Voltage Measurement Functionality

DIGITAL PHASE DETECTOR PD3259-50



- Easily transfer measurement data to your smartphone or tablet by using our free app Gennect Cross or to an Excel® file. (Wireless Adapter Z3210 is necessary)
- Available to check the unbalance rate and vector diagram in our free app Gennect Cross
- World's first non-metallic contact voltage detection and testing
- Simply clip onto wire insulation
- Phase detection check and line-to-line voltage inspection at the same time
- Easy and intuitive phase detection check with backlight and buzzer
- Ideal for work certification photos, offering simultaneous display of phase sequence and 3-phase voltage

Model No. (Order Code) **PD3259-50** (Wireless Adapter Z3210 not included)
PD3259-90 (Bundled with the Wireless Adapter Z3210)

Basic specifications (Accuracy guaranteed for 1 year)

Detection functions	Positive phase, negative phase (Three-phase 3-wire, Three-phase 4-wire), open phase, prediction of ground phase (Three-phase 3-wire)
Measurement parameters	Three-phase AC voltage (line-to-line voltage and voltage to ground), Frequency • Voltage measurement accuracy: ±2.0% rdg. ±8 dgt., • Frequency measurement accuracy: ±0.5% rdg. ±1 dgt., • Response time: 3 s or less, Display update rate: 500 ms
Measurement targets	Covered cables, Metal portions *Use on shielded cables not supported Three-phase 90.0 to 520.0 V AC (45 to 66 Hz)
Diameter of measurable conductors	Finished outer diameter: 6 to 30 mm (0.24 to 1.18 in.)
Maximum rated voltage to earth	600 V AC (CAT IV)
Environmental protection	Main unit (excluding voltage sensors): IP54 (EN60529) dustproof and waterproof
Other functions	Hold function, Backlight, Buzzer, Auto power-off, Low battery warning, Drop proof (on concrete, 1 m/ 1 time)
Power supply	AA alkaline batteries (LR6) ×4, Maximum rated power: 3 VA, Continuous operating time: 5 hours (Backlight off, standby state, Without Z3210)
Dimensions and mass	84 mm (3.31 in.)W × 146 mm (5.75 in.)H × 46 mm (1.81 in.)D, 590 g (20.8 oz, including batteries), cord length: 0.5 m (1.64 ft.)
Included accessories	AA alkaline batteries (LR6) ×4, Instruction manual ×1, Carrying case C0203 ×1, Color clip (White ×2, red ×2, blue ×2, yellow ×2), Spiral tubes (black ×1)

Note: multi-core cables, thick cables, and dirty cables may not be measured accurately.

Bundled Accessory CARRYING CASE C0203	Option WIRELESS ADAPTER Z3210 Simply plug in the Z3210 wireless adapter and your compatible Hioki device is Bluetooth® ready	 MAGNETIC STRAP Z5020 Extra strength	Software GENNECT Cross SF4071, SF4072 Mobile app for iOS, Android
--	--	---	---

Easy-To-Read Arrow and No-Metal-Contact Clips for the Ultimate in Safety

PHASE DETECTOR PD3129-10



- Simply clip clamps onto wire insulation
- Green LED arrow clearly shows phase direction, perfect for visual reports
- CAT III 1000 V
- Rotating LED indicator shows the phase sequence for a 3-phase power supply at a glance
- Intermittent beeps signal positive phase; continuous tone signals reverse phase
- Magnetic base allows the instrument to be secured on a distribution panel

Model No. (Order Code) **PD3129-10** (Large clips)

Basic specifications

Functions	Phase detection (positive and negative)
Voltage detection method	Static induction
Voltage range	70 to 1000 V AC (50/60 Hz) (sine wave, continuous input)
Frequency range	45 Hz to 66 Hz
Object to be connected	7 mm (0.28 in.) to 40 mm (1.57 in.) of insulated wiring
Display	Phase detection : Positive ; 4 LEDs lit in clockwise order and the buzzer sounds intermittently, green arrow lights up Negative ; 4 LEDs lit in counterclockwise order and the buzzer sounds continuously
Battery check function	Power ON lamp: lights up (Power ON), blinks (Battery LOW)
Auto power off	Auto shut off if no activity is detected after power is turned ON for 15 minutes
Power supply	AA alkaline battery(LR6) x 2, Continuous use: 200 hr
Dimensions and mass	70 mm (2.76 in.)W × 75 mm (2.95 in.)H × 30 mm (1.18 in.)D, 240 g (8.5 oz.), Cord length : 0.7 m (2.30 ft.)
Included accessories	Carrying case ×1, Strap ×1, Spiral tube ×1, Instruction manual ×1, AA alkaline battery(LR6) x 2

Easy-To-Read Arrow and No-Metal-Contact Clips for the Ultimate in Safety

PHASE DETECTOR PD3129



- Simply clip clamps onto wire insulation
- Green LED arrow clearly shows phase direction, perfect for visual reports
- Rotating LED indicator shows the phase sequence for a 3-phase power supply at a glance
- Intermittent beeps signal positive phase; continuous tone signals reverse phase
- Magnetic base allows the instrument to be secured on a distribution panel

Model No. (Order Code) **PD3129**

Basic specifications

Functions	Phase detection (positive and negative)
Voltage detection method	Static induction
Voltage range	70 to 600 V AC (50/60 Hz) (sine wave, continuous input)
Frequency range	45 Hz to 66 Hz
Object to be connected	2.4 mm (0.09 in.) to 17 mm (0.67 in.) of insulated wiring
Display	Phase detection :Positive ; 4 LEDs lit in clockwise order and the buzzer sounds intermittently, green arrow lights up Negative ; 4 LEDs lit in counterclockwise order and the buzzer sounds continuously
Battery check function	Power ON lamp: lights up (Power ON), blinks (Battery LOW)
Auto power off	Auto shut off if no activity is detected after power is turned ON for 15 minutes
Power supply	AA alkaline battery(LR6) x 2, Continuous use: 200 hr
Dimensions and mass	70 mm (2.76 in.)W × 75 mm (2.95 in.)H × 30 mm (1.18 in.)D, 200 g (7.1 oz.), Cord length : 0.7 m (2.30 ft.)
Included accessories	Carrying case ×1, Strap ×1, Spiral tube ×1, Instruction manual ×1, AA alkaline battery(LR6) x 2

Field Measuring Instruments

Measurement Data Integration Software with Synchronized Video

GENNECT Space SF4300



Monitor/PC hardware not included



- Multi-instrument data integration in a unified workspace
- Time-synchronized measurement, video, and GPS data
- High-speed data acquisition with 1 ms sampling resolution
- Large-scale multi-channel integration up to 3,000 channels
- Customizable analysis dashboards for flexible workflows
- Quick system setup for data acquisition from Hioki instruments

Model No. (Order Code) **SF4300** (Application for Windows) Free

■ Functions

Search	Automatically searches for measuring instruments on the computer's network and adds them to the instrument list.
Remote Control	This utility function uses the HTTP server function to view the screen of a measuring instrument and to operate this instrument from this application. Supported measuring instruments: LR8450, LR8101, LR8102, PW8001, PW4001
Instrument settings	Configures the settings of registered measuring instruments. Supported measuring instruments: LR8450, LR8101, LR8102
Update	This utility function is used to check for and update the measuring instrument's firmware to the latest version from this application.

■ Basic specifications (data logging)

Number of measuring instruments	Up to 30
Number of channels	Simultaneous measurement of up to 3,000 items Inter-channel calculation: up to 100
Recording interval	1 ms, 5 ms, 10 ms, 50 ms, 100 ms, 200 ms, 500 ms, 1 s, 2 s, 5 s, 10 s, 30 s, 1 min The recording interval cannot be set to a value shorter than the instrument's data update interval.
Recording period	Continuous, specified time (days, hours, minutes, and seconds), data length
Recording format	Binary file (file extension: .gred), text file (.csv/.txt)
Waveform panel	Displays and operates waveforms during monitoring, during recording, and after recording. Number of panels: up to 5 panels per logging session
Measured value panel	Displays measured values during monitoring, during recording, and after recording. Number of panels: up to 10 panels per logging session
Camera panel	Displays camera images during monitoring, during recording, and after recording. Number of panels: up to 5 panels per logging session
Map panel	Displays maps and GPS paths during monitoring, during recording, and after recording. Number of panels: up to 1 panel per logging session

Please check the website for the latest list of compatible products.



Cloud Service for the Gennect Series

GENNECT Cloud SF4180



- Connects to the Gennect series to provides added value through cloud services
- Makes measurement more convenient with features like exchanging data via the cloud and enabling remote measurement
- Offers a range of plans and payment methods

Model No. (Order Code)	Plan	Price
SF4180	(Free plan with basic functions)	Free
SF4181-01	(GENNECT Cloud Standard 1 month license)	Fees apply
SF4181-03	(GENNECT Cloud Standard 3 months license)	Fees apply
SF4181-12	(GENNECT Cloud Standard 12 months license)	Fees apply
SF4182-01	(GENNECT Cloud Pro 1 month license)	Fees apply
SF4182-03	(GENNECT Cloud Pro 3 months license)	Fees apply
SF4182-12	(GENNECT Cloud Pro 12 months license)	Fees apply

Basic specifications

	Free (Free)	Standard (Fees apply)	Pro (Fees apply)
Monitor function	Collect and save Gennect polled data (logged at a 1 min. interval) and display it in real time.		
Drive functionality	Manage and export Gennect polled data and instrument data files.		
Alarm function	Alarm notification destinations: Email, Slack, Gennect Cross		
Console function	-	Control instruments remotely (not supported by Gennect Cross)	
Cloud storage space	5 GB	50 GB	500 GB
No. of users / No. of teams / No. of measurement groups	3 / 3 / 1	10	100
Max. no. of alarms per measurement group	3	30	100
WebAPI use	No	No	Yes

You can also set up automatic ongoing payments (a subscription) by credit card.

Get Results from the Job Site in Real-Time & Capture Data on the PC while Testing Remotely

GENNECT One SF4000

GENNECT One



PC not included

- Connect measuring instruments to a PC via a LAN cable
- Acquire measurement values from multiple measuring instruments at regular intervals and display them on a graph in real time. *1
- Lay out measurement values on the image and able to check graphically **
- Operate measuring instruments connected via LAN from a PC **2
- Automatically transfer files saved on a LAN-connected measuring instrument to a PC *3
- Software automatically recognizes LAN-connected measuring instrument
- Manage and save results with software
- List MAX, MIN and AVG values (Display time of MAX & MIN data)
- Real-time calculation of measurement values of arbitrary measurement items (calculation between channels)
- Automatically output measurement data to daily/weekly/monthly report or CSV file

*1 Max. number of connections: 30 units, The measurement value (current location) displayed by the instrument is acquired at a fixed interval (minimum 1 second) by the PC timer.

*2 Max. number of connections: 30 units

*3 Max. number of connections: 15 units

Model No. (Order Code)	Plan	Price
SF4000	(Application for Windows)	Free

Basic specifications (Free software)

[Logging]	
Functions	Graph and list displays that present measured values from LAN-connected instruments in real time * Acquire measured values (current values) displayed on instruments at a set interval (as short as 1 sec.) using the computer's timer.
Logging intervals	1, 2, 5, 10, 30 sec. / 1, 2, 5, 10, 30 min. / 1 hour
Number of log items	Max. 512 items + 16 items (calculation between channels) *Maximum 32 items when simultaneously displaying graphs
Recording time	Recording time: Continuous measurement, set time File segmentation: 1 day, 1 hour Logging stops when the storage capacity of the PC is below 512 MB
[Dashboard]	
Functions	Display measured values from LAN-connected measuring instruments on optional backgrounds of monitors and alarms * Acquire measured values (current values) displayed on instruments at a set interval (as short as 1 sec.) according to the computer's timer.
Monitoring intervals	1, 2, 5, 10, 30 sec. / 1, 2, 5, 10, 30 min. / 1 hour
Number of measured parameters	Max. 512 items + 16 items (calculation between channels)
[Remote control]	
Functions	Control LAN-connected instruments from a computer
[File transfer (Manual)]	
Functions	Acquire files stored in LAN-connected instruments from a PC The BT3554-50 series can be acquired via USB.
[File transfer (Automatic)]	
Functions	Automatically send files saved by LAN-connected instruments to a computer.
[Other functions]	
Instrument clock synchronization	Set the clocks of measuring instruments connected via LAN to the PC (manual, automatic)
Files loading	Data file obtained by Gennect Cross for iOS/Android Note: Logging, General Measurement, image and battery formats only Note: no direct Bluetooth® connection is possible, please use the smartphone app for Bluetooth® data collection Data acquired by Gennect Remote
Others	CSV output (battery, logging), data statistics (logging), report generation (battery, logging)



Share data via the GENNECT Cloud

Free App for Easy Instrument Connectivity, Data Recording, and Report Creation

GENNECT Cross SF4071, SF4072

GENNECT Cross



- Connect instruments to your smart phone or tablet
- Save all measured values on your smart phone
- Use the logging function to save measured values automatically at a set interval
- Use the simple oscilloscope function to view current and voltage waveforms on your smart phone (CM/DT series, etc.)
- Continuously measure the internal resistance and voltage of lead-acid batteries (BT3554-50 series only)

Model No. (Order Code)	SF4072	(Mobile app for Android)	Free
	SF4071	(Mobile app for iOS)	Free

■ Data can be downloaded to tablets and smartphones using Hioki's dedicated apps available from the Google Play or App Store. Search for "HIOKI" and download the "GENNECT Cross" app.



*Android, Google Play and the Google Play logo are trademarks of Google Inc.
 *iOS is a registered trademark of Cisco Technology, Inc. and/or its affiliates in the United States and certain other countries.
 *iPhone, iPad, iPad mini, iPad Pro and iPod touch are trademarks of Apple Inc.
 *Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.
 *Microsoft, Windows, Windows Vista, and Excel are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
 *Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.
 *The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license.
 *For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website.

■ SF4071, SF4072 Basic specifications (Free software)

Bluetooth® connection	Bluetooth® LE
OS which Gennect Cross can be installed	SF4071: iOS 10.0 or later, iPadOS 13.0 or later SF4072: Android™ 5.0 or later
Measurement data management	Local, e-mail / cloud sharing
Report function	Various template reports
Picture / Memo recording	Ok
Measurement functions	General measurement: Ok
	Logging: Ok
	Pass/Faile judge: Ok
	Photo/Drawing with Values Measurement: Ok
	Waveform display: CM/DT series, etc.
	Battery: BT3554-50 series only
	Detect electricity theft: CM3286-50 only
	Harmonic measurement: CM/DT series compatible with Z3210, etc.
	Lux measurement: FT3425 only
	Event Recording: CM/DT series compatible with Z3210, etc.
Vector Measurement: PD3259-50 only	
The above is an example. For details, please refer to the catalogs and web-sites of compatible products.	
Firmware upgrade for measuring instruments: Measurement instruments compatible with Z3210	



Share data via the GENNECT Cloud

Get Connected to Create and Share Graphical Reports in a Flash!

WIRELESS ADAPTER Z3210



- Increase your work efficiency, by eliminating human errors from manual reporting
- Transfer readings on instruments to easy-to-read graphical reports to prove integrity
- Increase your work productivity & save costs!
- Provide additional new functions for Hioki instruments such as waveform display & more!
- Compliance with wireless regulations in more than 50 countries and regions

Model No. (Order Code) **Z3210**

Note: Z3210 cannot be used by itself. Wireless communication will be possible by connecting to a compatible measuring instrument.

■ Basic specifications

Operating environment	Indoors, pollution degree 2, operable at an altitude specified in specifications of each measuring instrument to which the adapter is attached
Operating temperature and humidity (Storage temperature and humidity)	-30°C (-22°F) to 70°C (158°F), 90% RH or less (no condensation)
Standards	Safety: EN61010 RF: EN300 328 RF EMC: EN301 489-1, EN301 489-17 Exposure: EN62479
Maximum attaching/detaching count	5000 times
Gennect Cross App confirmed compatible OSs	iOS 13 or later, Android 8 or later, Bluetooth® 4.0 or later
Bluetooth® communication distance	About 10 m (line-of-sight distance)
Product warranty period	3 years (do not exceed the maximum attaching/detaching count)
Dimensions and mass	Approx. 16.4 mm (0.65 in.)W × 6.7 mm (0.26 in.)H × 15.6 mm (0.61 in.)D, 1.5 g (0.05 oz.)
Included accessory	Instruction manual

*For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website.

Compatible Products

Advancing R&D of Water Electrolysis Cells and Fuel Cells; Fast and Precision EIS Measurement

EIS MEASUREMENT SYSTEM ALDAS-α



- High-speed EIS measurement enables shorter test cycles
- Draws smooth curve from high to low frequencies
- Up to 20 A DC output without a booster
- Easy connection to existing EC and FC evaluation system
- Simultaneous measurement of up to 8 cells without any measurement delay

Model No. (Order Code)	EA5301-01	SENSE module 1 ch
	EA5301-02	SENSE module 2 ch
	EA5301-03	SENSE module 3 ch
	EA5301-04	SENSE module 4 ch
	EA5301-05	SENSE module 5 ch
	EA5301-06	SENSE module 6 ch
	EA5301-07	SENSE module 7 ch
	EA5301-08	SENSE module 8 ch
	EA5503	SOURCE module
	EA5703	ALDAS-α PC application software

■ Basic specifications (Accuracy guaranteed: 1 year)

Measurement target	Electrolysis cell, fuel cell
Measurement parameters	Impedance (R, X, θ, Z), voltage (V), current (I)
Measurement modes	EIS Mode, Logging Mode
Max. input voltage	20 V
Max. measurable current	40 mA to 30 A (amperage depends on the current sensor used)
Load operating modes	Constant-current (CC)
Output power	For EC : 400 W (100 W if using an external DC power supply) For FC : 100 W
Output voltage	±20 V
Output current	±20 A
Measurement frequency range	10 mHz to 100 kHz
Number of input channels	Up to 8 channels
Dimensions and weight	SENSE MODULE EA5301 (with 8 channels): approx. 430W × 221H × 361D mm (16.9W × 8.7H × 14.2D in.) (excluding protruding parts), approx. 12.7 kg (28.0 lb.) SOURCE MODULE EA5503: approx. 430W × 128H × 550D mm (16.9W × 5.0H × 21.7D in.) (excluding protruding parts), approx. 22.0 kg (48.5 lb.) (excluding cables)
Power supply	SENSE MODULE EA5301: AC 100 to 240 V, 50/60 Hz, 150 VA SOURCE MODULE EA5503: AC 100 to 240 V, 50/60 Hz, 900 VA
PC requirements	OS: Windows 11, Interface: wired LAN

A separately sold current sensor and connection cable are required for measurements. Please purchase the optional current sensor and connection cable separately.



Visualizing Dynamic Characteristics of Electrolysis Cells or Fuel Cells & Optimizing Operational Efficiency

EIS MEASUREMENT SYSTEM ALDAS-Mini





- Innovative impedance measurement: max. 2000 A electrolysis or load current
- Ease of integration: requiring no modifications to existing systems
- Simultaneous multi-cell measurement: up to 8 cells in a stack
- High-precision measurements in noisy environments: consistent and reliable results
- Wide compatibility: supports electrolysis cell types including PEM, SOEC, AEM, AWE, etc.

Model No. (Order Code)	EA5301-01	SENSE module 1 ch
	EA5301-02	SENSE module 2 ch
	EA5301-03	SENSE module 3 ch
	EA5301-04	SENSE module 4 ch
	EA5301-05	SENSE module 5 ch
	EA5301-06	SENSE module 6 ch
	EA5301-07	SENSE module 7 ch
	EA5301-08	SENSE module 8 ch
	EA5501	SOURCE module
	EA5701	PC application software

■ Basic specifications (Accuracy guaranteed: 1 year)

Measurement target	Electrolysis cell, fuel cell, cell stack
Measurement parameters	Impedance (R, X, θ, Z), voltage (V), current (I)
Measurement modes	Logging Mode, EIS Mode
Display modes	Nyquist plot, Bode plot, logging plot
Measurement voltage range	250 mV to 60 V
Measurement current range	100 mA to 500 A (CT6845A) Maximum 2000 A (depending on the combination of sensors)
Max. applied measurement signal	40 Ap-p (at 5 V) Derating applies for voltages above 5 V
Measurement frequency range	10 mHz to 100 kHz
Number of input channels	1 to 8 channels
Dimensions and weight	SENSE Module EA5301 (with 8 channels): approx. 430W × 221H × 361D mm (16.9W × 8.7H × 14.2D in.) (excluding protruding parts), approx. 12.7 kg (28.0 lbs) SOURCE module EA5501: approx. 520W × 197H × 540D mm (20.5W × 7.8H × 21.3D in.) (excluding protruding parts), approx. 27.0 kg (59.5 lbs) (not including cables)
Power supply	100 V to 240 V AC, 50 Hz/60 Hz, 500 VA
PC requirements	OS: Windows 11, Interface: wired LAN

A separately sold current sensor and connection cable are required for measurements. Please purchase the optional current sensor and connection cable separately. The CT9557 is required when using two or more current sensors.

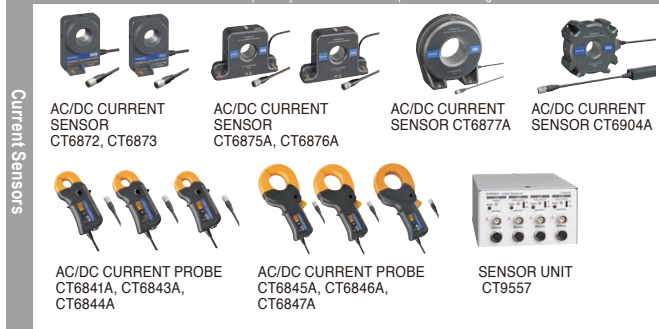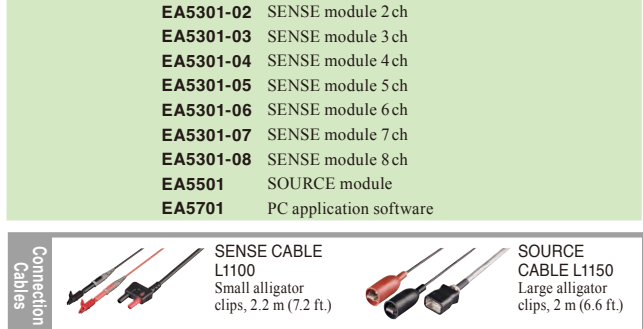

EIS Measurement of kW to MW Class Stacks in Actual Operation

EIS MEASUREMENT SYSTEM ALDAS-E

New



CE

- EIS measurements during the actual operation of kW to MW class stacks
- Simultaneous measurement of stack and cell with up to 48 channels
- High-speed EIS measurement
- Stable and high-precision measurement down to low frequency range
- Easy connection to existing electrolyzers and FC systems

Model No. (Order Code) **EA5702** ALDAS-E

The configuration of the equipment varies depending on the number of measurement channels. For more details, please contact your authorized Hioki distributor or reseller.

Basic specifications (Accuracy guaranteed: 1 year)

Measurement target	Electrolysis cell, fuel cell, cell stack
Measurement parameters	Impedance (R,X,θ,Z), voltage (V), current (I)
Measurement modes	Logging Mode, EIS Mode
Display modes	Nyquist plot, Bode plot, logging plot
Measurement voltage range	1.5 V to 1000 V
Measurement current range	400 mA to 2000 A (CT6877A) Maximum 10 kA (depending on the combination of sensors)
Max. applied measurement signal	80 Ap-p (at 50 V) Derating applies for voltages above 50 V
Measurement frequency range	10 mHz to 100 kHz
Number of input channels	1 to 48 channels
Dimensions and weight	13U Rack cabinet (Z5411) : Approx. 570W × 860H × 650D mm (22.4W × 33.9H × 25.6D in.) (including casters, excluding protruding parts) Approx. 85 kg (EA5302-08 ×1, EA5502 ×1, EA5901 ×1)
	19U Rack cabinet (Z5412) : Approx. 570W × 1100H × 650D mm (22.4W × 43.3H × 25.6D in.) (including casters, excluding protruding parts) Approx. 125 kg (EA5302-08 ×2, EA5502 ×2, EA5901 ×1)
	24U Rack cabinet (Z5413) : Approx. 570W × 1360H × 650D mm (22.4W × 53.5H × 25.6D in.) (including casters, excluding protruding parts) Approx. 150 kg (EA5302-08 ×3, EA5502 ×2, EA5901 ×1)
Power supply	100 V to 240 V AC, 50 Hz/60 Hz
	13U Rack cabinet (Z5411) : Maximum rated power 360 VA
	19U Rack cabinet (Z5412) : Maximum rated power 815 VA
PC requirements	24U Rack cabinet (Z5413) : Maximum rated power 965 VA
	OS: Windows 11, Interface: wired LAN

A separately sold current sensor and connection cable are required for measurements. Please purchase the optional current sensor and connection cable separately. The CT9557 is required when using two or more current sensors.

Current Sensors				
	AC/DC CURRENT SENSOR CT6872, CT6873	AC/DC CURRENT SENSOR CT6875A, CT6876A	AC/DC CURRENT SENSOR CT6877A	AC/DC CURRENT SENSOR CT6904A
	AC/DC CURRENT PROBE CT6841A, CT6843A, CT6844A	AC/DC CURRENT PROBE CT6845A, CT6846A, CT6847A	SENSOR UNIT CT9557	

Connection cables	
	SENSE CABLE L1101 2.1 m L1101-01 3 m
	SOURCE CABLE L1151 2.1 m L1151-01 3 m

Elevate your PCB manufacturing with Hioki's inspection systems—where outstanding precision, trusted reliability, and effortless usability converge.



Bare Board and Package Testing



■ FLYING PROBE TESTER FA1823

■ FLYING PROBE TESTER FA1813

■ FLYING PROBE TESTER FA1815-20

■ FLYING PROBE TESTER FA1816

■ FLYING PROBE TESTER FA1817

■ FLYING PROBE TESTER FA1811

Populated Board Testing



■ IN-CIRCUIT TESTER FA1220-11

■ IN-CIRCUIT TESTER FA1220-02

■ IN-CIRCUIT TESTER FA1220-62

■ FLYING PROBE TESTER FA1240-60 series

■ SHORT-OPEN TESTER FA1221

■ IN-CIRCUIT TESTER FA1220

Computer and peripherals not included in FA1220. A separate control computer is required in order to use the FA1220 on a standalone basis.

Bare Board and Package Testing

Enabling Reliable Four-terminal Testing of Ultra-fine Pads on Advanced IC Package Substrates

FLYING PROBE TESTER FA1823



CE compliance available
Inquire for detail

- Ultra-fine Kelvin probe enables 4-terminal measurement of $\phi 19\mu\text{m}$ pad
- Adjustment work when replacing probes is fully automated, improving maintenance workability
- Automatic substrate transport function allows easy construction of an automated system in combination with peripheral equipment

Model No. (Order Code) **FA1823** (Horizontal double sided)

Specifications Overview

Number of arms	4 (2 each, top and bottom)
Compatible probes	1172 series, CP1072 series, CP1073 series
Number of test steps	Max. 999,999 steps
Test parameters and measurement ranges	DC constant-current continuity measurement: 400.0 m Ω to 1.000 k Ω DC constant-current resistance measurement: 40.00 $\mu\Omega$ to 400.0 k Ω DC constant-voltage resistance measurement: 4.000 Ω to 40.00 M Ω Insulation resistance measurement: 1.000 k Ω to 100.0 G Ω Low voltage insulation resistance measurement: 1.000 M Ω to 100.0 G Ω AC constant-voltage capacitance measurement: 100.0 fF to 10.00 μF Leakage current measurement: 1.000 μA to 10.00 mA High-voltage resistance measurement: 1.000 k Ω to 100.0 G Ω Capacitor insulation measurement: 1.000 k Ω to 10.00 M Ω Open measurement: 4.000 Ω to 4.000 M Ω Short measurement: 400.0 m Ω to 40.00 k Ω
Embedded device board test	LSI connection test: 0.000 V to 12.00 V AC constant-voltage resistance measurement: 10.00 k Ω to 100.0 k Ω AC constant-voltage capacitance measurement: 10.00 pF to 100.0 μF AC constant-voltage inductance measurement: 1.000 μH to 1.000 mH
Judgment range	-99.9% to +999.9% or absolute value
Movement resolution	XYZ: 0.1 μm
Minimum pad pitch	24 μm (with CP1073-01, Both the top and bottom)
Minimum pad size	1 μm (with CP1075-09, Both the top and bottom)
Measurement speed	Max. 76 points/sec. (0.15 mm movements, 4-arm simultaneous probing, capacitance measurement)
Testable board size	Thickness: 1 mm (0.04 in.) to 12 mm (0.47 in.) Outer dimensions: 50 mm (1.97 in.) W \times 50 mm (1.97 in.) D to 280 mm (11.02 in.) W \times 260 mm (10.24 in.) D
Maximum testable area	280 mm (11.02 in.) W \times 260 mm (10.24 in.) D
Clamp method	Board Two-edge holding method
Air requirements	Primary-side pressure: 0.5 MPa to 0.99 MPa (dry air) Maximum consumption: 10 L/min. (ANR)
Power supply	200 V, 220 V, 230 V, 240 V AC single-phase (specified at time of order); 50/60 Hz; maximum power consumption: 5 kVA
Dimensions and weight	1355 mm (53.35 in.) W \times 1200 mm (47.24 in.) H \times 1265mm (49.80 in.) D (excluding protruding parts); 1550 kg \pm 50 kg (54675 oz. \pm 1764 oz.)

Evaluate High-density Package Board Reliability with Super-high-precision Probing

FLYING PROBE TESTER FA1813



CE compliance available
Inquire for detail

- Four-terminal measurement with a minimum pad diameter of 28 μm
- Reduce probe marks in combination with the latest probes
- Defect analysis using Hioki's Process Analyzer

Model No. (Order Code) **FA1813** (Horizontal double sided)

Specifications Overview

Number of arms	4 (2 each, top and bottom)
Compatible probes	1172 series, CP1072 series, CP1073 series
Number of test steps	999,999 steps
Test parameters and measurement ranges	DC constant-current continuity measurement: 400.0 m Ω to 1.000 k Ω DC constant-current resistance measurement: 40.00 $\mu\Omega$ to 400.0 k Ω DC constant-voltage resistance measurement: 4.000 Ω to 40.00 M Ω Insulation resistance measurement: 1.000 k Ω to 100.0 G Ω AC constant-voltage capacitance measurement: 100.0 fF to 10.00 μF Leakage current measurement: 1.000 μA to 10.00 mA High-voltage resistance measurement: 1.000 k Ω to 100.0 G Ω Capacitor insulation measurement: 1.000 k Ω to 10.00 M Ω Open measurement: 4.000 Ω to 4.000 M Ω Short measurement: 400.0 m Ω to 40.00 k Ω
Embedded device board test	LSI Connection test: 0.000 V to 12.00 V AC constant-voltage resistance measurement: 10.00 k Ω to 100.0 k Ω AC constant-voltage capacitance measurement: 10.00 pF to 100.0 μF AC constant-voltage inductance measurement: 1.000 μH to 1.000 mH
Judgment range	-99.9% to +999.9% or absolute value
Movement resolution	XY: 0.1 μm / pulse; Z: 1 μm / pulse
Minimum pad pitch	Top surface: 30 μm (with CP1073-01) Bottom surface: 42 μm (with CP1073-01)
Minimum pad size	Top surface: 2 μm (with CP1075-09) Bottom surface: 14 μm (with CP1075-09)
Measurement speed	Max. 76 points/sec. (0.5 mm movements, 4-arm simultaneous probing, capacitance measurement)
Testable board size	Thickness: 0.5 mm (0.02 in.) to 2.5 mm (0.10 in.) Outer dimensions: 50 mm (1.97 in.) W \times 50 mm (1.97 in.) D to 400 mm (15.75 in.) W \times 330 mm (12.99 in.) D
Maximum testable area	398 mm (15.67 in.) W \times 304 mm (11.97 in.) D
Clamp method	2-side holder
Air requirements	Primary-side pressure: 0.5 MPa to 0.99 MPa (dry air) Maximum consumption: 0.3 L/min. (ANR)
Power supply	200 V, 220 V, 230 V, 240 V AC single phase (specified at time of order), 50 Hz/60 Hz, Maximum power consumption: 5 kVA
Dimensions and weight	1355 mm (53.35 in.) W \times 1200 mm (47.24 in.) H \times 1265mm (49.8 in.) D (excluding protruding parts); 1130 kg (39860 oz.)

Improved Efficiency and Reliability Take Board Production to the Next Level

FLYING PROBE TESTER FA1815-20

CE compliance available
Inquire for detail



- Gentle low voltage insulation resistance measurement of 10 V, 100 GΩ
- Achieves both high-speed testing up to 100 points/sec. and improved probing accuracy
- Includes a Flexible Fixture suitable for various shapes, such as circular and square
- Enhanced measurement functions for substrates with embedded components, including capacitance measurement and diode testing

Model No. (Order Code) **FA1815-20** (Horizontal double sided)

Specifications Overview

Number of arms	4 (2 each, top and bottom)
Compatible probes	1172 series, CP1072 series, CP1073 series
Number of test steps	Max. 4,000,000 steps
Test parameters and measurement ranges	DC constant-current continuity measurement: 400.0 mΩ to 1.000 kΩ DC constant-current resistance measurement: 40.00 μΩ to 400.0 kΩ DC constant-voltage resistance measurement: 4.000 Ω to 40.00 MΩ Insulation resistance measurement: 1.000 kΩ to 100.0 GΩ Low voltage insulation resistance measurement: 1.000 MΩ to 100.0 GΩ AC constant-voltage capacitance measurement: 100.0 fF to 10.00 μF Leakage current measurement: 1.000 μA to 10.00 mA High-voltage resistance measurement: 1.000 kΩ to 100.0 GΩ Capacitor insulation measurement: 1.000 kΩ to 10.00 MΩ Open measurement: 4.000 Ω to 4.000 MΩ Short measurement: 400.0 mΩ to 40.00 kΩ
Embedded device board test	LSI connection test: 0.000 V to 12.00 V AC constant-voltage resistance measurement: 10.00 Ω to 100.0 kΩ AC constant-voltage capacitance measurement: 10.00 pF to 100.0 μF AC constant-voltage inductance measurement: 1.000 μH to 1.000 mH
Judgment range	-99.9% to +999.9% or absolute value
Movement resolution	XYZ: 0.1 μm
Minimum pad pitch	Top surface: 32 μm (with CP1073-01) Bottom surface: 42 μm (with CP1073-01)
Minimum pad size	Top surface: 4 μm square (with CP1075-09) Bottom surface: 14 μm square (with CP1075-09)
Measurement speed	Max. 100 points/sec. (0.15 mm movements, 4-arm simultaneous probing, capacitance measurement)
Testable board size	Thickness: 1 mm (0.04 in.) to 12 mm (0.47 in.) Outer dimensions: 50 mm (1.97 in.) W × 50 mm (1.97 in.) D to 340 mm (13.39 in.) W × 340 mm (13.39 in.) D
Maximum testable area	340 mm (13.39 in.) W × 340 mm (13.39 in.) D
Clamp method	Flexible Fixture, Vacuum Unit for Capacitance Test (Options)
Air requirements	Primary-side pressure: 0.5 MPa to 0.99 MPa (dry air) Maximum consumption: 0.3 L/min. (ANR)
Power supply	200 V, 220 V, 230 V, 240 V AC single-phase (specified at time of order); 50/60 Hz; maximum power consumption: 5 kVA
Dimensions and weight	1355 mm (53.35 in.) W × 1190 mm (46.85 in.) H × 1265mm (49.8 in.) D (excluding protruding parts); 1100 kg ±50 kg (38800 oz. ±1,763 oz.)

Significantly lower testing costs while maintaining high-speed performance

FLYING PROBE TESTER FA1816

CE compliance available
Inquire for detail



- High-speed pattern testing using the capacitive measurement method
- Reduce probe marks in combination with the latest probes
- Significantly improved operability

Model No. (Order Code) **FA1816** (Horizontal single sided)

Specifications Overview

Number of arms	2 (top surface × 2)
Compatible probes	1172 series, CP1072 series
Number of test steps	999,999 steps
Test parameters and measurement ranges	DC constant-current continuity measurement: 400.0 mΩ to 1.000 kΩ DC constant-current resistance measurement: 40.00 μΩ to 400.0 kΩ DC constant-voltage resistance measurement: 4.000 Ω to 40.00 MΩ Insulation resistance measurement: 1.000 kΩ to 500.0 MΩ AC constant-voltage capacitance measurement: 100.0 fF to 10.00 μF Leakage current measurement: 1.000 μA to 10.00 mA High-voltage resistance measurement: 1.000 kΩ to 500.0 MΩ Capacitor insulation measurement: 1.000 kΩ to 10.00 MΩ Open measurement: 4.000 Ω to 4.000 MΩ Short measurement: 400.0 mΩ to 40.00 kΩ
Test parameters and measurement for MLCC tests	AC constant-voltage capacitance measurement: 100.0 pF to 100.0 μF
Judgment range	-99.9% to +999.9% or absolute value
Minimum pad pitch	38 μm (with CP1072-01)
Minimum pad size	10 μm (with CP1075-09)
Measurement speed	Max. 100 points/sec. (0.1 mm movements, 2-arm simultaneous probing, capacitance measurement)
Testable boards	50 mm (1.97 in.) W × 50 mm (1.97 in.) D to 610 mm (24.02 in.) W × 510 mm (20.08 in.) D, Thickness 0.1 mm (0.004 in.) to 3.2 mm (0.13 in.)
Maximum testable area	610 mm (24.02 in.) W × 510 mm (20.08 in.) D
Air requirements (only with the option for air equipment)	Primary-side pressure: 0.5 MPa to 0.99 MPa (dry air) Maximum consumption: 0.3 L/min. (ANR)
Power supply	200 V, 220 V, 230 V, 240 V AC single phase (specify at time of order), 50 Hz/ 60 Hz, Maximum power consumption: 3 kVA
Dimensions and mass	1303 mm (51.30 in.) W × 1194 mm (47.01 in.) H × 1167 mm (45.94 in.) D (excluding protruding parts), 900 kg (31746 oz.)

Bare Board and Package Testing

Detect Latent Defects on High-Density Printed Wiring Boards with Absolute Reliability

FLYING PROBE TESTER FA1817



CE compliance available
Inquire for detail

- Optimization of probe movement reduces inspection time by up to 20%
- Reduce probe marks in combination with the latest probes
- Fault analysis using newly developed "Process Analyzer"

Model No. (Order Code) **FA1817** (Vertical double sided)

■ Specifications Overview

Number of arms	4 (front × 2, rear × 2)	
Compatible probes	1172 series, CP1072 series	
Number of test steps	999,999 steps	
Test parameters and measurement ranges	DC constant-current continuity measurement:	400.0 mΩ to 1.000 kΩ
	DC constant-current resistance measurement:	40.00 μΩ to 400.0 kΩ
	DC constant-voltage resistance measurement:	4.000 Ω to 40.00 MΩ
	Insulation resistance measurement:	1.000 kΩ to 100.0 GΩ
	AC constant-voltage capacitance measurement:	100.0 fF to 10.00 μF
	Leakage current measurement:	1.000 μA to 10.00 mA
	High-voltage resistance measurement:	1.000 kΩ to 100.0 GΩ
	Capacitor insulation measurement:	1.000 kΩ to 10.00 MΩ
	Open measurement:	4.000 Ω to 4.000 MΩ
	Short measurement:	400.0 mΩ to 40.00 kΩ
	LSI Connection test:	0.000 V to 12.00 V
AC constant-voltage resistance measurement:	10.00 Ω to 100.0 kΩ	
AC constant-voltage capacitance measurement:	10.00 pF to 100.0 μF	
AC constant-voltage inductance measurement:	1.000 μH to 1.000 mH	
Judgment range	-99.9% to +999.9% or absolute value	
Minimum pad pitch	43 μm (with CP1072-01)	
Minimum pad size	15 μm (with CP1075-09)	
Measurement speed	Max. 100 points/sec. (0.15 mm movements, 4-arm simultaneous probing, capacitance measurement)	
Testable boards	Standard specification: 50 mm (1.97 in.) W × 50 mm (1.97 in.) H to 610 mm (24.02 in.) W × 510 mm (20.08 in.) H, Thickness 1.0 mm (0.04 in.) to 3.2 mm (0.13 in.)	
	Pneumatic board clamp (option): 50 mm (1.97 in.) W × 70 mm (2.76 in.) H to 610 mm (24.02 in.) W × 510 mm (20.08 in.) H, Thickness: 0.6 mm (0.02 in.) to 6.0 mm (0.24 in.)	
Maximum testable area	604 mm (23.78 in.) W × 504 mm (19.84 in.) H	
Air requirements (only with the option for air equipment)	Primary-side pressure: 0.5 MPa to 0.99 MPa (dry air)	
	Maximum consumption: 0.3 L/min (ANR)	
Power supply	200 V, 220 V, 230 V, 240 V AC single-phase (specify at time of order), 50 Hz/ 60 Hz, Maximum power consumption: 3 kVA	
Dimensions and mass	1485 mm (58.46 in.) W × 1950 mm (76.77 in.) H × 800 mm (31.50 in.) D, (excluding protruding parts), 1,070 kg (37742.5 oz.)	

Installation area: FA1817 can inspect boards (610 × 510 mm) of the same size as the conventional Model 1271, but the installation area for the equipment is even smaller than the conventional Model 1270 (inspection board size is smaller than on the 1271), contributing to space saving measures. In addition, a back door is available as an option, supporting easier maintenance.

Meeting Ever Increasing Demands for Greater Analytical Power, Faster Testing Speeds and Reduced Costs

FLYING PROBE TESTER FA1811



Not CE Marked

- Achieve both high precision contact and high-speed probing in a space of 10 μm.
 - Double test method delivers an operation rate of 100%.
 - Full-net insulation continuity test using resistance: x10 max. speed*
 - High-speed test using capacitance: x2 max. speed*
- (* Compared to the double-sided 4-arm FLYING PROBE TESTER)

Model No. (Order Code) **FA1811** (4096 channels built-in)

Testing requires either the CP1165-11 or the E4101.

■ TEST FIXTURE CP1165-11 Specifications

Board dimensions	Square 10 mm (0.39 in.) to Square 80 mm (3.15 in.)
Supported range of board thicknesses for clamping	0.1 mm (0.004 in.) to 5.0 mm (0.20 in.)
Notes	Designed for each board
Board clamping	Holder, shutter, and vacuum pump required separately
Supported pad diameter	200 μm or larger, 300 μm or larger when using Kelvin probe
Max. number of pins	8192

■ Specifications Overview


Number of arms	2 (Upper: 2)	
Mountable probes	CP1073 series	
Measurement parameters and measurement ranges	Resistance measurement:	400.0 μΩ to 40.00 MΩ 4.000 Ω to 4.000 MΩ (T)
	Capacitance measurement:	100.0 fF to 10.00 μF
	MLCC measurement:	100.0 nF to 100.0 μF
	Insulation measurement:	1.000 kΩ to 100.0 GΩ 1.000 kΩ to 250.0 MΩ (T)
	Capacitor insulation measurement:	1.000 kΩ to 10.00 MΩ
	High-voltage resistance measurement:	1.000 kΩ to 100.0 GΩ 1.000 kΩ to 250.0 MΩ (T)
	Leak current measurement:	1.000 μA to 10.00 mA
	Continuity:	400 mΩ to 1.000 kΩ
	Open measurement:	4.000 Ω to 4.000 MΩ
	Short measurement:	400.0 mΩ to 40.00 kΩ
	(T):	When measuring via the TEST FIXTURE
Judgment range	-99.9% to +999.9% or absolute value	
Total probing precision	10 μm (Square)	
Probing pitch	Min. 40 μm (when using CP1073-01)	
Supported range of board thicknesses for clamping	Follow option on BGA side	
Probing area	75 mm (2.95 in.) × 75 mm (2.95 in.)	
Power supply	200 V AC ±10% (three phase) 50/60 Hz (200 V, 220 V AC: specify at time of order) Maximum power consumption: 5 kVA	
Dimensions and mass	1300 mm (51.18 in.) W × 1670 mm (65.75 in.) H × 1700 mm (66.93 in.) D (Excluding protruding parts), 2000 kg (70,546.7 oz.)	

■ VACUUM UNIT FOR CAPACITANCE TEST E4101 Specifications

Board dimensions	50 mm (1.97 in.) W × 90 mm (3.54 in.) D to 105 mm (4.13 in.) × 250 mm (9.84 in.)
Supported range of board thicknesses for clamping	0.1 mm (0.004 in.) to 0.8 mm (0.031 in.)
Notes	To accommodate the entire range of substrate thickness, it is necessary to replace the spacer for substrate thickness adjustment.
Board clamping	VACUUM PUMP E4106 required separately

1/2 Data Generation Time With New Platform, 3-in-1 Editing Software for Bare Board Testing

FEB-LINE INSPECTION DATA CREATION SYSTEM UA1781

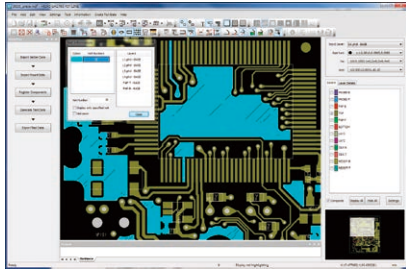

Gerber editing software that embodies the know-how for substrate testing

Built-in commands eliminate need for special know-how

- Easily generate test points even on the inner layer for cavity structures (One-point test-point generation)
- Expanded touch panel functions for printed boards (Optional E7001)
- Support for built-in component boards
- High-precision relay-point deletion functionality that reliably delete only the unnecessary relay-points

Model No. (Order Code) **UA1781** (Permanent license version)

■ Specifications Overview

License content	Install CD, license key (USB), instruction manual *Note: please purchase hardware such as PC and monitor separately.
Supported OS	Windows 11, 10 Pro 64-bit
Data entry function	Gerber file, aperture file, drill file, U-ART database, DXF (optional E7001)
Test data generation function	Net information generation, part test data generation, test point generation, relay-point deletion
Test data output format	SFD, SFDX, NND, IND, CON, COT, COTX, PRTX, LAYOUT


Options

Model No. (Order Code)	Product Name	Remarks
Options		
E7001	FEB-LINE TOUCH PANEL DESIGN EXTENSION SOFTWARE	For the UA1781
E7002	FEB-LINE TEST FIXTURE FUNCTION SOFTWARE	For the UA1781

Note: inquire separately about setup of the E7002.

Robust Support for Repair Work Using Simple Operations and Assistive Functionality

FAIL VISUALIZER UA1782

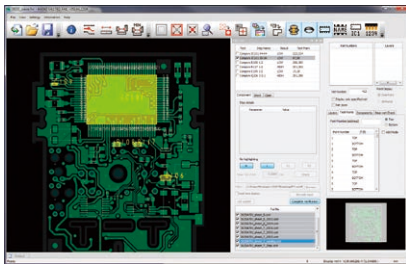

Robust support for repair work through simple operation and assistive functionality

Dedicated visualization software for Hioki electrical testing equipment and data creation systems

- Visualize test results from flying-probe testers
- Pinpoint components and patterns from test result files
- Display the probing positions of test fixtures or test heads for both ICT and bare board testers
- Search for components and nets on device embedded substrates


Model No. (Order Code) **UA1782** (supports UA1780 database input)
UA1782-01 (supports IPC-D-356 format input)
UA1782-02 (supports CAN & ADR format input)

■ Specifications Overview

License content	Install CD, license key (USB), instruction manual *Note: please purchase hardware such as PC and monitor separately.
Database import	Load UA1780 and U-ART databases
Supported OS	Windows 11, 10 Pro 64-bit
Net highlighting	Display user-specified nets with color highlighting. The user can select whether to display all layers or only top and bottom layers.
Fail list loading with real-time monitoring	Monitor a test result output folder for a testing system at a specified interval and automatically load new test data as it becomes available.

Data Analysis Software for Detecting Latent Defects on PASS Boards

DATA ANALYSIS SOFTWARE UA1801

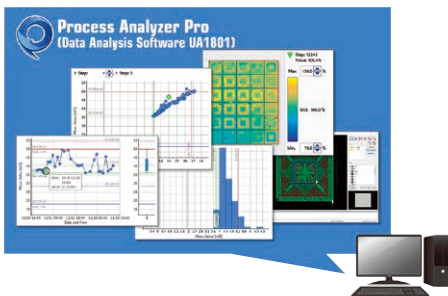

Detect Latent Defects Hidden in PASS Boards

- Perform statistical analysis using the latest AI technologies
- Detect significant points that can cause latent defects
- Provide feedback to improve quality in board production and design processes

Model No. (Order Code) **UA1801-01** (Limited 1-year license)
UA1801-02 (Unlimited license)


Please purchase computer, display and other hardware separately and download the installer and documentation from Hioki's website.

■ Specifications Overview

License contents	License key (USB) only
Supported test equipment	FA1813, FA1815-20, FA1817, FA1816, FA1811, FA1282-01, FA1282-11, FA1283-01, FA1283-11, 1281, 1281-11, 1281-12, 1281-50, FA1116-03, 1116, 1116-01, 1116-02, 1116-12, 1116-21, 1116-22, 1116-23, 1116-24, 1116-32, 1116-41, 1116-42, 1116-43, 1116-44, 1116-45, 1116-51, 1116-52, 1116-53, 1116-54, 1116-62, 1116-71, 1116-72, 1116-73, 1116-74, 1116-75, 1270, 1271
Operating environment	Operating system: Windows 11, 10 Pro 64-bit; CPU: x64 processor running at 1.0 GHz or better (2.0 GHz or better recommended); memory: 2 GB or better (4 GB or better recommended); other software: Microsoft .NET Framework 4.6 and appropriate language pack
Supported languages	English, Japanese, Simplified Chinese, Traditional Chinese, Korean

Real-time anomaly monitoring **Process Analyzer Client (E4781)** Client
 *Supported Products: FA1811, FA1813, FA1816, FA1817

Adding Process Analyzer Pro's Singularity Detection Function to Inspection Equipment Detects latent defects in real time at the same time as normal inspection.

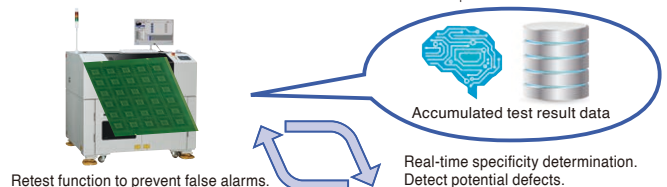

Electrical Testing Verifies Correct Mounting ----- Populated Board Testing System

FLYING PROBE TESTER FA1240-60



FA1240-61



- Quickly complete programs that take into account component height
- Automatic calculation of arm interference (when used with the UA1780)
- Designed to improve probe replaceability, dramatically reducing system downtime caused by probe replacement
- High-speed testing at up to 0.025 sec./step
- Proprietary Hioki lead float detection reliably detects issues up to and including pseudo-contact
- Provides a superior level of solder quality assurance
- Phase-isolated measurement and guarding functionality are ideal for analog circuits
- Support for active testing (optional feature)
- High-precision probing
- Large testing area of 510 × 460 mm (FA1240-61)
- Standard transport capability
- Automatic alignment function and simple visual test function

Model No. (Order Code) **FA1240-61** (for large boards)
FA1240-63 (for medium rack boards)
FA1241-61 (CE compliant model, for large boards)

Specifications Overview

	FA1240-61 FA1241-61	FA1240-63
Number of arms	4 (L, ML, MR, R)	
Number of test steps	40,000 (max.)	
Measurement ranges	Resistance: 400 μΩ to 40 MΩ Capacitance: 1 pF to 400 mF Inductance: 1 μH to 100 H Diode VZ measurement: 0 to 25 V Zener diode VZ measurement: 0 to 25 V, 25 to 80 V (optional feature) Digital transistors: 0 to 25 V Photo couplers: 0 to 25 V Short: 0.4 Ω to 400 kΩ Open: 4 Ω to 40 MΩ DC voltage measurement: 0 to 25 V	
Measurement time	Max. 0.025 sec./step	Max. 0.025 sec./step
Probing precision	Within ±100 μm for each arm (X and Y directions)	
Positioning repeatability	Within ±50 μm (probing positions)	
Inter-probe pitch	Min. 0.15 mm Min. 0.5 mm (when using 4-terminal probes)	Min. 0.15 mm Min. 0.5 mm (when using 4-terminal probes)
Testable board dimensions	510 mm (20.08 in.) W × 460 mm (18.11 in.) D	400 mm (15.75 in.) W × 330 mm (12.99 in.) D
Power supply	200 V AC (single-phase), 50/60 Hz, 6 kVA (FA1241: 230 V AC)	200 V AC (single-phase), 50/60 Hz, 5 kVA
Dimensions and mass	1406 mm (55.35 in.) H × 1300 mm (51.18 in.) H × 1380 mm (54.33 in.) D, 1150 kg (40,564.4 oz.)	1266 mm (49.84 in.) H × 1369 mm (53.90 in.) H × 1425 mm (56.10 in.) D, 1050 kg (37,037 oz.)


Options

FIT-LINE INSPECTION DATA CREATION SYSTEM

- UA1780** (software with a four-year license term)
- UA1780-01** (software with a one-year license term)
- UA1780-11** (one year license renewal)
- UA1780-14** (four year license renewal)

Data Creation Software for Populated Board Testing

FIT-LINE INSPECTION DATA CREATION SYSTEM UA1780

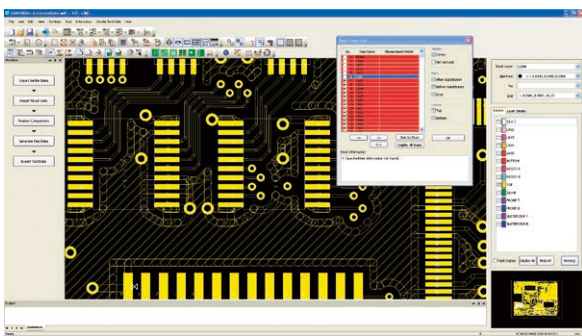

The UA1780 generates data from Gerber data and mounting data while referencing component library information

- No need for camera-based teaching
- No need to visually trace patterns under components
- Easy generation of high-quality test data without boards
- Support for the new FA1240 data format

Thanks to these features, programs can be created with plenty of time to spare before the prototyping stage. Anybody can generate high-quality test programs in a short period of time by using net information that has been reverse-generated from Gerber data and component information libraries. The UA1780 delivers maximum performance when used in conjunction with Hioki's new FA1240-60 flying probe tester.

Model No. (Order Code) **UA1780** (Software and 4 years license)
UA1780-01 (Software and 1 year license)
UA1780-11 (1 year license)
UA1780-14 (4 years license)

Specifications Overview

Included	Installation CD, license key (USB), instruction manual (× 1 each) *Caution: Computer, monitor, and other hardware not included.
Gerber data input functions	Loading of Gerber files (RS-274X, RS-274D), aperture files, and drill files
Mounting data input functions	Loading of CSV files containing circuit names, layout coordinates, angles of rotation, shape names, and component names Support for operations such as rotation and mirroring, and display of data such as mounting locations
Graphic editing functions	Copying, movement, deletion, and other manipulation of figures
Component library registration functions	Registration of component list displays and component size, height, and pin numbers; registration of test pin pairs, test modes, ratings (thresholds), and upper and lower limit values; duplication of libraries
Test data generation functions	Reverse net generation, test point extraction taking into account components and patterns, automatic movement of test points underneath components, generation of open tests between adjacent pads, etc.
Test point confirmation functions	Display of test points on a graphical screen
Test data output functions	FA1240 files, 1240/1114 files
Data management functions	Saving of databases and management of component libraries

Batch Testing System That Achieves a High-performance Measurement Engine in a Smart Body

IN-CIRCUIT TESTER FA1220-62

New



CE

3 Year Warranty

- High-precision measurement engine housed in a smart body
- Achieving cost performance by specializing in basic functions
- Numerous measurement parameters and detecting defects for a wide variety of inspections
- Productivity, quality, and safety
- Data creation support functionality: ATG function

Model No. (Order Code) **FA1220-62**

- The FA1220-62 does not have a CD or DVD drive. You will need to provide an external CD or DVD drive in order to use the included application disc

FA1220-62 Specifications Overview

Number of test points	Standard: 512 pins (built-in scanner board E4201) Maximum: 1024 pins (expandable in increments of 128 pins) Note: The effective maximum number of pins for each item depends on the total number of pins of the scanner board installed in the product
Number of test steps	Group data: 256 groups Comprehensive Short/Open Data: 1024 pins* Macro Data: 1024 pins*/2048 steps Charge Data: 40 sets Pin Contact Data: 1024 pins IC Data: 500 steps (maximum 1024 pins/1 step) Note: The effective maximum number of pins for each item depends on the total number of pins of the scanner board installed in the product.
Measurement unit	DC Voltage Meter: 800 μ V f.s. to 25 V f.s., 8 ranges DC Current Meter: 100 nA f.s. to 25 mA f.s., 8 ranges AC Current Meter: 10 μ A rms to 10 mA rms, 4 ranges
Scanner unit	Used SW: Analog Switch (scanner board E4201) Number of channels: 128 per board ± 15 V ± 0.5 V (can be set collectively)
External I/O	Ethernet (LAN) 100BASE-TX x 1 (for PC connection only; please consult separately for external device connections)
Control unit	- Measurement control Installed OS: Real-time OS Storage Device: SD card - Main unit control Installed OS: Windows Storage device: SSD Operation: keyboard, mouse Display: 17-inch display Printer: Standard equipment: E4243
Power supply	Rated Power Supply Voltage: AC 100 V to 240 V (specified at the time of order), single-phase 50 Hz/60 Hz
Dimensions and weight	652 \pm 20 mm (25.7 \pm 0.79 in.) W \times 780 \pm 15 mm (30.7 \pm 0.59 in.) D \times 1671 \pm 20 mm (65.8 \pm 0.79 in.) H, 245 kg (8642 oz.)
Included accessories	Instruction Manual (with warranty) \times 1, Test Lead \times 1, Application Disk \times 1, Positioning Screws \times 4

Batch Testing System for Improved Populated Circuit Board Productivity

IN-CIRCUIT TESTER FA1220-02



CE

3 Year Warranty

- Slide-in mechanism simplifies installation and removal of test fixtures, reducing man-hours and workload.
- Extension range of options that reduces setup man-hours and boosts productivity.
- Numerous measurement parameters and detecting defects for a wide variety of inspections.
- Productivity, quality, and safety.
- Data creation support functionality: ATG function.

Model No. (Order Code) **FA1220-02**

- The FA1220-02 does not have a CD or DVD drive. You will need to provide an external CD or DVD drive in order to use the included application disc.

FA1220-02 Specifications Overview

Number of test points	Standard: 0 pins (scanner boards optional) Max. 2048 pins (expandable in blocks of 128 pins)* * The maximum number of active pins for each test type depends on the total number of scanner board pins installed in the product.
Number of test steps	Group data: 256 groups Round-robin short/open data: 2048 pins* Macro data: 2048 pins*/2048 steps (regardless of pin count) Component data: 10000 steps Charge data: 40 groups Pin contact data: 2048 pins* IC data: 500 steps (max. 2048 pins/step)* * The maximum number of active pins for each test type depends on the total number of scanner board pins installed in the product.
Measurement unit	DC voltmeter: 800 μ V f.s. to 25 V f.s., 8 ranges DC ammeter: 100 nA f.s. to 250 mA f.s., 9 ranges AC ammeter: 10 μ A rms to 10 mA rms, 4 ranges HV voltmeter: 25 mV f.s. to 250 V f.s. (Requires E4210 and E4203) HV ammeter: 1.2 μ A f.s. to 120 mA f.s. (Requires E4210 and E4203)
Scanner unit	Switch type: analog (Scanner Board E4201 and E4202), read relay (Scanner Board E4203) Number of channels: 128 per board Input protection: ± 15 V (Scanner Board E4201 and E4202), none (Scanner Board E4203)
External I/O	Ethernet (LAN) 100Base-TX $\times 1$ (please contact Hioki for communication with external devices.)
Control unit	- Measurement control Operating system: Real-time operating system Storage device: SD card (for booting system) - Main unit control Operating system: Windows 10 Pro (64-bit) Storage device: 64 GB SSD Operation: keyboard and mouse Display: 15-inch display Printer: E4243 (option)
Power supply	Rated supply voltage: 100 to 240 V AC, 50 Hz/60 Hz Maximum power consumption: 1 kVA
Dimensions and mass	655 mm (25.79 in.) W \times 1830 mm (72.05 in.) H \times 705 mm (27.76 in.) D, 310 kg (10934.7 oz.)
Included accessories	Instruction Manual $\times 1$, Test lead $\times 1$, Application disc $\times 1$, Positioning screws $\times 4$, Maintenance key (for opening and closing the maintenance door) $\times 1$

Boost Productivity of Populated Circuit Board Testing with the Inline Automatic Testing System

IN-CIRCUIT TESTER FA1220-11



- Installation area about 23% smaller than the previous model. Offers new flexibility for production line layout by saving space.
- Extension range of options that reduces setup man-hours and boosts productivity.
- Numerous measurement parameters and detecting defects for a wide variety of inspections
- Safeguard people, products, and lines with many safety features.
- Data creation support functionality: ATG function.

Model No. (Order Code) **FA1220-11**

- The FA1220-11 does not have a CD or DVD drive. You will need to provide an external CD or DVD drive in order to use the included application disc.

■ FA1220-11 Specifications Overview

Number of test points	Standard: 0 pins (scanner boards optional) Max. 2048 pins (expandable in blocks of 129 pins)* * The maximum number of active pins for each test type depends on the total number of scanner board pins installed in the product.
Number of test steps	Group data: 256 groups Round-robin short/open data: 2048 pins* Macro data: 2048 pins/2048 steps (regardless of pin count)* Component data: 10000 steps Charge data: 40 groups Pin contact data: 2048 pins* IC data: 500 steps (max. 2048 pins/step)* * The maximum number of active pins for each test type depends on the total number of scanner board pins installed in the product.
Measurement unit	DC voltmeter: 800 μ V f.s. to 25 V f.s., 8 ranges DC ammeter: 100 nA f.s. to 250 mA f.s., 9 ranges AC ammeter: 10 μ A rms to 10 mA rms, 4 ranges
Scanner unit	Switch type: analog (E4201 and E4202), read relay (E4203) Number of channels: 128 per board Input protection: ± 15 V / ± 0.5 V (batch-configurable, E4201 and E4202), none (E4203)
External I/O	Ethernet (LAN) 100Base-TX $\times 1$ (please contact Hioki for communication with external devices.) USB 2.0 $\times 1$
Control unit	- Measurement control Operating system: Real-time operating system Storage device: SD card (for booting system) - Main unit control Operating system: Windows 10 Pro (64-bit) Storage device: 64 GB SSD Operation: keyboard and mouse Display: 15-inch display Printer: E4243 (option)
Power supply	Rated supply voltage: 100 to 240 V AC, 50 Hz/60 Hz Maximum power consumption: 1 kW Maximum current consumption: 10 A
Dimensions and mass	780 mm (30.71 in.) W \times 1760 mm (69.29 in.) H \times 750 mm (29.53 in.) D, 390 kg (1375.6 oz.)
Included accessories	Instruction Manual $\times 1$, Test lead $\times 1$, Application disc $\times 1$, Positioning screws $\times 4$, Maintenance key (for opening and closing the maintenance door) $\times 1$, Set of transport motor accessories $\times 1$, Before and after process communication connector set $\times 2$

Functionality Has Been Consolidated in a Single, Desktop Tower

IN-CIRCUIT TESTER FA1220



- Extensive function testing
- Electrolytic capacitor and IC reverse insertion detection
- Macro-testing function to increase test efficiency
- Four-terminal low-resistance measurement for stable measurement of low resistance

Model No. (Order Code) **FA1220** Main unit only

- Data from the legacy 1101 and 1102 cannot be converted for use by the 1220 (FA1220) because Hioki is unable to supply computers that can run the 1137 Support Software.
- Data compatibility between the FA1220/FA1221 and legacy products (1220-00/-01/-02/-11/-50/-51/-52/-55): Although data created for legacy products can be used, such data is not fully compatible with the FA1220/FA1221. It may be necessary to perform stray capacitance acquisition, wiring resistance acquisition, S/O data acquisition, IC data acquisition, and component test debugging. In particular, it may be necessary to reacquire stray capacitance in applications that involve measurement of minuscule capacitance values.

■ Specifications Overview

Number of test points	Max. 1024 pins (Can be added in blocks of 128 pins.) Standard : 0 pins (Scanner boards are sold as options.)
Number of test steps	Round-robin short/open data: 1024 pins Component data: Max. 10000 steps Macro data: 1024 pins/1024 steps (regardless of number of pins) IC data: 500 steps (max. 1024 pins/step) Charge data: 40 sets Pin contact data: 1024 pins Group data: 255 groups
Test parameters and measurement ranges	Round-robin short/open: 4 Ω to 400 k Ω (Default: 40 Ω) Macro testing (impedance): 1 Ω to 10 M Ω Component tests: Possible IC reverse insertion detection: Possible
Measurement unit	DC voltmeter: 800 μ V f.s. to 25 V f.s., 8 ranges DC ammeter: 100 nA f.s. to 250 mA f.s., 9 ranges AC ammeter: 10 μ A rms f.s. to 10 mA rms f.s., 4 ranges Macro test: Ammeter 10 μ / 100 μ / 1 m / 10 mA rms, 4 ranges
Scanner unit (*2)	Software used: Analog switch (Scanner board E4201, E4202) Number of channels: 128 channels/board (2-/4-terminal switchable) Input protection: ± 15 V / ± 0.5 V (Batch-configurable, Scanner Board E4201 / E4202 only)
External I/O (*2)	Using I/O Board E4220 (*1) : 60 inputs, 56 outputs External computer (sold separately)
Control unit	FA1220: Real-time operating system, LAN for PC connectivity (10 / 100 $\times 1$ port)
Power supply	100 to 240 V AC ($\pm 10\%$), single-phase, 50 Hz / 60 Hz, max. 260 W (with full 1024 pins of scanner boards)
Dimensions and mass	200 mm (7.87 in.) W \times 323 mm (12.72 in.) H \times 298 mm (11.73 in.) D, 10 kg (352.7 oz.)
Accessories	Instruction manual $\times 1$, Test leads $\times 1$, Power cord $\times 1$, Metal fittings $\times 1$, Installation CD $\times 1$

*1: Hioki plans to update the FA1220/FA1221 to provide functionality for configuring the I/O Board E4220.

*2: Sold separately.


Multichannel Short/Open Tester that can be Embedded in Your Test Equipment

SHORT-OPEN TESTER FA1221



- Specifically designed for short/open testing
- Four-terminal low-resistance measurement for stable measurement of low resistance
- Functionality has been consolidated in a single, desktop tower that can be easily embedded in existing equipment

Model No. (Order Code) **FA1221** Main unit only



FAIL VISUALIZER UA1782
Dedicated visualization software for Hioki electrical testing equipment and data creation systems

■ FA1221 Specifications Overview

Number of test points	128 pins (during 4-terminal measurement, up to 32 sets)	
Number of test steps	Round-robin short/open : 128 pins Component data : Max. 10000 steps Charge data : 40 sets Pin contact data : 128 pins Group data : 255 groups	
Test parameters and measurement ranges	Round-robin short/open :	4 Ω to 400 kΩ (Default: 40 Ω) Possible
Component tests	Resistance :	400 μΩ to 40 MΩ
	Open :	4 Ω to 4 MΩ
	Short :	400 mΩ to 40 Ω
Test signals	DC constant voltage :	100 m / 400 mV : 2 ranges
	DC constant current :	2 m / 20 mA, 2 ranges
Measurement unit	DC ammeter :	Ammeter 80 μ / 800 μ / 4 m / 40 m Arms, 4 ranges
	DC ammeter :	250 n / 2.5 μ / 25 μ / 250 μ / 2.5 m / 25 m A f.s., 6 ranges
Scanner unit	Analog software : 128 channels/board (2-/4-terminal switchable, no guarding)	
Judgment range	-99.9% to +999.9% or absolute value	
Measurement times	Round-robin short/open :	From approx. 0.8 ms per pin
	Component :	From approx. 0.9 ms per step
Statistics functionality	Defect rate tabulation and graph display test, group, and overall; component test histogram; operating time cumulative and subtotal displays	
External I/O *2	Using I/O Board E4220*1 : 60 inputs, 56 outputs *1 Hioki plans to update the FA1220/FA1221 to provide functionality for configuring the I/O Board E4220. *2 Sold separately.	
Power supply	100 to 240 V AC (±10%), single-phase, 50 Hz / 60 Hz, max. 130 W	
Dimensions and mass	200 mm (7.87 in.) W × 323 mm (12.72 in.) H × 298 mm (11.73 in.) D, 10 kg (352.7 oz.)	
Included accessories	Instruction manual ×1, Test leads ×1, Power cord ×1, Metal fittings ×1, Installation CD ×1	

Electrical Measuring Instruments

General Catalog

2026

Model No. (Order Code) Index

Model No. (Order Code) Index

Note: D mark indicates discontinued or discontinuation scheduled models.

Model No.	Name	Page	Note	Model No.	Name	Page	Note
0GA00019	MEASURING LEAD (RED)	54	For SM7810, DSM-LR010	9615-01	H.V.TEST LEAD	64	For the 3930
0GA00021	MEASURING LEAD (RED)	54	For SM7810, DSM-LR020	9637	RS-232C CABLE(9pin-9pin/1.8m)	31	For the BT3563 and similar products
0GA00027	MEASURING LEAD (RED)	54	For SM7810, DSM-LR050	9641	CONNECTION CABLE	28	For the LR8431-20, 8430-20 and similar products
1196	RECORDING PAPER	--	For the 9442 (ST5540), 112mm width	9642	LAN CABLE	22	For the Memory HiCorder, LR8450, and similar products
3153	AUTOMATIC INSULATION/WITHSTANDING HITESTER	64	Insulation, AC/DC withstanding voltage	9657-10	CLAMP ON LEAK SENSOR	86	For the PQ3100, PW3360/65, LR8513 and similar products
3174	AC AUTOMATIC INSULATION/WITHSTANDING HITESTER	63		9660	CLAMP ON SENSOR	86	For the PW3360, PW3365, PW3198 and similar products
3244-60	CARD HITESTER	91		9661	CLAMP ON SENSOR	86	For the PW3360, PW3365, PW3198 and similar products
3246-60	PENCIL HITESTER	90		9665	10:1PROBE	22	For the Memory HiCorder series
3269	POWER SUPPLY	77	For the CT6710 series, CT6700 series	9666	100:1PROBE	22	For the Memory HiCorder series
3272	POWER SUPPLY	77	For the CT6700 series, up to 1	9669	CLAMP ON SENSOR	86	For the PW3360/65, LR8513 and similar products
3273-50	CLAMP ON PROBE	77	DC to 50 MHz, 30 A rms	9675	CLAMP ON LEAK SENSOR	86	For the PW3360/65, LR8513 and similar products
3274	CLAMP ON PROBE	77	DC to 10 MHz, 150 A rms	9677	SMD TEST FIXTURE	34	For the IM3570 and similar products
3275	CLAMP ON PROBE	77	DC to 2 MHz, 500 A rms	9690-01	TERMINATOR(ID1-5)	91	For the 3665-20
3276	CLAMP ON PROBE	77	DC to 100 MHz, 30 A rms	9690-02	TERMINATOR(ID6-10)	91	For the 3665-20
3280-10F	AC CLAMP METER	99	Average rectified	9690-03	TERMINATOR(ID11-15)	91	For the 3665-20
3280-70F	AC CLAMP METER SET	99	3280-10F, CT6280 bundled model	9690-04	TERMINATOR(ID16-20)	91	For the 3665-20
3287	CLAMP ON AC/DC HITESTER	98	True RMS	9694	CLAMP ON SENSOR	86	For the PW3360/65, 3169, PW3198 and similar products
3288	CLAMP ON AC/DC HITESTER	98	Average rectified	9695-02	CLAMP ON SENSOR	86	For the PW3360/65, 3169, PW3198 and similar products
3288-20	CLAMP ON AC/DC HITESTER	98	True RMS	9695-03	CLAMP ON SENSOR	86	For the PW3360/65, 3169, PW3198 and similar products
3481-20	VOLTAGE DETECTOR	104		9699	SMD TEST FIXTURE	34	For the IM3533, and similar products
3504-40	C HITESTER	38	Built-in RS-232C interface	9704	CONVERSION ADAPTER	85	For the CT9667 series, 9132-50 and similar products
3504-50	C HITESTER	38	Built-in GP-IB, RS-232C	9713-01	CAN CABLE	18	For the MR8904(MR8875), U8555/LR8535(LR8450)
3504-60	C HITESTER	38	Built-in GP-IB, RS-232C	9728	PC CARD 512M	19	512 MB
3506-10	C METER	38	Measurement frequencies: 1 kHz and 1 MHz	9729	PC CARD 1G	19	1 GB
D3561	BATTERY HITESTER	52		9770	PIN TYPE LEAD	51	For the BT3563, BT3562, 3561 and similar products
D3561-01	BATTERY HITESTER	52	Built-in GP-IB interface	9770-90	TIP PIN	51	For the 9770, L2102, replacement tip
3665-20	LAN CABLE HITESTER	91	English model	9771	PIN TYPE LEAD	51	For the BT3563, BT3562, 3561 and similar products
3930	HIGH VOLTAGE SCANNER	64	For the 3153 and similar products	9771-90	TIP PIN	51	For the 9771, L2103, replacement tip
8966	ANALOG UNIT	16	For MR6000, MR8848, MR8827, and similar products	9772	PIN TYPE LEAD	44	For the RM3548 series, BT3554-50 and similar products
8967	TEMP UNIT	16	For MR6000, MR8848, MR8827, and similar products	9772-90	TIP PIN	44	For the 9772(RM3548/BT3554-50), L2100(BT3563/62)
8968	HIGH RESOLUTION UNIT	16	For MR6000, MR8848, MR8827, and similar products	9780	BATTERY PACK	19	For the MR8870-20, LR8431-20, LR8432-20
8970	FREQ UNIT	16	For MR6000, MR8848, MR8827, and similar products	9782	CARRYING CASE	19	For the MR8870-20, LR8431-20, LR8432-20, SS7012
D8971	CURRENT UNIT	16	For MR6000, MR8848, MR8827, and similar products	9783	CARRYING CASE	17	For the MR8848 and the MR8847 series
8972	DC/RMS UNIT	16	For MR6000, MR8848, MR8827, and similar products	9784	DC POWER UNIT	17	For the MR8848 and the MR8847 series
8973	LOGIC UNIT	16	For MR6000, MR8848, MR8827, and similar products	9790-02	GRABBER CLIP	22	For the LR9790
9010-50	CLAMP ON PROBE	85	BNC output terminal	9790-03	CONTACT PIN	22	For the LR9790
9018-50	CLAMP ON PROBE	85	Wide band, BNC output terminal	9804	MAGNETIC ADAPTER	71	For the CM3286-50, CM4371-50 and similar products
9050	EARTH NETS	103	For the FT6031, FT3151	9804-01	MAGNETIC ADAPTER	73	For the L9438 series (PW3360 series and similar products), red x1
9132-50	CLAMP ON PROBE	85	BNC output terminal	9804-02	MAGNETIC ADAPTER	73	For the L9438 series (PW3360 series and similar products), black x1
9140	4-TERMINAL PROBE	38	For the RM3542, RM3543, 3504 and similar products	9809	PROTECTION SHEET	19	For the MR8870-20, LR8431-20, LR8432-20
9140-10	4-TERMINAL PROBE	34	For the IM3590/3570/3533/3523 and similar products	9812	SOFT CASE	19	For the MR8870-20, LR8431-20, LR8432-20
9151-02	GP-IB CONNECTOR CABLE	65	For the PW3335 and similar products	9830	PC CARD 2G	19	2 GB
9165	CONNECTION CORD	22	For the Memory HiCorder and similar products	BT3554-50	BATTERY TESTER	53	Pin Type Lead not included
9166	CONNECTION CORD	22	For the Memory HiCorder and similar products	BT3554-51	BATTERY TESTER	53	Bundled with Pin Type Lead 9465-10
9195	ENCLOSURE PROBE	60	For the ST5540 series, 3156/3155	BT3554-52	BATTERY TESTER	53	Bundled with Pin Type Lead L2020
9199	CONVERSION ADAPTOR	22	For Memory HiCorder, the 3283 and similar products	BT3554-91	BATTERY TESTER	53	BT3554-51 + Wireless Adapter Z3210
9209	TEST LEADS HOLDER	98	For the 3280-10F and similar products	BT3554-92	BATTERY TESTER	53	BT3554-52 + Wireless Adapter Z3210
9219	CONNECTION CABLE	86	For the 9695-02/03	BT3561A	BATTERY HITESTER	50	Compact packs up to 60 V
9221	RECORDING PAPER	22	For the 8835-01, 8815/30/35, 8852, 10 rolls	BT3562A	BATTERY HITESTER	50	Medium-size packs up to 100 V
9229	RECORDING PAPER	22	For the 8826, 8825, 6 rolls/set	DBT3562-01	BATTERY HITESTER	52	Built in GP-IB and analog output
9229-01	RECORDING PAPER(PERFORATED)	22	For the 8826, 8825, (Perforated) 6 rolls/set	BT3563A	BATTERY HITESTER	51	Large packs up to 300 V
9231	RECORDING PAPER	22	For the MR8848 optional printer, the MR8847 series, 6 rolls/set	DBT3563-01	BATTERY HITESTER	52	Built in GP-IB and analog output
9232	RECORDING PAPER	22	For the 3193-10, 8804 and similar products, 10 rolls	BT3564	BATTERY HITESTER	51	
9234	RECORDING PAPER	22	For the MR8880-20, 8807/08, 8420 series, 10 rolls/set	BT4560-50	BATTERY IMPEDANCE METER	48	EIS measurement frequency: 0.01 Hz to 1.05 kHz
9235	RECORDING PAPER	22	For the 8205-10, 8206-10, 60mm width	BT4560-60	BATTERY IMPEDANCE METER	48	EIS measurement frequency: 0.01 Hz to 10 kHz
9236-01	RECORDING PAPER	22	For the 8205-10, 8206-10, 60mm width (Climate-resistant)	BT5525	BATTERY INSULATION TESTER	62	
9248	POWER CORD	21	For the 9322 to 9687 connect	BT6065	PRECISION BATTERY TESTER	49	Max. DC V resolution: 10 μV
9249	CARRYING CASE	91	For the 3665-20	BT6075	PRECISION BATTERY TESTER	49	Max. DC V resolution: 1 μV
9261-10	TEST FIXTURE	34	For the IM3590/3570/3533/3523 and similar products	C0106	CARRYING CASE	103	For the FT6031, FT3151 and similar products
9262	TEST FIXTURE	34	For the LCR meters	C0200	CARRYING CASE	90	For the DT4220 series
9263	TEST FIXTURE	34	For the LCR meters	C0201	CARRYING CASE	87	For the DT4250 series, DT4210 series, FT3424
9267	SAFETY TEST DATA MANAGEMENT SOFTWARE	64	For ST5540/ST5541, 3153 and similar products	C0202	CARRYING CASE	87	For the DT4280 series, DT4250 series, DT4210 series, FT3424
9268-10	DC BIAS VOLTAGE UNIT	34	For the IM3590/3570/3533/3523 and similar products	C0203	CARRYING CASE	97	For the CM4370 series, and similar products
9269-10	DC BIAS CURRENT UNIT	34	For the IM3590/3570/3533/3523 and similar products	C0204	CARRYING CASE	91	For the 3244-60
9272-05	CLAMP ON SENSOR	82	20/200 A AC, ME15W terminal	C0205	CARRYING CASE	99	For the CT6280, CM3291/3280-70F and similar products
9290-10	CLAMP ON ADAPTER	86		C0207	CARRYING CASE	87	Bag type
9299	SWITCHED PROBE	62	For the ST5520 and similar products	C0208	CARRYING CASE	102	For the FT6041
D9318	CONVERSION CABLE	79	To connect HIOKI PL23 (10 pin) connector to the 8971/40/51	C0209	CARRYING CASE	102	For the FT6041
9320-01	LOGIC PROBE	22	For the Memory HiCorder, miniature terminal type	C0212	CARRYING CASE	95	For the IR5050 and IR5051, IP65
9322	DIFFERENTIAL PROBE	21	For the Memory HiCorder series	C0220	CARRYING CASE	84	For the CT7600 series, 7700 series
9327	LOGIC PROBE	22	For the MR6000, MR8848, MR8827 and similar products	C0221	CARRYING CASE	84	For the CT7600 series, 7700 series
9333	LAN COMMUNICATOR	24	For the MR8848, MR8827 and similar products, CD	C1002	CARRYING CASE	73	For the PQ3198, PQ3100, PW3198
9333-01	LAN COMMUNICATOR	24	Downloadable (license card)	C1003	CARRYING CASE	19	For the MR8880
9333-03	LAN COMMUNICATOR	24	Downloadable (digital license)	C1004	CARRYING CASE	18	For the MR8875
9335	WAVE PROCESSOR	24	For the Memory HiCorder series, CD	C1005	CARRYING CASE	75	For the PW3365/3360 series
9335-01	WAVE PROCESSOR	24	Downloadable (license card)	C1008	CARRYING CASE	75	For PW3365
9335-03	WAVE PROCESSOR	24	Downloadable (digital license)	C1009	CARRYING CASE	73	For the PQ3100 and similar products
9355	CARRYING CASE	82	For the 9272-10, 9270 series, and similar products	C1010	CARRYING CASE	16	For the MR6000 series
9398	CARRYING CASE	98	For the 3287, 3288, 3280-10F, CM3289	C1012	CARRYING CASE	27	For the LR8450 series
9418-15	AC ADAPTER	21	For the 9322 and similar products	C1013	CARRYING CASE	20	For the SP7000 series
9445-02	AC ADAPTER	84	For the CM7290 and similar products, 100 to 240 V AC	C1014	CARRYING CASE	53	For the BT3554-50 series
9451	TEMPERATURE PROBE	53	For the BT3554-50 series	C1015	CARRYING CASE	44	For the RM3548-50
9451-01	TEMPERATURE PROBE	53	For the BT3554-50 series	C4001	CARRYING CASE	66	For the PW4001
9454	ZERO ADJUSTMENT BOARD	44	For the RM3548(9465-10), BT3563(L2100) and similar products	C8001	CARRYING CASE	65	For the PW8001
9459	BATTERY PACK	75	For the PW3360 series, 3351, 3197, 3455	CM3281	AC CLAMP METER	100	Average rectified
9460	CLIP TYPE LEAD WITH TEMPERATURE SENSOR	53	For the BT3554-50 and similar products	CM3286-50	AC CLAMP POWER METER	71	
9465-10	PIN TYPE LEAD	44	For the RM3548 series, BT3554-50 and similar products	CM3286-90	AC CLAMP POWER METER/WIRELESS ADAPTER	71	Bundled with the Wireless Adapter Z3210
9465-11	PIN TYPE LEAD	44	For the RM3548 series	CM3289	AC CLAMP METER	99	True RMS
9465-90	TIP PIN	44	For the RM3548 series and BT3554-50 (9465-10, L2020)	CM3291	AC CLAMP METER	100	True RMS
9466	REMOTE CONTROL SWITCH	53	For the BT3554-50 (use with the L2020), 9772, 9465-10	CM4001	AC LEAKAGE CLAMP METER	101	
9467	LARGE CLIP TYPE LEAD	44	For the RM3548, 3561, 3541/40 and similar products	CM4001-90	AC LEAKAGE CLAMP METER/WIRELESS ADAPTER	101	Bundled with the Wireless Adapter Z3210
9478	SHEATH TYPE TEMPERATURE PROBE	34	For the IM3590/IM3533/3447, Pt100	CM4002	AC LEAKAGE CLAMP METER	101	
9500	4-TERMINAL PROBE	43	For the RM3543, 3532-90	CM4002-90	AC LEAKAGE CLAMP METER/WIRELESS ADAPTER	101	Bundled with the Wireless Adapter Z3210
9500-10	4-TERMINAL PROBE	34	For the IM3590/3570/3533/3523 and similar products	CM4003	AC LEAKAGE CLAMP METER	101	
9613	REMOTE CONTROL BOX(SINGLE)	63	For the 3174, 3153/57/58/59 series	CM4003-90	AC LEAKAGE CLAMP METER/WIRELESS ADAPTER	101	Bundled with the Wireless Adapter Z3210
9614	REMOTE CONTROL BOX(DUAL)	63	For the 3174, 3153/57/58/59 series	CM4141-50	AC CLAMP METER	99	
9615	H.V.TEST LEAD	63	For the 3174/73/59/58/53	CM4141-90	AC CLAMP METER/WIRELESS ADAPTER	99	Bundled with the Wireless Adapter Z3210

Model No. (Order Code) Index

Note: D mark indicates discontinued or discontinuation scheduled models.

Model No.	Name	Page	Note
CM4371-50	AC/DC CLAMP METER	97	
CM4371-90	AC/DC CLAMP METER/WIRELESS ADAPTER	97	Bundled with the Wireless Adapter Z3210
CM4373-50	AC/DC CLAMP METER	96	
CM4373-90	AC/DC CLAMP METER/WIRELESS ADAPTER	96	Bundled with the Wireless Adapter Z3210
CM4373-93	AC/DC CLAMP METER SOLAR SET	96	Bundled with DC High Voltage Probe P2010 and Wireless Adapter Z3210
CM4375-50	AC/DC CLAMP METER	96	Wireless Adapter Z3210 not included
CM4375-90	AC/DC CLAMP METER/WIRELESS ADAPTER	96	Bundled with the Wireless Adapter Z3210
CM4375-93	AC/DC CLAMP METER SOLAR SET	96	Bundled with DC High Voltage Probe P2010 and Wireless Adapter Z3210
CM7290	DISPLAY UNIT	84	For the CT7000 series
CT6280	AC FLEXIBLE CURRENT SENSOR	100	For the CM3291/89, 3280-10F and similar products
CT6500	CLAMP ON SENSOR	29	For the LR8513, LR5051
CT6700	CURRENT PROBE	76	From 1 mA, 50 MHz bandwidth
CT6701	CURRENT PROBE	76	From 1 mA, 120 MHz bandwidth
CT6710	CURRENT PROBE	76	From 200 µA, 50 MHz bandwidth
CT6711	CURRENT PROBE	76	From 200 µA, 120 MHz bandwidth
CT6830	AC/DC CURRENT SENSOR	81	2 A AC/DC, ME15W terminal
CT6831	AC/DC CURRENT SENSOR	81	20 A AC/DC, ME15W terminal
CT6833	AC/DC CURRENT PROBE	81	200 A AC/DC, ME15W terminal, 5m(16.4 ft.) cable length
CT6833-01	AC/DC CURRENT PROBE	81	200 A AC/DC, ME15W terminal, 10m(32.8 ft.) cable length
CT6834	AC/DC CURRENT PROBE	81	500 A AC/DC, ME15W terminal, 5m(16.4 ft.) cable length
CT6834-01	AC/DC CURRENT PROBE	81	500 A AC/DC, ME15W terminal, 10m(32.8 ft.) cable length
CT6841A	AC/DC CURRENT PROBE	80	20 A AC/DC, ME15W terminal
CT6843A	AC/DC CURRENT PROBE	80	200 A AC/DC, ME15W terminal
CT6844A	AC/DC CURRENT PROBE	80	500 A AC/DC, ME15W terminal
CT6845A	AC/DC CURRENT PROBE	80	500 A AC/DC, ME15W terminal
CT6846A	AC/DC CURRENT PROBE	80	1000 A AC/DC, ME15W terminal
CT6847A	AC/DC CURRENT PROBE	80	2000 A DC /1400 A AC, ME15W terminal
CT6862-05	AC/DC CURRENT SENSOR	79	50 A AC/DC, ME15W terminal
CT6863-05	AC/DC CURRENT SENSOR	79	200 A AC/DC, ME15W terminal
CT6872	AC/DC CURRENT SENSOR	79	50 A AC/DC, ME15W terminal, 3 m (9.84 ft.) cable length
CT6872-01	AC/DC CURRENT SENSOR	79	50 A AC/DC, ME15W terminal, 10 m (32.81 ft.) cable length
CT6873	AC/DC CURRENT SENSOR	79	200 A AC/DC, ME15W terminal, 3 m (9.84 ft.) cable length
CT6873-01	AC/DC CURRENT SENSOR	79	200 A AC/DC, ME15W terminal, 10 m (32.81 ft.) cable length
CT6875A	AC/DC CURRENT SENSOR	78	500 A AC/DC, ME15W terminal, 3 m (9.84 ft.) cable length
CT6875A-1	AC/DC CURRENT SENSOR	78	500 A AC/DC, ME15W terminal, 10 m (32.81 ft.) cable length
CT6876A	AC/DC CURRENT SENSOR	78	1000 A AC/DC, ME15W terminal, 3 m (9.84 ft.) cable length
CT6876A-1	AC/DC CURRENT SENSOR	78	1000 A AC/DC, ME15W terminal, 10 m (32.81 ft.) cable length
CT6877A	AC/DC CURRENT SENSOR	78	2000 A AC/DC, ME15W terminal, 3 m (9.84 ft.) cable length
CT6877A-1	AC/DC CURRENT SENSOR	78	2000 A AC/DC, ME15W terminal, 10 m (32.81 ft.) cable length
CT6904A	AC/DC CURRENT SENSOR	78	Special order product up to 500 A, ME15W terminal, 10 m (32.81 ft.) cable length
CT6904A-2	AC/DC CURRENT SENSOR	78	Special order product up to 800 A, ME15W terminal, 3 m (9.84 ft.) cable length
CT6904A-3	AC/DC CURRENT SENSOR	78	Special order product up to 800 A, ME15W terminal, 10 m (32.81 ft.) cable length
CT7044	AC FLEXIBLE CURRENT SENSOR	84	6000 A, φ100 mm (3.94 in.)
CT7045	AC FLEXIBLE CURRENT SENSOR	84	6000 A, φ180 mm (7.09 in.)
CT7046	AC FLEXIBLE CURRENT SENSOR	84	6000 A, φ254 mm (10.00 in.)
CT7116	AC LEAKAGE CURRENT SENSOR	86	For the PQ3100, 6 A, PL14 terminal
CT7126	AC CURRENT SENSOR	86	For the PQ3100, 60 A, PL14 terminal
CT7131	AC CURRENT SENSOR	86	For the PQ3100, 100 A, PL14 terminal
CT7136	AC CURRENT SENSOR	86	For the PQ3100, 600 A, PL14 terminal
CT7631	AC/DC CURRENT SENSOR	83	100 A AC/DC, φ33 mm (1.30 in.)
CT7636	AC/DC CURRENT SENSOR	83	600 A AC/DC, φ33 mm (1.30 in.)
CT7642	AC/DC CURRENT SENSOR	83	2000 A AC/DC, φ55 mm (2.17 in.)
CT7731	AC/DC AUTO-ZERO CURRENT SENSOR	83	100 A AC/DC, φ33 mm (1.30 in.)
CT7736	AC/DC AUTO-ZERO CURRENT SENSOR	83	600 A AC/DC, φ33 mm (1.30 in.)
CT7742	AC/DC AUTO-ZERO CURRENT SENSOR	83	2000 A AC/DC, φ55 mm (2.17 in.)
CT7812	AC/DC CURRENT SENSOR	83	2 A AC/DC
CT7822	AC/DC CURRENT SENSOR	83	20 A AC/DC
CT9555	SENSOR UNIT	82	For the CT6841A, etc., ME15W connector
CT9556	SENSOR UNIT	82	For the CT6841A, etc., ME15W connector
CT9557	SENSOR UNIT	82	For the CT6841A, etc., ME15W connector
CT9667-01	AC FLEXIBLE CURRENT SENSOR	85	φ100 mm (3.94 in.)
CT9667-02	AC FLEXIBLE CURRENT SENSOR	85	φ180 mm (7.09 in.)
CT9667-03	AC FLEXIBLE CURRENT SENSOR	85	φ254 mm (10.00 in.)
CT9848	CLAMP ON SENSOR	102	For the FT6041, for detection
DCT9900	CONVERSION CABLE	68	For the CT6841, and similar products
CT9902	EXTENSION CABLE	79	For the CT6841A and similar products
CT9904	CONNECTION CABLE	68	For the CT9557, PW8001/PW4001
CT9920	CONVERSION CABLE	68	For the PW4001 and similar products
DM7275-01	PRECISION DC VOLTMETER	57	
DM7275-02	PRECISION DC VOLTMETER	57	Built-in GP-IB
DM7275-03	PRECISION DC VOLTMETER	57	Built-in RS-232C
DM7276-01	PRECISION DC VOLTMETER	57	
DM7276-02	PRECISION DC VOLTMETER	57	Built-in GP-IB
DM7276-03	PRECISION DC VOLTMETER	57	Built-in RS-232C
DSM8104F	INTERLOCK CABLE	56	For the SM7110, SM7120, DSM-8104/8542
DT4223	DIGITAL MULTIMETER	90	With resistance measurement, for electrical work
DT4224	DIGITAL MULTIMETER	90	With C/R measurement, for general use
DT4252	DIGITAL MULTIMETER	89	10 A direct input
DT4253	DIGITAL MULTIMETER	89	With mA DC, temperature
DT4255	DIGITAL MULTIMETER	89	With fused measurement terminals
DT4256	DIGITAL MULTIMETER	89	Multi-functional model, with 10 A direct input
DT4261	DIGITAL MULTIMETER	88	Multi-functional, for on-site maintenance
DT4261-90	DIGITAL MULTIMETER/WIRELESS ADAPTER	88	Bundled with the Wireless Adapter Z3210
DT4281	DIGITAL MULTIMETER	87	Direct and current clamp input terminals
DT4282	DIGITAL MULTIMETER	87	10 A direct input
DT4900-01	COMMUNICATION PACKAGE (USB)	87	For the DT4280 series, DT4250 series
DT4910	THERMOCOUPLES(K)	87	For the DT4280 series, DT4253, and similar products
DT4911	TEST LEAD	90	For the DT4220 series
EA5301-01	SENSE MODULE	109	For the ALDAS-Mini, 1 ch
EA5301-02	SENSE MODULE	109	For the ALDAS-Mini, 2 ch
EA5301-03	SENSE MODULE	109	For the ALDAS-Mini, 3 ch
EA5301-04	SENSE MODULE	109	For the ALDAS-Mini, 4 ch
EA5301-05	SENSE MODULE	109	For the ALDAS-Mini, 5 ch
EA5301-06	SENSE MODULE	109	For the ALDAS-Mini, 6 ch
EA5301-07	SENSE MODULE	109	For the ALDAS-Mini, 7 ch
EA5301-08	SENSE MODULE	109	For the ALDAS-Mini, 8 ch

Model No.	Name	Page	Note
EA5501	SOURCE MODULE	109	For the ALDAS-Mini
EA5502	SOURCE MODULE	--	For the ALDAS-E
EA5503	SOURCE MODULE	109	For the ALDAS-α
EA5701	ELECTROLYSIS CELL ANALYZER	109	For the ALDAS-Mini, PC application software
EA5702	ALDAS-E	110	PC application software
EA5703	ALDAS-α	109	PC application software
DFR-RD	INK PEN	--	For the EPR-1FA
FT3424	LUX METER	92	
FT3425	LUX METER	92	Built in Bluetooth® wireless technology
FT3700-20	INFRARED THERMOMETER	92	Long-focus type
FT3701-20	INFRARED THERMOMETER	92	Long-focus, precise-field type
FT6031-50	EARTH TESTER	103	
FT6031-90	EARTH TESTER/WIRELESS ADAPTER	103	Bundled with the Wireless Adapter Z3210
FT6041	EARTH TESTER	102	
FT6041-90	EARTH TESTER	102	Bundled with the FT9847 and CT9848
FT6380-50	CLAMP ON EARTH TESTER	104	
FT6380-90	CLAMP ON EARTH TESTER/WIRELESS ADAPTER	104	Bundled with the Wireless Adapter Z3210
FT9847	SIGNAL INDUCTION CLAMP	102	For the FT6041
IM3523A	LCR METER	37	
IM3533	LCR METER	37	
IM3533-01	LCR METER	37	Advanced function model
IM3536	LCR METER	36	
IM3570	IMPEDANCE ANALYZER	35	
IM3590	CHEMICAL IMPEDANCE ANALYZER	34	For electrochemical components
IM7580A-1	IMPEDANCE ANALYZER	33	Connection cable 1 m is bundled
IM7580A-2	IMPEDANCE ANALYZER	33	Connection cable 2 m is bundled
IM7581-01	IMPEDANCE ANALYZER	33	Connection cable 1 m is bundled
IM7581-02	IMPEDANCE ANALYZER	33	Connection cable 2 m is bundled
IM7583-01	IMPEDANCE ANALYZER	32	Connection cable 1 m is bundled
IM7583-02	IMPEDANCE ANALYZER	32	Connection cable 2 m is bundled
IM7585-01	IMPEDANCE ANALYZER	32	Connection cable 1 m is bundled
IM7585-02	IMPEDANCE ANALYZER	32	Connection cable 2 m is bundled
IM7587-01	IMPEDANCE ANALYZER	31	Connection cable 1 m is bundled
IM7587-02	IMPEDANCE ANALYZER	31	Connection cable 2 m is bundled
IM9000	EQUIVALENT CIRCUIT ANALYSIS FIRMWARE	35	Factory option firmware for the IM3570
IM9000-01	EQUIVALENT CIRCUIT ANALYSIS	35	Downloadable (license card)
IM9000-03	EQUIVALENT CIRCUIT ANALYSIS	35	Downloadable (digital license)
IM9100	SMD TEST FIXTURE	34	For the IM3536, and similar products
IM9110	SMD TEST FIXTURE	34	For the IM3570, and similar products
IM9200	TEST FIXTURE STAND	31	For the IM7580 series
IM9201	SMD TEST FIXTURE	31	For the IM7580 series
IM9202	TEST FIXTURE	31	For the IM7580 series
IM9901	CONTACT TIPS	34	To replace the tip on the L2001
IM9902	CONTACT TIPS	34	To replace the tip on the L2001
IM9905	CALIBRATION KIT	31	For the IM7580 series
IM9906	ADAPTER(3.5mm/7mm)	31	For the IM7580 series
IR4053-10	INSULATION TESTER	94	Bundled with Test Lead L9787
IR4056-20	INSULATION TESTER	94	Economic model
IR4056-21	INSULATION TESTER	94	Economic model, Not CE marked
IR4057-50	INSULATION TESTER	93	
IR4057-90	INSULATION TESTER/WIRELESS ADAPTER	93	Bundled with the Wireless Adapter Z3210
IR4059	INSULATION TESTER	93	
IR5050	HIGH VOLTAGE INSULATION TESTER	95	
IR5051	HIGH VOLTAGE INSULATION TESTER	95	For solar PV system
IR5051-90	HIGH VOLTAGE INSULATION TESTER	95	For solar PV system, bundled with the Z3210
L0220-01	EXTENSION CABLE	84	For the CT7600/CT7700 series
L0220-02	EXTENSION CABLE	84	For the CT7600/CT7700 series
L0220-03	EXTENSION CABLE	84	For the CT7600/CT7700 series
L0220-04	EXTENSION CABLE	84	For the CT7600/CT7700 series
L0220-05	EXTENSION CABLE	84	For the CT7600/CT7700 series
L0220-06	EXTENSION CABLE	84	For the CT7600/CT7700 series
L0220-07	EXTENSION CABLE	84	For the CT7600/CT7700 series
L1000	VOLTAGE CORD	65	For the PW8001, PW4001, PQ3198
L1000-05	VOLTAGE CORD	73	For the PQ3100
L1002	USB CABLE(A-B)	47	For the DM7276 and similar products
L1010	CONNECTION CABLE	29	For the LR8512
L1011	CONVERSION CABLE	21	For the P9000 and similar products
L1011-10	CONVERSION CABLE	21	For the P9000 and similar products
L1012	POWER CABLE	25	Unprocessed ends, 2 m (6.6 ft.) length
L1021-01	PATCH CORD	65	For the PW4001, PQ3198 and similar products
L1021-02	PATCH CORD	65	For the PW4001, PQ3198 and similar products
L1025	VOLTAGE CORD	65	For the PW8001
L1050-01	VOLTAGE CORD	67	For the VT1005, 1.6 m (5.25 ft.) length
L1050-03	VOLTAGE CORD	67	For the VT1005, 3 m (9.84 ft.) length
L1050-10	CONNECTION CABLE	59	For the ST1005
L1050-11	VOLTAGE CORD	--	For the ST1005
L1050-13	VOLTAGE CORD	--	For the ST1005
L1100	SENSE CABLE	109	For the ALDAS-Mini
L1101	SENSE CABLE	110	For the ALDAS-E
L1101-01	SENSE CABLE	110	For the ALDAS-E
L1150	SOURCE CABLE	109	For the ALDAS-Mini
L1151	SOURCE CABLE	110	For the ALDAS-E
L1151-01	SOURCE CABLE	110	For the ALDAS-E
L2000	4-TERMINAL PROBE	34	For the IM3590/IM3570, 3506-10, 3505/06
L2001	PINCHER PROBE	34	For the IM3523, and similar products
L2002	CLIP TYPE PROBE	48	For the BT4560 series, 1.5 m (4.92 ft.) length
L2003	PIN TYPE PROBE	48	For the BT4560 series, 1.5 m (4.92 ft.) length
L2004	CONNECTION CABLE	47	For the SW1001 and similar products
L2005	CONNECTION CABLE	59	For connecting the SW2001 and the IM3533
L2020	PIN TYPE LEAD	53	For the BT3554-50
L2100	PIN TYPE LEAD	42	For the BT3562, BT3563, BT6065, BT6075 and RM3545A
L2101	CLIP TYPE LEAD	42	For the RM3544, RM3545 series
L2102	PIN TYPE LEAD	42	For the RM3544, RM3545 series
L2103	PIN TYPE LEAD	42	For the RM3544, RM3545 series
L2105	LED COMPARATOR ATTACHMENT	42	For the RM3544, RM3545 series, RM3548-50
L2107	CLIP TYPE LEADS	44	For the RM3548 series, BT3563 and similar products
L2108	CONNECTION CABLE	47	For the SW1001 and similar products

Model No. Index

Model No. (Order Code) Index

Note: D mark indicates discontinued or discontinuation scheduled models.

Model No.	Name	Page	Note	Model No.	Name	Page	Note
L2110	PIN TYPE LEAD	50	For the BT3562(-01), BT3563(-01), BT3564	L9851-01	ALLIGATOR CLIP	95	For the L9850, red
L2111	CONNECTION CABLE	59	For connecting SW2001 and RM3545	L9851-02	ALLIGATOR CLIP	95	For the L9850, black
L2120	PIN TYPE LEAD	49	For the BT6065, BT6075	L9851-03	ALLIGATOR CLIP	95	For the L9850, blue
L2121	CLIP TYPE LEAD	49	For the BT6065, BT6075	L9852	TEST PIN SET	95	Red and black, for L9850
L2130	CLIP TYPE LEAD	62	For the BT5525	L9910	CONVERSION CABLE	73	For the PQ3100
L2131	CLIP TYPE LEAD	62	For the BT5525	LR8101	DATA LOGGER	25	Main unit only, standard model
L2132	UNTERMINATED LEAD L2132	62	For the BT5525	LR8102	DATA LOGGER	25	Main unit only, advanced model
L2133	UNTERMINATED LEAD L2132	62	For the BT5525	LR8431-20	MEMORY HILOGGER	28	10 ch, English model
L2140	TEST LEADS	44	For the RM3548-50	LR8431-30	MEMORY HILOGGER	--	10ch, Chinese model
L2140-01	TEST LEAD (RED)	44		LR8432-20	HEAT FLOW LOGGER	28	10 ch, English model
L2140-02	TEST LEAD (BLACK)	44		LR8432-30	HEAT FLOW LOGGER	--	10 ch, Chinese model
L2141	PIN TYPE LEAD	44	For the RM3548-50	LR8450	MEMORY HILOGGER	26	Standard model (Plug-in model), main unit only
L2142	PIN TYPE LEAD	44	For the RM3548-50	LR8450-01	MEMORY HILOGGER	26	Wireless LAN equipped model, main unit only
L2200	TEST LEAD	60	For the ST5540/ST5541, MR8990	LR8512	WIRELESS PULSE LOGGER	29	2 ch
L2220	CONNECTOR	54	For the SM7810	LR8513	WIRELESS CLAMP LOGGER	29	2 ch, sensor is sold separately
L2221	CONNECTOR	54	For the SM7860	LR8514	WIRELESS HUMIDITY LOGGER	30	2 ch, sensor is sold separately
L2230	PIN TYPE LEAD (RED)	55	For the SM7110 and similar products	LR8515	WIRELESS VOLTAGE/TEMP LOGGER	30	2 ch, sensor is sold separately
L2231	PIN TYPE LEAD (BLACK)	55	For the SM7110 and similar products	LR8530	WIRELESS VOLTAGE/TEMP UNIT	27	For the LR8450-01
L2232	CLIP TYPE LEAD (RED)	55	For the SM7110 and similar products	LR8531	WIRELESS UNIVERSAL UNIT	27	For the LR8450-01
L2233	CLIP TYPE LEAD (BLACK)	55	For the SM7110 and similar products	LR8532	WIRELESS VOLTAGE/TEMP UNIT	27	For the LR8450-01
L2234	OPEN LEAD (RED)	55	For the SM7110 and similar products	LR8533	WIRELESS HIGH SPEED VOLTAGE UNIT	27	For the LR8450-01
L2235	OPEN LEAD (BLACK)	55	For the SM7110 and similar products	LR8534	WIRELESS STRAIN UNIT	27	For the LR8450-01
L2250	CLIP TYPE LEAD	60	For the ST4030A, ST4030	LR8535	WIRELESS CAN UNIT	27	For the LR8450-01
L2252	UNPROCESSED LEAD CABLE	60	For the ST4030A	LR8536	WIRELESS CURRENT MODULE	27	For the LR8450-01
L2255	CONNECTION CABLE	59	For connecting the SW2001 and the ST4030A	LR8537	WIRELESS THERMISTOR MODULE	27	For the LR8450-01
L2265	UNTERMINATED LEAD CABLE	59	Red: for connecting DUT to the SW2001	M1100	AC POWER MODULE	25	For the LR8101/LR8102, M7100/M7102/M7103
L2270	CONNECTION CABLE	59	Red Hi: for connecting the 3153 and the SW2001	M7100	VOLTAGE/TEMP MODULE	25	For the LR8101/LR8102
L2271	CONNECTION CABLE	59	Black Low: for connecting the 3153 and the SW2001	M7102	VOLTAGE/TEMP MODULE	25	For the LR8101/LR8102
L2280-01	CONNECTION CABLE	45	For the Powder Impedance Measurement System	M7103	POWER MEASUREMENT MODULE	25	For the LR8101/LR8102
L2280-03	CONNECTION CABLE	45	For the Powder Impedance Measurement System	MR6000	MEMORY RECORDER	16	Main unit only, input modules up to 8 units
L3000	D/A OUTPUT CABLE	65		MR6000-01	MEMORY RECORDER	16	Built-in real-time waveform calculation and other functionality
L4930	CONNECTION CABLE SET	87	For the DT4280 series, DT4250 series	MR6740-50	MEMORY RECORDER	18	Max. 108ch, 1GW memory, main unit only
L4931	EXTENSION CABLE SET	22	For the L4930/L4940	MR6790	WAVEFORM GENERATOR UNIT	58	For the MR6000, MR8848 and similar products
L4932	TEST PIN SET	87	For the L4930/L4940	MR8791	PULSE GENERATOR UNIT	58	For the MR6000, MR8848 and similar products
L4933	CONTACT PIN SET	87	For the L9207-10, DT4911(DT4280 series, DT4250 series)	DMR8827	MEMORY RECORDER	17	Max. 32ch, 512MW memory, main unit only
L4934	SMALL ALLIGATOR CLIP SET	87	For the L4932, L9207-10, DT4911(DT4280 series, DT4250 series)	MR8848	MEMORY RECORDER	17	Max. 32ch, 512MW memory, main unit only
L4935	ALLIGATOR CLIP SET	22	For the L4930/L4940 (DT4280 series, DT4250 series)	MR8870-20	MEMORY RECORDER	19	2ch, English model
L4936	BUS BAR CLIP SET	57	For the L4930/L4940 (DT4280 series, DT4250 series)	MR8870-30	MEMORY RECORDER	--	2ch, Chinese model
L4937	MAGNETIC ADAPTER SET	87	For the L4930/L4940 (DT4280 series, DT4250 series)	MR8875	MEMORY RECORDER	18	Max. 16 - 60ch, 32MW memory, main unit only
L4938	TEST PIN SET	87	For the L4930 (DT4280 series, DT4250 series)	MR8875-30	MEMORY RECORDER	--	Chinese model
L4939	BREAKER PIN SET	87	For the L4930 (DT4280 series, DT4250 series)	MR8880-20	MEMORY RECORDER	19	4ch, printer unit option, English model
L4940	CONNECTION CABLE SET	22	For the MR8905	MR8880-21	MEMORY RECORDER	18	4ch, printer unit option, Chinese model
L6000	OPTICAL CONNECTION CABLE	65	For the PW8001	MR8901	ANALOG UNIT	--	For the MR8875
L6101	OPTICAL CONNECTION CABLE	25	For the LR8102, 1 m (3.3 ft.) length	MR8902	VOLTAGE/TEMP UNIT	18	For the MR8875
L6102	OPTICAL CONNECTION CABLE	25	For the LR8102, 10 m (32.8 ft.) length	MR8903	STRAIN UNIT	18	For the MR8875
L9094	OUTPUT CORD	22	For Memory HiCorder, CM7290 and similar products	MR8904	CAN UNIT	18	For the MR8875
L9095	OUTPUT CORD	22	For Memory HiCorder, CM7290 and similar products	MR8905	ANALOG UNIT	18	For the MR8875
L9096	OUTPUT CORD	22	For Logger, CM7290 and similar products	MR8990	DIGITAL VOLTMETER UNIT	16	For the MR6000, MR6740T, MR8848, MR8827, and similar products
L9097	CONNECTION CABLE	101	For the CM4003	MR9000	PRINTER UNIT	19	For the MR8880
L9197	CONNECTION CORD	22	For the Memory HiCorder series	MR9001-01	DIRECT WRITE TO STORAGE	17	For the MR8848, additional function
L9198	CONNECTION CORD	22	For the Memory HiCorder series	MR9321-01	LOGIC PROBE	22	For the Memory HiCorder, miniature terminal type
L9208	TEST LEAD	98	For the 3288, 3287, 3280 series	P-1201A	FELT PEN (RED)	--	For the PR8111 series, INR-9000 series, EPR-3000 series
L9217	CONNECTION CORD	22	1.6 m (5.25 ft.) length	P-1201B	FELT PEN (RED)	--	For the INR-9000 series, EPR-3000 series
L9217-01	CONNECTION CORD	67	3 m (9.84 ft.) length	P-1202A	FELT PEN (GREEN)	--	For the PR8111 series, INR-9000 series, EPR-3000 series
L9217-02	CONNECTION CORD	67	10 m (32.81 ft.) length	P-1203A	FELT PEN (BLUE)	--	For the PR8111 series, INR-9000 series, EPR-3000 series
L9218	CONNECTION CABLE	59	For connecting the ST4200 and the SW2001	P2010	DC HIGH VOLTAGE PROBE	87	2000 V compatible
L9243	GRABBER CLIP	21	For the Memory HiCorder, L4930/9197, 9322	P9000-01	DIFFERENTIAL PROBE	21	For the Memory HiCorder series, Wave only
L9257	CONNECTION CORD	62	For the CM3286-50 and similar products	P9000-02	DIFFERENTIAL PROBE	21	For the Memory HiCorder series, Wave/RMS
L9300	TEST LEAD	87	For the DT4200 series, CM4000 series and similar products	PD3129	PHASE DETECTOR	105	
L9438-50	VOLTAGE CORD	65	For the PW8001, PW4001	PD3129-10	PHASE DETECTOR	105	Large clips
L9438-53	VOLTAGE CORD	75	For the PW3360 series, 3169 series, and similar products	PD3129-31	PHASE DETECTOR	--	Chinese model
L9500	POWER CABLE	20	For the SP7100	PD3129-32	PHASE DETECTOR	--	Large clips, Chinese model
L9510	USB CABLE	20	For the SP7150	PD3259-50	DIGITAL PHASE DETECTOR	105	Wireless Adapter Z3210 not included
L9637	RS-232C CABLE	62	For the BT5525	PD3259-90	DIGITAL PHASE DETECTOR/WIRELESS ADAPTER	105	Bundled with the Wireless Adapter Z3210
L9769	CONVERSION CABLE	--	Bundled with the U8969, for the MR6000 and similar products	PQ3100	POWER QUALITY ANALYZER	72	Main unit, current sensor is sold separately
L9773	PROBE KIT	40	For the RM3546	PQ3100-91	POWER QUALITY ANALYZER KIT	72	Kit includes 600 A sensor x 2 and other options
L9773-01	PROBE TIPS	40	For the RM3546	PQ3100-92	POWER QUALITY ANALYZER KIT	72	Kit includes 600 A sensor x 4 and other options
L9773-02	PROBE TIP SOCKETS	40	For the RM3546	PQ3100-94	POWER QUALITY ANALYZER KIT	72	Kit includes 6000 A sensor x 4 and other options
L9773-03	PROBE TIP SOCKET ADAPTERS	40	For the RM3546	PQ3198	POWER QUALITY ANALYZER	72	Main unit, current sensor is sold separately
L9787	TEST LEAD	93	For the IR4050 series, FT6031	PQ3198-92	POWER QUALITY ANALYZER KIT	72	Kit includes 600 A sensor x 4 and other options
L9787-91	BREAKER PIN	93	For the L9787 (IR4050 series)	PQ3198-94	POWER QUALITY ANALYZER KIT	72	Kit includes 6000 A sensor x 4 and other options
L9788-10	TEST LEAD WITH REMOTE SWITCH (RED)	93	For the IR4050 series	DPR-1RD	SOFT PEN (RED)	--	For the EPR-151/152/131/132/133
L9788-11	TEST LEAD SET WITH REMOTE SWITCH	93	For the IR4050 series	DPR-2GN	SOFT PEN (GREEN)	--	For the EPR-151/152/131/132/133
L9788-90	TIP PIN	93	For the L9788 (IR4050 series)	PW3335	POWER METER	70	Built-in LAN, RS-232C
L9788-92	BREAKER PIN	93	For the L9788-10/L9788-11 (IR4050 series)	PW3335-01	POWER METER	70	Built-in LAN, GP-IB
L9790	CONNECTION CORD	22	For the Memory HiCorder series	PW3335-02	POWER METER	70	Built-in LAN, RS-232C, D/A output
L9790-01	ALLIGATOR CLIP	22	For the L9790 (for the Memory HiCorder series)	PW3335-03	POWER METER	70	Built-in LAN, RS-232C, external sensor terminal
L9795-01	CONNECTION CABLE	58	For the U8793, MR6000 and similar products	PW3335-04	POWER METER	70	Built-in LAN, RS-232C, GP-IB, D/A output, external sensor terminal
L9795-02	CONNECTION CABLE	58	For the U8793, MR6000 and similar products	PW3336	POWER METER	69	2ch
L9820	CONNECTION CABLE	92	For the FT3424, FT3425	PW3336-01	POWER METER	69	2ch, built-in GP-IB
L9840	AUXILIARY EARTHING ROD	103	For the FT6031, FT3151	PW3336-02	POWER METER	69	2ch, built-in D/A output
L9841	MEASUREMENT CABLE	103	For the FT6031, FT3151	PW3336-03	POWER METER	69	2ch, built-in GP-IB, D/A output
L9842-11	MEASUREMENT CABLE	103	For the FT6031, FT3151	PW3337	POWER METER	69	3ch
L9842-22	MEASUREMENT CABLE	103	For the FT6031, FT3151	PW3337-01	POWER METER	69	3ch, built-in GP-IB
L9843-51	MEASUREMENT CABLE	103	For the FT6031, FT3151	PW3337-02	POWER METER	69	3ch, built-in D/A output
L9843-52	MEASUREMENT CABLE	103	For the FT6031, FT3151	PW3337-03	POWER METER	69	3ch, built-in GP-IB, D/A output
L9844	MEASUREMENT CABLE	103	For the FT6031, FT3151	PW3360-20	CLAMP ON POWER LOGGER	74	English model, main unit only
L9845-31	MEASUREMENT CABLE	102	For the FT6041	PW3360-21	CLAMP ON POWER LOGGER	74	English model, with harmonic analysis function
L9845-33	MEASUREMENT CABLE	102	For the FT6041	PW3360-30	CLAMP ON POWER LOGGER	--	Chinese model, main unit only
L9845-52	MEASUREMENT CABLE	102	For the FT6041	PW3360-31	CLAMP ON POWER LOGGER	--	Chinese model, with harmonic analysis function
L9846	EARTH NET MODULE	102	For the FT6041	PW3365-20	CLAMP ON POWER LOGGER	74	English model, main unit only
L9850-01	TEST LEAD	95	For the IR5050 and IR5051, red, 3 m (9.84 ft.) length	PW3365-30	CLAMP ON POWER LOGGER	--	Chinese model, main unit only
L9850-02	TEST LEAD	95	For the IR5050 and IR5051, black, 3 m (9.84 ft.) length	PW4001-01	POWER ANALYZER	66	
L9850-03	TEST LEAD	95	For the IR5050 and IR5051, blue, 3 m (9.84 ft.) length	PW4001-02	POWER ANALYZER	66	D/A output
L9850-11	TEST LEAD	95	For the IR5050 and IR5051, red, 10 m (32.81 ft.) length	PW4001-03	POWER ANALYZER	66	Motor analysis
L9850-12	TEST LEAD	95	For the IR5050 and IR5051, black, 10 m (32.81 ft.) length	PW4001-04	POWER ANALYZER	66	External power source
L9850-13	TEST LEAD	95	For the IR5050 and IR5051, blue, 10 m (32.81 ft.) length	PW4001-05	POWER ANALYZER	66	D/A output, motor analysis, external power source

Model No. (Order Code) Index

Note: D mark indicates discontinued or discontinuation scheduled models.

Model No.	Name	Page	Note	Model No.	Name	Page	Note
PW8001-01	POWER ANALYZER	65		SP7001-90	NON-CONTACT CAN SENSOR	20	Supports CAN FD / CAN signals, SP7001, SP7100, SP9200 set
PW8001-02	POWER ANALYZER	65	D/A output	SP7001-95	NON-CONTACT CAN SENSOR	20	Supports CAN FD / CAN signals, SP7001, SP9250, SP7150 set
PW8001-03	POWER ANALYZER	65	CAN	SP7100	CAN INTERFACE	20	For the SP7001
PW8001-04	POWER ANALYZER	65	Optical link	SP7150	CAN INTERFACE	20	For the SP7001
PW8001-05	POWER ANALYZER	65	D/A output, Optical link	SP9200	SIGNAL PROBE	20	For the SP7001, screw type
PW8001-06	POWER ANALYZER	65	CAN, Optical link	SP9250	SIGNAL PROBE	20	For the SP7001, trigger type
PW8001-11	POWER ANALYZER	65	Motor analysis	SP9900	SPLIT CABLE	20	For the SP7100
PW8001-12	POWER ANALYZER	65	Motor analysis, D/A output	SR-2	STANDARD RESISTOR	56	
PW8001-13	POWER ANALYZER	65	Motor analysis, CAN	SS7081-50	BATTERY CELL VOLTAGE GENERATOR	47	
PW8001-14	POWER ANALYZER	65	Motor analysis, Optical link	ST1005	IMPULSE HIGH VOLTAGE DIVIDER	59	
PW8001-15	POWER ANALYZER	65	Motor analysis, D/A output, Optical link	ST4030A	IMPULSE WINDING TESTER	59	
PW8001-16	POWER ANALYZER	65	Motor analysis, CAN, Optical link	ST4200-50	PARTIAL DISCHARGE DETECTOR	59	
PW9000	WIRING ADAPTER	73	For the PQ3198 and similar products	ST5520	INSULATION TESTER	62	Built-in external I/O output
PW9001	WIRING ADAPTER	73	For the PQ3198 and similar products	ST5520-01	INSULATION TESTER	62	Built-in BCD output
PW9002	BATTERY SET	75	For the PW3360/PW3365	DST5540	LEAK CURRENT HITESTER	60	For medical-use and electrical devices
PW9003	VOLTAGE LINE POWER ADAPTER	75	For the PW3360	DST5541	LEAK CURRENT HITESTER	61	For electrical devices
DPW9005	GPS BOX	73	For the PQ3198	ST9000	DISCHARGE DETECTION UPGRADE	60	Factory option firmware for the ST4030A
PW9020	SAFETY VOLTAGE SENSOR	75	For PW3365	ST9000-01	DISCHARGE DETECTION UPGRADE	60	Downloadable (license card)
PW9100A-3	AC/DC CURRENT BOX	67	For the PW8001/PW4001, 3 ch	ST9000-03	DISCHARGE DETECTION UPGRADE	60	Downloadable (digital license)
PW9100A-4	AC/DC CURRENT BOX	67	For the PW8001/PW4001, 4 ch	ST9200	PD SENSOR	59	Specify at time of order, built into SW2001
RM2610	ELECTRODE RESISTANCE MEASUREMENT SYSTEM	46	System product	ST9201-50	PD SENSOR	59	Specify at time of order, built into SW2001
RM3542C-1	RESISTANCE METER	43		ST9210	PD SENSOR	59	For the ST4200 series
RM3542C-2	RESISTANCE METER	43		ST9211	PD SENSOR	59	For the ST4200-50
RM3542C-3	RESISTANCE METER	43		ST9220	PD FILTER	59	For the ST4200-50
RM3543	RESISTANCE HITESTER	43		SW1001	SWITCH MAINFRAME	47	3 slots
RM3543-01	RESISTANCE HITESTER	43	Built in GP-IB interface	SW1002	SWITCH MAINFRAME	47	12 slots
RM3544	RESISTANCE METER	42		SW2001-04	HIGH VOLTAGE MULTIPLEXER	59	For the ST4200-50
RM3544-01	RESISTANCE METER	42	Built in EXT I/O, RS-232C, USB	SW2001-08	HIGH VOLTAGE MULTIPLEXER	59	For the ST4200-50
RM3545A-1	RESISTANCE METER	41	Single-channel model	SW2001-12	HIGH VOLTAGE MULTIPLEXER	59	For the ST4200-50
RM3545A-2	RESISTANCE METER	41	Support for the multiplexer unit	SW9001	MULTIPLEXER MODULE	47	For SW1001 and similar products
DRM3545-01	RESISTANCE METER	41	Built-in GP-IB interface	SW9002	MULTIPLEXER MODULE	47	For SW1001 and similar products
RM3546	RESISTANCE METER	40		U7001	2.5MS/S INPUT UNIT	65	For the PW8001
RM3548-50	RESISTANCE METER	44		U7005	15MS/S INPUT UNIT	65	For the PW8001
RM9006	MAINTENANCE TOOL	46	For the RM2610	DUB330	SSD UNIT	17	For the MR8827, factory option
RM9010-01	FOUR-POINT ARRAY PROBE	42	For the RM3545 series	UB332	SSD UNIT	16	For the MR6000, factory option
RM9010-02	FOUR-POINT ARRAY PROBE	42	For the RM3545 series	UB334	INTERNAL STORAGE	17	For the MR8848, factory option
SA2634	ANALYTICAL SOFTWARE	46	For the Slurry Analytical System	UB335	SSD UNIT	16	For the MR6000, factory option
SA2653	MEASUREMENT SOFTWARE	45	For the Powder Impedance Measurement System	DUB350	PRINTER UNIT	17	For the MR8827, factory option
SA2654	SENSOR UNIT	45	For the Powder Impedance Measurement System	UB351	PRINTER UNIT	17	For the MR8848, factory option
SA9001	ELECTRODE CELL	46	For the Slurry Analytical System	UB550	VOLTAGE/TEMP UNIT	27	For the LR8450, LR8450-01
SA9001-01	ELECTRODE CELL	46	For the Slurry Analytical System	UB551	UNIVERSAL UNIT	27	For the LR8450, LR8450-01
SA9002	TEST FIXTURE	46	For the Slurry Analytical System	UB552	VOLTAGE/TEMP UNIT	27	For the LR8450, LR8450-01
SA9003	PRESS UNIT	45	For the Powder Impedance Measurement System	UB553	HIGH SPEED VOLTAGE UNIT	27	For the LR8450, LR8450-01
SA9004	TEST FIXTURE	45	For the Powder Impedance Measurement System	UB554	STRAIN UNIT	27	For the LR8450, LR8450-01
SA9005	MOLD RELEASE UNIT	45	For the Powder Impedance Measurement System	UB555	CAN UNIT	27	For the LR8450, LR8450-01
SE-10	RECORDING PAPER	22	For the PR8111, PR8112, EPR-3500 series, EPR-10B	UB556	CURRENT MODULE	27	For the LR8450, LR8450-01
SE-10Z-2	RECORDING PAPER	22	For the PR8111, PR8112, EPR-3500 series, EPR-10B	UB557	THERMISTOR MODULE	27	For the LR8450, LR8450-01
SF-10CXZ-35	-	22	For the INR-9000	UB793	ARBITRARY WAVEFORM GENERATOR UNIT	58	For the MR6000, MR8848, MR8827, and similar products
SF-10PXZ-45	-	22	For the PRR-5000	UB794	VIR GENERATOR UNIT	58	For the MR8740-50
SF1001	POWER LOGGER VIEWER	75	For the PW3360/PW3365 series, CD version	UB969	STRAIN UNIT	16	For the MR6000, MR8848, MR8827, and similar products
SF1001-01	POWER LOGGER VIEWER	75	Downloadable (license card)	UB974	HIGH VOLTAGE UNIT	16	For the MR6000, MR8848, MR8827, and similar products
SF1001-03	POWER LOGGER VIEWER	75	Downloadable (digital license)	UB975	4CH ANALOG UNIT	16	For the MR6000 and similar products
SF4000	GENNECT One	107	Application for Windows	UB976	HIGH SPEED ANALOG UNIT	16	For the MR6000
SF4071	GENNECT Cross	108	Mobile app for iOS	UB977	3CH CURRENT UNIT	16	For the MR6000 and similar products
SF4072	GENNECT Cross	108	Mobile app for Android	UB978	4CH ANALOG UNIT	16	For the MR6000 and similar products
SF4180	GENNECT Cloud	107	Free plan with basic functions	UB979	CHARGE UNIT	16	For the MR6000 and similar products
SF4181-01	GENNECT Cloud Standard	107	GENNECT Cloud Standard 1 month license	UB991	DIGITAL VOLTMETER UNIT	57	For the MR8740T
SF4181-03	GENNECT Cloud Standard	107	GENNECT Cloud Standard 3 months license	VT1005	AC/DC HIGH VOLTAGE DIVIDER	67	For the PW8001, PW4001
SF4181-12	GENNECT Cloud Standard	107	GENNECT Cloud Standard 12 months license	Z1000	BATTERY PACK	19	For the MR8880
SF4182-01	GENNECT Cloud Pro	107	GENNECT Cloud Pro 1 month license	Z1002	AC ADAPTER	19	For the MR8880, MR8875, PQ3198
SF4182-03	GENNECT Cloud Pro	107	GENNECT Cloud Pro 3 months license	Z1003	BATTERY PACK	18	For the MR8875, PQ3198/PW3198, PQ3100
SF4182-12	GENNECT Cloud Pro	107	GENNECT Cloud Pro 12 months license	Z1005	AC ADAPTER	19	For the MR8870, LR8431, LR8432
SF4300	GENNECT Space	106	Application for Windows	Z1006	AC ADAPTER	75	For the PW3360 series
SG-10Z	-	22	For the FBR-250 series	Z1007	BATTERY PACK	27	For the LR8450, LR8450-01
SH-OZ-T1	-	22	For the PSR-2101	Z1008	AC ADAPTER	20	For the PW3365 series, P9000, SP7001, SP7001, SP7100
SM7110	SUPER MEGOHM METER	55	1 ch, 1000 V output	Z1013	AC ADAPTER	20	For the SP7001, CM4003
SM7120	SUPER MEGOHM METER	55	1 ch, 2000 V output	Z1014	AC ADAPTER	27	For the LR8450 and similar products
SM7420	SUPER MEGOHM METER	55	4ch, dedicated micro current measurement	Z1016	AC ADAPTER	25	For the LR8101, LR8102
SM7810	SUPER MΩ HITESTER	54	100/110 V AC power supply	Z2000	HUMIDITY SENSOR	27	For the LR8450 series
SM7810-20	SUPER MΩ HITESTER	54	220 V AC power supply	Z2001	TEMPERATURE SENSOR	42	For the RM3544/RM3545A series, DM7275/DM7276, RM6111
SM7860-51	POWER SOURCE UNIT	54	100 V AC power supply	Z2002	TEMPERATURE SENSOR	44	For the RM3548-50
SM7860-52	POWER SOURCE UNIT	54	100 V AC power supply	Z2003	AC ADAPTER	30	For the LR8512 series
SM7860-53	POWER SOURCE UNIT	54	100 V AC power supply	Z2005	TEMPERATURE SENSOR	48	For the BT4560 series, 1 m (3.28 ft.) length
SM7860-54	POWER SOURCE UNIT	54	100 V AC power supply	Z2010	HUMIDITY SENSOR	30	For the LR8514
SM7860-55	POWER SOURCE UNIT	54	100 V AC power supply	Z2011	HUMIDITY SENSOR	30	For the LR8514
SM7860-56	POWER SOURCE UNIT	54	100 V AC power supply	Z3000	GP-IB INTERFACE	31	For the IM3590, IM3523/IM3533 series
SM7860-57	POWER SOURCE UNIT	54	100 V AC power supply	Z3001	RS-232C INTERFACE	31	For the IM3590, IM3523/IM3533 series
SM7860-58	POWER SOURCE UNIT	54	100 V AC power supply	Z3002	LAN INTERFACE	34	For the IM3590, IM3523/IM3533 series
SM7860-61	POWER SOURCE UNIT	54	220 V AC power supply	Z3003	MULTIPLEXER UNIT	40	For the RM3545A-2, input scanner
SM7860-62	POWER SOURCE UNIT	54	220 V AC power supply	Z3210	WIRELESS ADAPTER	108	For the CM4001, FT6031-50 etc.
SM7860-63	POWER SOURCE UNIT	54	220 V AC power supply	Z4001	SD MEMORY CARD 2GB	16	
SM7860-64	POWER SOURCE UNIT	54	220 V AC power supply	Z4003	SD MEMORY CARD	16	8GB
SM7860-65	POWER SOURCE UNIT	54	220 V AC power supply	Z4006	USB DRIVE	16	16GB
SM7860-66	POWER SOURCE UNIT	54	220 V AC power supply	Z5004	MAGNETIC STRAP	73	For the PQ3198, PQ3100, LR8512 series and similar products
SM7860-67	POWER SOURCE UNIT	54	220 V AC power supply	Z5008	THERMALLY CONDUCTIVE TAPE	-	For the Z2012 series(discontinued), 20 sheets set
SM7860-68	POWER SOURCE UNIT	54	220 V AC power supply	Z5010	CONVERSION ADAPTER	55	For the SM7110, SM7120 and similar products, custom order product
SM9001	SURFACE VOLUME RESISTANCE MEASUREMENT ELECTRODE	56	For the SM-8200 series	Z5020	MAGNETIC STRAP	105	For the PD3259-50, DT4250/4280 series
SM9002	VERIFICATION FIXTURE FOR SURFACE RESISTANCE MEASUREMENT	56	For the SM9001(SM-8200 series)	Z5021	PROBE POWER UNIT	16	For the MR6000, factory option
SME-8301	SURFACE RESISTANCE MEASUREMENT ELECTRODE	56		Z5023	EXTENSION CART	92	For the FT3424, FT3425
SME-8302	ELECTRODE FOR SURFACE RESISTANCE	56		Z5038	0 ADJ BOARD	51	For the L2100, L2110 (BT3564) and similar products
SME-8310	PLATE SAMPLE ELECTRODE	56		Z5040	FIXED STAND	27	For the LR8450, LR8450-01
SME-8311	ELECTRODE FOR FLAT SAMPLE	56		Z5041	PROTECTOR	44	For the BT3554-50 series, RM3548-50 series
SME-8320	WEIGHT ELECTRODE	56		Z5042	PROTECTOR	93	For the IR4059
SME-8330	LIQUID SAMPLE ELECTRODE	56		Z5050	FUSE SET	53	630 mA/250 VAC, 5 pieces
SME-8350	SHIELDING BOX	56		Z5051	FUSE SET	42	0.5 A/250 V, 5 pieces
SME-8360	ELECTRODE FOR CHIP CAPACITOR	56		Z5052	FUSE SET	93	0.5 A/1000 V, 2 pieces
SP7001	NON-CONTACT CAN SENSOR	20	Sensor box only, supports CAN FD / CAN signals	Z5053	FUSE SET	87	11 A/1000 V, 2 pieces

Model No. Index

Product Warranties

Hioki products are generally covered by a three-year warranty.

Product warranty	In the event Hioki is responsible for the failure of a product during the warranty term beginning on the date of purchase (or beginning in the month the product was manufactured if the date of purchase is unclear), we will repair or replace the product free of charge.
Warranty scope	We check products on a standalone basis to verify their specifications, performance, and functionality. Although we verify proper operation of components that are connected to Hioki products in standard configurations, we ask that customers verify proper operation of their Hioki products when connected to other manufacturers' products. The scope of Hioki's warranty is limited to Hioki products. Connected devices and issues caused by connected devices are considered outside the scope of the warranty. In the event of physical damage, any compensation that might be provided by Hioki is limited to the purchase price of the product.
Accuracy guarantee	For products with an accuracy guarantee, we guarantee the level of accuracy indicated in the specifications for a certain period of time following shipment from the factory. In the event of an accuracy defect during that period of time, we will adjust the product free of charge.


After-sales Service

Standard Calibration	If measured values fail to meet Hioki's standards during a calibration performed by Hioki ("Standard Calibration"), the instrument will be adjusted to meet the standards, and the calibration will then be repeated. For supported products, please refer to the "Service Information by Product" section on our website. Except for certain products, the company recommends that each product's accuracy guarantee period be treated as the recommended calibration interval. If a customer reports a loss of accuracy after Standard Calibration while the instrument in question is covered by the recommended calibration interval and we are able to verify the issue, we will adjust the instrument free of charge.
ISO/IEC 17025 Calibration (JCSS)	After Standard Calibration, we perform calibration based on ISO/IEC 17025. Hioki Headquarters is an international MRA-compliant, JCSS-accredited calibration service provider that meets ISO/IEC 17025 requirements. A JCSS calibration certificate bearing the JCSS symbol, compliant with the international MRA framework, is issued as internationally recognized proof of calibration. For details about which products are eligible for this service, please contact us. Note that the service is limited to the JCSS-accredited field of calibration. You can check the JCSS-accredited field of calibration on our website under Service for Calibration and Adjustment > ISO/IEC 17025 Calibration (JCSS) > JCSS certificate and scope of accreditation(English).
Repair	All faults reported by the customer will be repaired. Standard calibration is first conducted as a pre-repair diagnostic procedure, followed by standard calibration or adjustment/calibration after the repair. In some cases, pre-repair calibration may not be possible depending on the type of repair required. For supported products, please refer to the "Service Information by Product" section on our website. If within six months of the original repair, Hioki is responsible for an issue requiring an additional repair (a repair of the same issue) of a product that has been used as described in its user manual. We will repair it free of charge.

Warranty coverage after each service does not apply to issues suspected to be caused by factors such as component lifespan and degradation, equipment damage, or problems related to usage or storage conditions.

The calibration validity period (calibration interval) should be determined by each customer, taking into account the calibration interval recommended by the company.

Quality of Hioki's calibration and repair service

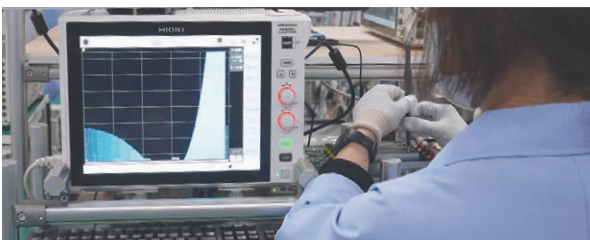

90 years of history and fine-grained, expert service

Technicians performing calibration, adjustment, and repair work undergo in-house training to ensure they possess the specialized expertise and skills that such work demands.

Precise calibration and adjustment guidelines compiled by product designers

We determine everything from the procedures for measuring instrument functionality checks to calibration points based on the results of reviews conducted by designers who are well versed in the characteristics of products' internal circuitry and the principles that underlie their operation. In this way, we are able to provide optimal, extensive calibration and adjustment service as only the manufacturer can.


Highly reliable service that's traceable to national standards

The standard devices we use to calibrate and adjust products are all linked to national standards, ensuring that we can issue inspection reports with accurate, reliable calibrated values.

Comprehensive calibration and repair service with fast turnaround

If we discover a malfunction or failure during the calibration process, we'll contact you to let you know where the problem is and what's necessary to address it. If you wish, we'll then repair the product. This capability eliminates unnecessary back-and-forth so you can put your product back to work as soon as possible.

Traceability Sample

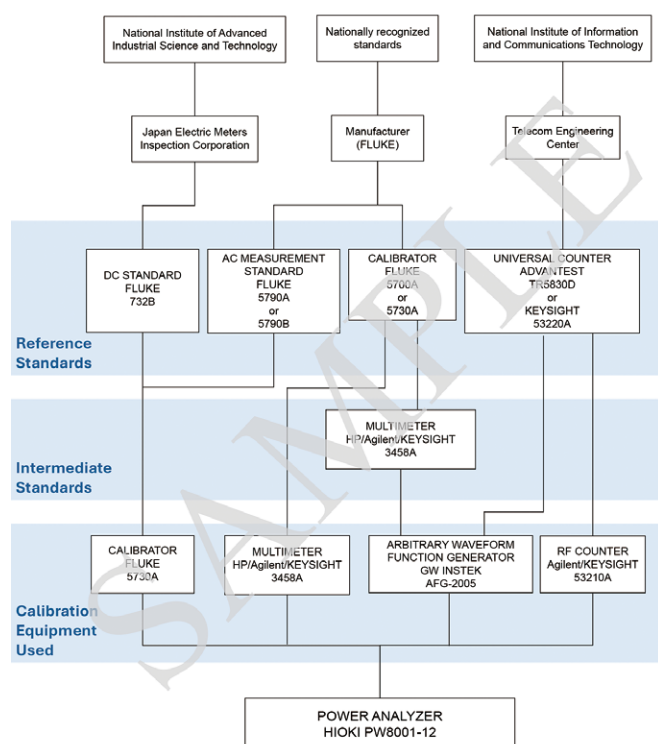

Calibration and Repair Service

(1) Service content

Calibration Services


When an instrument is calibrated and its measured values are found not to satisfy internal Hioki standards, the instrument is adjusted. Through the ongoing use of calibration services offered as only an instrument manufacturer can, customers are able to use their instruments with peace of mind while maintaining their precision.

This calibration service will allow us to return products to customers with minimal downtime, since there are no work interruptions.

Notes

*If you do not wish your instrument to be adjusted, please let us know when you request calibration. Your product will be returned without adjustment, even if the calibration report indicates a FAIL judgment (non-compliance).

*This service does not extend to products that cannot be adjusted or to discontinued products.

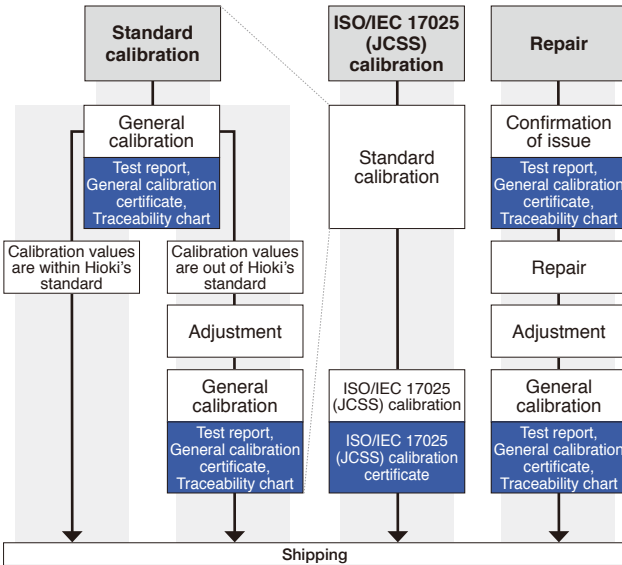

Depending on the type of repair, standard calibration may not be possible in advance.

(2) Documents we can issue and their content

Sample documents are also available on Hioki's website.




Test report

- Calibration results
- Judgment




General calibration certificate

- Calibration certificate declaration
- Information about equipment used in calibration



Traceability chart (overall)

An overview tracing Hioki product groups to national standards via individual standard devices



Traceability chart (model-specific)

A detailed diagram tracing a particular product model to national standards via individual standard devices



JCSS calibration certificate

- Calibration results
- Inaccuracies
- Coverage factor
- Calibration certificate declaration
- ilac-MRA, IA Japan, and JCSS logos

Calibration


Calibration provides a way to check the condition of a measuring instrument by comparing the ideal value indicated by a standard device with the value indicated by the instrument being calibrated.

Adjustment

Calibration values will be optimized so that the instrument satisfies Hioki's internal standards.

If an instrument is adjusted as part of calibration service

Values are optimized so that they satisfy Hioki's internal standards to reduce the risk that they will subsequently exceed the tolerance.

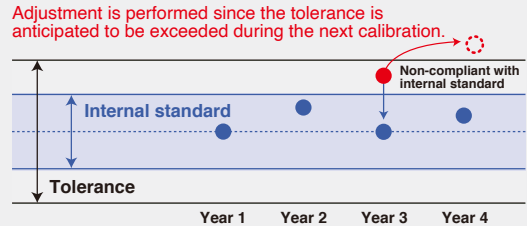

ISO/IEC 17025 Calibration (JCSS)

When is JCSS necessary?

JCSS calibration is the solution when you need calibration that includes inaccuracy data, for example ISO/IEC 17025 calibration, ILAC calibration, MRA calibration, or IATF 16949 calibration.

Specific examples:

- Calibration of instruments used by automobile (or motorcycle) manufacturers and part suppliers
- Calibration of instruments used in UL product certification
- Calibration of instruments as required by Japanese law (for radiation therapy) or ministerial ordinance (for pharmaceuticals and quasi-drugs)

JCSS calibration and international MRAs

JCSS is a registration program designed to ensure that calibration service providers possess the technological skills needed to perform calibration that complies with measurement-related laws and the requirements imposed by ISO/IEC 17025.

Registered service providers are entitled to perform JCSS calibration and issue calibration certificates bearing the JCSS symbol mark. Such certificates serve as evidence of the calibration service provider's technological skills and traceability. JCSS calibration service providers who have been certified as international MRA-compliant can issue calibration certificates bearing the ILAC-MRA and IA Japan symbol marks. Such certificates can be used as official documents whose validity is recognized worldwide.

International MRAs

An MRA is a mutual recognition agreement. IA Japan belongs to ILAC and APAC which includes NVLAP, A2LA, UKAS, DAkkS, and NATA. Calibration certificates issued by calibration service providers that have been certified as MRA-compliant by IA Japan are treated as equivalent to calibration certificates recognized by member certification entities in member countries.

Service capability and warranty duration

You can find out whether Hioki accepts repair and calibration requests for your instrument, associated lead times if so, and the information listed below simply by entering the product model number on Hioki's website.

Product Search		Availability of repair and calibration service	
Product	07055	Availability	Repair
Results	<input checked="" type="checkbox"/> Available <input type="checkbox"/> Not available <input type="checkbox"/> Partially available (see restricted)		
Model	Product	Available Service	Discontinued date
07055	DIGITAL MULTIMETER	Calibration	
Recommended calibration interval	12 months	Repair	
Product discontinued	3 months		


Calibration Interval

Product warranty period

Date production discontinued

Sales and service network

● HQ ● Regional Group HQ ● Offices of Group Companies

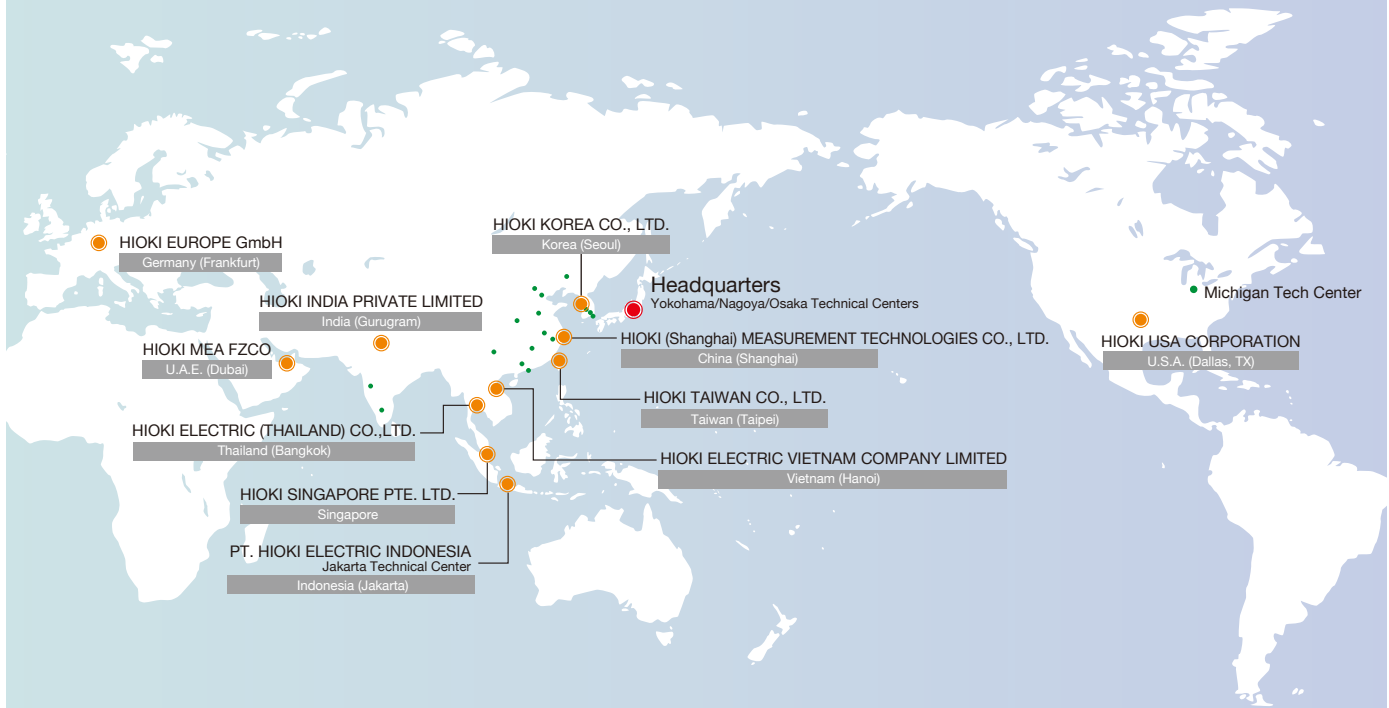

Our knowledgeable staff are always happy to assist you at Hioki group offices. Feel free to contact local tech centers or sales offices if you have any questions or need support.

What we offer:

- Expert consultation to help enhance your measurement accuracy
- Product training tailored to your specific applications
- Hands-on measurement of your Devices Under Test (DUTs)
- Integrated use of our measuring instruments for advanced applications

HIOKI

HIOKI E. E. CORPORATION

HEADQUARTERS

81 Koizumi,
Ueda, Nagano 386-1192 Japan
<https://www.hioki.com/>



Scan for all regional contact information

DISTRIBUTED BY