



### Recorders Data Loggers

Waveform recording  
Data logging



### Current Probes Clamp Sensors

Non-contact sensing



### Impedance Analyzers Battery Testers

Electronic components measurement  
Renewable energy measurement



### Power Meters Power Analyzers

Power quality analysis  
Power measurement



# Featured New Products

Optimizing energy consumption and transitioning to sustainable energy are major societal challenges. Hioki contributes to solving these issues by developing and delivering cutting-edge measuring instruments worldwide.


## AC/DC Current Probe CT6833, CT6834



With the shift toward sustainable mobility, there is a growing need for highly accurate and reliable measurement tools. In addition, the increase in electronic control units and auxiliary systems in automobiles has led to higher wiring density, making it difficult to install sensors.

Based on feedback from global automobile manufacturers and testing organizations, Hioki has developed the CT6833/CT6834 AC/DC current probes, which deliver excellent performance in actual use environments. These probes achieve industry-leading DC accuracy of  $\pm 0.07\%$  and provide the high measurement performance required for WLTP testing, SAE J1634, and other standards. The housing, which is 50% smaller than the previous model, features a lock mechanism that can be easily opened and closed with just one finger. This allows for easy installation and removal even in narrow spaces, improving work efficiency.

## Powder Impedance Measurement System

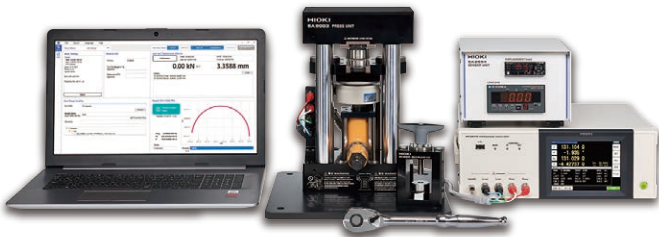

Currently, all-solid-state batteries using solid electrolytes are considered promising as next-generation batteries for automotive applications. However, this material is susceptible to degradation by moisture in the air, so it must be handled in glove boxes or dry chambers in R&D environments.

Hioki's powder impedance measurement system simultaneously measures impedance, thickness, and press pressure while pressing powdered materials at up to 60 kN (764 MPa). Furthermore, its compact design allows it to be installed and operated inside a glove box. All work can be completed without removing the sample, greatly improving safety, reliability, and work efficiency in the battery development process.

## Precision Battery Tester BT6075, BT6065



Battery packs are composed of an assembly of numerous battery cells. With packs getting bigger and better, cell testing needs to be super accurate, so the requirements for testing equipment are getting tougher.

Our flagship battery tester, the BT6075, has a minimum resolution of  $1\ \mu\text{V}$  for OCV (open circuit voltage) and  $0.01\ \mu\Omega$  for IR (internal resistance), so it can measure tiny differences between cells. In addition to achieving simultaneous measurement of OCV and IR, which were previously measured sequentially, the BT6075 boasts ultra-fast measurement speeds of just 12 ms, enabling high-precision inspections to be performed quickly and reliably. Furthermore, it features continuous monitoring of wiring degradation to prevent issues, contributing to improved efficiency and reliability across the entire battery cell inspection line.












Discover the latest innovations on our website.



<https://www.hioki.com/>



# Contents

<p><b>Hioki's 90th Anniversary &amp; Philosophy</b>..... P.2  <b>About the Catalog</b> ..... P.4  <b>Ensuring Safe Operation of the Product</b> .. P.5  <b>Category Index</b> ..... P.6 - P.18</p>	<b>Category Index</b>
<p> <b>Data Acquisition, Memory Recorders, Data Loggers, Multichannel Loggers</b> ..... P.19 -</p>	<b>Data Recorders &amp; Loggers</b>
<p> <b>Impedance Analyzers, LCR/Resistance Meters, Battery Testers, Super Megohm Meters, DMM, Signal Generators/Calibrators</b> ..... P.38 -</p>	<b>LCR/Resistance Meters</b>
<p> <b>Motor Insulation Testers, Leakage Current Testers, Insulation Withstanding Testers</b> ..... P.65 -</p>	<b>Safety Testing</b>
<p> <b>Power Meters, Power Analyzers, Power Quality Analyzers, Power Loggers</b> ..... P.71 -</p>	<b>Power Meters</b>
<p> <b>Current Probes, Current Sensors</b> ..... P.84 -</p>	<b>Current Sensors</b>
<p> <b>LAN Cable Testers, PV Maintenance Testers</b> ..... P.95 -</p>	<b>PV Maintenance &amp; Telecommunication</b>
<p> <b>Environmental Measuring Instruments (Temperature, Magnetic Field, Lux)</b> ..... P.97 -</p>	<b>Environmental Measuring</b>
<p> <b>Digital Multimeters (DMMs), Testers</b> ..... P.99 -   <b>Insulation Testers, Clamp Meters, Ground Resistance Testers, Voltage Detectors, Phase Rotation Meters</b> ..... P.104 -</p>	<b>DMM/ Testers &amp; Field Measuring</b>
<p> <b>IoT/Specialized Solutions</b> ..... P.118 -</p>	<b>IoT/Specialized Solutions</b>
<p> <b>ATE (Automatic Test Equipment) Bare Board &amp; Package Testing, Populated Board Testing</b> ..... P.121 -</p>	<b>Bare Board &amp; Package Testing</b>
<p>■ <b>Model No. (Order Code) Index</b> .....P.130 -          ■ <b>Product Warranties</b> .....P.136          ■ <b>Calibration and Repair Service</b> .....P.136</p>	<b>Model No. Index / Other</b>



Lead the Future  
HIOKI 90th Anniversary



**HIOKI**

HIOKI E. E. CORPORATION

Thanks to your support, we are celebrating our 90th anniversary.  
We will continue to pursue "measurement" with sincerity. [www.hioki.com](http://www.hioki.com)

The 90th  
Anniversary  
Website








# Hioki Philosophy

-Transforming People Value into Corporate Value -

We believe that for any company to grow, two conditions must be met: each and every employee must realize his or her full potential, and the company must act as a good corporate citizen.

At Hioki, the corporate philosophy of **Respect for Humanity** and **Contribution to Society** informs the personal value system of all employees, anchors the company's ultimate mission, and defines its social responsibility. To this end, we are dedicated to becoming a high value-added company unique in both culture and accomplishment so that we might both earn the trust of all stakeholders and provide customers with products of exceptional quality and services of the highest caliber.




## Respect for Humanity

Hioki will build a free and open environment where employees can maximize their potential and abilities. Our aim is to foster the creativity and individuality of all persons and help them become the best version of themselves. To ensure that personal development is the driving force behind Hioki's evolution and achieve lasting growth and development, management demonstrates "Respect for Humanity" to achieve a high degree of harmony between individual potential and organizational goals.

## Contribution to Society

As a manufacturer, Hioki contributes to the security and advancement of society and the happiness of people by providing high-quality products and unparalleled services. As a member of the communities we serve, we work actively to support the development of local youth and protect the local environment to make an educational, cultural, and environmental contribution.

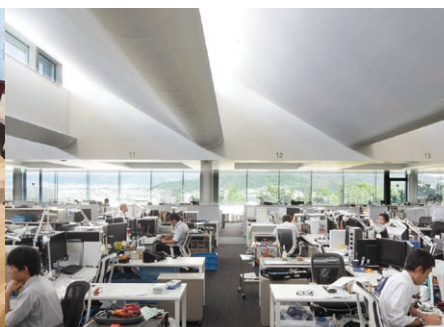

# About the Catalog

● This catalog is organized by product group. Search for products using the field-based (category-based) index on the first page. Products have been grouped using general names by principal application.

● A list of all available products can be found at the end of the catalog. The list is organized by product model and encompasses all products, including options.

● Options. Individual product pages include dedicated options. Options that are used by entire product groups are introduced together under the corresponding product group. For option specifications and other detailed information, please see the catalog for the product in question.

● Dimensions and mass. Exterior dimensions exclude protrusions, and are given in order of width(W), height(H), and depth(D), in mm units. Indicated weight represents an approximation of the mass of the main unit only, not including case, accessories, etc.

● Battery labeling. Battery labeling complies with IEC international standards and includes R6P (AA), R03 (AAA), 6F22 (9 V), LR6 (AA alkaline), LR03 (AAA alkaline), and CR2032 (button-cell lithium).

## About the Marks



Products that were released within 1 year from the publication date of this catalog



Products labeled as having a three-year warranty are covered for a period of three years from the date of purchase (or if the date of purchase is unknown, a period of three years from the date of manufacture). Accuracy is guaranteed for the duration of the separately indicated guaranteed accuracy period.



Use only when the measurement object is an insulated conductor.



True RMS measuring capability for accurate measurement of even distorted waveforms.



\*Android, Google Play and the Google Play logo are trademarks of Google Inc.

\*iOS is a registered trademark of Cisco Technology, Inc. and/or its affiliates in the United States and certain other countries.

\*iPhone, iPad, iPad mini, iPad Pro and iPod touch are trademarks of Apple Inc.

\*Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.

\*Microsoft, Windows, Windows Vista, Excel, and Teams are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

\*Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

\*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license.

\*For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website.



## Rectification Methods: True RMS and Mean

There are two methods for converting current into RMS values: the true RMS method (true RMS value indication) and the mean method (mean rectification RMS value indication). Although both methods yield the same value for undistorted sine waves, distortion of the waveform causes the values to diverge.

### True RMS RMS value method (true RMS value indication)


The waveform including harmonic components is calculated according to an RMS calculation formula and displayed.

### MEAN Mean method (mean rectification RMS value indication)


The input waveform is treated as an undistorted sine wave (single frequency only). The AC signal mean is calculated, converted to an RMS value, and displayed. The measurement error increases when the waveform is distorted.

\*Widespread use of equipment such as inverter devices and switching power supplies has made it more common for current waveforms being measured to be distorted. It is recommended to use a measuring instrument that uses the true RMS method to ensure accurate measurement.


■ Comparing distorted current values from an inverter, etc.



Current waveform from an inverter (primary side)



Mean-type clamp ammeter



True RMS clamp ammeter

## Accuracy and Tolerances

● *f.s.* (maximum display, or length of scale, ...full-scale)

Signifies the maximum display (scale) value or the length of the scale (in cases where the scale consists of unequal increments or where the maximum value cannot be defined). In general, this is the range value (the value written on the range selector, or equivalent) currently in use. However, be aware that in cases where the maximum display value is 2000V but the range value is only 600V, the maximum display value (scale value) is still used as the f.s. value.



300V range

● *rdg* (displayed or indicated value, ... reading value)


This signifies the value actually being measured, i.e., the value that is currently indicated or displayed by the measuring instrument.



Measuring 100 V using the 300 V range

● *dgt* (digital resolution, ... digit)

Signifies the smallest display unit on a digital measuring instrument, i.e., the value displayed when the last digit on the digital display is "1". Essentially, this indicates an error of 1 digit (based on decimal processing in analog-to-digital conversion), but in actuality this is the digit error combined with the f.s. error converted to a fraction of a digit unit. The accuracy associated with a particular measured value as shown in the product specifications is derived from these values.



In the 300 V range, the 0.1 V digit is the smallest digit

### Example accuracy calculations

[Example accuracy calculation 1] (when the accuracy notation combines *rdg* and *dgt*)

Accuracy specification:  $\pm 1.0\% \text{ rdg} \pm 3 \text{ dgt}$   
 Measurement range: 300.0 V  
 Measured value: 100.0 V

Since the value being measured is 100.0 V:

- (A) Reading error ( $\pm\% \text{ rdg}$ ):  $\pm 1.0\%$  of 100.0 V =  $\pm 1.0$  V
- (B) Digit error (*dgt*): Since the maximum resolution is 0.1 V,  $\pm 3 \text{ dgt} = \pm 0.3$  V
- (C) Total error (A+B):  $\pm 1.3$  V

Based on the total error (C), the error boundary values for a measured value of 100.0 V would be **98.7 V to 101.3 V**.

[Example accuracy calculation 2] (when the accuracy notation combines *rdg* and f.s.)

Accuracy specification:  $\pm 0.2\% \text{ rdg} \pm 0.1\% \text{ f.s.}$   
 Measurement range: 300.0 V  
 Measured value: 100.0 V

Since the value being measured is 100.0 V:

- (A) Reading error ( $\pm\% \text{ rdg}$ ):  $\pm 0.2\%$  of 100.0 V =  $\pm 0.20$  V
- (B) Full-scale error ( $\pm\% \text{ f.s.}$ ):  $\pm 0.1\%$  of 300 V =  $\pm 0.30$  V
- (C) Total error (A+B):  $\pm 0.50$  V

Based on the total error (C), the error boundary values for a measured value of 100.0 V would be **99.50 V to 100.50 V**.

This Electrical Measuring Instruments General Catalog provides a product outline. For more detailed information, please refer to individual product catalogs and series catalogs, which group together similar products.



# Ensuring Safe Operation of the Product

To help you use measuring instruments safely, the following information is provided in each product's Instruction Manual under "Specifications":


- Rated voltage to ground: The measurement point's voltage level relative to ground, Measurement Category, Anticipated transient overvoltage, etc.
- Location for use: Pollution Degree 2, indoor, altitude no more than 2000 m, etc.

## Measurement Category


Under safety standards (EN61010 Series, JIS C 1010 Series), measurement is classified into Categories II to IV according to the measurement point's rated voltage to ground, current capacity (size of current that flows in a short-circuit fault), etc., and the transient overvoltage that occurs at the measurement point.

- **Category II** Measurement at a point from the power plug to the equipment's power circuits, where equipment is directly connected to an outlet.
- **Category III** Measurement at a point on the power distribution cabling or power supply circuits, or at a point from the distribution panel to a distribution terminal behind an outlet, where equipment (for example a fixed installation) takes electricity directly from a distribution panel.
- **Category IV** Measurement at a point on a service drop to a building, or on the line from the drop connection to the power meter or distribution panel.


The measurement instrument's Category is marked as "CAT II", "CAT III" or "CAT IV" near the measurement terminals.

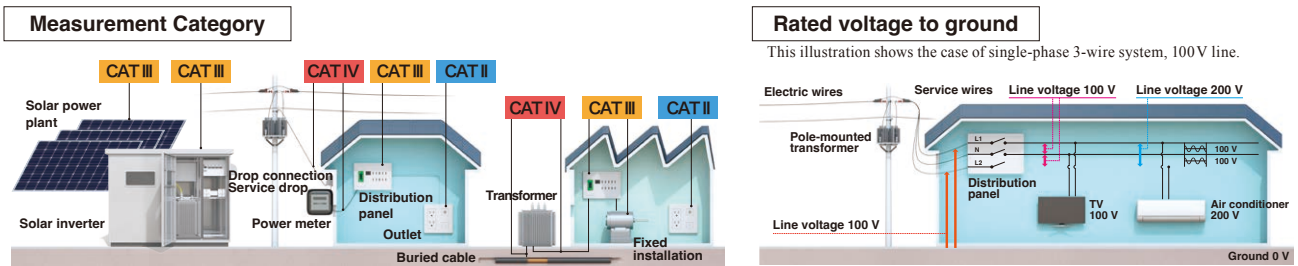

## How to read a category indication

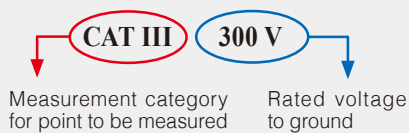

Three-phase three-wire (3P3W) system, 400 V line



\* Voltage indications  
**Black:** voltage to ground  
 (including line-to-line voltage)  
**Red:** line-to-line voltage

With the 400 V line in the figure, the line-to-line voltage is 415 V, whereas the voltage to ground is no more than 240 V (300 V).



Never measure a measurement point with a higher category number than the category indicated on the measuring instrument. Doing so could lead to a serious accident such as electric shock.

## Anticipated Transient Overvoltage

Power lines in factories and similar facilities will at times include transient overvoltage (impulse voltage) that is around 10 times the power source voltage. The transient overvoltage of the measurement points must be predicted in advance, and the instrument will need a safety design that will enable it to withstand such overvoltage.

Safety standards stipulate values such as the following for transient overvoltage, according to the voltage to ground and the measurement category.

Assuming 600 V for the measurement point's voltage to ground, a Category IV location could potentially include transient overvoltage of 8000 V. Hence, CAT IV measurement instruments are designed to withstand transient overvoltage of 8000 V. CAT III measurement instruments can only withstand up to 6000 V, so if 8000 V transient overvoltage enters, it will cause insulation breakdown that could result in electric shock.

Rated voltage to ground [V]	Transient overvoltage [V]		
	CAT II	CAT III	CAT IV
300	2500	4000	6000
600	4000	6000	8000
1000	6000	8000	12000
1500	8000	10000	15000
2000	12000	15000	18000

## Pollution Degrees

If contaminants adhere to the surfaces of a measuring instrument, its insulation performance will fall and it will pose a high risk of electric shock.

Safety standards classify environments where measuring instruments are used into Pollution Degrees 1 to 4.

- **Pollution Degree 1**  
Environment with no pollution, or with only dry contaminants present (non-conductive dirt, dust, etc.), which will not affect a measuring instrument's insulation performance.
- **Pollution Degree 2**  
Environment with only dry contaminants present (non-conductive dirt, dust, etc.), but where condensation could form on a measuring instrument, in which case the contaminants could cause a temporary drop in its insulation performance.
- **Pollution Degree 3**  
Environment with conductive contaminants present (water, soil, etc.), and which therefore could affect a measuring instrument's insulation performance, depending on how (much) contaminant adheres to it. Or, environment with high humidity, where even non-conductive contaminants could be a problem, since due to condensation a measuring instrument could have wet surfaces for relatively long periods.
- **Pollution Degree 4**  
Environment that could cause a prolonged drop in a measuring instrument's insulation performance, due to conductive contaminants (water, soil and the like) adhering to its surfaces, or to being wetted by rain.

A "Pollution Degree 2" marking on a measurement instrument means that it can be used without detriment to safety in environments of Pollution Degree 1 or 2 described above,, and a "Pollution Degree 3" marking means the measurement instrument can be used in environments of Pollution Degrees 1 to 3.

## Altitude

As altitude (elevation) rises, the air pressure decreases and flashover (breakdown and discharge through the air) becomes more likely to occur.

Accordingly, safety standards stipulate safety design that assumes use locations of altitude no more than 2000 m for measuring instruments.

If measuring instruments are used in locations of altitude exceeding 2000 m, the spaces between their parts that are under hazardous voltage and their parts that humans touch should be made larger as a precaution.

# Data Acquisition, Recorder, Data Logger Index

Portable Recorders for Servicing and Maintenance

Simultaneously Capture Multiple Signals

Monitor Anomalies in the Power Line

Category Index

Sampling speed	1ch	2ch	4ch	8ch	10ch	16ch	20ch
200MS/s (5ns)						<p>MEMORY HiCORDER MR6000 (16ch) Instantaneous waveform/ Long term recording ..... p.19</p>	
20MS/s (50ns)					<p>MEMORY HiCORDER MR8848 (16ch) Instantaneous waveform/ RMS value recording ..... p.20</p>	<p>MEMORY HiCORDER MR8741 (16ch) Discontinuation scheduled Systems Integration ..... p.23</p>	
10MS/s (100ns)							
1MS/s (1μs)		<p>MEMORY HiCORDER MR8870 (2ch) Instantaneous waveform/ RMS value recording ..... p.22</p>	<p>MEMORY HiCORDER MR8880 (4ch) Instantaneous waveform/ RMS value recording ..... p.22</p>			<p>MEMORY HiCORDER MR8875 (16ch) Instantaneous waveform/ Temperature/ Pulse measurement ..... p.21</p>	
100kS/s (10μs)							
<b>Log Multiple Channels of Temperature, Voltage</b>							
10kS/s (100μs)							
1kS/s (1ms)				<p>HEAT FLOW LOGGER LR8432 (10ch) Heat flow/ Voltage/ Temperature/ Pulse measurement ..... p.32</p>	<p>MEMORY HiLOGGER LR8431 (10ch) Voltage/ Temperature/ Pulse measurement ..... p.32</p>		<p>MEMORY HiLOGGER LR8450 (20ch) Voltage/ Current/ Strain measurement ..... p.30</p>
100S/s (10ms)		<p>WIRELESS MINI LOGGER LR8512- LR8515 Multi-signal recording ..... p.34-p.33</p>					
10S/s (100ms)	<p>DATA LOGGER LR 5000 series Multi-signal recording ..... p.37-p.35</p>						
1S/s (1sec)							

## Non-contact CAN Sensors

NON-CONTACT CAN SENSOR SP7001, SP7002



- Supports φ1.2mm to 2.0mm covered wires
- No modification of vehicle cables
- No impact on the CAN bus or ECUs
- Accurate, reliable signal capture ..... p.24

## Recorder Peripherals



- Connection cord
- Storage media
- Logic probe
- Current probe, etc. .... p.26-p.27


## PC Software for Data Management

MR6000 Viewer




- For Memory HiCorder MR6000, available for download free of charge from Hioki's website ..... p.28

WAVE PROCESSOR 9335



- For Memory HiCorder
- Convert data, print and display waveforms ..... p.28

LAN COMMUNICATOR 9333



- For Memory HiCorder
- For data collection and remote control ..... p.28



MEMORY HiCORDER  
MR8827 (32ch)



Instantaneous waveform/  
RMS value recording  
..... p.21



MEMORY HiCORDER  
MR8740 (54ch)  
Ideal for rack-mounting  
..... p.23

Discontinuation  
scheduled

MEMORY HiCORDER  
MR8740T (54ch)  
Ideal for rack-mounting  
..... p.23

MEMORY HiCORDER  
MR8740T (108ch)



Ideal for rack-mounting  
..... p.23



MEMORY HiCORDER  
MR8848 (32ch)  
Instantaneous waveform/  
Long term recording  
..... p.20



MEMORY HiCORDER  
MR6000 (32ch)  
Instantaneous waveform/  
Long term recording  
..... p.19


## and More

MEMORY HiLOGGER  
LR8450-01 (55ch)



Voltage/ Current/  
Strain measurement  
..... p.30

MEMORY HiCORDER  
MR8875 (60ch)



Voltage/ Temperature  
measurement  
..... p.21

MEMORY HiLOGGER  
LR8450 (120ch)



Voltage/ Temperature/  
Pulse measurement  
..... p.30

DATA LOGGER LR8101  
(300ch)



Voltage/ Temperature  
measurement  
..... p.29

DATA LOGGER LR8102  
(3000ch)



Voltage/ Temperature  
measurement  
..... p.29

MEMORY HiLOGGER  
LR8450-01 (330ch)



Voltage/ Temperature/  
Pulse measurement  
..... p.30

32ch

60ch 64ch

120ch

300ch

...3000ch

Number of channels

## Monitor Power Demand and Equipment Efficiency

### CLAMP ON POWER LOGGER PW3365



- Designed for 50/60 Hz commercial line use
- 3 circuits (1P2W), single circuit (1P3W, 3P3W, 3P4W)
- Save data to SD card continuously
- (Current) Clamp input
- (Voltage) Non-metallic contact sensor

### CLAMP ON POWER LOGGER PW3360



- Designed for 50/60 Hz commercial line use
- 3 circuits (1P2W), single circuit (1P3W, 3P3W, 3P4W)
- Save data to SD card continuously
- Clamp input
- Harmonic analysis

## Compact Temperature or Humidity Loggers

### WIRELESS HUMIDITY LOGGER LR8514



- 2 ch Temperature/ 2 ch Humidity recording
- - 40 to 80 °C/ 0 to 100 % RH (with optional sensor)
- Minimum 0.5 sec interval
- Wireless data download to a tablet or computer
- 500,000 data/ ch
- Three-way power

### WIRELESS VOLTAGE/ TEMP LOGGER LR8515



- 2 ch Voltage ( $\pm 50$  mV to  $\pm 50$  V)/ Thermocouple recording
- Minimum 0.1 sec interval
- Wireless data download to a tablet or computer
- 500,000 data/ ch
- Three-way power

### HUMIDITY LOGGER LR5001



- 2 ch Temperature/Humidity alternating recording
- - 40 °C to 85 °C/ 0 to 100 %rh (with LR9504 sensor)
- Fastest 1 sec interval
- 60000 data  $\times$  2ch memory
- Dry cell battery operation
- IP54 (splash-proof)

### TEMPERATURE LOGGER LR5011



- 1 ch Temperature recording
- - 40 °C to 180 °C (with optional sensor)
- Fastest 1 sec interval
- 60000 data  $\times$  1ch memory
- Dry cell battery operation
- IP54 (splash-proof)

## Pulse Integration (flow rate, vehicle speed, etc.)

### WIRELESS PULSE LOGGER LR8512



- 2 ch Pulse totalization/ No. of revolutions/ Logic recording
- Fastest 0.1 sec interval
- Wireless data download to a tablet or computer
- 500,000 data/ ch
- Three-way power

## Compact Current Loggers

### WIRELESS CLAMP LOGGER LR8513



- AC/DC load current, AC leakage current recording
- 2ch, Clamp-on sensor input
- Fastest 0.5 sec interval
- Wireless data download to a tablet or computer
- 500,000 data/ ch
- Three-way power

### CLAMP LOGGER LR5051



- 2ch AC current recording (with optional sensor)
- 0 to 1000 A AC
- Fastest 1 sec interval
- 60000 data  $\times$  2ch memory
- Dry cell battery operation

## Compact DC Voltage Loggers

### WIRELESS VOLTAGE/ TEMP LOGGER LR8515



- 2 ch Voltage ( $\pm 50$  mV to  $\pm 50$  V)/ Thermocouple recording
- Minimum 0.1 sec interval
- Wireless data download to a tablet or computer
- 500,000 data/ ch
- Three-way power

### VOLTAGE LOGGER LR5041, LR5042, LR5043



- 1ch DC voltage recording
- LR5041:  $\pm 50$ mV DC
- LR5042:  $\pm 5$ V DC
- LR5043:  $\pm 50$ V DC
- Minimum 1 sec interval
- 60000 data  $\times$  1ch memory
- Dry cell battery operation
- IP54 (splash-proof)

## Instrumentation Recording

### INSTRUMENTATION LOGGER LR5031



- 1 ch 0 to 20mA recording
- Minimum 1 sec interval
- 60000 data  $\times$  1ch memory
- Dry cell battery operation
- IP54 (splash-proof)

## Peripherals for Compact Loggers








### DATA COLLECTOR LR5092 COMMUNICATION ADAPTER LR5091








- Used with the LR5000 series
- Transfer data from LR5000 series to the PC
- Transfer setting/clock data from PC to the LR5000 series
- Free bundled software
- USB interface



## Impedance, Inductance and Capacitance Testing in R&D and During Component Production


<p><b>IMPEDANCE ANALYZER IM7587</b></p>  <ul style="list-style-type: none"> <li>•  Z , L, C, R testing</li> <li>• Testing source frequency: 1 MHz to 3 GHz</li> <li>• Measuring time: 0.5 ms</li> <li>• Measure LCR and conduct frequency sweeps simultaneously</li> </ul> <p>..... p.38</p>	<p><b>IMPEDANCE ANALYZER IM7585</b></p>  <ul style="list-style-type: none"> <li>•  Z , L, C, R testing</li> <li>• Testing source frequency: 1 MHz to 1.3 GHz</li> <li>• Measuring time: 0.5 ms</li> <li>• Measure LCR and conduct frequency sweeps simultaneously</li> </ul> <p>..... p.39</p>	<p><b>IMPEDANCE ANALYZER IM7583</b></p>  <ul style="list-style-type: none"> <li>•  Z , L, C, R testing</li> <li>• Testing source frequency: 1 MHz to 600 MHz</li> <li>• Measuring time: 0.5 ms</li> <li>• Measure LCR and conduct frequency sweeps simultaneously</li> </ul> <p>..... p.39</p>	<p><b>IMPEDANCE ANALYZER IM7581</b></p>  <ul style="list-style-type: none"> <li>•  Z , L, C, R testing</li> <li>• Testing source frequency: 100 kHz to 300 MHz</li> <li>• Measuring time: 0.5 ms</li> <li>• Measure LCR and conduct frequency sweeps simultaneously</li> </ul> <p>..... p.40</p>	<p><b>IMPEDANCE ANALYZER IM7580A</b></p>  <ul style="list-style-type: none"> <li>•  Z , L, C, R testing</li> <li>• Testing source frequency: 1 MHz to 300 MHz</li> <li>• Measuring time: 0.5 ms</li> <li>• Measure LCR and conduct frequency sweeps simultaneously</li> </ul> <p>..... p.40</p>	<p><b>CHEMICAL IMPEDANCE ANALYZER IM3590</b></p>  <ul style="list-style-type: none"> <li>•  Z , L, C, R, <math>\sigma</math> (conductivity), <math>\epsilon</math> (dielectric constant) testing</li> <li>• Battery measurement</li> <li>• Testing source frequency: 1 MHz to 200 kHz</li> <li>• Measuring time: 2 ms</li> </ul> <p>..... p.41</p>	<p><b>IMPEDANCE ANALYZER IM3570</b></p>  <ul style="list-style-type: none"> <li>•  Z , L, C, R testing</li> <li>• Testing source frequency: 4 Hz to 5 MHz</li> <li>• Measuring time: 0.5 ms</li> <li>• Measure LCR and conduct frequency sweeps simultaneously</li> </ul> <p>..... p.42</p>
---	---	---	---	---	---	--

## Impedance, Inductance and Capacitance Testing During Component Production

<p><b>LCR METER IM3536</b></p>  <ul style="list-style-type: none"> <li>•  Z , L, C, R testing</li> <li>• Testing source frequency: DC, or 4 Hz to 8 MHz</li> <li>• Measuring time: 1 ms</li> <li>• Accuracy guaranteed range from 1m<math>\Omega</math></li> <li>• Continuous testing under varying conditions</li> </ul> <p>..... p.43</p>	<p><b>LCR METER IM3533</b></p>  <ul style="list-style-type: none"> <li>•  Z , L, C, R testing</li> <li>• Testing source frequency: 1 MHz to 200 kHz</li> <li>• Measuring time: 2 ms</li> <li>• Transformer measurement mode</li> <li>• Frequency sweep measurement: (IM3533-01)</li> </ul> <p>..... p.44</p>	<p><b>LCR METER IM3523, IM3523A</b></p>  <ul style="list-style-type: none"> <li>•  Z , L, C, R testing</li> <li>• Testing source frequency: 40 Hz to 200 kHz</li> <li>• Measuring time: 2 ms</li> <li>• IM3523A: USB and LAN as standard</li> </ul> <p>..... p.43</p>	<p><b>C METER 3506-10</b></p>  <ul style="list-style-type: none"> <li>• C, D, Q, low capacitance testing</li> <li>• Testing source frequency: 1 kHz, 1 MHz</li> <li>• Measuring time: 1.5 ms (1 MHz)</li> <li>• RS-232C, GP-IB</li> </ul> <p>..... p.44</p>	<p><b>C HiTESTER 3504</b></p>  <ul style="list-style-type: none"> <li>• C, D, large capacitance MLCC testing</li> <li>• Testing source frequency: 120 Hz or 1 kHz</li> <li>• Measuring time: 2 ms</li> <li>• RS-232C standard (3504-50) BIN function, GP-IB (3504-60) BIN function, Contact check, GP-IB</li> </ul> <p>..... p.45</p>
--	---	--	--	---

## Exclusive Option for the IM3570


**EQUIVALENT CIRCUIT ANALYSIS FIRMWARE IM9000**



- Optional software built in to the IM3570
- Equivalent five circuit models
- Enables displaying the ideal frequency characteristics graph derived from the analysis results
- Cole-Cole plot, Admittance circle display

..... p.42








## Probes and Test Fixtures



- Probes and test fixtures for lead components
- Test fixtures for SMDs
- DUT size reference table included

..... p.46

## DC Resistance Testing

<p><b>RESISTANCE METER RM3545A</b></p>  <ul style="list-style-type: none"> <li>• Market leading precision tests for testing every weld or connection on your production line</li> <li>• 1000 <math>\mu\Omega</math> to 1000 M<math>\Omega</math> range</li> <li>• Testing source current: DC, 1 A Max.</li> <li>• Finest resolution: 1 n<math>\Omega</math></li> <li>• Multi-point measurement: 20 locations</li> </ul> <p>..... p.47</p>	<p><b>RESISTANCE METER RM3545</b></p>  <p>Discontinuation scheduled</p> <ul style="list-style-type: none"> <li>• Featuring super-high accuracy and multi-channel capabilities</li> <li>• Testing source: DC, 1 A max</li> <li>• Fastest measurement speed: 2.2ms</li> <li>• Finest resolution: 10 n<math>\Omega</math></li> <li>• Multi-point measurement: 20 locations</li> </ul> <p>..... p.48</p>	<p><b>RESISTANCE METER RM3544</b></p>  <ul style="list-style-type: none"> <li>• High-precision bench-top resistance meter for both manual operation and integration with automatic lines</li> <li>• Testing source current: DC, 300 mA Max.</li> <li>• Fastest measurement speed: 18 ms</li> <li>• Finest resolution: 1 <math>\mu\Omega</math></li> </ul> <p>..... p.49</p>	<p><b>RESISTANCE HiTESTER RM3543</b></p>  <ul style="list-style-type: none"> <li>• Advanced enough to measure 0.1 m<math>\Omega</math> shunts with room to spare</li> <li>• Ideal high precision &amp; high resolution for automated lines</li> <li>• Testing source: DC 1 A max.</li> <li>• Minimum integration time: 0.1 ms</li> <li>• Finest resolution: 0.01 <math>\mu\Omega</math></li> </ul> <p>..... p.49</p>	<p><b>RESISTANCE METER RM3542A, RM3542</b></p>  <ul style="list-style-type: none"> <li>• High-speed resistance meter ideal for automated lines</li> <li>• Compatible with super-small electronic components (RM3542A)</li> <li>• Testing source: DC, 100 mA max.</li> <li>• Fastest measurement time: 0.9 ms</li> <li>• Minimum integration time: 0.1 ms</li> <li>• Finest resolution: 0.1 <math>\mu\Omega</math></li> </ul> <p>..... p.50</p>	<p><b>RESISTANCE METER RM3548-50</b></p>  <p>New</p> <ul style="list-style-type: none"> <li>• High-precision portable resistance meter measures from <math>\mu\Omega</math> to M<math>\Omega</math></li> <li>• Testing source current: DC, 1A Max.</li> <li>• Display refresh rate: approx. 100 ms</li> <li>• Finest resolution: 0.1 <math>\mu\Omega</math></li> <li>• Compatible with Wireless Adapter Z3210</li> </ul> <p>..... p.51</p>	<p><b>RESISTANCE METER RM3548</b></p>  <ul style="list-style-type: none"> <li>• High-precision portable resistance meter measures from <math>\mu\Omega</math> to M<math>\Omega</math></li> <li>• Testing source current: DC, 1 A Max.</li> <li>• Display refresh rate: approx. 100 ms</li> <li>• Finest resolution: 0.1 <math>\mu\Omega</math></li> </ul> <p>..... p.51</p>
--	---	--	---	--	---	--


## Accelerating R&D of Rechargeable Battery Materials

### Powder Impedance Measurement System



- Simultaneously control powder press details while measuring impedance
- All-in-one glove box operation and time-saving efficiency

### Slurry Analytical System



- Impedance measurement and analysis of LiB electrode slurries
- Analysis results "DCR, Rratio, Uniformity" indicate electron conductivity of slurry

### ELECTRODE RESISTANCE MEASUREMENT SYSTEM RM2610



- Isolates and quantifies composite layer resistance and interface resistance in positive- and negative-electrode sheets used in lithium-ion batteries.

## Battery Testing

### BATTERY CELL VOLTAGE GENERATOR SS7081-50



- Easily build a BMS evaluation environment
- Power supply, electronic load, DMM function integrated into one (12 channels)
- Generated voltage: 5V / ch

### SWITCH MAINFRAME SW1001, SW1002



- Pair with a measuring instrument to achieve multi-channel capabilities
- SW1001: max. 66 channels (2-wire) to max. 18 channels (4-terminal pair)
- SW1002: max. 264 channels (2-wire) to max. 72 channels (4-terminal pair)

## Battery Testing

### BATTERY IMPEDANCE METER BT4560



- EIS measuring instrument for Li-ion batteries
- From R&D to production line
- Measurement of R, X, Z, V,  $\theta$ , T
- Test frequency: 0.01 Hz and above
- Max. measurement voltage: 5V DC
- Measurement range: 3 m $\Omega$  and above
- Voltage measurement resolution: 10  $\mu$ V

### PRECISION BATTERY TESTER BT6075, BT6065



- Industry-leading precision model
- AC 4-terminal method
- Resistance measurement: 0  $\Omega$  to 51  $\Omega$  (max. resolution: 0.01  $\mu\Omega$ )
- Voltage measurement: 0 V to  $\pm 120$  V DC (max. resolution: BT6075: 1  $\mu$ V, BT6065: 10  $\mu$ V)
- Route resistance monitor

### BATTERY TESTER BT3561A



- Compact power cells
- Compact packs up to 60 V
- AC 4-terminal method
- Resistance measurement: 0  $\Omega$  to 3.1 k $\Omega$  (maximum resolution: 1  $\mu\Omega$ )
- Voltage measurement: 0 V to  $\pm 60$  V DC (maximum resolution: 10  $\mu$ V)

### BATTERY TESTER BT3562A



- Large cells for xEVs
- Medium-size packs up to 100 V
- AC 4-terminal method
- Resistance measurement: 0  $\Omega$  to 3.1 k $\Omega$  (maximum resolution: 0.1  $\mu\Omega$ )
- Voltage measurement: 0 V to  $\pm 100$  V DC (maximum resolution: 10  $\mu$ V)

### BATTERY TESTER BT3563A



- Large packs for xEVs
- Large packs up to 300 V
- AC 4-terminal method
- Resistance measurement: 0  $\Omega$  to 3.1 k $\Omega$  (maximum resolution: 0.1  $\mu\Omega$ )
- Voltage measurement: 0 V to  $\pm 300$  V DC (maximum resolution: 10  $\mu$ V)

### BATTERY HITESTER BT3564



- EV and PHEV battery pack testing
- Testing source: AC 1kHz
- Measure voltage up to 1000V
- Measurement time: 728 ms
- Finest resolution: 0.1  $\mu\Omega$  and 10  $\mu$ V

## Battery Testing

### BATTERY HITESTER BT3562-01, BT3563-01



- The perfect battery tester for production lines
- Testing source: AC 1kHz
- Max. voltage: 60 V DC (BT3562-01) 300 V DC (BT3563-01)
- Measurement time: 18ms
- Finest resolution: 0.1  $\mu\Omega$  and 10  $\mu$ V

### BATTERY HITESTER 3561



- The perfect battery tester for small secondary batteries
- Testing source: AC 1kHz
- Measurement time: 10ms
- Finest resolution: 0.01 m $\Omega$

### PRECISION DC VOLTMETER DM7275, DM7276



- DC V only
- Measure DC voltage and temperature simultaneously
- 7-1/2 digit resolution
- 1-year 20ppm Accuracy (DM7275)
- 1-year 9ppm Accuracy (DM7276)
- Built-in EXT I/O, LAN, and USB

### BATTERY INSULATION TESTER BT5525



- Ideal for insulation resistance testing before battery electrolyte filling
- Detecting minuscule insulation defects caused by contamination
- Test voltage: 500 V max.
- Insulation resistance test: up to 9999 M $\Omega$
- Contact check

### BATTERY TESTER BT3554-50



- Diagnose deterioration and health of UPS, compact and large lead-acid batteries
- Testing source: AC 1kHz
- Finest resolution: 1  $\mu\Omega$
- Compatible with Wireless Adapter Z3210

## Super Insulation Testing of Capacitors

### SUPER M $\Omega$ HITESTER SM7810



- For testing leakage current in MLCC
- 6.8ms measurement speed over 8ch simultaneously
- Testing current is applied externally
- Resistance measurement: Max. 1 $\times 10^8$   $\Omega$
- Current measurement: 1pA to 1mA

### POWER SOURCE UNIT SM7860 series



- Specially designed power source unit for SM7810
- Supports multi-channel systems and provides functions required for MLCC test lines
- 50 mA per channel output

### SUPER MEGOHM METER SM7420



- Fastest speed of 6.4 ms
- 4ch
- Dedicated micro current measurement (cannot generate or measure voltage)
- Max. 2 $\times 10^8$   $\Omega$  display
- Min. 0.1 fA resolution

### SUPER MEGOHM METER SM7110, SM7120



- Fastest speed of 6.4 ms
- 1ch
- Max. 2000 V output (SM7120)
- Max. 1000 V output (SM7110)
- Max. 2 $\times 10^8$   $\Omega$  display
- Min. 0.1 fA resolution

## Peripherals

### SURFACE/VOLUME RESISTANCE MEASUREMENT ELECTRODE SM9001



- Simple and Convenient Surface/Volume Resistance Measurement (up to 10<sup>8</sup>  $\Omega$ , 1000V)
- Measure surface and volume resistance of entire sheets without need to cut samples




### Testing terminals for super megohm measurement



- For flat plate testing
- For surface resistance testing
- For liquid testing
- Screen box
- Comparing resistance box



## System Integrated Digital Multi-Module Stations

<p><b>DMM STATION</b> U8991+MR8740T</p>  <ul style="list-style-type: none"> <li>• Store entire data from 108 units of DMM in single operation</li> <li>• Simultaneous 108 ch sampling without signal scanner</li> <li>• High <math>\pm 0.02\%</math> precision &amp; ultra high 6-1/2 digit resolution</li> <li>• 50 times/s sampling</li> </ul> <p>..... p.63</p>	<p><b>DMM STATION</b> MR8990+MR8741</p>  <ul style="list-style-type: none"> <li>• Store entire data from 16 units of DMM in single operation</li> <li>• Simultaneous 16 ch sampling without signal scanner</li> <li>• High <math>\pm 0.01\%</math> precision &amp; ultra high 6-1/2 digit resolution</li> <li>• 500 times/s sampling</li> </ul> <p>..... p.63</p>	<p><b>DMM STATION</b> MR8990+MR8740</p>  <ul style="list-style-type: none"> <li>• Store entire data from 54 units of DMM in single operation</li> <li>• Simultaneous 32 ch sampling without signal scanner</li> <li>• High <math>\pm 0.01\%</math> precision &amp; ultra high 6-1/2 digit resolution</li> <li>• 500 times/s sampling</li> </ul> <p>..... p.63</p>
---	--	--

## Benchtop Multimeters for Production and Inspection Lines

**PRECISION DC VOLTMETER**  
DM7275, DM7276




- DC V only
- Measure DC voltage and temperature simultaneously
- 7-1/2 digit resolution
- 1-year 9ppm Accuracy (DM7276)
- 1-year 20ppm Accuracy (DM7275)
- Built-in EXT I/O, LAN, and USB

..... p.63

## Signal Generators and Calibrators

**DC SIGNAL SOURCE**  
SS7012










Discontinuation scheduled





- DC constant voltage, constant current source
- $\pm 25$  V,  $\pm 25$  mA
- Thermoelectric power generation, K, E, J, T, R, S, B, N thermocouple
- DC voltage, DC current measurement
- Battery operation

..... p.64



## Arbitrary Waveform Generation Recorders

<p><b>ARBITRARY WAVEFORM GENERATION RECORDER</b> U8793+MR6000</p>  <ul style="list-style-type: none"> <li>• Max. 2 MHz D/A output Arbitrary Waveform Generation function</li> <li>• 10 mHz to 100 kHz Function Generator</li> <li>• Max. 200M-Sampling/s</li> <li>• Max. 15V output</li> <li>• Max. 16ch</li> </ul> <p>..... p.64</p>	<p><b>ARBITRARY WAVEFORM GENERATION RECORDER</b> U8793+MR8848</p>  <ul style="list-style-type: none"> <li>• Max. 2 MHz D/A output Arbitrary Waveform Generation function</li> <li>• 10 mHz to 100 kHz Function Generator</li> <li>• Max. 20M-Sampling/s</li> <li>• Max. 15V output</li> <li>• Max. 16ch</li> </ul> <p>..... p.64</p>	<p><b>ARBITRARY WAVEFORM GENERATION RECORDER</b> U8793+MR8827</p>  <ul style="list-style-type: none"> <li>• Max. 2 MHz D/A output Arbitrary Waveform Generation function</li> <li>• 10 mHz to 100 kHz Function Generator</li> <li>• Max. 20M-Sampling/s</li> <li>• Max. 15V output</li> <li>• Max. 32ch</li> </ul> <p>..... p.64</p>	<p><b>ARBITRARY WAVEFORM GENERATION RECORDER</b> U8793+MR8740T</p>  <ul style="list-style-type: none"> <li>• Max. 2 MHz D/A output Arbitrary Waveform Generation function</li> <li>• 10 mHz to 100 kHz Function Generator</li> <li>• Max. 20M-Sampling/s</li> <li>• Max. 15V output</li> <li>• Max. 54ch</li> </ul> <p>..... p.64</p>	<p><b>ARBITRARY WAVEFORM GENERATION RECORDER</b> U8793+MR8741</p>  <p>Discontinuation scheduled</p> <ul style="list-style-type: none"> <li>• Max. 2 MHz D/A output Arbitrary Waveform Generation function</li> <li>• 10 mHz to 100 kHz Function Generator</li> <li>• Max. 20M-Sampling/s</li> <li>• Max. 15V output</li> <li>• Max. 16ch</li> </ul> <p>..... p.64</p>	<p><b>ARBITRARY WAVEFORM GENERATION RECORDER</b> U8793+MR8740</p>  <p>Discontinuation scheduled</p> <ul style="list-style-type: none"> <li>• Max. 2 MHz D/A output Arbitrary Waveform Generation function</li> <li>• 10 mHz to 100 kHz Function Generator</li> <li>• Max. 20M-Sampling/s</li> <li>• Max. 15V output</li> <li>• Max. 54ch</li> </ul> <p>..... p.64</p>	<p><b>VIR GENERATOR UNIT</b> U8794+MR8740T</p>  <ul style="list-style-type: none"> <li>• DC voltage output</li> <li>• DC current output</li> <li>• Resistance output (simulated resistance)</li> <li>• Max. 216ch</li> </ul> <p>..... p.64</p>
--	---	---	--	---	--	---






## Motor Insulation Performance Inspection

<p><b>PARTIAL DISCHARGE DETECTOR</b> ST4200</p>  <p>New</p> <ul style="list-style-type: none"> <li>• Dual-mode PD detection discovers latent insulation defects in motor windings with the AC PD test and surge PD test</li> <li>• Reliable PD testing even on the production line</li> </ul> <p>..... p.65</p>	<p><b>HIGH VOLTAGE MULTIPLEXER</b> SW2001</p>  <p>New</p> <ul style="list-style-type: none"> <li>• Boost efficiency with one multiplexer handling six tests</li> <li>• Reduce connection man-hours and test time</li> <li>• Safe switching between high-voltage testing and 4-terminal low-voltage measurement</li> </ul> <p>..... p.65</p>	<p><b>IMPULSE WINDING TESTER</b> ST4030A</p>  <ul style="list-style-type: none"> <li>• Diagnose winding quality and insulation while the rotor is assembled</li> <li>• Identify single-turn faults</li> <li>• Detect partial discharge with high accuracy</li> <li>• Diagnose insulation failure between motor windings</li> <li>• Output voltage up to 4200 V</li> </ul> <p>..... p.66</p>	<p><b>DISCHARGE DETECTION UPGRADE</b> ST9000</p>  <ul style="list-style-type: none"> <li>• Optional function for ST4030A</li> <li>• Detect microscopic partial discharges obscured by noise</li> <li>• Hioki original filter</li> </ul> <p>..... p.66</p>
--	--	--	--

## Leakage Current Testing in Equipment and Medical Devices

<p><b>LEAK CURRENT HITESTER</b> ST5540</p>  <ul style="list-style-type: none"> <li>• Test both medical- and general-use electrical devices</li> <li>• Built-in support for all networks</li> <li>• Support for rated currents of up to 20 A</li> <li>• Support for automatic testing on production lines, etc.</li> </ul> <p>..... p.66</p>	<p><b>LEAK CURRENT HITESTER</b> ST5541</p>  <ul style="list-style-type: none"> <li>• Testing of general-use electrical devices</li> <li>• Built-in support for networks other than medical-use electrical devices</li> <li>• Support for rated currents of up to 20 A</li> <li>• Support for automatic testing on production lines, etc.</li> </ul> <p>..... p.65</p>
---	--

## Insulation Resistance and Withstand Voltage Testing

<p><b>BATTERY INSULATION TESTER</b> BT5525</p>  <ul style="list-style-type: none"> <li>• Ideal for insulation resistance testing before battery electrolyte filling</li> <li>• Detecting minuscule insulation defects caused by contamination (Break Down Detect function)</li> <li>• Test voltage: 500 V max.</li> <li>• Insulation resistance test: up to 9999 M<math>\Omega</math></li> <li>• Contact check</li> </ul> <p>..... p.68</p>	<p><b>INSULATION TESTER</b> ST5520</p>  <ul style="list-style-type: none"> <li>• Rapid 50ms testing speed</li> <li>• Test voltage: 1000 V max.</li> <li>• Insulation resistance test: up to 9999 M<math>\Omega</math></li> <li>• Contact check</li> </ul> <p>..... p.68</p>	<p><b>AC AUTOMATIC INSULATION/WITHSTANDING HITESTER</b> 3174</p>  <ul style="list-style-type: none"> <li>• Insulation resistance test: up to 2000 M<math>\Omega</math></li> <li>• Withstanding voltage test: up to 5 kV AC</li> <li>• Contact check</li> <li>• Full remote control</li> </ul> <p>..... p.69</p>	<p><b>AUTOMATIC INSULATION/WITHSTANDING HITESTER</b> 3153</p>  <ul style="list-style-type: none"> <li>• Insulation resistance test: up to 9999 M<math>\Omega</math></li> <li>• Withstanding voltage test: up to 5 kV AC/DC</li> <li>• Full remote control</li> </ul> <p>..... p.70</p>	<p><b>HIGH VOLTAGE SCANNER</b> 3930</p>  <ul style="list-style-type: none"> <li>• Supports remote control</li> <li>• For automatic multipoint testing of insulation / withstand voltage</li> <li>• Use with 3153's program or with general-purpose logic sequencers</li> </ul> <p>..... p.70</p>
--	--	--	---	--

## PC Applications

**SAFETY TEST DATA MANAGEMENT SOFTWARE**  
9267



- PC-controlled application software

..... p.70

## Evaluate and Analyze the Power Efficiency of Motors, Equipment and Other Energy Saving Devices

**POWER ANALYZER PW8001**



- Max. 16 ch power analysis by optical link
- For total evaluation of equipment
- Wide-band DC, 0.1 Hz to 5 MHz (U7005)
- DC, or 1P2W to 3P4W
- 8 ch/ current sensor input
- Measure inverter equipment, analyze motors and high frequency reactors
- Analyze waveforms without an oscilloscope

**POWER ANALYZER PW6001**



- Max. 12 ch by synchronizing two 6-channel models
- For total evaluation of equipment
- Wide-band DC, 0.1 Hz to 2 MHz
- DC, or 1P2W to 3P4W
- 6 ch/ current sensor input
- Measure inverter equipment and analyze motors
- Analyze waveforms without an oscilloscope

**POWER ANALYZER PW3390**



- Max. 32ch by synchronizing eight 4-channel models
- For total evaluation of equipment
- Wide-band DC, 0.5Hz to 200kHz
- DC, or 1P2W to 3P4W
- 4 ch/ current sensor input
- Measure inverter equipment and analyze motors

**AC/DC CURRENT BOX PW9100A**



- Direct current measurement option for PW8001/ PW6001/ PW3390
- Wide-band DC to 3.5MHz, 50A AC/DC rated input, 0.04V/A output
- PW9100A-3 : 3 channels
- PW9100A-4 : 4 channels

**AC/DC HIGH VOLTAGE DIVIDER VT1005**



- Voltage measurement option for PW8001/PW6001/ PW3390
- Divides high voltage by 1000:1 and outputs
- Wide-band DC to 4 MHz
- Measurement Accuracy: ±0.08% (DC) ±0.04% (50/60 Hz) ±0.17% (50 kHz)

## 3-Phase Power Meters for Industrial Equipment Testing

**POWER METER PW3337**



- 3 ch input, DC, or 1P2W to 3P3W, or 3P4W
- Max. input 1000 V, 65 A
- DC, or 0.1 Hz to 100 kHz
- ±0.1 % basic accuracy
- Direct input or clamp input

**POWER METER PW3336**



- 2 ch input, DC, or 1P2W to 3P3W
- Max. input 1000 V, 65 A
- DC, or 0.1 Hz to 100 kHz
- ±0.1 % basic accuracy
- Direct input or clamp input

**POWER METER PW3335**



- Ultra-sensitive standby power measurement
- Measure according to IEC 62301
- DC, or 1P2W
- Max. input 1000 V, 30 A
- DC, or 0.1 Hz to 100 kHz
- ±0.1% basic accuracy
- Direct or clamp input

**AC/DC POWER HiTESTER 3334**



- Compliant with the SPECpower® Benchmark
- DC, or 1P2W
- Max. input 300 V, 30 A
- DC, or 45 Hz to 5 kHz
- ±0.2% basic accuracy
- Guaranteed accuracy of 3 Years ±0.3 %
- Direct input only

**POWER HiTESTER 3333**



- Space-saving footprint
- High accuracy of ±0.2 %
- 1P2W only
- Max. input 300 V, 30 A
- 45 Hz to 5 kHz
- Guaranteed accuracy of ±0.3% for 3 years
- Direct input only

## Handheld Power Meter

**AC CLAMP POWER METER CM3286-50**



- Easy AC power checker
- Single-phase, 3-phase (balanced condition/without distortion)
- Phase angle, power factor
- Voltage/current harmonics (with Z3210 installed)
- AC clamp, True RMS, Battery operation
- Compatible with Wireless Adapter Z3210

## Monitor and Record Power Quality

**POWER QUALITY ANALYZER PQ3198**



- IEC61000-4-30 Ed.3 Class A Power Quality Analyzer
- Monitor and record the quality of power
- 1P2W to 3P4W, DC/ 50/ 60/ 400 Hz
- Clamp input

**POWER QUALITY ANALYZER PQ3100**



- IEC61000-4-30 Ed.3 Class S Power Quality Analyzer
- Monitor and record the quality of power
- 1P2W to 3P4W, DC/ 50/ 60 Hz
- Clamp input

**CLAMP ON POWER LOGGER PW3365**




- Designed for 50/60 Hz commercial line use
- 3 circuits (1P2W), single circuit (1P3W, 3P3W, 3P4W)
- Save data to the SD card continuously
- (Current) Clamp input
- (Voltage) Non-metallic contact sensor

**CLAMP ON POWER LOGGER PW3360**



- Designed for 50/60 Hz commercial line use
- 3 circuits (1P2W), single circuit (1P3W, 3P3W, 3P4W)
- Save data to the SD card continuously
- Clamp input
- Harmonic analysis

**POWER LOGGER VIEWER SF1001**



- Easy graphical processing of measurement data saved with the PW3360/3365 series, 3169 series on a PC

## Non-contact CAN Sensors

**NON-CONTACT CAN SENSOR SP7001, SP7002**



- Supports φ1.2mm to 2.0mm covered wires
- No modification of vehicle cables
- No impact on the CAN bus or ECUs
- Accurate, reliable signal capture

## Current Probes to Observe DC to MHz Bandwidth Waveforms on Oscilloscopes and Memory Recorders

**CURRENT PROBE CT6710, CT6711**



- Clearly observe signals with high S/N ratio and 10x output rate
- CT6710: DC to 50 MHz
- CT6711: DC to 120 MHz
- 30 Arms max. 3 ranges
- φ 5 mm (0.20 in.) Core dia.

**CURRENT PROBE CT6700, CT6701**



- CT6700: DC to 50 MHz
- CT6701: DC to 120 MHz
- 5 Arms max.
- φ 5 mm (0.20 in.) Core dia.

**CLAMP ON PROBE 3273-50, 3276**



- 3276: DC to 100 MHz
- 3273-50: DC to 50 MHz
- 30 Arms max.
- φ 5 mm (0.20 in.) Core dia.

**CLAMP ON PROBE 3274, 3275**



- 3275: DC to 2 MHz, 500 Arms max.
- 3274: DC to 10 MHz, 150 Arms max.
- φ 20 mm (0.79 in.) Core dia.

## Power Supplies for Current Probes

**POWER SUPPLY 3269, 3272**



- 3269: Power 2 × CT6710 series or 4 × CT6700, 3270 series
- 3272: Power 1 × CT6700, 3270 series



## Current Probes to Observe Waveforms Using Wide-Band Power Analyzers

AC/DC CURRENT SENSOR  
CT6904A



- Frequency bandwidth  
CT6904A  
Amplitude: DC to 4 MHz, 500 A AC/DC  
Phase: DC to 1 MHz  
CT6904A-2  
Amplitude: DC to 4 MHz, 800 A AC/DC  
Phase: DC to 1 MHz  
•  $\phi$  32 mm (1.26 in.) Core dia.  
..... p.86

AC/DC CURRENT SENSOR  
CT6875A, CT6876A  
CT6877A



- Frequency bandwidth  
CT6875A: Amplitude: DC to 2 MHz, 500 A AC/DC,  
Phase: DC to 1 MHz,  $\phi$  36 mm (1.42 in.) Core dia.  
CT6876A: Amplitude: DC to 1.5 MHz, 1000 A AC/DC,  
Phase: DC to 1 MHz,  $\phi$  36 mm (1.42 in.) Core dia.  
CT6877A: Amplitude: DC to 1 MHz, 2000 A AC/DC,  
Phase: DC to 700 kHz,  $\phi$  80 mm (3.15 in.) Core dia.  
..... p.86

AC/DC CURRENT SENSOR  
CT6872, CT6873



- Frequency bandwidth  
CT6872: Amplitude: DC to 10 MHz,  
50 A AC/DC, Phase: DC to 1 MHz  
CT6873: Amplitude: DC to 10 MHz,  
200 A AC/DC, Phase: DC to 1 MHz  
•  $\phi$  24 mm (0.94 in.) Core dia.  
..... p.87

AC/DC CURRENT SENSOR  
CT6862, CT6863



- Frequency bandwidth  
CT6862-05: Amplitude: DC to 1 MHz,  
50 A AC/DC rated, Phase: DC to 300 kHz  
CT6863-05: Amplitude: DC to 500 kHz,  
200 A AC/DC rated, Phase: DC to 300  
kHz  
•  $\phi$  24 mm (0.94 in.) Core dia.  
..... p.87

## Current Probes to Observe Waveforms Using Wide-Band Power Analyzers

AC/DC CURRENT PROBE  
CT6844A, CT6845A,  
CT6846A



- Frequency bandwidth, rated current, core dia.  
CT6844A: DC to 500 kHz, 500 A AC/DC,  $\phi$  20 mm (0.79 in.)  
CT6845A: DC to 200 kHz, 500 A AC/DC,  $\phi$  50 mm (1.97 in.)  
CT6846A: DC to 100 kHz, 1000 A AC/DC,  $\phi$  50 mm (1.97 in.)  
..... p.88

AC/DC CURRENT PROBE  
CT6833, CT6834



- Frequency bandwidth  
DC to 50 kHz  
• Rated current  
CT6833: 200 A AC/DC  
CT6834: 500 A AC/DC  
• Core dia.  $\phi$  20 mm (0.79 in.)  
..... p.89

AC/DC CURRENT PROBE  
CT6841A, CT6843A



- Frequency bandwidth, rated current  
CT6841A: DC to 2 MHz,  
20 A AC/DC  
CT6843A: DC to 700 kHz,  
200 A AC/DC  
• Core dia.  $\phi$  20 mm (0.79 in.)  
..... p.89

AC/DC CURRENT PROBE  
CT6830, CT6831



- Frequency bandwidth  
CT6830: DC to 100 kHz,  
2 A AC/DC rated  
CT6831: DC to 100 kHz,  
20 A AC/DC rated  
• Core dia.  $\phi$  5 mm (0.20 in.)  
..... p.89

CLAMP ON SENSOR  
9272-05



- Frequency bandwidth  
Amplitude: 1 Hz to  
100 kHz  
Phase: 5 Hz to 50 kHz  
• Rated current: 20 A AC,  
or 200 A AC  
• Core dia.:  $\phi$  46 mm (1.81 in.)  
..... p.90

## Power Supplies for Current Probes

SENSOR UNIT  
CT9555, CT9556, CT9557



- Power supply for current sensors  
CT9555: 1ch, with waveform output  
CT9556: 1ch, with waveform/ RMS output  
CT9557: 4ch, with waveform/ total waveform / total RMS output  
..... p.90

## AC/DC Current Input

AC/DC CURRENT BOX  
PW9100A



- Direct current measurement option for PW8001/ PW6001/ PW3390  
• Wide-band DC to 3.5 MHz, 50 A AC/DC rated input, 0.04 V/A output  
• PW9100A-3 : 3 channels  
• PW9100A-4 : 4 channels  
..... p.74

## AC/DC Current Clamps Terminal HIOKI PL14

AC/DC CURRENT SENSOR  
CT7812, CT7822



- Frequency bandwidth  
CT7812: DC to 100 kHz,  
2 A AC/DC rated  
CT7822: DC to 100 kHz,  
20 A AC/DC rated  
• Core dia.  $\phi$  5 mm (0.20 in.)  
..... p.91

AC/DC AUTO-ZERO CURRENT SENSOR  
CT7700 series



- DC to 5 kHz (-3dB)  
• Rated current, core dia.  
CT7742: 2000 A AC/DC,  $\phi$  55 mm (2.17 in.)  
CT7736: 600 A AC/DC,  $\phi$  33 mm (1.30 in.)  
CT7731: 100 A AC/DC,  $\phi$  33 mm (1.30 in.)  
..... p.91

AC/DC CURRENT SENSOR  
CT7600 series



- DC to 10 kHz (-3dB)  
• Rated current, core dia.  
CT7642: 2000 A, AC/DC  $\phi$  55 mm (2.17 in.)  
CT7636: 600 A AC/DC,  $\phi$  33 mm (1.30 in.)  
CT7631: 100 A AC/DC,  $\phi$  33 mm (1.30 in.)  
..... p.91

DISPLAY UNIT  
CM7290



- Use with CT7000 series current sensors  
• DCA, ACA, (DC+AC)A, frequency measurement  
• Power supply for single sensor  
..... p.92

AC CURRENT SENSOR  
CT7126, CT7131, CT7136



- CT7126:  
• Frequency band up to 20 kHz  
• 60 A AC rated input  
•  $\phi$  15 mm (0.59 in.) Core dia.  
CT7131:  
• 100 A AC rated input  
•  $\phi$  15 mm (0.59 in.) Core dia.  
CT7136:  
• 600 A AC rated input  
•  $\phi$  46 mm (1.81 in.) Core dia.  
..... p.94

AC FLEXIBLE CURRENT SENSOR CT7040 series



- 10 Hz to 50 kHz ( $\pm$ 3dB)  
• 6000 A AC rated  
• loop diameters  
CT7044:  $\phi$  100 mm (3.94 in.)  
CT7045:  $\phi$  180 mm (7.09 in.)  
CT7046:  $\phi$  254 mm (10.0 in.)  
..... p.92

## AC Current Clamps Terminal BNC

CLAMP ON SENSOR  
9695



- 9695-02 Requires the 9219  
• 40 Hz to 5 kHz  
• Phase: 45 Hz to 5 kHz  
• 50 A AC rated input  
•  $\phi$  15 mm (0.59 in.) Core dia.  
9695-03 Requires the 9219  
• 100 A AC rated input  
..... p.94

CLAMP ON SENSOR  
9661, 9669



- 9661  
• 500 A AC rated input  
•  $\phi$  46 mm (1.81 in.) Core dia.  
9669  
• 40 Hz to 5 kHz  
• Phase: 45 Hz to 5 kHz  
• 1000 A AC rated input  
•  $\phi$  55 mm (2.17 in.) Core dia.  
..... p.94

AC FLEXIBLE CURRENT SENSOR CT9667



- 10 Hz to 20 kHz ( $\pm$ 3dB)  
• 5000 A / 500 A AC rated input  
• Three types of core dia. :  $\phi$  100 mm (3.94 in.) to  $\phi$  254 mm (10.0 in.)  
..... p.93

CLAMP ON SENSOR  
9660, 9694



- 9660:  
• Frequency characteristics  
Amplitude: 40 Hz to 5 kHz,  
Phase: 45 Hz to 5 kHz  
• 100 A AC rated input  
•  $\phi$  15 mm (0.59 in.) Core dia.  
9694:  
• 5 A AC rated input  
..... p.94

## Leak Current Terminal HIOKI PL14

AC LEAKAGE CURRENT SENSOR CT7116



- Frequency band 40 Hz to 5 kHz  
• 6 A AC rated input  
•  $\phi$  40 mm (1.57 in.) Core dia.  
..... p.94

## Leak Current Terminal BNC

CLAMP ON LEAK SENSOR 9657-10, 9675



- 9657-10:  
•  $\phi$  40 mm (1.57 in.) Core dia.  
9675:  
• Frequency characteristics  
Amplitude: 40 Hz to 5 kHz  
• Primary rated 10 A AC  
•  $\phi$  30 mm (1.18 in.) Core dia.  
..... p.94

## Load Current Terminal BNC

CLAMP ON PROBE 9132-50, 9010-50, 9018-50



- Use for level measurement  
9132-50: AC 20 to 1000 A,  $\phi$  55 mm (2.17 in.) Core dia.  
9010-50: AC 10 to 500 A,  $\phi$  46 mm (1.81 in.) Core dia.  
• Excellent phase characteristics  
9018-50: AC 10 to 500 A,  $\phi$  46 mm (1.81 in.) Core dia.  
..... p.93

## Communication Testing for Electrical Construction

LAN CABLE HITESTER  
3665



- Use for installing LAN cables or repair maintenance
  - Detect split pairs with wiring check
  - Get NVP-Enhanced measurement
  - Identify cable destinations
- ..... p.95

## PV Maintenance Testers

BYPASS DIODE TESTER  
FT4310



- Test for open or short-circuit bypass diodes even during the day
  - Easily test using the strings in the junction boxes
  - Automatically transfer data wirelessly via Bluetooth® wireless technology
- ..... p.96

HIGH VOLTAGE INSULATION TESTER  
IR5051



- 5 high voltage ranges
  - 250/500/1 k/2.5 k/5 kV testing voltages
  - Insulation resistance, leakage current, voltage, capacitance (DD function), PV insulation resistance
  - IP65 rated all-in-one storage and carrying case
- ..... p.107

INSULATION TESTER  
IR4053



- Built-in dedicated PV function
  - 600 V AC/ 1000 V DC
  - 5 test voltage ranges from 50 to 1000 V
  - Comparator function
  - Integrated hard carrying case
- ..... p.105

## Magnetic Field Testing

MAGNETIC FIELD HITESTER  
FT3470-52



- To measure as defined by IEC/EN 62233
  - Compliance testing of household appliances
  - Compliant to ICNIRP 2010 guidelines
  - 10 Hz to 400 kHz
  - Bundled with 100 cm<sup>2</sup> and 3 cm<sup>2</sup> sensors
- ..... p.97

MAGNETIC FIELD HITESTER  
FT3470-51



- To measure as defined by IEC/EN 62233
  - Compliance testing of household appliances
  - Compliant to ICNIRP 2010 guidelines
  - 10 Hz to 400 kHz
  - Bundled with 100 cm<sup>2</sup> sensor
- ..... p.97

## Infrared Thermometers

INFRARED THERMOMETER  
FT3701



- Long-focus, precise-field type
  - φ 100mm at a 3m distance
  - -35.0 °C to 500.0 °C
  - Measurement wavelength 8 to 14μm
  - Two-beam laser marker
- ..... p.97

INFRARED THERMOMETER  
FT3700



- Long-focus type
  - φ 83mm at a 1m distance
  - -35.0 °C to 500.0 °C
  - Measurement wavelength 8 to 14μm
  - Two-beam laser marker
- ..... p.97

## Temperature Measurement

MEMORY HiLOGGER  
LR8450-01



Refer to the Multi-channels Logger series for temperature measurement

..... p.30

WIRELESS HUMIDITY LOGGER  
LR8514, etc.



Refer to the Wireless Logger series for temperature measurement

..... p.34

Compact Data Logger  
LR5000 Series



Refer to the LR5000 Data Logger series for temperature measurement

..... p.37

## Heat Flow Measurement

HEAT FLOW LOGGER  
LR8432



Heat flow/Voltage/ Temperature/Pulse measurement

..... p.32

MEMORY HiLOGGER  
LR8450-01



Refer to the Multi-channels Logger series for heat flow measurement

..... p.30

## Illumination Testing

LUX METER  
FT3424, FT3425



- DIN 5032-7:1985 class B, JIS C 1609-1: 2006 general AA class compliant
  - 0 to 200 000 lx
  - Timer hold function
  - Memory function
  - Built-in Bluetooth® wireless technology (FT3425)
- ..... p.98



# Digital Multimeter, Tester Index

Because the DMM offers a large number of measurement functions and ranges, only a representative value (maximum accuracy) for each range is included as the basic accuracy (due to space limitations). For more accuracy information for each range, please see the detailed catalog or user manual.

## High-Precision Handheld DMM

DIGITAL MULTIMETER DT4282



- 60000 count display
- DC+AC Voltage measurement
- + Peak, - Peak measurement
- Low-pass filter function
- 10 A Direct input
- USB communication (option)
- True RMS
- CAT IV 600 V

p.99

DIGITAL MULTIMETER DT4281



- 60000 count display
- DC+AC Voltage measurement
- + Peak, - Peak measurement
- Low-pass filter function
- AC Current measurement with Clamp-on probe
- USB communication (option)
- True RMS
- CAT IV 600 V

p.99

## DMM for On-site Maintenance

DIGITAL MULTIMETER DT4261



- 6000 count display
- DC+AC Voltage measurement
- + Peak, - Peak measurement
- Low-pass filter function
- USB communication (option)
- True RMS
- CAT IV 600 V
- Compatible with Wireless Adapter Z3210

p.100

## DMM for Electrical Work

DIGITAL MULTIMETER DT4255



- 6000 count display
- Current-limiting resistor/ fast-blow fuse
- Low-pass filter function
- AC current measurement with clamp-on probe
- Voltage detector
- USB communication (option)
- True RMS
- CAT IV 600 V

p.101

DIGITAL MULTIMETER DT4253



- 6000 count display
- Protective function against accidental voltage input
- Low-pass filter function
- No current measurement
- Voltage detector
- True RMS
- CAT III 600 V

p.102

## DMM for Heating, Ventilation and Air Conditioning (HVAC)

DIGITAL MULTIMETER DT4253



- 6000 count display
- Low-pass filter function
- DC 60µA to 60mA measurement
- AC Current measurement with Clamp-on probe
- USB communication (option)
- True RMS
- CAT IV 600 V

p.101

## General Purpose DMM

DIGITAL MULTIMETER DT4256



- 6000 count display
- Low-pass filter function
- 10 A Direct input
- AC current measurement with clamp-on probe
- Voltage detector
- USB communication (option)
- True RMS
- CAT IV 600 V

p.101

DIGITAL MULTIMETER DT4252



- 6000 count display
- Low-pass filter function
- 10 A Direct input
- USB communication (option)
- True RMS
- CAT IV 600 V

p.101

DIGITAL MULTIMETER DT4224



- 6000 count display
- Protective function against accidental voltage input
- Low-pass filter function
- No current measurement
- True RMS
- CAT III 600 V

p.102

PENCIL HITESTER 3246-60



- Insulated test pin sleeves prevent short-circuits
- Pencil type DMM
- CAT III 600 V
- 4199 count display
- Average rectified
- Ultra bright LED light at probe tip

p.103

CARD HITESTER 3244-60



- Insulated test pin sleeves prevent short-circuits
- A thin card size DMM
- CAT III 300 V, CAT II 600 V
- 4199 count display
- Average rectified

p.103

## Analog Multimeters

HITESTER 3030-10



- Basic type analog tester
- CAT III 600V
- Average rectified

p.103

## Benchtop Multimeters for Production and Inspection Lines

PRECISION DC VOLTMETER DM7275, DM7276



- DC V only
- Measure DC voltage and temperature simultaneously
- 7-1/2 digit resolution
- 1-year 20ppm Accuracy (DM7275)
- 1-year 9ppm Accuracy (DM7276)
- Built-in EXT I/O, LAN, and USB

p.63

## System Integrated Digital Multi-Module Stations

DMM STATION U8991+MR8740T



- Store entire data from 108 units of DMM in single operation
- Simultaneous 108 ch sampling without signal scanner
- High ±0.02% precision & ultra high 6-1/2 digit resolution
- 50 times/s sampling

p.63

DMM STATION MR8990+MR8741



- Store entire data from 16 units of DMM in single operation
- Simultaneous 16 ch sampling without signal scanner
- High ±0.01% precision & ultra high 6-1/2 digit resolution
- 500 times/s sampling

p.63

DMM STATION MR8990+MR8740



- Store entire data from 54 units of DMM in single operation
- Simultaneous 16 ch sampling without signal scanner
- High ±0.01% precision & ultra high 6-1/2 digit resolution
- 500 times/s sampling

p.63

## 5-Range Digital Meg-ohm Meters

HIGH VOLTAGE INSULATION TESTER IR5050, IR5051



- 5 high voltage ranges
  - 250/500/1 k/2.5 k/5 kV testing voltages
  - Insulation resistance, leakage current, voltage, capacitance (DD function), PV insulation resistance (IR5051 only)
  - IP65 rated all-in-one storage and carrying case
- ..... p.107

INSULATION TESTER IR4053



- Built-in dedicated PV function
  - 600 V AC/ 1000 V DC
  - 5 test voltage ranges from 50 to 1000 V
  - Comparator function
  - Integrated hard carrying case
- ..... p.105

## 5-Range Digital Meg-ohm Meters for Electrical Equipment Maintenance

INSULATION TESTER IR4057-50, IR4059



- 5 test voltage ranges from 50 to 1000 V
  - High-speed measurement with bar graph
  - Comparator detection function
  - 600 V AC/DC voltmeter
  - Compatible with Wireless Adapter Z3210
- ..... p.104

INSULATION TESTER IR4056



- 5 test voltage ranges from 50 to 1000 V
  - Comparator function
  - 600 V AC/DC meter
  - 200 mA continuity check
  - Integrated hard carrying case
- ..... p.105

## 3-Range Analog Meg-ohm Meters

ANALOG MΩ HITESTER 3490



- 3 ranges
  - 250/500/1000 V testing voltages
  - 200 mA continuity (3 Ω resistance range)
  - AC voltage measurement
  - Bright LED, luminous scale
  - Integrated hard carrying case
- ..... p.107

## Single-Range Analog Meg-ohm Meters

ANALOG MΩ HITESTER IR4018



- Single range
  - 1000 V testing voltage (2000 MΩ)
  - AC voltage measurement
  - Bright LED, luminous scale
  - Integrated hard carrying case
- ..... p.106

ANALOG MΩ HITESTER IR4017



- Single range
  - 500V testing voltage (1000 MΩ)
  - AC voltage measurement
  - Bright LED, luminous scale
  - Integrated hard carrying case
- ..... p.106

ANALOG MΩ HITESTER IR4016



- Single range
  - 500 V testing voltage (100 MΩ)
  - AC voltage measurement
  - Bright LED, luminous scale
  - Integrated hard carrying case
- ..... p.106

## Ground Clamps and Earth Resistance Testers

CLAMP ON EARTH TESTER FT6380-50



- Grounding resistance measurement for multiple-ground installations
  - Current measurement capable (AC)
  - CAT IV 600 V compliant
  - RMS measurement (true RMS rectification)
  - Compatible with Wireless Adapter Z3210
- ..... p.116

EARTH TESTER FT6041



- 4- or 3- or 2- pole method
  - Grounding resistance measurement without disconnecting ground electrodes
  - IP67 protected, built tough to withstand use at harsh sites
  - Compatible with Wireless Adapter Z3210
- ..... p.114

EARTH TESTER FT6031-50



- 3- or 2- pole method
  - Supports Class A to Class D ground types
  - IP67 dustproof and waterproof
  - Compatible with Wireless Adapter Z3210
- ..... p.115

ANALOG EARTH TESTER FT3151



- Three or two electrode measurement method
  - EN and JIS standard
- ..... p.115

## Voltage Detectors

VOLTAGE DETECTOR 3481



- Non-metallic contact
  - 40 to 600 V AC range
  - Sensitivity adjustment function
  - With LED light
- ..... p.116

## Phase Detectors

DIGITAL PHASE DETECTOR PD3259-50



- Non-metallic voltage measurements
  - Non-metallic measure voltage and detect phase sequence simultaneously
  - 90 to 520 V AC
  - φ 6 - 30 mm (0.24 - 1.18 in.) core dia.
  - Compatible with Wireless Adapter Z3210
- ..... p.117

PHASE DETECTOR PD3129



- Non-metallic contact clip
  - PD3129-10: For use on 70 to 1000 V lines (50/60 Hz), Thick conductors φ 10 - 40 mm (0.39 - 1.57 in.) core dia.
  - PD3129: For use on 70 to 600 V lines (50/60 Hz), Conductors φ 2.4 - 17 mm (0.09 - 0.67 in.) core dia.
- ..... p.117



## AC Current Leakage Clamp Meters

CLAMP ON EARTH TESTER  
FT6380-50



- Grounding resistance measurement for multiple-ground installations
- Current measurement capable (AC)
- CAT IV 600 V compliant
- True RMS
- Compatible with Wireless Adapter Z3210

..... p.116

AC LEAKAGE CLAMP METER  
CM4001



- Measure everything from leakage to load
- 0.60 mA (resolution 10  $\mu$ A)
- True RMS
- Filter function
- Inrush current measurement
- Compatible with Wireless Adapter Z3210

..... p.113

AC LEAKAGE CLAMP METER  
CM4002, CM4003



- Measure everything from leakage to load
- 0.060 mA (resolution: 1  $\mu$ A) to 200.0 A
- True RMS
- External output function (CM4003)
- Compatible with Wireless Adapter Z3210

..... p.113

## AC Current Clamp Meters for Electrical Work

AC CLAMP METER  
CM4141-50



- Thin jaw easily gets into tight spaces
- 60 to 2000 A AC range
- True RMS
- V, A, Hz,  $\Omega$ , and other extensive measurement parameters
- Compatible with Wireless Adapter Z3210

..... p.111

AC CLAMP METER  
CM3281  
CM3291



- 42 to 2000 A AC range
- Average rectified (CM3281)
- True RMS (CM3291)
- V, A,  $\Omega$ , and other extensive measurement parameters

..... p.112

AC CLAMP METER  
CM3289



- 42 to 1000 A AC range
- Weighing only 100g with thin 16 mm body
- True RMS
- DMM function

..... p.111

AC CLAMP METER  
3280-10F



- 42 to 1000 A AC range
- Weighing only 100g with thin 16 mm body
- Average rectified
- DMM function

..... p.111

## AC/DC Current Clamp Meters for General Industrial Applications

AC/DC CLAMP METER  
CM4375-50



- Easily get into tight spaces
- 1000 A AC/DC range
- True RMS
- V, A, Hz,  $\Omega$ , and other extensive measurement parameters
- Inrush current
- Compatible with Wireless Adapter Z3210

..... p.108

AC/DC CLAMP METER  
CM4373-50



- 600/2000 A AC/DC range
- True RMS
- V, A, Hz,  $\Omega$ , and other extensive measurement parameters
- Inrush current
- Max/Min/Avg/Peak
- Compatible with Wireless Adapter Z3210

..... p.108

AC/DC CLAMP METER  
CM4371-50



- 20/600 A AC/DC range
- True RMS
- V, A, Hz,  $\Omega$ , and other extensive measurement parameters
- Inrush current
- Max/Min/Avg/Peak
- Compatible with Wireless Adapter Z3210

..... p.109

CLAMP ON AC/DC HITESTER  
3288



- 100/ 1000 A AC/DC range
- True RMS (3288-20)
- Average rectified (3288)
- Weighing only 150g with thin 16 mm body
- DMM function

..... p.110

CLAMP ON AC/DC HITESTER  
3287



- 10/ 100 A AC/DC range
- True RMS
- Weighing only 170g with thin 16 mm body
- DMM function

..... p.110

DISPLAY UNIT  
CM7290



- Use with CT7000 series current sensors
- DCA, ACA, (DC+AC)A, frequency measurement
- Power supply for single sensor

..... p.92

## Handheld Power Meter

AC CLAMP POWER METER  
CM3286-50



- Easy AC power checker
- Single-phase, 3-phase (balanced condition/without distortion)
- Phase angle, power factor
- Voltage/current harmonics (with Z3210 installed)
- AC clamp, True RMS, Battery operation
- Compatible with Wireless Adapter Z3210

..... p.79

## Accessories for AC Clamp Meters

AC FLEXIBLE CURRENT  
SENSOR CT6280



- For large diameter and large current measurement in combination with AC clamp meter
- 4200 A AC continuous

..... p.112

CLAMP ON ADAPTER  
9290-10



- Primary 1000A, secondary 100A (1/10 ratio) output
- Superior phase angle characteristics for power

..... p.94

## Connecting Instruments in the Field with IT

### GENNECT Cross SF4071, SF4072



- Mobile app for iOS and Android
  - Improve efficiency especially for repeated measurements and recording
  - Find root cause of failures through data analysis and create quick reports
- ..... p.119

### WIRELESS ADAPTER Z3210



- Simply plug in the Z3210 wireless adapter and your compatible Hioki device is Bluetooth® ready
- ..... p.119

### GENNECT One SF4000



- Automatically pair with LAN-connected measuring instruments
  - Display acquired data graphically in real-time
  - List MAX, MIN and AVG values
  - Windows compatible
- ..... p.118

### GENNECT Cloud SF4180



- Connects to the GENNECT series to provides added value through cloud services
  - Exchanging data via the cloud
  - Offers a range of plans and payment methods
- ..... p.118

## Advanced Technologies

### ELECTROLYSIS CELL ANALYZER (ALDAS-Mini)



- For R&D, analysis of electrolysis cells
  - Wide compatibility: supports electrolysis cell types including PEM, SOEC, AEM, AWE, etc.
- ..... p.111



## Highest Measurement Capabilities and Fastest Transfer Rate in History

### MEMORY HiCORDER MR6000



Recorders  
Data Loggers

- Work efficiently and intuitively using the MR6000's large touch panel
- Capture momentary phenomena by performing isolation measurement at up to 200 MS/s (when using the High Speed Analog Unit U8976)
- Enjoy a stress-free user experience thanks to dramatically faster saving of data
- Save data in real time while measurement continues
- CAN, CAN FD, and LIN measurement; MDF saving
- Generate user-defined waveforms and monitor values

Model No. (Order Code)	<b>MR6000</b>	(Main unit only, input modules up to 8 units)
	<b>MR6000-01</b>	(Built-in real-time waveform calculation and other functionality)

*Note: main unit MR6000/MR6000-01 cannot operate alone. You must install one or more optional input modules in the unit.*

#### Basic specifications (Accuracy guaranteed for 1 year)

	MR6000	MR6000-01
Additional function	N/A	Real-time waveform calculation, Digital Filter calculation
Number of input units	Max. 8 units	
Number of channels	Max. 32 analog channels (when using the U8975), or 128 logic channels (when using the 8973)	
Measurement ranges (20 div full-scale)	10 mV to 400 V f.s., 12 ranges (when using the U8976), Resolution : 1/1600 of range 4 V to 200 V f.s., 6 ranges (when using the U8975), Resolution : 1/32000 of range	
Max. allowable input	1000 V DC/700 V AC (when using the U8974), 400 V DC (when using the U8976), 200 V DC (when using the U8975)	
Frequency characteristics	DC to 30 MHz (when using the U8976), DC to 2 MHz (when using the U8975)	
Max. sampling rate	200 MS/s, all channels simultaneously (when using the U8976) External sampling: 10 MS/s	
Recording methods	Normal: Normal waveform recording Envelope: Record maximum and minimum values every fixed period Dual sampling: Record waveforms at a sampling rate that differs from the envelope during envelope measurement	
Calculation functions	Numerical calculation, waveform processing*, FFT calculations *Power fluctuation analysis using full-wave average operator	
Storage memory capacity	1 G-words	
Removable storage	SD memory card ×1, USB memory ×7, SSD/HDD (built in the main unit) ×1 FTP transmission (to LAN-connected computer) *Use only Storage Media sold by Hioki.	
Display	12.1 inch XGA-TFT color LCD (1024 × 768 dots)	
Display formats	Time-domain waveform representation, XY composite waveform display, FFT display	
External interfaces	LAN, USB, SD, SATA, Monitor output	
Power supply	100 to 240 V AC (50/60 Hz) (300 VA max.)	
Dimensions and mass	353 mm (13.9 in.)W × 235 mm (9.25 in.)H × 154.8 mm (6.09 in.)D, 6.5 kg (229.3 oz.) (main unit only)	
Included accessories	Power cord ×1, Quick start manual ×1, Precautions concerning use ×1, Application disk (CD-R) ×1, Instruction manual (CD-R, detail and calculation) ×1, Blank panel (for blank slots only)	

*Note: user cannot install or change the SSD Unit U8332 and the Probe Power Unit Z5021*

Options A



**SSD UNIT U8332**  
Specified upon order, built-in type, 256 GB



**SD MEMORY CARD 2GB Z4001**  
2 GB capacity



**SD MEMORY CARD 8GB Z4003**  
8 GB capacity



**USB DRIVE Z4006**  
16 GB, Long-life, high-reliability SLC Flash Memory



**PROBE POWER UNIT Z5021**  
Specified upon order of the MR6000, power max. 4 × CT6710 series, or max. 8 × other probes



**CARRYING CASE C1010**  
For the MR6000, includes compartment for options, hard trunk type

#### Storage Media Precaution

*Use only Storage Media sold by Hioki. Compatibility and performance are not guaranteed for Storage Media made by other manufacturers. You may be unable to read from or save data to such media.*

*Install by inserting into the main unit. Can be replaced by user.*



*Other options refer to the detailed brochure*

Options B

- **ANALOG UNIT 8966**  
2 ch, voltage input, 20MS/s (DC to 5 MHz)
- **TEMP UNIT 8967**  
2 ch, thermocouple temperature input
- **HIGH RESOLUTION UNIT 8968**  
2 ch, voltage input, 1MS/s (DC to 100 kHz)
- **STRAIN UNIT 8969**  
2 ch, strain gauge type converter amp
- **FREQ UNIT 8970**  
2 ch, for measurement of frequency, rpm, pulse
- **CURRENT UNIT 8971**  
2 ch, for measuring current using dedicated current sensors
- **DC/RMS UNIT 8972**  
2 ch, Voltage, 1MS/s (DC to 400 kHz), or RMS (DC/30 to 100 kHz)
- **LOGIC UNIT 8973**  
4 terminals, 16 ch
- **DIGITAL VOLTMETER UNIT MR8990**  
2 ch, DC V input, 0.1 μV resolution, 500 times/s sampling
- **HIGH VOLTAGE UNIT U8974**  
2 ch, voltage input, max. 1000 V DC, 700 V AC
- **4CH ANALOG UNIT U8975**  
4 ch, voltage input, 5MS/s (DC to 2 MHz)
- **HIGH SPEED ANALOG UNIT U8976**  
2 ch, Voltage input, 200MS/s (DC to 30 MHz)
- **3CH CURRENT UNIT U8977**  
3 ch, current measurement by dedicated current sensor
- **4CH ANALOG UNIT U8978**  
4 ch, voltage input, 5MS/s (DC to 2 MHz)
- **CHARGE UNIT U8979**  
2 ch, for acceleration measurement, charge output / preamplifier output / voltage output
- **ARBITRARY WAVEFORM GENERATOR UNIT U8793**  
2 ch, FG function 10 mHz to 100 kHz, arbitrary waveform generator D/A refresh rate 2 MHz, output 15 V

## Engineered for Extremes, Trusted for Precision

### MEMORY HiCORDER MR8848

**New**



MR8848 main unit with U8351 Printer Unit installed

LAN

USB3.0

SD

SSD

CE

3 Year Warranty

Recorders  
Data Loggers

- Safely measure with isolated channels
- Capture data quickly with 20 MS/s high-speed sampling
- Handle complex tasks using 32 analog and 64 logic channels
- Record for extended periods with high-capacity memory
- Work anywhere with a durable, shock-resistant, portable design
- Save data directly to 1TB SSD or external storage
- Capture diverse events using versatile trigger options
- Make pass/fail judgments with waveform and numerical analysis
- Seamlessly connect to PCs via LAN or USB
- Check printed waveforms on-site using a built-in printer

Model No. (Order Code) **MR8848** (Max. 32ch, 512MW memory, main unit only)

Note: main unit MR8848 cannot operate alone. You must install one or more optional input modules in the unit.

#### Basic specifications

Measurement functions	Memory function (waveform recording), Recorder function (peak/trough recording), X-Y Recorder function, FFT function
Example channel configurations/numbers	Eight analog input modules: 16 analog channels + 16 logic channels (built-in) Eight 4ch analog input modules: 32 analog channels + 16 logic channels (built-in) Five analog input modules + three logic input modules: 10 analog channels + 64 logic channels (16 built-in channels + 48 channels in logic input modules) Five 4ch analog input modules + three logic input modules: 20 analog channels + 64 logic channels (16 built-in channels + 48 channels in logic input modules)
Module slots	Up to 8 modules Restrictions: Up to 4 modules of Model 8971 CURRENT UNIT Up to 3 modules of Model 8973 LOGIC PROBE Up to 3 modules of Model U8977 3CH CURRENT UNIT
Maximum sampling speed	20 MS/s for simultaneous use of all channels (when using ANALOG UNIT 8966) 10 MS/s for external sampling
Memory capacity	Total 512 megawords (no memory expansion) (16 megawords/ch using 32 analog channels, 256 megawords/ch using 2 analog channels)
Removable storage	SD card slot × 1, USB memory slot × 1, Internal storage (1 TB, factory option)
Printer	PRINTER UNIT U8351 (factory option)
Control terminals	External trigger input, trigger output, external sampling input, two external outputs (GO, NG), three external inputs (START, STOP, SAVE)
External interface	LAN: 1000BASE-T (FTP server, HTTP server) USB: USB 3.0 compliant, series A receptacle × 1, series B receptacle × 1
Environmental conditions (no condensation)	Operation: -10°C to 40°C (14°F to 104°F), 20% to 80% RH With printer in use: 0°C to 40°C (32°F to 104°F), 20% to 80% RH Storage: -20°C to 50°C (-4°F to 122°F), 90% RH or less
Power supply	100 V to 240 V AC, 50 Hz/60 Hz 10 V to 28 V DC (when using DC POWER UNIT 9784)
Power consumption	130 VA (220 VA when using PRINTER UNIT U8351)
Dimensions and weight	Approx. 351 mm (13.82 in.) W × 261 mm (10.28 in.) H × 140 mm (5.51 in.) D (excluding protrusions), 7.6 kg (268.1 oz., main unit only)
Included accessories	Startup guide ×1, precautions for use ×1, input code label ×1, power cord ×1 (RECORDING PAPER 9231 ×1 and roll paper attachment ×1, when PRINTER UNIT U8351 is installed)

Other options: refer to the detailed catalog

Note: user cannot install or change the Printer Unit U8351, the DC Power Unit 9784, the Internal Storage U8334, and the Direct Write to Storage MR9001.

**Option A**

**PRINTER UNIT U8351**  
Factory option

**RECORDING PAPER 9231**  
A4 width 216 mm (8.50 in.) × 30 m (98.43 ft.), 6 rolls/set

**DC POWER UNIT 9784**  
Factory option, built in on the bottom case. 10 to 28 V DC drive.

**CARRYING CASE 9783**  
For the MR8848, includes compartment for options, hard trunk type

**INTERNAL STORAGE U8334**  
Factory option, built-in type, 1 TB

**DIRECT WRITE TO STORAGE MR9001-01**  
Additional function

**SD MEMORY CARD 2GB Z4001**  
2 GB capacity

**SD MEMORY CARD Z4003**  
8 GB capacity

**USB DRIVE Z4006**  
16 GB, Long-life, high-reliability SLC Flash Memory


**Storage Media Precaution**  
Use only Storage Media sold by Hioki. Compatibility and performance are not guaranteed for Storage Media made by other manufacturers. You may be unable to read from or save data to such media.

**Option B**

- **ANALOG UNIT 8966**  
2 ch, voltage input, 20MS/s (DC to 5 MHz)
- **4ch ANALOG UNIT U8975**  
4 ch, voltage input, 5MS/s (DC to 2 MHz)
- **4CH ANALOG UNIT U8978**  
4 ch, voltage input, 5MS/s (DC to 2 MHz)
- **HIGH RESOLUTION UNIT 8968**  
2 ch, voltage input, 1MS/s (DC to 100 kHz)
- **DC/RMS UNIT 8972**  
2 ch, Voltage, 1MS/s (DC to 400 kHz), or RMS (DC/ 30 to 100 kHz)
- **HIGH VOLTAGE UNIT U8974**  
2 ch, voltage input, max. 1000 V DC, 700 V AC
- **DIGITAL VOLTMETER UNIT MR8990**  
2 ch, DC V input, 0.1 μV resolution, 500 times/s sampling
- **3CH CURRENT UNIT U8977**  
3 ch, for measuring current using dedicated current sensors
- **CURRENT UNIT 8971**  
2 ch, for measuring current using dedicated current sensors
- **TEMP UNIT 8967**  
2 ch, thermocouple temperature input
- **STRAIN UNIT U8969**  
2 ch, strain gauge type converter amp
- **FREQ UNIT 8970**  
2 ch, for measurement of frequency, rpm, pulse
- **CHARGE UNIT U8979**  
2 ch, for acceleration measurement, charge output / preamplifier output / voltage output
- **LOGIC UNIT 8973**  
4 terminals, 16 ch
- **WAVEFORM GENERATOR UNIT MR8790**  
4 ch, ±10 V DC output, 1 Hz to 20 kHz sine waveform output
- **ARBITRARY WAVEFORM GENERATOR UNIT U8793**  
2 ch, FG function 10 MHz to 100 kHz, Arbitrary waveform generator D/A refresh rate 2 MHz, Output 15 V
- **PULSE GENERATOR UNIT MR8791**  
8 ch, 0.1 Hz to 20 kHz pulse, pattern output

## Waveform Generation and Recording. Total 64ch, 32 Analog Channels + 32 Logic Channels

### MEMORY HiCORDER MR8827

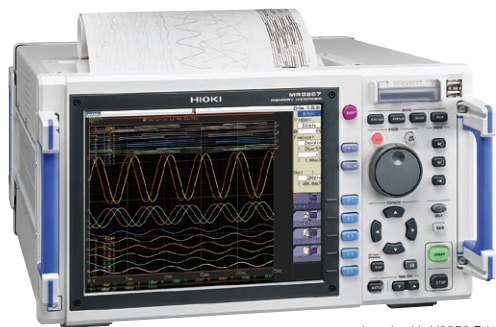

MR8827 main unit with U8350 Printer Unit installed

USB 2.0

LAN

CE

3 Year Warranty

#### Basic specifications (Accuracy guaranteed for 1 year)

Max. Number of channels	32 ch analog + 32 ch logic, or 28 ch analog + 64 ch logic (when use with built-in logic input + plug-in logic unit 8973 × 2)
Number of slots	16 slots (Max. 16)
Number of logic channels	32 ch logic (logic probe terminal GND share a common GND with chassis) Built-in logic input not available when using DVM Unit MR8990 on slots 1, 2, 9, or 10. [Limitation on using built-in logic input] (with logic measurement ON) • Measurement resolution on slots 1, 2, 9, and slot 10 is limited up to 12 bits • Cannot use Frequency Unit 8970 on slots 1, 2, 9, or 10
Measurement ranges (20 div full-scale)	[Analog Unit 8966]: 5 mV/div to 20 V/div, 12 ranges, resolution : 1/100 of range (using 12-bit A/D) [High Resolution Unit 8968]: 5 mV/div to 20 V/div, 12 ranges, resolution : 1/1600 of range (using 16-bit A/D)
Max. allowable input	400 V DC (using the 8966/8968)
Frequency characteristics	DC to 5 MHz (-3 dB, using the 8966), DC to 100 kHz (-3 dB, using the 8968)
Time axis (Memory function)	5 μs to 5 min/div, 26 ranges, at 100 points/div resolution
Measurement functions	Memory (high-speed recording), Recorder (real-time recording), X-Y recorder, FFT
Other functions	Numerical calculation, Waveform processing, Waveform judgment (at Memory, or FFT function)
Memory capacity	128M-words/ch (using 4 Analog channels) to 16M-words/ch (using 32 Analog channels), Total capacity 512MW memory
Data storage media	USB memory stick, CF card, Built-in SSD unit (option, 128GB) *Approx. 125 sec. when saving 100 MB of data, *Data of 100 MB in size can record 16,000 div waveforms across 32 channels.
Printing	[Built-in A4-size printer option]: 216 mm (8.50 in.) × 30 mm (98.43 ft.), thermal paper roll, Recording speed : Max. 50 mm (1.97 in.)/s
Display	10.4 inch TFT color LCD (SVGA, 800 × 600 dots)
External interfaces	LAN: 100BASE-TX, USB 2.0 series A receptacle 2 port (for USB memory, mouse) USB 2.0 series B receptacle (for communication with PC, mass storage)
Power supply	100 to 240 V AC, 50/60 Hz (220 VA max., when using printer: 350 VA max.)
Dimensions and mass	401 mm (15.79 in.)W × 233 mm (9.17 in.)H × 388 mm (15.28 in.)D (including protruding parts except handle), 12.6 kg (444.4 oz.) (main unit only)
Included accessories	Instruction manual ×1, Power cord ×1, Application disk (CD-R) ×1, Input cord label ×1, Printer paper ×1 (when ordering printer unit), Roll paper attachment ×2 (when ordering printer unit)

- Generate and record waveforms with a single unit
- Output previously recorded problematic waveforms and apply to devices under test to simulate potential issues
- 32 analog + 32 logic channels to 28 analog + 64 logic channels
- High-speed sampling up to 20MS/s with fully isolated inputs
- Safe measurement with all isolated analog inputs
- Large capacity memory of total 512M-words
- Measure various system signals from high voltage to ultra low voltage simultaneously

Model No. (Order Code) **MR8827** (Max. 32ch, 512MW memory, main unit only)

Note: main unit MR8827 cannot operate alone. You must install one or more optional input modules in the unit.

Other options: refer to the detailed catalog

**Option A**

**SSD UNIT U8330**  
Specify upon order, built-in type, 128 GB

**PRINTER UNIT U8350**  
Built-in option. Printing width 200 mm (7.87 inch). Compatible recording paper: Model 9231

**RECORDING PAPER 9231**  
A4 width 216 mm (8.50 in.) × 30 mm (98.43 ft.), 6 rolls/set

**CARRYING CASE (special order)**  
Hard trunk type. Inquire with your local Hioki distributor.

Install by inserting into the main unit. Can be replaced by user.

**Option B**

- **ANALOG UNIT 8966**  
2 ch, voltage input, 20MS/s (DC to 5 MHz)
- **TEMP UNIT 8967**  
2 ch, thermocouple temperature input
- **HIGH RESOLUTION UNIT 8968**  
2 ch, voltage input, 1MS/s (DC to 100 kHz)
- **STRAIN UNIT U8969**  
2 ch, strain gauge type converter amp
- **FREQ UNIT 8970**  
2 ch, for measurement of frequency, rpm, pulse
- **CURRENT UNIT 8971**  
2 ch, for measuring current using dedicated current sensors

- **DC/RMS UNIT 8972**  
2 ch, Voltage, 1MS/s (DC to 400 kHz), or RMS (DC/30 to 100 kHz)
- **LOGIC UNIT 8973**  
4 terminals, 16 ch
- **DIGITAL VOLTMETER UNIT MR8990**  
2 ch, DC V input, 0.1 μV resolution, 500 times/s sampling
- **WAVEFORM GENERATOR UNIT MR8790**  
4 ch, ±10V DC output, 1 Hz to 20 kHz sine waveform
- **PULSE GENERATOR UNIT MR8791**  
8 ch, 0.1 Hz to 20 kHz pulse, pattern output
- **ARBITRARY WAVEFORM GENERATOR UNIT U8793**  
2 ch, FG function 10 mHz to 100 kHz, Arbitrary waveform generator D/A refresh rate 2 MHz, Output 15 V
- **HIGH VOLTAGE UNIT U8974**  
2 ch, voltage input, max. 1000 V DC, 700 V AC
- **CHARGE UNIT U8979**  
2 ch, for acceleration measurement, charge output / preamplifier output / voltage output

## 1000V Direct Input Multi-channel Logger

### MEMORY HiCORDER MR8875



LAN

USB 2.0

SD

SSD

CE

3 Year Warranty

#### Basic specifications (Accuracy guaranteed for 1 year)

Number of input units	Up to 4 slots
Number of channels	Max. 16 analog channels (Max. 60 channels when using the MR8902) + standard 8 logic channels + 2 pulse channels Note: For analog units, channels are isolated from each other and from the MR8875's GND. For CAN unit ports or standard logic terminals or standard pulse terminals, all channels have common GND.
Measurement ranges (20 div full-scale)	5 mV to 10 V/div, 11 ranges (when using the MR8901), 500 mV to 50 V/div, 7 ranges (when using the MR8905), resolution : 1/1250 of range
Max. rated voltage	Between terminals: 1000 V DC, 700 V AC (when using the MR8905)
Frequency characteristics	DC to 100 kHz (-3 dB, when using the MR8901)
Time axis	200 μs to 5 min/div, 21 ranges, sampling period: 1/100 of range, External sampling possible
Max. sampling rate	[When using MR8901] 500 kS/s (2 μs period, all channels simultaneously) [When using MR8902] 10 ms (all input channels are scanned at high speed during every recording interval) [When using MR8903] 200 kS/s (5 μs period, all channels simultaneously) External sampling: 200 kS/s (5 μs period)
Measurement functions	High-speed function (high speed recording), Real-time calculation between channels, FFT calculation, or other functions
Storage memory capacity	Total 32 M-words (memory expansion: N/A, 8 MW each input unit) Note: 1 word = 2 bytes, therefore 32 Mega-words = 64 Mega-bytes. Note: storage memory can be allocated depending on the number of channels used at each input unit
Removable storage	SD card slot ×1, USB 2.0 memory
Display	Touch-panel operation 8.4-inch SVGA-TFT color LCD (800 × 600 dots)
Communication interfaces	LAN: 100BASE-TX (DHCP, DNS supported, FTP server/ client, WEB server, send E-mail, command control) USB: USB 2.0 compliant, series mini-B receptacle ×1 (setting / measure with communication command, or file transfer SD card to PC), series A receptacle ×2 (USB memory, USB mouse/ key-board)
Power supply	1) AC adapter Z1002: 100 to 240 V AC (50/60 Hz), 56 VA 2) Battery pack Z1003: 7.2 V DC, 36 VA, continuous operation time: 1 hour with back light ON (AC adapter has priority when used in combination with battery pack), Charges while installed in the MR8875, recharging time: 3 hours 3) External DC Power: 10 to 28 V DC, 56 VA, (please contact your Hioki distributor for connection cord)
Dimensions and mass	298 mm (11.73 in.)W × 224 mm (8.82 in.)H × 84 mm (3.31 in.)D, 2.4 kg (84.7 oz.), (excluding input units and the Battery pack Z1003) Reference data: 3.47 kg / 122.4 oz (including the MR8901 ×4 units and the Battery pack Z1003)
Included accessories	Instruction manual ×1, Measurement guide ×1, AC adapter Z1002 ×1, Protection sheet ×1, USB cable ×1, Shoulder strap ×1, Application disk (Wave viewer Wv, communication commands table, CAN Editor) ×1

- 1000V input and instantaneous DC or RMS waveform measurement with new Analog Unit MR8905
- Multi-channel logger capable of thermocouple temperature measurement up to 60 ch at 10 msec intervals
- Measure multiple channels simultaneously despite handheld portable design
- Max. 2 μsec high-speed simultaneous logging for all input channels
- Save directly to the SD Card in real time for uninterrupted long-term logging
- 16-bit high-resolution measurement of voltage, temperature, and distortion
- FFT calculation, waveform calculation functions for advanced analysis
- Intuitive touch screen for optimal operability
- Tough against vibrations and extreme temperatures
- 3 different power supplies

Model No. (Order Code) **MR8875** (Max. 16 - 60ch, 32MW memory, main unit only)

Note: test leads are not included. Purchase the leads appropriate for your application separately. AC Adapter Z1005 is included as standard.

Other options: refer to the detailed catalog

**Option C**

**AC ADAPTER Z1002**  
For main unit, 100 to 240 V AC

**POWER CABLE L1012**  
For main unit, DC drive, connect to external battery, Unprocessed ends, Approx. 2 m (6.6 ft.)

**BATTERY PACK Z1003**  
NiMH, Charges while installed in the main unit

**CAN CABLE 9713-01**  
For the MR8904, unprocessed on one end, 1.8 m (5.91 ft.) length, CAN FD is not supported

**SD MEMORY CARD Z4001 (2GB) Z4003 (8GB)**

**SD Card Precaution**  
Use only SD Cards sold by Hioki. Compatibility and performance are not guaranteed for SD cards made by other manufacturers. You may be unable to read from or save data to such cards.

**CARRYING CASE C1004**  
For the MR8875, includes compartment for options, hard trunk type

**Input modules**

- ANALOG UNIT MR8901**  
4ch, Voltage measurement, DC to 100kHz
- VOLTAGE/TEMP UNIT MR8902**  
15ch, Voltage measurement, Thermocouple measurement
- STRAIN UNIT MR8903**  
4ch, Voltage measurement, strain gauge converter input
- CAN UNIT MR8904**  
2-port, up to 15 analog channels and up to 16 logic channels, CAN FD is not supported.
- ANALOG UNIT MR8905**  
2ch, High-voltage measurement (available with MR8875 Ver 2.14/3.4 or later)



## Capture High- to Low-Voltage Signals in a Single Device! Rugged, Professional and Ready for the Field

### MEMORY HiCORDER MR8880



USB 2.0

CE

3 Year Warranty



Optional printer docks onto main unit

- CAT III 600V isolation performance; directly measure a 480V power line
- 4 completely isolated channels let you simultaneously record data on a 3-phase power line plus have one extra channel
- Tough against harsh environments; -10°C to 50°C operating temperature range
- Built to withstand mechanical shocks and vibrations (ships standard with side protectors)
- Make settings easily with PRESETS function

Model No. (Order Code) **MR8880-20** (4ch, printer unit option, English model)

Note: input cords and Battery Pack are not included. Purchase the cords appropriate for your application separately. Printer Unit MR9000 is optional and sold separately.

#### Basic specifications (Accuracy guaranteed for 1 year)

Number of channels	4 analog channels + 8 logic channels (standard) <i>Note: isolated analog channels, isolated input and frame, logic has common GND</i>
Measurement ranges (10 div full-scale)	4 channels of voltage measurement; mode switchable between instantaneous waveform or RMS value, 10 mV to 100 V/div, 13 ranges, resolution: 1/640 of range RMS value mode: 30 Hz to 10 kHz, Crest factor: 2
Max. rated voltage	Between terminals: 600 V AC/DC, Between terminal to earth: 600 V AC/DC CAT III; 300 V AC/DC CAT IV
Frequency characteristics	DC to 100 kHz (±3dB)
Time axis (High-speed function)	100 μs to 100 ms/div, 10 ranges, Sampling period: 1/100 of range
Recording intervals (Real-time function)	100 μs to 1 minute, 19 selections (simultaneous sampling in all channels)
Measurement functions	High-speed function (high speed recording) Real-time function (actual time recording)
Memory capacity	14-bits × 1M-words/ch (1 word = 2 bytes)
Removable storage	CF card slot ×1 (Up to 2 GB), USB 2.0 memory ×1
Printing	[Printer unit is option] 112 mm (4.41 in.) × 18 m (59.06 ft), thermal paper roll, Recording speed : 10 mm (0.39 in.)/sec <i>Note: printing is not supported when using alkaline batteries</i>
Display	5.7-inch VGA-TFT color LCD (640 × 480 dots)
Displayable languages	English, Japanese, Chinese
Communication interfaces	USB 2.0 mini-B receptacle × 1; Transfers files from the installed CF card or USB memory stick to a PC when connected, and External PC control
Power supply	AC adapter Z1002: 100 to 240 V AC (50/60 Hz), 45 VA (include AC adapter, when Real-time recording), 107 VA (include AC adapter, when Real-time recording and printing) Battery pack Z1000: AC adapter has priority when used in combination with battery pack, recharge with AC adapter 3 hours, Continuous use 3 hours (with back-light ON) LR6 (AA) alkaline batteries ×8, Continuous use 40 minutes, (with back-light ON, cannot be used with the Printer unit) DC power supply: 10 to 28 V DC (cable available by special order)
Dimensions and mass	205 mm (8.07 in.)W × 199 mm (7.83 in.)H × 67 mm (2.64 in.)D, 1.66 kg (58.6 oz.) (with the Battery pack installed) When printer is combined - with main unit: 303 mm (11.93 in.)W × 199 mm (7.83 in.)H × 67 mm (2.64 in.)D, 2.16 kg (76.2 oz.) (with the Battery pack installed)
Included accessories	Instruction manual ×1, AC adapter Z1002 ×1, Alkaline battery box ×1, Strap ×1, USB cable ×1, Application disk (Wave viewer Wv, Communication commands table) ×1

AC adapter Z1002 is bundled with the MR8880

Dedicated options

**PRINTER UNIT MR9000**  
Printing width 100 mm (3.94 in.), used together with the MR8880-20 main body, includes 1 roll of recording paper

**AC ADAPTER Z1002**  
For main unit, 100 to 240 V AC

**POWER CABLE L1012**  
For main unit, DC drive, connect to external battery. (Unprocessed ends, Approx. 2 m (6.6 ft.))

**BATTERY PACK Z1000**  
NiMH, Charges while installed in the main unit

**CARRYING CASE C1003**  
For the MR8880, includes compartment for options, soft case type

Options

Other options: refer to the detailed catalog

**PC CARD 2G 9830** (2 GB capacity)  
**PC CARD 1G 9729** (1 GB capacity)  
**PC CARD 512M 9728** (512 MB capacity)

**RECORDING PAPER 9234**  
112 mm (4.41 in.) × 18 m (59.06 ft.), roll type, 10 rolls/set

## Oscilloscope-like Waveform Observation, Plus Recording of RMS Variations - In a Single Device!

### MEMORY HiCORDER MR8870



USB 2.0

CE

3 Year Warranty

- Mode for recording instantaneous waveform and RMS fluctuations
- Save values in real time to a CF card
- Record four channels at once by synchronizing two instruments with the bundled PC application
- Compact and easy to carry
- Easy, intuitive operation
- Fast, 1MS/s performance despite the compact size
- Built-in, compact-yet-sharp QVGA-TFT wide LCD

Model No. (Order Code) **MR8870-20** (2ch, English model)

Note: input cords and battery pack are not included. Purchase the cords appropriate for your application separately. The AC Adapter Z1005 is included as standard.

#### Basic specifications (Accuracy guaranteed for 1 year)

Number of channels	2 analog channels + 4 logic channels (standard) <i>Note: isolated analog channels, isolated input and frame, logic has common GND</i>
Measurement ranges	10 mV to 50 V/div (10 div full-scale), 12 ranges, Resolution: 1/100 of range
Max. rated voltage	Between terminals: 400 VDC, Between terminal to earth: 300 VAC, DC CAT II
Frequency characteristics	DC to 50 kHz (-3 dB)
Time axis (Memory mode)	100 μs to 5 min/div, 20 ranges, at 100 points/div resolution, three steps of time-axis magnification from ×2 to ×10, and 9 steps of time-axis compression from ×1/2 to ×1/1,000
Recording intervals (RMS mode)	1 ms to 1 min., 16 settings, sampling period: 200 μs (fixed) (for AC voltage/current, 1,000 RMS values/sec.), envelope mode always on <i>Note: only the maximum value and minimum value for each recording interval are recorded.</i>
Measurement functions	Memory recorder (high speed recording), RMS recorder (50/60 Hz, DC only)
Memory capacity	12-bits × 2M-words/ch (1 word = 2 bytes)
Removable storage	CF card TYPE I slot ×1 (Up to 2 GB)
Display	4.3-inch WQVGA-TFT color LCD (480 × 272 dots)
Displayable languages	English, Japanese
Interfaces	USB 2.0 mini-B receptacle ×1, Functionality: Connect the instrument to a PC to send files on the CF card to the PC. The instrument cannot be controlled from a PC.
Printer	N/A
Power supply	AC Adapter Z1005: 100 to 240 VAC (50/60 Hz), 30 VA max. (when using the AC adapter and charging the 9780 with the instrument) Battery Pack 9780: 3 VA, continuous operating time of approx. 2 hr. (25°C reference value; when used with the Z1005, the Z1005 takes priority), charging time of 200 min. using the AC adapter (25°C reference value) (option) External DC power: 10 to 16 V, 10 VA max. (connection cord of 3 m or less is available by special-order)
Dimensions and mass	176 mm (6.93 in.)W × 101 mm (3.98 in.)H × 41 mm (1.61 in.)D, 600 g (21.2 oz.) (with the Battery pack 9780 installed)
Included accessories	Instruction manual ×1, Measurement guide ×1, AC adapter Z1005 ×1, Strap ×1, USB cable ×1, Application disk (Dedicated program for the MR8870) ×1, Protection sheet 9809 ×1

Accessories

**PROTECTION SHEET 9809**  
For LCD protection, pairs of additional sheets can be purchased separately, bundled with instrument

**AC ADAPTER Z1005**  
100 to 240 V AC, bundled with instrument

Options

Other options refer to the detailed catalog

**BATTERY PACK 9780**  
NiMH, Charges while installed in the main unit

**SOFT CASE 9812**  
Includes space for small items, Neoprene rubber

**CARRYING CASE 9782**  
Includes compartment for options, resin coated

**PC CARD 2G 9830** (2 GB capacity)  
**PC CARD 1G 9729** (1 GB capacity)  
**PC CARD 512M 9728** (512 MB capacity)

## Max. 108 Analog Channels, Reduce Inspection Data Transfer Time to Zero

### MEMORY HiCORDER MR8740T



- Ideal for multipoint inspection of high performance boards such as ECU
- 108ch analog to 96ch analog + 48ch logic input
- Reduce time required to save to external media to max.1/100 compared with conventional method
- 20 MS/s simultaneous sampling on all channels
- Safe measurement with all analog inputs isolated
- Supports 4K monitor to display multi-channel waveforms without overlapping
- Measure 4 channels with 1 unit (4 ch analog Unit U8975, 4 ch DVM Unit U8991)
- Generate constant voltage, constant current, and simulated resistance (VIR Generator Unit U8794)

Model No. (Order Code) **MR8740-50** (Max. 108ch, 1GW memory, main unit only)

Note: a special option such as an input unit is required for the main unit. Please purchase various common options such as input code separately.

Install by inserting into the main unit. Can be replaced by user.

Options

- **ANALOG UNIT 8966**  
2 ch, voltage input, 20MS/s (DC to 5 MHz)
- **4ch ANALOG UNIT U8975**  
4 ch, voltage input, 5MS/s (DC to 2 MHz)
- **4CH ANALOG UNIT U8978**  
4 ch, voltage input, 5MS/s (DC to 2 MHz)
- **TEMP UNIT 8967**  
2 ch, thermocouple temperature input
- **HIGH RESOLUTION UNIT 8968**  
2 ch, voltage input, 1MS/s (DC to 100 kHz)
- **STRAIN UNIT U8969**  
2 ch, strain gauge type converter amp
- **FREQ UNIT 8970**  
2 ch, for measurement of frequency, rpm, pulse
- **CURRENT UNIT 8971** : 2 ch, for measuring current using dedicated current sensors
- **3CH CURRENT UNIT U8977**  
3 ch, for measuring current using dedicated current sensors
- **DC/RMS UNIT 8972**  
2 ch, Voltage, 1MS/s (DC to 400 kHz), or RMS (DC/ 20 to 100 kHz)
- **LOGIC UNIT 8973**  
4 terminals, 16 ch

#### Basic specifications (Accuracy guaranteed for 1 year)

Number of input units	Max. 27 slots
Number of channels	[Using the U8975] Max. 108 ch analog, or 96 ch analog + 48 ch logic (when used in combination with U8975 + 8973) [Using the 8966] Max. 54 ch analog, or 48 ch analog + 48 ch logic (when used in combination with 8966 + 8973) *Logic unit 8973 is limited to slots 25 to 27, up to 3 units. *Analog unit channels are isolated from each other and from chassis. Logic unit channels share a common GND with chassis.
Measurement ranges	100 mV to 400 V f.s., 12 ranges, resolution : 1/2000 of range (when using 8966) 4 V to 200 V f.s., 6 ranges, resolution : 1/32000 of range (when using U8975) 100 mV to 1000 V f.s., 5 ranges, resolution : 1/1000 000 of range (when using MR8990) 1 V, 10 V, 100 V f.s., 3 ranges, resolution : 1/1000 000 of range (when using U8991)
Max. allowable input	400 V DC (when using 8966; upper limit voltage that can be applied between input terminals without damage)
Max. rated voltage to earth	300 V AC/DC (input and instrument are isolated; between input channels and chassis; upper limit voltage that can be applied between input channels without damage)
Frequency characteristics	DC to 5 MHz (-3 dB, when using 8966)
Max. sampling speed	20 MS/s, all ch simultaneous, external sampling: 10 MS/s
Measurement functions	Memory (high-speed recording)
Memory capacity	Total of 1 G Word installed, 16 MW/ch (when using 8966), 8 MW/ch (when using U8975 or MR8990), 4 MW/ch (when using U8991)
Internal storage	SSD 480 GB
Removable storage	USB memory stick *8
Monitor output	VGA, HDMI, Display Port, Recommended resolution 1920 × 1080 dot or more
External interfaces	[LAN] 1000 BASE-T, 100 BASE-TX, 10 BASE-TX (2 port) (DHCP and DNS support, FTP server/client, HTTP server) [USB] USB 3.0 Series A receptacle × 4, USB 2.0 × 4
Power supply	100 to 240 V AC, 50/60 Hz (400 VA max.)
Dimensions and mass	426 mm (16.77 in.)W × 177 mm (6.97 in.)H × 505 mm (19.88 in.)D, 13.3 kg (469.1 oz.) (main unit only)
Included accessories	Power cord ×1, Quick Start Manual (booklet) ×1, Instruction Manual (detailed edition) (CD-R) ×1, application disk (CD-R) ×1, blank panel (blank slot only), rack installation hardware

- **DIGITAL VOLTMETER UNIT MR8990**  
2 ch, DC V input, 0.1 μV resolution, 500 times/s sampling
- **DIGITAL VOLTMETER UNIT U8991**  
4 ch, DC V input, 1 μV resolution, 50 times/s sampling
- **HIGH VOLTAGE UNIT U8974**  
2 ch, voltage input, max. 1000 V DC, 700 V AC
- **CHARGE UNIT U8979**  
2 ch, for acceleration measurement, charge output / preamplifier output / voltage output
- **WAVEFORM GENERATOR UNIT MR8790**  
: 4 ch, ±10 V DC output, 1 Hz to 20 kHz sine waveform output
- **ARBITRARY WAVEFORM GENERATOR UNIT U8793**  
2 ch, FG function 10 mHz to 100 kHz, Arbitrary waveform generator D/A refresh rate 2 MHz, Output 15 V
- **PULSE GENERATOR UNIT MR8791**  
8 ch, 0.1 Hz to 20 kHz pulse, pattern output
- **VIR GENERATOR UNIT U8794**  
8 ch, DC voltage, DC current, resistance (simulated output)

Recorders  
Data Loggers

## High-speed/Isolated Multi-channel Measurement System Recorders (rack-mounted)

### MEMORY HiCORDER MR8740, MR8741



MR8740 (54ch Max.)

MR8741 (16ch Max.)



- Introducing the DVM Unit MR8990 with high 24-bit resolution! Perform high-speed, high-accuracy measurement without going through a scanner.
- Support for multi-channel measurement (MR8740: up to 54 ch; MR8741: up to 16 ch)
- Isolated input (between input channels; input-to-chassis isolation: maximum input-to-ground rated voltage of 300 V AC/DC)
- High-speed sampling (max. 20 MS/s; with 54-ch type, simultaneous sampling of up to 32 ch)
- Ideal for rack-mounting (4U height/within 180 mm; display-less, box-type design)
- Display waveforms and make settings on a DVI-D connected monitor and mouse
- Remote measurement via LAN using control commands from a PC

\*Screen monitoring and remote operation available via Internet browser. For faster and more convenient remote operation, we recommend using the Hioki 9333 LAN Communicator.

Model No. (Order Code) **MR8740** (Max. 54ch, 864MW memory, main unit only)  
**MR8741** (Max. 16ch, 256MW memory, main unit only)

Note: main unit MR8740/MR8741 requires input units and other dedicated options. Input cords not included. For more information about input cords and other common options, refer to the detailed catalog.

Install by inserting into the main unit. Can be replaced by user.

- **ANALOG UNIT 8966**  
2 ch, voltage input, 20MS/s (DC to 5 MHz)
- **TEMP UNIT 8967**  
2 ch, thermocouple temperature input
- **HIGH RESOLUTION UNIT 8968**  
2 ch, voltage input, 1MS/s (DC to 100 kHz)
- **STRAIN UNIT U8969**  
2 ch, strain gauge type converter amp
- **FREQ UNIT 8970**  
2 ch, for measurement of frequency, rpm, pulse
- **CURRENT UNIT 8971** : 2 ch, for measuring current using dedicated current sensors
- **DC/RMS UNIT 8972**  
2 ch, Voltage, 1MS/s (DC to 400 kHz), or RMS (DC/30 to 100 kHz)
- **LOGIC UNIT 8973**  
4 terminals, 16 ch
- **DIGITAL VOLTMETER UNIT MR8990**  
2 ch, DC V input, 0.1 μV resolution, 500 times/s sampling
- **WAVEFORM GENERATOR UNIT MR8790** : 4 ch, ±10 V DC output, 1 Hz to 20 kHz sine waveform output
- **PULSE GENERATOR UNIT MR8791**  
8 ch, 0.1 Hz to 20 kHz pulse, pattern output
- **ARBITRARY WAVEFORM GENERATOR UNIT U8793**  
2 ch, FG function 10 mHz to 100 kHz, Arbitrary waveform generator D/A refresh rate 2 MHz, Output 15 V
- **HIGH VOLTAGE UNIT U8974**  
2 ch, voltage input, max. 1000 V DC, 700 V AC
- **CHARGE UNIT U8979**  
2 ch, for acceleration measurement, charge output / preamplifier output / voltage output

#### Basic specifications (Accuracy guaranteed for 1 year)

	MR8740	MR8741
Max. Number of channels	[Block I] 32 ch analog + 8 ch logic, or 29 ch analog + 56 ch logic (when used with built-in logic input + plug-in logic unit 8973 × 3) [Block II] 22 ch analog + 8 ch logic, or 19 ch analog + 56 ch logic (when used with built-in logic input + plug-in logic unit 8973 × 3)	16 ch analog + 16 ch logic, or 10 ch analog + 64 ch logic (when used with built-in logic input + plug-in logic unit 8973 × 3)
Number of slots	[Block I] 16 slots (Max. 16), [Block II] 11 slots (Max. 11) [Limitation on number of slots] when using the Current Unit 8971: Max. 4, When using the Logic Unit 8973: [Block I] Max. 3; cannot use slots 9 to 16 [Block II] Max. 3; cannot use slots 9 to 11	8 slots (Max. 8) [Limitation on number of slots] cannot use Current Unit 8971 When using the Logic Unit 8973: Max. 3
Number of logic channels	[Block I] 8 ch logic (Logic probe terminal GND share a common GND with chassis.) [Block II] 8 ch logic (Logic probe terminal GND share a common GND with chassis.) [Limitation on using built-in logic input] applies to both Block I and Block II (with logic measurement ON) • Measurement resolution on slots 1 and 2 is limited up to 12 bits • Cannot use Frequency Unit 8970 on slots 1 and 2 • When using the DVM Unit MR8990 on slots 1 or 2, cannot use built-in logic input	16 ch logic (Logic probe terminal GND share a common GND with chassis.) on condition that DVM Unit MR8990 is used on slots 1 and 2, cannot use built-in logic input [Limitation on using built-in logic input] (with logic measurement ON) • Measurement resolution on slots 1 and 2 is limited up to 12 bits • Cannot use Frequency Unit 8970 on slots 1 and 2
Measurement ranges (20 div full scale)	5 mV to 20 V/div, 12 ranges, resolution : 1/100 of range (when using 8966) 5 mV to 50 V/div, 5 ranges, resolution : 1/50,000 of range (when using MR8990)	
Max. allowable input	400 V DC (when using 8966; upper limit voltage that can be applied between input terminals without damage)	
Max. rated voltage to earth	300 V AC/DC (input and instrument are isolated; between input channels and chassis; upper limit voltage that can be applied between input channels without damage)	
Frequency characteristics	DC to 5 MHz (-3 dB, when using 8966)	
Time axis (MEMORY operation)	5 μs to 5 min/div; 26 ranges; time axis resolution: 100 points/div; time axis expansion: 3 stages from ×2 to ×10; compression: 13 stages from 1/2 to 1/20,000	
Measurement functions	Memory (high-speed recording), FFT, Recorder	
Memory capacity	16 MW/ch (fixed), total of 864 MW installed	16 MW/ch (fixed), total of 256 MW installed
Removable storage	USB memory stick (USB 2.0)	
Display	None (1 digital DVI terminal per block, 800 × 600 dots)	None (1 digital DVI terminal, 800 × 600 dots)
External interfaces	[LAN] 100Base-TX (DHCP and DNS support, FTP server, HTTP server) [USB] USB 2.0 Series A receptacle × 2 (mouse operation)	
Power supply	100 to 240 V AC, 50/60 Hz (250 VA max.)	100 to 240 V AC, 50/60 Hz (120 VA max.)
Dimensions and mass	426 mm (16.77 in.)W × 177 mm (6.97 in.)H × 505 mm (19.88 in.)D, 10.8 kg (38.1 oz.) (main unit only)	350 mm (13.78 in.)W × 160 mm (6.30 in.)H × 320 mm (12.60 in.)D, 5.4 kg (19.05 oz.) (main unit only)
Included accessories	Instruction manual ×1, Application disk (Wave viewer Wv, Communication commands table) ×1, Power cord ×1	



# Non-contact Sensing

## Easy CAN Acquisition, Simply Pinch Over Wire Insulation

### NON-CONTACT CAN SENSOR SP7001, SP7002

Recorders  
Peripherals

CAN FD  
CAN



- Acquire CAN FD/CAN data immediately, simply by pinching probes over wire insulation with one-hand
- Eliminate concerns by using non-contact sensing technology
- Use in a diverse array of development and evaluation applications that demand reliability

Model No. (Order Code)	<b>SP7002-90</b> (Supports CAN signals, SP7002, SP7100, SP9200 set)
	<b>SP7001-90</b> (Supports CAN FD / CAN signals, SP7001, SP7100, SP9200 set)
	<b>SP7001-95</b> (Supports CAN FD / CAN signals, SP7001, SP9250, SP7150 set)

#### Basic specifications

Detection method	Capacitive-coupled signal detection *No bare-wire connections
Detectable cables	AVS/AVSS-compliant cables, External diameter: 1.2 mm (0.05 in.) to 2.0 mm (0.08 in.)
Number of channels	1 CH (SP7150), 2 CH (SP7100)
Compatible communications speeds	SP7001: CAN, CAN FD 125 kbit/s to 3 Mbit/s SP7002: CAN 125 kbit/s to 1 Mbit/s
Total delay time	130 ns (typical)
CAN terminal resistance	60 Ω (typical), built-in
Signal output connector	D-sub 9-pin female
Operating temperature, humidity	Temperature: -40 °C to 85 °C (-40 °F to 185 °F) Humidity: -40 °C to 60 °C (-40 °F to 140 °F), 80% RH or less (with no condensation), 60 °C to 85 °C (140 °F to 185 °F), 60% RH or less (with no condensation)
Power supply	(1) When using the SP7001-95 or SP7150 - USB bus power (5 V DC), Maximum rated power: 8 VA - Z1013 AC Adapter: Rated supply voltage: 100 V to 240 V AC, Maximum rated power: 6 VA (including AC adapter), 1 VA (product only) (2) When using the SP7001-90, SP7002-90, or SP7100 - Z1008 AC Adapter: Rated supply voltage: 100 V to 240 V AC, Maximum rated power: 8 VA (including AC adapter), 3 VA (product only) - External power supply: Rated supply voltage: 10 V to 30 V DC, Maximum rated power: 3 VA
Dimensions and mass	SP7001, SP7002: 44 W × 85 H × 20 D mm (1.73 in. W × 3.35 in. H × 0.79 in. D), 180 g (6.35 oz.), Cable length: 2.5 m (8.20 ft.) SP7100: 55 W × 120 H × 25 D mm (2.17 in. W × 4.72 in. H × 0.98 in. D), 130 g (4.59 oz.), Cable length: 0.3 m (0.98 ft.) SP7150: 47 W × 100 H × 20 D mm (1.85 in. W × 3.94 in. H × 0.79 in. D), 100 g (3.52 oz.), Cable length: 0.3 m (0.98 ft.) SP9250: 10.5 W × 24.5 H × 101 D mm (0.41 in. W × 0.96 in. H × 3.98 in. D), 45 g (1.59 oz.), Cable length: 0.8 m (2.62 ft.) SP9200: φ11.6 × 33.7 H mm (φ0.46 in. × 1.33 in.), 26 g (0.92 oz.), Cable length: 0.5 m (1.64 ft.) *Dimensions do not include cables. Mass includes cables.
Included accessories (SP7001, SP7002)	Quick Start Manual ×1, Operating Precautions ×1
Included accessories (SP7100)	Quick Start Manual ×1, Operating Precautions ×1, Spiral tube ×1, Power cable L9500 ×1, Alligator clip ×1, Ground connection cable ×1
Included accessories (SP7150)	Quick Start Manual ×1, Operating Precautions ×1, Spiral tube (for fixing power cable) ×1, USB Cable L9510 ×1, Ground connection cable ×1, Alligator clip ×1

For more information on product combinations, please see our product catalog.

Single Item sales

**SIGNAL PROBE SP9250**  
Trigger Type, Set of 2

**NON-CONTACT CAN SENSOR SP7001**  
Supports CAN FD / CAN signals

**CAN INTERFACE SP7150**  
1 ch, USB power supply

**USB CABLE L9510**  
USB A-C type, Power supply only

**SIGNAL PROBE SP9200**  
Screw type, Set of 2

**NON-CONTACT CAN SENSOR SP7002**  
Supports CAN signals

**CAN INTERFACE SP7100**  
2 ch, power supply +10 V to +30 V DC

**POWER CABLE L9500**  
For supplying 10 V to 30 V DC

Options

**AC ADAPTER Z1013**  
For SP7150  
Can be powered from a commercial power supply

**CARRYING CASE C1013**  
Hard case, 2CH can be stored

**AC ADAPTER Z1008**  
For SP7100  
Can be powered from a commercial power supply

**SPLIT CABLE SP9900**  
For CH1, CH2 output branch



## Measure High Voltages Safely

### DIFFERENTIAL PROBE P9000



- Compact probe for CAT III 1000V environments
- Wave mode: Observe instantaneous waveforms
- RMS mode: Observe RMS value waveforms
- Principal areas of use
  1. High-voltage battery circuits in EVs, HEVs, and other automobiles
  2. High-voltage circuits in energy-related equipment such photovoltaic cells
  3. Commercial power line circuits (480 Vrms, etc.)
  4. High-voltage surge noise from inverters, motors, solenoids, etc.

Model No. (Order Code) **P9000-01** (For the Memory HiCorder series, Wave only)  
**P9000-02** (For the Memory HiCorder series, Wave/RMS)

Connect to a Memory HiCorder's analog input terminal. Must be powered by an AC adapter, USB bus power, or other suitable power source. Please visit the Hioki website to see the number of P9000 probes that can be used when power is supplied from the standard USB terminal of the Memory HiCorder.

#### Basic specifications (Accuracy guaranteed for 1 year)

	P9000-01	P9000-02
Measurement functions	Waveform monitor output only Frequency characteristics: DC to 100 kHz, -3 dB	Waveform monitor output/AC RMS value output (switchable) Wave mode frequency characteristics: DC to 100 kHz, -3 dB RMS mode frequency characteristics: 30 Hz to 10 kHz, response time: 300 ms (rising) or 500 ms (falling)
Division ratio	1000:1 or 100:1 (user selectable)	
DC amplitude accuracy	±0.5% f.s. (f.s. = 1.0 V; voltage division ratio: 1000:1) (f.s. = 3.5 V; voltage division ratio: 100:1)	
RMS amplitude accuracy (P9000-02 only)	±1% f.s. (30 Hz to 1 kHz non-inclusive, sine wave), ±3% f.s. (1 kHz to 10 kHz, sine wave)	
Input resistance, capacity	Between H and L: 10.5 MΩ, 5 pF or less (at 100 kHz)	
Max. allowable input	1000 V AC/DC	
Max. rated voltage to earth	1000 V AC/DC (CAT III)	
Operating temperature	-40 °C (-40 °F) to 80 °C (176 °F)	
Power supply	(1) AC Adapter Z1008 (100 to 240 V AC, 50/60 Hz), 6 VA (including AC adapter) or 0.9 VA (probe only) (2) USB bus power (5 V DC, USB Micro-B receptacle), 0.8 VA To prevent an electric shock, when supplying power from the USB-microB terminal, please supply from a device which USB's GND terminal of the source device is grounded. (3) External power supply (2.7 V to 15 V DC)	
Dimensions and mass	128 mm (5.04 in.)W × 36 mm (1.42 in.)H × 22 mm (0.87 in.)D, 170 g (6.0 oz.) Cord length: Input: 70 cm (2.30 ft.) ; output: 1.5 m (4.92 ft.)	
Included accessories	Instruction manual ×1, alligator clips ×2, carrying case ×1	

Can also be used with accessories such as L4936/L4937/L4931 as available for other testers.

Options			
	AC ADAPTER Z1008 100 to 240V AC	GRABBER CLIP L9243 Attaches to the tip of the banana plug cable, Red/Black: 1 each, 185 mm (7.28 in.) length, CAT II 1000 V	CONVERSION CABLE L1011-10 30 cm (0.98 ft.) length, covert BNC to wire
			CONVERSION CABLE L1011-10 2.4 m (7.87 ft.) length, covert BNC to wire

## 3 Kinds of Measurements with a Single Probe

### DIFFERENTIAL PROBE 9322



- Floating measurement of high-voltage waveforms (DC mode)
- Detection of power supply surge noise (AC mode)
- RMS rectified output (RMS mode)
- Main Applications
  1. Measurement of potential differences included in common mode voltages, such as IGBT
  2. Measurement of commercial power line waveforms, such as on 400V power lines
  3. Measurement of high voltage surge noise waveforms
  4. Measurement of the RMS value of inverter outputs, etc.

Model No. (Order Code) **9322** (For the Memory HiCorder series)

The Differential Probe 9322 cannot be used by itself. Please use it in combination with a Hioki Memory HiCorder. The Differential Probe 9322 requires a power supply.

\* For the latest information about how to power the 9322 with a Memory HiCorder, please visit the Hioki website.

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement functions	DC mode: Waveform monitor output, DC to 10 MHz ±3 dB AC mode: Detection of power line surge noise, 1 kHz to 10 MHz ±3 dB (Low frequency cut-off frequency 1 kHz ± 300 Hz) RMS mode: Rectified RMS output of DC and AC voltages, DC, 40 Hz to 100 kHz, Response speed: 200 ms or less (400 V AC)
Max. allowable input	2000 V DC, 1000 V AC
Max. rated voltage to earth	When using the Grabber Clip L9243: 1000 V AC/DC (CAT II) When using alligator clip: 1000 V AC/DC (CAT II), 600 V AC/DC (CAT III)
Output	Voltage division ratio: 1/1000, BNC terminal (DC/AC/RMS 3-mode selectable output)
DC amplitude accuracy	±1 % f.s. (1000 V DC or less), ±3 % f.s. (2000 V DC or less) (f.s.=2000 V DC)
RMS amplitude accuracy	±1 % f.s. (DC, 40 Hz to 1 kHz), ±4 % f.s. (1 kHz to 100 kHz) (f.s.=1000 VAC)
Input resistance, capacity	H-L: 9 MΩ, approx 10 pF (C at 100 kHz) H-case, L-case: 4.5 MΩ, approx 20 pF (C at 100 kHz)
Power supply	+5 to +12 V, less than 300 mA. (DC jack OD 5.5 mm [0.22 in.], ID 2.1 mm [0.08 in.]) - Via AC adapter 9418-15 - Via MR6000 dedicated Probe Power Unit Z5021 through Power cord 9248 - Via Logic terminal on Memory HiCorder through Power cord 9324 <sup>(*)</sup> - Via sensor terminal of F/V Unit 8940 <sup>(*)</sup> through Power cord 9325 <sup>(*)</sup> - Via DC power output terminal attached to the input unit for the 8855 through Power cord 9328 <sup>(*)</sup> - Via the 8860 series dedicated Probe Power Unit 9687 <sup>(*)</sup> through Power cord 9248
Dimensions and mass	70 mm (2.76 in.)W × 150 mm (5.91 in.)H × 25 mm (0.98 in.)D, 350 g (12.3 oz.), Cord length: Input 46 cm (1.51 ft.), Output 1.3 m (4.27 ft.)
Included accessories	Alligator clips ×1 (red/black set), Grabber clip L9243 ×1 (red/black set), Carrying case C0203 ×1, Instruction manual ×1

\*1: Discontinued product

Supplied Accessories

GRABBER CLIP L9243 Attaches to the tip of the banana plug cable, Red/Black: 1 each, 185 mm (7.28 in.) length, CAT II 1000 V	CARRYING CASE C0203

Power Supply

AC ADAPTER 9418-15 100 to 240V AC

When a current sensor is connected to the Probe Power Unit Z5021, or the Current Unit 8971, U8977, the number of the 9322 connection including the current sensor is limited (up to a total of 9 including the current sensor).

MR6000 dedicated option PROBE POWER UNIT Z5021 Number of the 9322 connections : 8 (Combined with 9248 cable)	POWER CORD 9248 Power supply to the 9322 through this cord from the Probe power unit Z5021 / 9687, 70 cm (2.30 ft.) length

Power Supply 2

# Recorders Peripherals

## Recorder Peripherals

For more information about compatible models, please see individual product catalogs.

Recorders  
Peripherals

Voltage Measurement Type A					Voltage Measurement Type B	
	<p><b>CONNECTION CORD L9790</b> Flexible <math>\phi</math> 4.1 mm (0.16 in.) thin dia., cable allowing for up to 600 V input. 1.8 m (5.91 ft.) length * The end clip is sold separately.</p>	<p><b>ALLIGATOR CLIP L9790-01</b> Red/black set attaches to the ends of the cables L9790</p>	<p><b>CONTACT PIN 9790-03</b> Red/black set attaches to the ends of the cables L9790</p>	<p><b>GRABBER CLIP 9790-02</b> Red/black set attaches to the ends of the cables L9790 * When this clip is attached to the end of the L9790, input is limited to 300 V. Red/black set.</p>		<p><b>CONNECTION CORD L9198</b> <math>\phi</math> 5.0 mm (0.20 in.) dia., cable allowing for up to 300 V input. 1.7 m (5.58 ft.) length, small alligator clip</p>

Voltage Measurement Type C			Voltage Measurement Type D		
	<p><b>CONNECTION CORD L9197</b> <math>\phi</math> 5.0 mm (0.20 in.) dia., cable allowing for up to 600 V input. 1.8 m (5.91 ft.) length, a detachable large alligator clips are bundled</p>	<p><b>GRABBER CLIP L9243</b> Attaches to the tip of the banana plug cable, Red/Black: 1 each, 185 mm (7.28 in.) length, CAT II 1000 V</p>		<p><b>10:1 PROBE 9665</b> Max. rated voltage to earth is same as for input module, Frequency characteristics DC to 150 MHz, 1.5 m (4.92 ft.) length</p>	<p><b>100:1 PROBE 9666</b> Max. rated voltage to earth is same as for input module, Frequency characteristics DC to 200 MHz, 1.5 m (4.92 ft.) length</p>

Voltage Measurement Type E						
	<p><b>CONNECTION CABLE SET L4940</b> Banana plug - banana plug, 1.8 m (4.92 ft.) length, red/black each 1</p>	<p><b>EXTENSION CABLE SET L4931</b> Expands the length of L4930/L4940, 1.5 m (4.92 ft.) length</p>	<p><b>ALLIGATOR CLIP SET L4935</b> Attaches to the tip of the L4930/L4940, CAT IV 600V, CAT III 1000V</p>	<p><b>BUS BAR CLIP SET L4936</b> Attaches to the tip of the L4930/L4940, CAT III 600V</p>	<p><b>MAGNETIC ADAPTER SET L4937</b> Attaches to the tip of the L4930/L4940, CAT III 1000V</p>	<p><b>GRABBER CLIP L9243</b> Attaches to the tip of the Connection cord or cable, CAT II 1000 V, 185 mm (7.28 in.) length</p>

High Voltage Measurement			High Voltage Measurement		Storage Media	
	<p><b>DIFFERENTIAL PROBE P9000-01</b> For up to 2 kV DC or 1 kV AC. Use with AC Adapter 9418-15</p>	<p><b>AC ADAPTER Z1008</b> 100 to 240 V AC</p>		<p><b>DIFFERENTIAL PROBE P9000-02</b> (Waveform mode) For up to 1 kV AC, DC</p>		<p><b>PC CARD 2G 9830</b> 2 GB capacity</p>

Logic Measurement				Storage Media		Precaution
	<p><b>LOGIC PROBE 9320-01</b> 4-channel type, for voltage/contact signal ON/OFF detection (response pulse width 500 ns or more, miniature terminal type)</p>	<p><b>LOGIC PROBE MR9321-01</b> 4 isolated channels, ON/OFF detection of AC/DC voltage (miniature terminal type)</p>	<p><b>LOGIC PROBE 9327</b> 4-channel type, for voltage/contact signal ON/OFF detection (response pulse width 100 ns or more, miniature terminal type)</p>		<p><b>SD MEMORY CARD Z4003</b> 8 GB capacity</p>	

Connection Cables								
	<p><b>OUTPUT CORD L9094</b> <math>\phi</math> 3.5 mm (0.14 in.) dia. mini plug to banana, 1.5 m (4.92 ft.) length</p>	<p><b>OUTPUT CORD L9095</b> Connect to BNC terminal, 1.5 m (4.92 ft.) length</p>	<p><b>OUTPUT CORD L9096</b> Connect to terminal block, 1.5 m (4.92 ft.) length</p>	<p><b>CONNECTION CORD 9165</b> Cord has metallic BNC connectors at both ends, use at metallic terminal, 1.5 m (4.92 ft.) length</p>	<p><b>CONNECTION CORD 9166</b> Metal BNC to clip, 1.5 m (4.92 ft.) length</p>	<p><b>CONVERSION ADAPTOR 9199</b> Receiving side banana (female), output BNC (male)</p>	<p><b>CONNECTION CORD L9217</b> Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft.) length</p>	<p><b>LAN CABLE 9642</b> Straight Ethernet cable, supplied with straight to cross conversion adaptor, 5 m (16.41 ft.) length</p>

Recording Papers			
	<p><b>RECORDING PAPER 9234</b> For the MR8880 (MR9000), 8860/8861 (8995-01), 8420/21/22 (8992), 8807/08 (8992), 8807-50/8808-50 (8992), 8714/15 Roll type A6 width 112 mm (4.41 in.) <math>\times</math> 18 m (59.06 ft.), 10 rolls/set</p>	<p><b>RECORDING PAPER 9232</b> For the 8804/05/06, 3193 (9604), 3194 (9604) Roll type, 74 mm (2.91 in.) <math>\times</math> 10 m (32.81 ft.), 10 rolls/set</p>	<p><b>RECORDING PAPER 9231</b> For the MR8848(U8351)/MR8847A/MR8847/MR8827(U8350), 8860-50/8861-50(8995), 8855/47/46/45/42/41/40 Roll type A4 width 216 mm (8.50 in.) <math>\times</math> 30 m (98.43 ft.), 6 rolls/set</p>
	<p><b>RECORDING PAPER 9229</b> For the 8825/8826 Roll type, 264 mm (10.39 in.) <math>\times</math> 30 m (98.43 ft.), 6 rolls/set</p>	<p><b>RECORDING PAPER 9221</b> For the 8801 series, 8810 series, 8830 series, 8835 series, 8851/52/53, 8710, 3195, 3620 Roll type, 110 mm (4.33 in.) <math>\times</math> 30 m (98.43 ft.), 10 rolls/set</p>	<p><b>RECORDING PAPER 9235</b> For the 8205 (-10), 8206 (-10) Roll type, 74 mm (2.91 in.) <math>\times</math> 15 m (49.22 ft.), 10 rolls/set</p>

# Recorders Peripherals

## Recorder Peripherals, Current Sensors



\*For more information about compatible models, please see individual product catalogs.

## For high-precision current measurement

CT9555, CT9556, CT9557 and connection cord are required separately

\*While the CT9555, CT9556, CT9557 is not required in order to use a sensor equipped with PL23 (10-pin) terminal with the 8971 or 8940, the Conversion Cable 9318 (which comes with the 8971) is required for that setup.

### Input Units for Current Sensors

- CURRENT UNIT 8971**  
For MR6000, MR8848, MR8827, MR8740T
- CONVERSION CABLE 9318**  
Connect current sensor equipped with PL23 (10-pin) terminal to 8971/40/51, 38 cm (14.96 in.) length

\*A separate power supply (CT9555, CT9556, CT9557) is required in order to use a high-precision current sensor. \*Only sensors with ME15W (12-pin) terminals can be connected to the CT9555, CT9556, CT9557. \*The separately available Conversion Cable CT9900 is required in order to use a sensor with PL23 (10-pin) terminal.

### Power Supply for Current Sensors

- SENSOR UNIT CT9555**  
1ch, with waveform output
- SENSOR UNIT CT9556**  
1ch, with waveform/RMS output
- SENSOR UNIT CT9557**  
4ch, with waveform/total waveform/total RMS output
- CONNECTION CORD L9217**  
Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft.) length
- PL23 (10-pin) - ME15W (12-pin) conversion CONVERSION CABLE CT9900**  
Convert PL23 (10-pin) terminal to ME15W (12-pin) terminal

### Up to 8000 A (High precision) Aggregate and measure large currents in multi-cable circuits

Use multiple AC/DC Current Sensor CT6877A units with the Sensor Unit CT9557 to measure currents of up to 8000 A in multi-cable circuits.

- AC/DC CURRENT SENSOR CT6877A**  
High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 1 MHz band width, 2000 A input,  $\pm 0.04\%$  amplitude accuracy,  $\pm 0.08^\circ$  phase accuracy, ME15W terminal. ( $\pm 0.1\%$  amplitude accuracy,  $\pm 0.18^\circ$  phase accuracy in case of the addition wave output)

### Up to 2000 A (High precision)

- AC/DC CURRENT SENSOR CT6877A**  
High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 1 MHz band width, 2000 A input,  $\pm 0.04\%$  amplitude accuracy,  $\pm 0.08^\circ$  phase accuracy, ME15W terminal

### Up to 1000 A (High precision)

- AC/DC CURRENT SENSOR CT6876A**  
High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 1.5 MHz band width, 1000 A input,  $\pm 0.04\%$  amplitude accuracy,  $\pm 0.08^\circ$  phase accuracy, ME15W terminal
- AC/DC CURRENT PROBE CT6846A**  
Monitor the waveforms of DC to distorted AC current, DC to 100 kHz band width, 1000 A input,  $\pm 0.2\%$  amplitude accuracy,  $\pm 0.1^\circ$  phase accuracy, ME15W terminal

### Up to 500 A (High precision)

- AC/DC CURRENT SENSOR CT6875A**  
High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 2 MHz band width, 500 A input,  $\pm 0.04\%$  amplitude accuracy,  $\pm 0.1^\circ$  phase accuracy, ME15W terminal
- AC/DC CURRENT PROBE CT6844A**  
Monitor the waveforms of DC to distorted AC current, DC to 500 kHz band width, 500 A input,  $\pm 0.2\%$  amplitude accuracy,  $\pm 0.1^\circ$  phase accuracy, ME15W terminal
- AC/DC CURRENT PROBE CT6845A**  
Monitor the waveforms of DC to distorted AC current, DC to 200 kHz band width, 500 A input,  $\pm 0.2\%$  amplitude accuracy,  $\pm 0.1^\circ$  phase accuracy, ME15W terminal
- AC/DC CURRENT PROBE CT6834**  
Monitor the waveforms of DC to distorted AC current, DC to 50 kHz band width, 500 A input,  $\pm 0.07\% \pm 0.007\%$  amplitude accuracy,  $\pm 0.1^\circ$  phase accuracy, ME15W terminal

### Up to 200 A (High precision)

- AC/DC CURRENT SENSOR CT6873**  
High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 10 MHz band width, 200 A input,  $\pm 0.03\%$  amplitude accuracy,  $\pm 0.05^\circ$  phase accuracy, ME15W terminal
- AC/DC CURRENT SENSOR CT6863-05**  
High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 500 kHz band width, 200 A input,  $\pm 0.05\%$  amplitude accuracy,  $\pm 0.2^\circ$  phase accuracy, ME15W terminal
- AC/DC CURRENT PROBE CT6843A**  
Monitor the waveforms of DC to distorted AC current, DC to 700 kHz band width, 200 A input,  $\pm 0.2\%$  amplitude accuracy,  $\pm 0.1^\circ$  phase accuracy, ME15W terminal
- CLAMP ON SENSOR 9272-05**  
Observe waveforms of distorted AC (not for DC), 1 Hz to 100 kHz band width, 20/200 A input,  $\pm 0.3\%$  amplitude accuracy,  $\pm 0.2^\circ$  phase accuracy, ME15W terminal
- AC/DC CURRENT PROBE CT6833**  
Monitor the waveforms of DC to distorted AC current, DC to 50 kHz band width, 200 A input,  $\pm 0.07\% \pm 0.007\%$  amplitude accuracy,  $\pm 0.1^\circ$  phase accuracy, ME15W terminal

### Up to 50 A (High precision)

- AC/DC CURRENT SENSOR CT6872**  
High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 10 MHz band width, 50 A input,  $\pm 0.03\%$  amplitude accuracy,  $\pm 0.05^\circ$  phase accuracy, ME15W terminal
- AC/DC CURRENT SENSOR CT6862-05**  
High-precision pull-through type, observe waveforms from DC to distorted AC, DC to 1 MHz band width, 50 A input,  $\pm 0.05\%$  amplitude accuracy,  $\pm 0.2^\circ$  phase accuracy, ME15W terminal
- AC/DC CURRENT PROBE CT6841A**  
Monitor the waveforms of DC to distorted AC current, DC to 2 MHz band width, 20 A input,  $\pm 0.2\%$  amplitude accuracy,  $\pm 0.1^\circ$  phase accuracy, ME15W terminal
- AC/DC CURRENT PROBE CT6830/CT6831**  
DC to 100 kHz band width, 2 A input (CT6830), 20 A input (CT6831),  $\pm 0.3\% \pm 0.05\%$  amplitude accuracy (CT6830),  $\pm 0.3\% \pm 0.01\%$  amplitude accuracy (CT6831),  $\pm 0.1^\circ$  phase accuracy, ME15W terminal

### Connection between Memory HiCorder and high precision current sensor

- MR8880/MR8875/MR8870**
  - High precision current sensor (ME15W) + CT9555, CT9556, CT9557 + BNC cable → MR8880
  - High precision current sensor (PL23) + CT9900 + CT9555, CT9556, CT9557 + BNC cable → MR8880
- MR6000/MR8848/MR8847A/MR8827/MR8740**
  - High precision current sensor (ME15W) + CT9901 + 9318 → Current Unit 8971
  - High precision current sensor (ME15W) + CT9555, CT9556, CT9557 + BNC cable → Except for Current Unit 8971
  - High precision current sensor (PL23) + 9318 → Current Unit 8971
  - High precision current sensor (PL23) + CT9900 + CT9555, CT9556, CT9557 + BNC cable → Except for Current Unit 8971
- MR8741**
  - High precision current sensor (ME15W) + CT9555, CT9556, CT9557 + BNC cable → Except for Current Unit 8971
  - High precision current sensor (PL23) + CT9900 + CT9555, CT9556, CT9557 + BNC cable → Except for Current Unit 8971
- 8860/8861**
  - High precision current sensor (ME15W) + CT9901 + 9705 + 9318 → F/V Unit 8940
  - High precision current sensor (ME15W) + CT9555, CT9556, CT9557 + BNC cable → Except for F/V Unit 8940
  - High precision current sensor (PL23) + 9705 + 9318 → F/V Unit 8940
  - High precision current sensor (PL23) + CT9900 + CT9555, CT9556, CT9557 + BNC cable → Except for F/V Unit 8940

## For wide-band current observation

A separate power supply (3272 or other) is required

### POWER SUPPLY \*Required when using Current Probe 3270 series

- POWER SUPPLY 3272**  
The CT6700, CT6701: up to 2 units  
The 3273-50, 3274, 3275 or 3276: up to 1 unit (May be used with up to 2 units on condition that the measurement current is sufficiently low.)
- POWER SUPPLY 3269**  
The CT6710, CT6711: up to 2 units  
The CT6700, CT6701, 3273-50, 3274, 3275 or 3276: up to 4 units

### 1 mA order to 500 A (High speed)

- CURRENT PROBE CT6700**  
Wide DC to 50 MHz bandwidth, 1 mA-class to 5 A rms
- CURRENT PROBE CT6701**  
Wide DC to 120 MHz bandwidth, 1 mA-class to 5 A rms
- CLAMP ON PROBE 3273-50**  
Wide DC to 50 MHz bandwidth, 10 mA-class to 30 A rms
- CLAMP ON PROBE 3276**  
Wide DC to 100 MHz bandwidth, 10 mA-class to 30 A rms
- CLAMP ON PROBE 3274**  
Wide DC to 10 MHz bandwidth, max. 150 A rms
- CLAMP ON PROBE 3275**  
Wide DC to 2 MHz bandwidth, max. 500 A rms
- CURRENT PROBE CT6710**  
Wide DC to 50 MHz bandwidth, 0.5 A-class to 30 A rms
- CURRENT PROBE CT6711**  
Wide DC to 120 MHz bandwidth, 0.5 A-class to 30 A rms

## For easy measurement of AC/DC currents

A separate power supply (CT7290) is required

- 100 to 2000 A (Medium speed), PL14 terminal**
- AC/DC CURRENT SENSOR CT7631 (AUTO-ZERO CT7731)**  
DC, 1 Hz to 10 kHz (5 kHz), 100 A, 1 mV/A output
- AC/DC CURRENT SENSOR CT7636 (AUTO-ZERO CT7736)**  
DC, 1 Hz to 10 kHz (5 kHz), 600 A, 1 mV/A output
- AC/DC CURRENT SENSOR CT7642 (AUTO-ZERO CT7742)**  
DC, 1 Hz to 10 kHz (5 kHz), 2000 A, 1 mV/A output
- DISPLAY UNIT CM7290**  
Measurement, display, signal output in combination with CT 7000 series

## For easy measurement of AC currents


Other than CT9667, separate power supply is not required

- 500 A to 5000 A \*For commercial power lines, 50/60Hz**
- CLAMP ON PROBE 9018-50**  
Good phase characteristics, Frequency characteristics: 40 Hz to 3 kHz, 10 to 500 A AC range, output 0.2 V AC f.s.
- CLAMP ON PROBE 9132-50**  
Frequency characteristics: 40 Hz to 1 kHz, 20 to 1000 A AC range, output 0.2 V AC f.s.
- AC FLEXIBLE CURRENT SENSOR CT9667-01/-02/-03**  
10 Hz to 20 kHz, 5000 A / 500 A AC, 500 mV/f.s. output,  $\phi$  100 to 254 mm (3.94 to 10.00 in.), 3 loop diameters

## For measurement of AC leak currents

Battery operated  
(Long-term observation is possible with separate power supply)

- Leak Current \*For commercial power lines, 50/60 Hz**
- AC LEAKAGE CLAMP METER CM4003**  
6 mA range (1  $\mu$ A resolution) to 200 A range, with WAVE/RMS output, CONNECTION CABLE L9097 (output terminal: BNC, power terminal: USB-C, 1.5 m (4.92 ft.) length) is included
- AC ADAPTER Z1013**  
100 V to 240 V AC

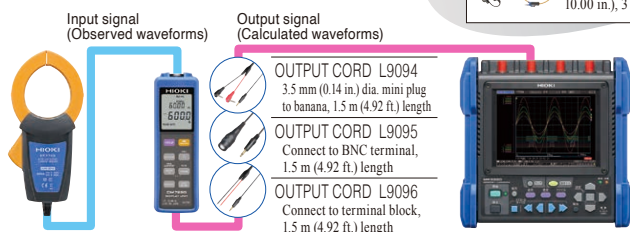



## Measurement support software

### MR6000 Viewer

Load measurement data on a computer to display waveforms and perform calculations.

- Take advantage of functionality similar to the MR6000 on a computer, including numerical calculations, waveform processing, and FFT calculations.  
\*Some functions limited.
- Ideal for report creation



Supported products:  
MR6000, MR6000-01, MR8848, MR8847A, MR8827, MR8740, MR8741


Available for download free of charge from Hioki's website.

Operating environment:  
Computer running Windows 11, 10 (64-bit)  
For other information and system requirements, please see the user manual.

### WAVE PROCESSOR 9335

Display, convert, calculate, and print waveforms with a PC

- Display waveform screens, X-Y graphs, and numerical results
- Rich printing and hard copy functions to assist in creating reports
- Save in CSV format and export to spreadsheet application (EXCEL)



Supported products:  
Model MR6000, MR6000-01, MR8848, MR8827, MR8880, MR8875, MR8870, MR8847A, MR8847, 8861-50/8860-50 (not compatible with dual time-axis data), 8870, 8855, 8847, 8842, 8841, 8840, 8835-01, 8835, 8826, 8825, 8808, 8807, 8808-51, 8807-51 (excluding harmonic analysis function), MR8730, MR8731, MR8740, MR8740-50, MR8741, 8730, 8731, 8720, 8715, 8714


Model No. (Order Code) **9335**

Operating environment:  
Computer running under Windows 11, 10/8/7 (32/64-bit)

### LAN COMMUNICATOR 9333

Remote control via LAN Memory HiCorders and PC Communications

- Auto save a waveform data to the PC
- Remote control with the PC via LAN
- Save in CSV format and export to spreadsheet application



Supported products:  
Model MR8848, MR8847-51/-52/-53, MR8827 (Ver. 1.00 or later), MR8740 (Ver. 3.12 or later), MR8741 (Ver. 2.12 or later), MR8847-01/-02/-03, 8847 (Ver. 3.07 or later), 8826 (Ver. 2.30 or later)

Model No. (Order Code) **9333**


Operating environment:  
Computer running under Windows 11, 10/8/7 (32/64-bit), Vista (32-bit), XP

## Other compatible software (third party)

### FlexPro

FlexPro - Advanced Software for Analysis and Presentation of Memory HiCorder Data

- Search through large amounts of data at lightning fast speeds for the MEMORY HiCORDER Series
- Use your analyses on any number of measurements at the click of a button.
- Share your analysis templates with colleagues over your network.




Supported products : MR6000, MR6000-01, MR8848, MR8827, MR8740, MR8741, MR8847A, MR8875, LR8450, LR8432, LR8431, LR8410

Model	FlexPro	Software (third party)
More information: Weisang GmbH (Germany) <a href="https://www.weisang.com/">https://www.weisang.com/</a>		

### NI DIAdem

NI DIAdem - Analyze the data measured by Memory HiCorder

- Data management, display, analysis and report creation with interactive operation.
- Synchronous playback and analysis function of video and measurement data.




Supported products : MR6000, MR6000-01, MR8848, MR8827, MR8740, MR8741, MR8847A (MR8990 is not supported), MR8875, MR8880, LR8400, LR8401, LR8402, LR8410, LR8416

Model	NI DIAdem	Software (third party)
-------	-----------	------------------------

### FAMOS

FAMOS - The software for engineers, which can quickly analyze measured data

- Load, display, and analyze the data measured by Memory HiCorder.
- Generate a report.
- More than 400 function libraries, like a FFT.



Supported products : MR6000, MR6000-01  
(Download a free MR6000 import filter free of charge from Hioki's website.)

Model	FAMOS	Software (third party)
More information: imc Test & Measurement GmbH (Germany) <a href="https://www.imc-tm.com/">https://www.imc-tm.com/</a>		

## Introducing a Modular Data Logger, Engineered for Use in Embedded Applications

### DATA LOGGER LR8101, LR8102



LR8102 main unit with ten M7100 Voltage/Temp modules (sold separately) attached



- Add measurement modules as needed to create the measurement system you need
- Connect up to 10 measurement modules per logger
- [LR8101] Add channels by synchronizing sampling across multiple loggers
- [LR8102] Transfer high-speed data in real time

Model No. (Order Code)	<b>LR8101</b>	(Main unit only, standard model)
	<b>LR8102</b>	(Main unit only, advanced model)

*Note: the LR8101 and LR8102 cannot be used alone. They must be combined with one or more measurement modules (sold separately). This product does not include an AC adapter. An AC Adapter Z1016 or the Power Cable L1012 must be purchased separately. For data storage, choose either the Hioki SD Memory Card Z4001 (2 GB), SD Memory Card Z4003 (8 GB), or the USB Drive Z4006 (16 GB). (Not necessary when acquiring data in real time to a PC) Thermocouples are not provided by Hioki, and must be purchased from a separate vendor.*

#### Basic specifications (Accuracy guaranteed for 1 year)

	LR8101	LR8102
Maximum number of module connections	10	
Maximum number of synchronizable loggers	N/A	10 (Requires optical connection cables)
Power supply	AC adapter: AC Adapter Z1016 (operates on 12 V DC $\pm$ 10%) External power supply: 10 V DC to 30 V DC	
Operating temperature and humidity range	-10°C to 50°C (14°F to 122°F), 80% RH or less (non-condensing)	
Number of LAN ports	1	2
Communication interface	[LAN1 functionality] Collecting data and setting recording conditions using Logger Utility Setting the initial IP address using Logger Utility Setting and controlling recording using communication commands Manually acquiring data using an FTP Server Automatically sending data via FTP (FTP client) HTTP server function, XCP on Ethernet (TCP), NTP client function ----- [LAN2 functionality] XCP on Ethernet (UDP) Measurement data can be output by UDP	
External media	USB Drive, Operation guaranteed: Z4006 (16 GB) SD memory card/SDHC memory card supported, Operation guaranteed: Z4001 (2 GB), Z4003 (8 GB)	
External control terminal	Pulse/logic input (1), External sampling input (1), External input and output (4), Alarm output (4), GND terminal (5)	Pulse/logic input (1), External sampling input (1), External input and output (4), Alarm output (4), GND terminal (5), CAN interface (1)
Dimensions and weight	- No module: Approx. 80W $\times$ 166H $\times$ 238D mm (3.1W $\times$ 6.5H $\times$ 9.4D in.) (excluding protruding parts), Approx. 1.5 kg (3.3 lbs) - With one M7100 installed: Approx. 134W $\times$ 166H $\times$ 263D mm (5.3W $\times$ 6.5H $\times$ 10.4D in.) (excluding protruding parts) - With ten M7100 installed: Approx. 620W $\times$ 166H $\times$ 263D mm (24.4W $\times$ 6.5H $\times$ 10.4D in.) (excluding protruding parts)	
Included accessories	Operating Precautions $\times$ 1, Startup Guide $\times$ 1, DVD $\times$ 1 (Startup Guide, Instruction Manual, Logger Utility, Logger Utility Instruction Manual, CAN Editor, CAN Editor Instruction Manual, Communication Command Instruction Manual)	

**Measurement Modules**

**VOLTAGE/TEMP MODULE M7100**  
 • For 600 V to 1500 V battery packs  
 • 15ch, voltage and temperature (thermocouple) measurement

**VOLTAGE/TEMP MODULE M7102**  
 • For 600 V or lower battery packs  
 • 30ch, voltage and temperature (thermocouple) measurement

**POWER MEASUREMENT MODULE M7103**  
 • 3ch, voltage, current (current sensor), and power measurement

Only LR8102 is supported

**CAN CABLE 9713-01**  
 Unprocessed on one end, 1.8 m (5.9 ft.)

**CAN Cable**

- Synchronizing sampling across multiple loggers (optical connection): Use when synchronizing measurements across multiple Data Logger LR8102 instruments. One optical connection cable is required for each logger.

Only LR8102 is supported

**OPTICAL CONNECTION CABLE**  
 L6101 1 m (3.3 ft.)  
 L6102 10 m (32.8 ft.)

**Synchronous Cables**

- CAN connectivity: Use to combine data with information about onboard devices such as a battery management system (BMS). One CAN cable is required for each logger.

**Power Supply**

**AC ADAPTER Z1016**  
100 V to 240 V AC

**POWER CABLE L1012**  
For main unit, DC drive, Connect to external battery, Unprocessed ends, Approx. 2 m (6.6 ft.)

**AC POWER MODULE M1100**  
Supplies power up to four Power Measurement Modules M7103

**LAN Cable**

**LAN CABLE 9642**  
Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft.) length

**Storage Media**

**SD MEMORY CARD 2GB Z4001**  
2 GB capacity

**SD MEMORY CARD Z4003**  
8 GB capacity

**USB DRIVE Z4006**  
16 GB, Long-life, High-reliability SLC Flash Memory

## 1ms Sampling Portable Logger Expandable to 120 Channels with Your Choice of Plug-in Modules

### MEMORY HiLOGGER LR8450

Measurement units (Sold separately)



LR8450 Main unit installed with U8552+U8550



- Expandable to 120 ch with wired/plug-in modules
- Record voltage output from pressure and other sensors with 1ms sampling speed
- Directly connect strain gauge and measure signals in as fast as 1ms intervals
- Significantly reduced effects from noise let you safely measure in high voltage and high frequency areas such as around inverter motors

Model No. (Order Code) **LR8450** (Standard model, main unit only)

Note) Measurement is not possible with the LR8450 only. One or more plug-in units are required (sold separately).

#### Basic specifications (Accuracy guaranteed for 1 year)

Max. number of connectable modules	4 plug-in input modules
Connectable modules (Plug-in modules)	U8550, U8551, U8552, U8553, U8554, U8555, U8556
No. of measurement channels	Up to 120 ch with plug-in input modules (U8555 can input up to 500 channels per unit)
Pulse/logic input	[Number of ch] 8 ch (common GND, non-isolated, exclusive setting for pulse/logic input for individual channels) [Adaptive input format] Non-voltage contact, open collector, or voltage input [Count] 0 to 1000 M pulse, 1 pulse resolution [Rotational speed] 0 to 5000/n (r/s), 1/n (r/s) resolution, 0 to 300,000/n (r/min.), 1/n (r/min.) resolution, n: Number of pulses per rotation (1 to 1000) [Logic input] Records 1 or 0 for each recording interval
Recording intervals	1 ms *, 2 ms *, 5 ms * (* Can be set only when using 1 ms/S modules), 10 ms to 1 hour, 22 selections (Data refresh interval can be set for each unit)
Data storage	SD Memory Card/USB Drive (user-selectable) (Only storage media sold by Hioki are guaranteed for operation)
LAN interface	100BASE-TX / 1000BASE-T, DHCP, DNS support, Functions: Data acquisition, condition settings used with the Logger Utility software, configuring settings and controlling recording using communications commands, FTP server / FTP client, HTTP server, Email transmission, NTP client
USB interface	Series A receptacle × 2; USB 2.0 compliant (USB drive, keyboard, or hub) Series mini-B receptacle × 1. Data acquisition, condition settings used with the Logger Utility, configuring settings and controlling recording using communications commands, transferring data from a connected SD Memory Card to a computer
SD card slot	SD standard-compliant slot × 1 (with SD memory card/SDHC memory card support), Guaranteed-operation options: Z4001, Z4003
Display	7 inch TFT color liquid crystal display (WVGA 800 × 480 pixel)
Functions	Save waveform data in real time to the SD memory card or USB drive, numerical value calculations, waveform calculations, 8ch alarm output, voltage output × 2 (5 V / 12 V / 24 V selectable)
Power supply	[AC adapter] Using the Z1014 (100 V to 240 V AC, 50 Hz/60 Hz), 95 VA Max. (including AC adapter), 28 VA Max. (exclusive of AC adapter) [Battery Pack] Using the Z1007 (accommodates 2 batteries), continuous use 4 hr (reference value for 2 pieces), 20 VA Max. [External power] 10 V to 30 V DC, 28 VA Max. (Please contact your Hioki distributor for connection cord)
Dimensions and mass	Without any modules: 272 mm (10.71 in.) W × 145 mm (5.71 in.) H × 43 mm (1.69 in.) D (excluding protrusions), 1108 g (39.1 oz.) (excluding Battery Pack) With 2 modules: 272 mm (10.71 in.) W × 198 mm (7.80 in.) H × 63 mm (2.48 in.) D (excluding protrusions) With 4 modules: 272 mm (10.71 in.) W × 252 mm (9.92 in.) H × 63 mm (2.48 in.) D (excluding protrusions)
Included accessories	Quick Start Manual × 1, LOGGER Application Disc (Quick Start Manual, Instruction Manual, Logger Utility, Logger Utility Instruction Manual, CAN editor, CAN editor instruction manual, Communication Instruction Manual) × 1, USB Cable × 1, AC Adapter Z1014 × 1

## 1ms Sampling Portable Logger Expandable to 330 Channels with Your Choice of Wireless and Plug-in Modules

### MEMORY HiLOGGER LR8450-01 (Wireless LAN model)

Measurement units (Sold separately)



LR8450-01 Main unit installed with U8552+U8550



- Wireless LAN model expandable to 330 ch with wireless and plug-in modules
- Record voltage output from pressure and other sensors with 1ms sampling speed
- Directly connect strain gauge and measure signals in as fast as 1ms intervals
- Significantly reduced effects from noise let you safely measure in high voltage and high frequency areas such as around inverter motors
- Avoid wiring issues by minimizing cable length using wireless units
- Monitor data captured remotely on PC with wireless LAN technology

Model No. (Order Code) **LR8450-01** (Wireless LAN equipped model, main unit only)

The LR8450 and LR8450-01 cannot perform measurement on their own. One or more plug-in modules or wireless modules are required (sold separately).

Note) The LR8450-01 and wireless modules emit radio waves. Use of radio waves is subject to licensing requirements in certain countries. Using it in a country or region other than those indicated may violate the law and may result in legal penalties for the operator.

Note) For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website.

#### Basic specifications (Accuracy guaranteed for 1 year)

Max. number of connectable modules	4 plug-in input modules + 7 wireless input modules
Connectable modules (Plug-in modules)	U8550, U8551, U8552, U8553, U8554, U8555, U8556
Connectable modules (Wireless modules)	LR8530, LR8531, LR8532, LR8533, LR8534, LR8535, LR8536
No. of measurement channels	Up to 120 ch with plug-in input modules, up to 330 ch with plug-in input modules and wireless input modules (U8555 and LR8535 can input up to 500 channels per unit)
Pulse/logic input	[Number of ch] 8 ch (common GND, non-isolated, exclusive setting for pulse/logic input for individual channels) [Adaptive input format] Non-voltage contact, open collector, or voltage input [Count] 0 to 1000 M pulse, 1 pulse resolution [Rotational speed] 0 to 5000/n (r/s), 1/n (r/s) resolution, 0 to 300,000/n (r/min.), 1/n (r/min.) resolution, n: Number of pulses per rotation (1 to 1000) [Logic input] Records 1 or 0 for each recording interval
Recording intervals	1 ms *, 2 ms *, 5 ms * (* Can be set only when using 1 ms/S modules), 10 ms to 1 hour, 22 selections (Data refresh interval can be set for each unit)
Data storage	SD Memory Card/USB Drive (user-selectable) (Only storage media sold by Hioki are guaranteed for operation)
LAN interface	100BASE-TX / 1000BASE-T, DHCP, DNS support, Functions: Data acquisition, condition settings used with the Logger Utility software, configuring settings and controlling recording using communications commands, FTP server / FTP client, HTTP server, Email transmission, NTP client
Wireless LAN interface	IEEE 802.11b/g/n Communications range: 30 m, line of sight Encryption function: WPA-PSK / WPA2-PSK, TKIP/AES Usable channels: 1 to 11 Supported modes: Wireless unit connectivity, access point, station Functions: Configuring settings and controlling recording using communications commands, FTP server / client, HTTP server, NTP client
USB interface	Series A receptacle × 2; USB 2.0 compliant (USB drive, keyboard, or hub) Series mini-B receptacle × 1. Data acquisition, condition settings used with the Logger Utility, configuring settings and controlling recording using communications commands, transferring data from a connected SD Memory Card to a computer
SD card slot	SD standard-compliant slot × 1 (with SD memory card/SDHC memory card support), Guaranteed-operation options: Z4001, Z4003
Display	7 inch TFT color liquid crystal display (WVGA 800 × 480 pixel)
Functions	Save waveform data in real time to the SD memory card or USB drive, numerical value calculations, waveform calculations, 8ch alarm output, voltage output × 2 (5 V / 12 V / 24 V selectable)
Power supply	[AC adapter] Using the Z1014 (100 V to 240 V AC, 50 Hz/60 Hz), 95 VA Max. (including AC adapter), 28 VA Max. (exclusive of AC adapter) [Battery Pack] Using the Z1007 (accommodates 2 batteries), continuous use 4 hr (reference value for 2 pieces), 20 VA Max. [External power] 10 V to 30 V DC, 28 VA Max. (Please contact your Hioki distributor for connection cord)
Dimensions and mass	Without any modules: 272 mm (10.71 in.) W × 145 mm (5.71 in.) H × 43 mm (1.69 in.) D (excluding protrusions), 1108 g (39.1 oz.) (excluding Battery Pack) With 2 modules: 272 mm (10.71 in.) W × 198 mm (7.80 in.) H × 63 mm (2.48 in.) D (excluding protrusions) With 4 modules: 272 mm (10.71 in.) W × 252 mm (9.92 in.) H × 63 mm (2.48 in.) D (excluding protrusions)
Included accessories	Quick Start Manual × 1, LOGGER Application Disc (Quick Start Manual, Instruction Manual, Logger Utility, Logger Utility Instruction Manual, CAN editor, CAN editor instruction manual, Communication Instruction Manual) × 1, USB Cable × 1, AC Adapter Z1014 × 1, Precautions Concerning Use of Equipment that Emits Radio Waves (LR8450-01 only) × 1



# Data Loggers/Data Acquisition

## Common options for LR8450 and LR8450-01

Plug-In modules



**VOLTAGE/TEMP UNIT U8550**  
Voltage, Temperature (thermocouples), Humidity, 15 ch, 10 ms sampling



**UNIVERSAL UNIT U8551**  
Voltage, Temperature (thermocouples), Humidity, Pt100/1000, JPt100, Resistance, 15 ch, 10 ms sampling



**VOLTAGE/TEMP UNIT U8552**  
Voltage, temperature (thermocouples), humidity, 30 ch, 20 ms sampling, 10 ms when the number of channels used is 15 or less



**HIGH SPEED VOLTAGE UNIT U8553**  
Voltage, 5 ch, 1 ms sampling



**STRAIN UNIT U8554**  
Strain, voltage, strain gauge transducer, 5 ch, 1 ms sampling



**CAN UNIT U8555**  
CAN/CAN FD input and output switchable, 2 ports, max. sampling 10 ms (up to 50 ch), Up to 500 ch (at 100 ms)



**CURRENT MODULE U8556**  
Current 5 ch (instantaneous, RMS values), 1 ms sampling

Wireless Modules



**WIRELESS VOLTAGE/TEMP UNIT LR8530**  
Voltage and temperature (thermocouples), 15 ch, 10 ms sampling



**WIRELESS UNIVERSAL UNIT LR8531**  
Voltage, Temperature (thermocouples), Humidity, Pt100/1000, JPt100, Resistance, 15 ch, 10 ms sampling



**WIRELESS VOLTAGE/TEMP UNIT LR8532**  
Voltage and temperature (thermocouples), 30 ch, 20 ms sampling, 10 ms sampling when the number of channels used is 15 or less



**WIRELESS HIGH SPEED VOLTAGE UNIT LR8533**  
Voltage, 5 ch, 1 ms sampling



**WIRELESS STRAIN UNIT LR8534**  
Strain, voltage, strain gauge transducer, 5 ch, 1 ms sampling



**WIRELESS CAN UNIT LR8535**  
CAN/CAN FD input and output switchable, 2 ports, max. sampling 10 ms (up to 50 ch), Up to 500 ch (at 100 ms)



**WIRELESS CURRENT MODULE LR8536**  
Current 5 ch (instantaneous, RMS values), 1 ms sampling

Input Options



**HUMIDITY SENSOR Z2000**  
3 m (9.84 ft.) length



**Thermocouple**  
\*For reference only. Please purchase locally.

For CAN Modules




**NON-CONTACT CAN SENSOR SP7001-95**  
Supports CAN FD/CAN signals, SP7001, SP9250, SP7150 set



**CAN CABLE 9713-01**  
For U8555/LR8535, unprocessed on one end, 1.8 m (5.91 ft.) length

LOGGER UTILITY and CAN EDITOR are bundled software



**LOGGER UTILITY SF1000**  
Control the measurement of loggers and collect data in real-time



**CAN EDITOR SF1002**  
Software for CAN unit settings



**LAN CABLE 9642**  
Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft.) length

Storage Media

**SD MEMORY CARD 2GB Z4001**  
2 GB capacity

**SD MEMORY CARD Z4003**  
8 GB capacity

**USB DRIVE Z4006**  
16 GB, Long-life, High-reliability SLC Flash Memory

**Precaution on purchasing memory device**

*Use only the memory device sold by Hioki. Compatibility and performance are not guaranteed for memory device made by other manufacturers. You may be unable to read from or save data to such devices.*

Current Sensors



**AC/DC CURRENT SENSOR CT7812**  
2A AC/DC,  $\phi$  5 mm (0.20 in.) core dia., cord length 4 m (13.12 ft.) (between sensor and multiplexer)



**AC/DC CURRENT SENSOR CT7822**  
20A AC/DC,  $\phi$  5 mm (0.20 in.) core dia., cord length 4 m (13.12 ft.) (between sensor and multiplexer)



**AC/DC AUTO-ZERO CURRENT SENSOR CT7731**  
100A AC/DC,  $\phi$  33 mm (1.30 in.) core dia., cord length 2.5 m (8.20 ft.)



**AC/DC AUTO-ZERO CURRENT SENSOR CT7736**  
600A AC/DC,  $\phi$  33 mm (1.30 in.) core dia., cord length 2.5 m (8.20 ft.)



**AC/DC AUTO-ZERO CURRENT SENSOR CT7742**  
2000A AC/DC,  $\phi$  55 mm (2.17 in.) core dia., cord length 2.5 m (8.20 ft.)



**AC LEAKAGE CURRENT SENSOR CT7116**  
6A AC,  $\phi$  40 mm (1.57 in.) core dia., cord length 2.5 m (8.20 ft.)



**AC CURRENT SENSOR CT7126**  
60A AC,  $\phi$  15 mm (0.59 in.) core dia., cord length 2.5 m (8.20 ft.)



**AC CURRENT SENSOR CT7131**  
100A AC,  $\phi$  15 mm (0.59 in.) core dia., cord length 2.5 m (8.20 ft.)



**AC CURRENT SENSOR CT7136**  
600A AC,  $\phi$  46 mm (1.81 in.) core dia., cord length 2.5 m (8.20 ft.)



**AC FLEXIBLE CURRENT SENSOR CT7044**  
6000A AC,  $\phi$  100 mm (3.94 in.) core dia., cord length 2.3 m (7.55 ft.)



**AC FLEXIBLE CURRENT SENSOR CT7045**  
6000A AC,  $\phi$  180 mm (7.09 in.) core dia., cord length 2.3 m (7.55 ft.)



**AC FLEXIBLE CURRENT SENSOR CT7046**  
6000A AC,  $\phi$  254 mm (10.00 in.) core dia., cord length 2.3 m (7.55 ft.)

Power Supply



**BATTERY PACK Z1007**  
For LR8450, LR8450-01 and wireless modules



**AC ADAPTER Z1014**  
For LR8450 and LR8450-01, 100 to 240V AC



**AC ADAPTER Z1008**  
For wireless modules, 100 to 240V AC



**POWER CABLE L1012**  
For main unit, DC drive, Connect to external battery, Unprocessed ends, Approx. 2 m (6.6 ft.)

Carrying Cases/stands



**CARRYING CASE C1012**  
Holds the main unit, 4 plug-in modules and 7 wireless modules



**FIXED STAND Z5040**  
For installing logger on wall

## Featuring USB Flash Drive and Improved Accuracy! Your Personal 10-channel Logger

### MEMORY HILOGGER LR8431



USB 2.0

CE

3 Year Warranty

- Record measurement data on a USB flash drive for easy transfer to a computer
- Record to reliable Compact Flash cards during long-term measurement applications for increased peace of mind
- Replace storage media during real-time recording
- Improved thermocouple measurement accuracy and reference junction compensation accuracy
- Ten isolated analog input channels
- 10 ms sampling and recording across all channels
- Noise-resistant measurement circuitry for improved readings
- Ultra-compact for convenient portability
- Widescreen, bright LCD gives excellent viewability

Model No. (Order Code) **LR8431-20** (10 ch, English model)

Note: the LR8431-20 is not bundled with the Battery Pack 9780. Thermocouples are not provided by Hioki, and must be purchased from a separate vendor.

Note: use only Hioki CF cards, which are manufactured to strict industrial standards, for long-term storage of important data. Correct operation of non-Hioki CF cards or USB memory sticks is not guaranteed.

#### Basic specifications (Accuracy guaranteed for 1 year)

Analog inputs	[No. of channels] 10 isolated analog channels using scanning input method (M3 mm dia. screw terminal block) [Voltage measurement range] $\pm 100$ mV to $\pm 60$ V, 1-5 V, Max. resolution 5 $\mu$ V [Temperature : thermocouples] $-200$ °C to 1800 °C (depending on sensor), thermocouples (K, J, E, T, N, R, S, B), Max. resolution 0.1 °C [Humidity] not available [Max. allowable input] 60 V DC [Max. rated voltage between input channels] [Max. rated voltage to earth] 30 AC Vrms, 60 V DC (max. voltage between input channel terminals, and from terminals to chassis ground without damage)
Pulse inputs	[No. of channels] 4 pulse input channels (requires CONNECTION CABLE 9641, all pulse inputs share common ground with the main unit) [Totalized pulses] 0 to 1000M (count) (No-voltage 'a' contact, open collector or voltage input), Max. resolution 1 pulse [Rotation count] 0 to 5000n (r/s), Resolution 1/n (r/s) * n = pulses per rotation (1 to 1,000) [Max. allowable input] 0 to 10 V DC [Max. rated voltage between input channels] [Max. rated voltage to earth] Non-isolated
Recording intervals	10 ms to 1 hour, 19 selections (All input channels are scanned at high speed during every recording interval)
Selectable filters	50 Hz, 60 Hz, or OFF (digital filtering of high frequencies on analog channels)
Memory capacity	Internal storage: 3.5 M-words, External storage: CF card or USB memory stick (only Hioki CF cards are guaranteed for correct operation)
External interface	USB 2.0 mini-B receptacle $\times 1$ ; Functions: Control from a PC, Transfers files from the installed CF card to a PC (cannot transfer files from the connected USB memory stick to a PC via USB communication), Data copy between CF card and USB memory stick
Display	4.3-inch WQVGA-TFT color LCD (480 $\times$ 272 dots)
Functions	Save data to the CF Card or USB memory stick in real time, Numerical Calculations, etc.
Power supply	AC Adapter Z1005: 100 to 240 VAC (50/60 Hz), 30 VA Max. (including AC adapter), 10 VA Max. (main unit only) Battery Pack 9780: Continuous use 2.5 hours (@25°C/77°F), 3 VA Max. External power source: 10 to 16 V, 10 VA Max. (please contact Hioki distributor for cable; less than 3 m/9.84 ft cable length)
Dimensions and mass	176 mm (6.93 in.) W $\times$ 101 mm (3.98 in.) H $\times$ 41 mm (1.61 in.) D, 550 g (19.4 oz.) (Battery Pack 9780 not installed)
Included accessories	Measurement Guide $\times 1$ , CD-R (Instruction manual PDF, Logger Utility Instruction Manual PDF, Data acquisition application program Logger Utility) $\times 1$ , USB cable $\times 1$ , AC Adapter Z1005 $\times 1$

## Compact & Lightweight Heat Flow Logger for Analyzing the Causes of Temperature Change

### HEAT FLOW LOGGER LR8432



USB 2.0

CE

3 Year Warranty

- Use a heat flow sensor to measure the movement and volume of heat energy
- Measure of temperature and voltage
- Record measurement data on a USB flash drive for easy transfer to a computer
- Record to reliable Compact Flash cards during long-term measurement applications for increased peace of mind
- Ten isolated analog input channels
- 10 ms sampling and recording across all channels
- Record raw waveforms and post-calculation waveforms at the same time. (Heat transmission coefficient processing)
- Two graduations can be displayed with a double gauge

Model No. (Order Code) **LR8432-20** (10 ch, English model)

Note: the LR8432-20 is not bundled with the Battery Pack 9780. Thermocouples are not provided by Hioki, and must be purchased from a separate vendor.

Note: use only Hioki CF cards, which are manufactured to strict industrial standards, for long-term storage of important data. Correct operation of non-Hioki CF cards or USB memory sticks is not guaranteed.

#### Basic specifications (Accuracy guaranteed for 1 year)

Specialized functions for heat flow measurement	<ul style="list-style-type: none"> <li>Easy scaling settings: directly enter the sensitivity of the heat flow sensor</li> <li>Calculations: waveform processing function for the analysis of temperature and heat flow (Simple average, moving average, integration, heat transmission coefficient), Integration with numerical calculations</li> </ul>
Analog inputs	[No. of channels] 10 isolated analog channels using scanning input method (M3 mm dia. screw terminal block) [Voltage measurement range] $\pm 10$ mV to $\pm 60$ V, 1-5 V, Max. resolution 500 nV [Temperature : thermocouples] $-200$ °C to 1800 °C (depending on sensor), thermocouples (K, J, E, T, N, R, S, B), Max. resolution 0.1 °C [Humidity] not available [Max. allowable input] 60 V DC [Max. rated voltage between input channels] [Max. rated voltage to earth] 30 AC Vrms, 60 V DC (max. voltage between input channel terminals, and from terminals to chassis ground without damage)
Pulse inputs	[No. of channels] 4 pulse input channels (requires CONNECTION CABLE 9641, all pulse inputs share common ground with the main unit) [Totalized pulses] 0 to 1000M (count) (No-voltage 'a' contact, open collector or voltage input), Max. resolution 1 pulse [Rotation count] 0 to 5000n (r/s), Resolution 1/n (r/s) * n = pulses per rotation (1 to 1,000) [Max. allowable input] 0 to 10 V DC [Max. rated voltage between input channels] [Max. rated voltage to earth] Non-isolated
Recording intervals	10 ms to 1 hour, 19 selections (All input channels are scanned at high speed during every recording interval)
Selectable filters	50 Hz, 60 Hz, or OFF (digital filtering of high frequencies on analog channels)
Memory capacity	Internal storage: 3.5 M-words, External storage: CF card or USB memory stick (only Hioki CF cards are guaranteed for correct operation)
External interface	USB 2.0 mini-B receptacle $\times 1$ ; Functions: Control from a PC, Transfers files from the installed CF card to a PC (cannot transfer files from the connected USB memory stick to a PC via USB communication), Data copy between CF card and USB memory stick
Display	4.3-inch WQVGA-TFT color LCD (480 $\times$ 272 dots)
Functions	Save data to the CF Card or USB memory stick in real time, Numerical Calculations, etc.
Power supply	AC Adapter Z1005: 100 to 240 VAC (50/60 Hz), 30 VA Max. (including AC adapter), 10 VA Max. (main unit only) Battery Pack 9780: Continuous use 2.5 hours (@25°C/77°F), 3 VA Max. External power source: 10 to 16 V, 10 VA Max. (please contact Hioki distributor for cable; less than 3 m/9.84 ft cable length)
Dimensions and mass	176 mm (6.93 in.) W $\times$ 101 mm (3.98 in.) H $\times$ 41 mm (1.61 in.) D, 550 g (19.4 oz.) (Battery Pack 9780 not installed)
Included accessories	Measurement Guide $\times 1$ , CD-R (Instruction manual PDF, Logger Utility Instruction Manual PDF, Data acquisition application program Logger Utility) $\times 1$ , USB cable $\times 1$ , AC Adapter Z1005 $\times 1$

### Common options for LR8431 and LR8432

Other options: refer to the detailed catalog

<p><b>BATTERY PACK 9780</b> NiMH, Charges while installed in the main unit</p>	<p><b>SOFT CASE 9812</b> Includes space for small items, Neoprene rubber</p>	<p><b>CARRYING CASE 9782</b> Includes compartment for options, Resin coated</p>	<p><b>CONNECTION CABLE 9641</b> For pulse inputs, 1.5 m (4.92 ft.) length</p>	<p><b>PROTECTION SHEET 9809</b> For LCD protection, pairs of additional sheets</p>	<p><b>Storage Media</b></p> <p><b>PC CARD 2G 9830</b> 2 GB capacity</p> <p><b>PC CARD 1G 9729</b> 1 GB capacity</p> <p><b>PC CARD 512M 9728</b> 512 MB capacity</p> <p><b>PC Card Precaution</b> Use only PC Cards sold by Hioki. Compatibility and performance are not guaranteed for PC cards made by other manufacturers. You may be unable to read from or save data to such cards.</p>
--	--	---	---	--	---



## Perform Pulse Integration of Vehicle Speed or Flow Rate for Equipment Such as Air Conditioners

### WIRELESS PULSE LOGGER LR8512



\*Bundled accessory (L1010)  
Not covered by warranty

- For pulse totalization and measuring logical ON/OFF signals or revolutions
- Compact, two-channel model fits where other devices don't
- Download measurement data to a tablet or computer with Bluetooth® wireless technology
- Three-way power (AC adapter, AA alkaline batteries, or external 5 to 13.5 V power supply)
- Store 500,000 data points per channel

Model No. (Order Code) **LR8512** (2 ch)

For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website.  
Bluetooth® is a trademark of Bluetooth SIG, Inc. and licensed for use by HIOKI E.E. CORPORATION.

■ Data can be downloaded using Hioki's tablet and smartphone app (for Android devices).  
Search for "HIOKI" and download the Wireless Logger Collector!



#### ■ Basic specifications (Accuracy guaranteed for 1 year)

Functionality	[Used as standalone product (Data collected manually)] Windows PC or Windows tablet (CD-R with software included) Android smartphone or Android tablet terminal (Software can be downloaded free of charge from Google Play.) *Communication range varies with the performance of the computer or tablet (up to a line-of-sight distance of roughly 30 m) [Used as logging module (Real-time measurement)] Device can be used as an LR8410 logging module to record and display data in real time and to control up to 7 units, Communication distance: 30 m
Number of channels	2ch (common GND)
Measurement items	Integrating (cumulative/Instant), Revolution, Logic (Records a 1/0 for each recording interval)
Supported input format	Non-voltage "a" contact (always-open contact point), open collector, or voltage input (DC 0 to 50 V)
Measurement range	[Totalization] 0 to 1000 M pulse, Max. resolution 1 pulse, [No. of revolutions] 0 to 5000/n [r/s], Max. resolution 1/n [r/s]
Display items	Measurement value, date, time, number of recorded data, maximum value, minimum value, and average value
Functions	Alarm, Scaling, Recording operation hold function, Erroneous operation prevention, Comment recording function, Power saving function, Authentication function
Recording	[Capacity] 500,000 data items for each channel [Mode] Instantaneous value [Interval] 0.1 to 30 sec, 1 to 60 min, 16 selections
Power source	AC Adapter Z2003 (100 to 240 V AC, 50/60 Hz), AA alkaline batteries (LR6) ×2, External power 5 to 13.5 V DC (can also be supplied from USB bus power, with a conversion cable)
Continuous operating time ((Capacity) 500,000 data items for each channel) (23°C)	2 months (Recording interval of 1 min, Bluetooth® OFF), 14 days (Recording interval of 1 sec, Bluetooth® ON), 5 days (Recording interval of 0.1 sec, during real-time measurement with the LR8410)
Dimensions and mass	85 mm (3.35 in.) W × 61 mm (2.40 in.) H × 31 mm (1.22 in.) D, 95 g (3.4 oz.) (excluding the battery)
Included accessories	CD-R ×1 (Instruction Manual, Logger Utility, Wireless Logger Collector), Measurement Guide ×1, Caution for Using Radio Waves ×1, AA alkaline batteries (LR6) ×2, Connection cable L1010 ×2

## Measure Load Current and Leak Current Easily with Clamp Sensors

### WIRELESS CLAMP LOGGER LR8513



\*Clamp sensor is sold separately  
(Sensor guaranteed for 1 year.)

- Measure AC and DC load current and AC leak current
- Choose from many current sensors
- Place inside a distribution panel, close the cover, and monitor measured values from the outside
- Measure power easily—just set the voltage and power factor
- Compact, two-channel model fits where other devices don't
- Download measurement data to a tablet or computer with Bluetooth® wireless technology
- Three-way power (AC adapter, AA alkaline batteries, or external 5 to 13.5 V power supply)
- Store 500,000 data points per channel

Model No. (Order Code) **LR8513** (2 ch, sensor is sold separately)

Note: the LR8513 alone is not capable of making measurements.  
For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website.  
Bluetooth® is a trademark of Bluetooth SIG, Inc. and licensed for use by HIOKI E.E. CORPORATION.

■ Data can be downloaded using Hioki's tablet and smartphone app (for Android devices).  
Search for "HIOKI" and download the Wireless Logger Collector!



#### ■ Basic specifications (Accuracy guaranteed for 1 year)

Functionality	[Used as standalone product (Data collected manually)] Windows PC or Windows tablet (CD-R with software included) Android smartphone or Android tablet terminal (Software can be downloaded free of charge from Google Play.) *Communication range varies with the performance of the computer or tablet (up to a line-of-sight distance of roughly 30 m) [Used as logging module (Real-time measurement)] Device can be used as an LR8410 logging module to record and display data in real time and to control up to 7 units, Communication distance: 30 m
Number of channels	2ch (common GND)
Measurement items	AC load current, DC load current, AC leak current (using current sensor)
Effective value calculation	Software calculates the true RMS value
Measurement range	500.0 mA to 5000 A AC, 10.00 A to 2000 A DC (By current sensor) *Current and leak current that occur intermittently cannot be measured.
Measurement accuracy	±0.5% rdg ±5 dgt (DC, AC 50/60 Hz) *Add the sensor's accuracy when the current sensor is connected
Display items	Measurement value, date, time, number of recorded data, maximum value, minimum value, and average value
Functions	Alarm, Scaling, Recording operation hold function, Erroneous operation prevention, Comment recording function, Power saving function, Authentication function, Free run
Recording	[Capacity] 500,000 data items for each channel [Mode] Instantaneous value, average value, maximum value [Interval] 0.5 to 30 sec, 1 to 60 min, 14 selections
Power source	AC Adapter Z2003 (100 to 240 V AC, 50/60 Hz), AA alkaline batteries (LR6) ×2, External power 5 to 13.5 V DC (can also be supplied from USB bus power, with a conversion cable)
Continuous operating time ((Capacity) 500,000 data items for each channel) (23°C)	3 months (Recording interval of 1 min, Bluetooth® OFF), 10 days (Recording interval of 1 sec, Bluetooth® ON), 5 days (Recording interval of 0.5 sec, during real-time measurement with the LR8410)
Dimensions and mass	85 mm (3.35 in.) W × 75 mm (2.95 in.) H × 38 mm (1.50 in.) D, 130 g (4.6 oz.) (excluding the battery)
Included accessories	CD-R ×1 (Instruction Manual, Logger Utility, Wireless Logger Collector), Measurement Guide ×1, Caution for Using Radio Waves ×1, AA alkaline batteries (LR6) ×2

For more information about sensors other than those listed below that can be used with the LR8513, see the product brochure or Hioki website.

<p>AC load current Approx. 3m (118.1 in.) CLAMP ON SENSOR CT6500 500 A AC</p>	<p>AC load current Approx. 3m (118.1 in.) CLAMP ON SENSOR 9669 1000 A AC</p>	<p>AC load current Connected to an AC flexible current sensor CT7044 CT7045 CT7046</p>
<p>AC leak current Insulated conductor Approx. 3m (118.1 in.) CLAMP ON LEAK SENSOR 9657-10</p>	<p>AC leak current Insulated conductor Approx. 3m (118.1 in.) CLAMP ON LEAK SENSOR 9675</p>	<p>AC/DC load current Connected to an AC/DC auto-zero current sensor CT7731 CT7736 CT7742</p>

Clamp on Leak Sensor 9657-10, 9675: Rated primary current 5 A AC.  
\*Maximum measurable current when used with the LR8513



## Ideal for Managing Environmental Temperature and Humidity at Production Plants and Agricultural Sites

### WIRELESS HUMIDITY LOGGER LR8514



\*Temperature and humidity sensor is sold separately (Sensor guaranteed for 1 year.)

- High-precision,  $\pm 3\%$  RH humidity sensor
- Convenient for simultaneously recording and comparing temperature and humidity readings at 2 locations
- Compact, two-channel model fits where other devices don't
- Download measurement data to a tablet or computer with Bluetooth® wireless technology
- Three-way power (AC adapter, AA alkaline batteries, or external 5 to 13.5 V power supply)
- Store 500,000 data points per channel

Model No. (Order Code) **LR8514** (2 ch, sensor is sold separately)

Note: the LR8514 alone is not capable of making measurements. Only the temperature and humidity sensors affect the measurement accuracy and are subject to calibration. The LR8514 logger does not require calibration. For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website. Bluetooth® is a trademark of Bluetooth SIG, Inc. and licensed for use by HIOKI E.E. CORPORATION.

■ Data can be downloaded using Hioki's tablet and smartphone app (for Android devices). Search for "HIOKI" and download the Wireless Logger Collector!



#### Basic specifications

Functionality	[Used as standalone product (Data collected manually)] Windows PC or Windows tablet (CD-R with software included) Android smartphone or Android tablet terminal (Software can be downloaded free of charge from Google Play.) *Communication range varies with the performance of the computer or tablet (up to a line-of-sight distance of roughly 30 m) [Used as logging module (Real-time measurement)] Device can be used as an LR8410 logging module to record and display data in real time and to control up to 7 units, Communication distance: 30 m
Number of channels	2 ch for temperature + 2 ch for humidity (2 sensors can be attached)
Measurement items	Temperature, Humidity
Measurable Range	[Temperature] -40 °C to 80 °C, Range 100°C f.s., Max. resolution 0.1°C [Humidity] 0 to 100% RH, Range 100% RH f.s., Max. resolution 0.1%RH
Measurement accuracy (using Z2010/ Z2011)	[Temperature basic accuracy] $\pm 0.5$ °C (10 to 60 °C) *If outside above temperature range: Add 0.015 °C / °C (-40 to 10 °C) or 0.02 °C / °C (60 to 80 °C) [Humidity basic accuracy] $\pm 3\%$ RH (20 to 30 °C, 20 to 90% RH), Hysteresis: $\pm 1\%$ RH (Added to the humidity measurement accuracy)
Display items	Measurement value, date, time, number of recorded data, maximum value, minimum value, and average value
Functions	Alarm, Scaling, Recording operation hold function, Erroneous operation prevention, Comment recording function, Power saving function, Authentication function, Free run
Recording	[Capacity] 500,000 data items for each channel [Mode] Instantaneous value [Interval] 0.5 to 30 sec, 1 to 60 min, 14 selections
Power source	AC Adapter Z2003 (100 to 240 V AC, 50/60 Hz), AA alkaline batteries (LR6) $\times 2$ , External power 5 to 13.5 V DC (can also be supplied from USB bus power, with a conversion cable)
Continuous operating time (Capacity) 500,000 data items for each channel) (23°C)	3.5 months (Recording interval of 1 min, Bluetooth® OFF), 20 days (Recording interval of 1 sec, Bluetooth® ON), 5 days (Recording interval of 0.5 sec, during real-time measurement with the LR8410)
Dimensions and mass	85 mm (3.35 in.) W $\times$ 61 mm (2.40 in.) H $\times$ 31 mm (1.22 in.) D (Excluding protrusions), 95 g (3.4 oz.) (Not including the battery)
Included accessories	CD-R $\times 1$ (Instruction Manual, Logger Utility, Wireless Logger Collector), Measurement Guide $\times 1$ , Caution for Using Radio Waves $\times 1$ , AA alkaline batteries (LR6) $\times 2$



## Wireless Collection of a Variety of Data Types, Voltage and K and T Thermocouple Input with a Single Device

### WIRELESS VOLTAGE/ TEMP LOGGER LR8515



\*Temperature sensor is sold separately

- A single device to measure everything from the minute voltages of pyranometers or heat flow sensors to battery voltage to temperature
- Compact, two-channel model fits where other devices don't
- Download measurement data to a tablet or computer with Bluetooth® wireless technology
- Three-way power (AC adapter, AA alkaline batteries, or external 5 to 13.5 V power supply)
- Store 500,000 data points per channel

Model No. (Order Code) **LR8515** (2 ch, sensor is sold separately)

For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website. Bluetooth® is a trademark of Bluetooth SIG, Inc. and licensed for use by HIOKI E.E. CORPORATION.

■ Data can be downloaded using Hioki's tablet and smartphone app (for Android devices). Search for "HIOKI" and download the Wireless Logger Collector!



#### Basic specifications (Accuracy guaranteed for 1 year)

Functionality	[Used as standalone product (Data collected manually)] Windows PC or Windows tablet (CD-R with software included) Android smartphone or Android tablet terminal (Software can be downloaded free of charge from Google Play.) *Communication range varies with the performance of the computer or tablet (up to a line-of-sight distance of roughly 30 m) [Used as logging module (Real-time measurement)] Device can be used as an LR8410 logging module to record and display data in real time and to control up to 7 units, Communication distance: 30 m
Number of channels	2 ch (isolated; select voltage of thermocouple for each channel), Input terminals: M3 screw type terminal block
Measurement items	Voltage/ Thermocouple (K, T)
Maximum input voltage	$\pm 50$ V DC, Max. inter-channel voltage 60 V DC
Measurement range	[Voltage] $\pm 50$ mV to $\pm 50$ V, Max. resolution 0.01 mV [Thermocouple] -200 °C to 999.9 °C, Thermocouples (K, T), Max. resolution 0.1 °C
Measurement accuracy	[Voltage] $\pm 0.05$ mV (50 mV range) [Thermocouple] $\pm 0.8$ °C (Thermocouple K -100 °C to 999.9 °C) *Reference junction compensation: Switchable between internal and external *Reference junction compensation accuracy: $\pm 0.5$ °C (When using internal compensation, add to thermocouple measurement accuracy.) *Temperature characteristics: Add (measurement accuracy $\times 0.1$ ) / °C to measurement accuracy.
Display items	Measurement value, date, time, number of recorded data, maximum value, minimum value, and average value
Functions	Alarm, Scaling, Recording operation hold function, Erroneous operation prevention, Comment recording function, Power saving function, Authentication function, Free run
Recording	[Capacity] 500,000 data items for each channel [Mode] Instantaneous value [Interval] 0.1 to 30 sec, 1 to 60 min, 16 selections
Power source	AC Adapter Z2003 (AC100 V to 240 V, 50 Hz/60 Hz), AA alkaline batteries (LR6) $\times 2$ , External power DC5 V to 13.5 V (can also be supplied from USB bus power, with a conversion cable)
Continuous operating time (Capacity) 500,000 data items for each channel) (23°C)	2.5 months (Recording interval of 1 min, Bluetooth® OFF), 7 days (Recording interval of 1 sec, Bluetooth® ON), 2 days (Recording interval of 0.1 sec, during real-time measurement with the LR8410)
Dimensions and mass	85 mm (3.35 in.) W $\times$ 75 mm (2.95 in.) H $\times$ 38 mm (1.50 in.) D, 126 g (4.4 oz.) (Not including the battery)
Included accessories	CD-R $\times 1$ (Instruction Manual, Logger Utility, Wireless Logger Collector), Measurement Guide $\times 1$ , Caution for Using Radio Waves $\times 1$ , AA alkaline batteries (LR6) $\times 2$



## Record Temperature and Humidity Simultaneously

### HUMIDITY LOGGER LR5001



- Easily mount the light-weight , pocket-sized loggers in tight spaces
- Easy-to-see dual display
- Transfer data to PC even during recording
- Replace batteries while recording (30 second limit)  
Note: recording is interrupted during battery replacement if the battery is very weak. After batteries are replaced, recording resumes automatically. Previously recorded data is not lost during battery replacement.
- 7 times the memory capacity than predecessor (Record 60,000 data per channel)
- Record without missing fluctuations in STAT mode
- Measurement data is preserved even after the battery dies
- Worry-free backup preserves recorded data even if a new measurement is started by mistake

Model No. (Order Code) **LR5001** (Temperature / Humidity each 1ch)

Note: Communication Adapter LR5091 or Data Collector LR5092-20 is necessary to collect data from the LR5000 series Logger and transfer data to a PC.

#### ■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement items	Temperature 1ch and Humidity 1ch (Requires included or optional humidity sensor)
Measurement range	Temperature: -40.0 to 85.0 °C, Humidity: 0 to 100 % rh *at sensor environment
Basic accuracy	[Temperature] : ±0.5 °C (main unit + sensor accuracy, at 0.0 to 35.0 °C) [Humidity] : ±5 % rh (main unit + temperature / humidity sensor LR9501/ LR9502/LR9503/LR9504 combination, at 20 to 30 °C / 10 to 50 % rh) Note: basic accuracy is typical value, refer to the detailed catalog
Storage capacity	Instantaneous value mode: 60,000 data/ch, Statistical value mode: 15,000 data/ch
Recording interval	1 to 30 sec., 1 to 60 min., 15 selections
Recording modes	Instantaneous recording: at every recording interval Statistical value recording: Measure at one second intervals, and record the instantaneous, maximum, minimum, and average values within every recording interval
Recording methods	One-time recording: Stop recording when the memory capacity is full Endless recording: Continue recording even when the memory capacity is full (old data is overwritten) Start: Logger button operation or scheduled time Stop: Logger button operation or scheduled time, or auto-stop when the memory capacity is full (at one-time recording)
Other functions	Always backs up last recorded data; backs up recorded data and setting conditions when battery power is low Note: after batteries are replaced within 30 seconds, recording resumes automatically (Recording is interrupted during battery replacement)
Waterproof and dust-proof	IP54 (EN60529) (with sensor connected, but not including sensor tip)
Interfaces	Infrared optical communications with LR5091, LR5092-20
Power supply	LR6 (AA) Alkaline battery ×1, Battery life: Approx. 3 months (Instantaneous recording, with 1-minute interval and auto power saving, at 20 °C), Approx. 20 days (Instantaneous recording, with 1-second interval at 20 °C) (typical data: Approx. 1 year recording with 10-minutes interval)
Dimensions and mass	79 mm (3.11 in.)W × 57 mm (2.246 in.)H × 28 mm (1.10 in.)D, 105 g (3.7 oz.)
Included accessories	LR6 (AA) Alkaline battery (built-in internal) ×1, Humidity sensor LR9504 ×1, Instruction manual ×1, Operation guide ×1, Kickstand ×1

For data acquisition to PC

Options

COMMUNICATION ADAPTER LR5091  
Dock logger and transfer data via optical communication

DATA COLLECTOR LR5092-20  
Dock logger or transfer data to internal memory/SD memory card

For Fixing

MAGNETIC STRAP Z5004

WALL-MOUNTED HOLDER LR9901  
Not compatible with Model LR5051

Optional Sensors

Temperature range: -40 to 85 °C  
Humidity range: 0 to 100 % rh  
Response time: 300 seconds (90 % response time)  
Waterproof: None  
Sensor size: 13×30 mm (0.51×1.18 in.)

LR9501 1 m (3.28 ft.) length  
LR9502 5 m (16.41 ft.) length  
LR9503 10 m (32.81 ft.) length  
LR9504 40 mm (1.57 in.) length

LR9504 is bundled accessory

## Measure Temperature with External Sensor

### TEMPERATURE LOGGER LR5011



- Easily mount the light-weight , pocket-sized loggers in tight spaces
- Easy-to-see dual display
- Transfer data to PC even during recording
- Replace batteries while recording (30 second limit)
- 3 times the memory capacity than predecessor (Record 60,000 data per channel)
- Record without missing fluctuations in STAT mode
- Measurement data is preserved even after the battery dies
- Worry-free backup preserves recorded data even if a new measurement is started by mistake

Model No. (Order Code) **LR5011** (Temperature 1ch)

Note: Communication Adapter LR5091 or Data Collector LR5092-20 is necessary to collect data from the LR5000 series Logger and transfer data to a PC.

#### ■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement items	Temperature 1ch (with optional sensor)
Measurement range	-40.0 °C to 180.0 °C *Depends on measurement range of sensor
Basic accuracy	±0.5 °C (main unit + sensor accuracy, at 0.0 to 35.0 °C) Note: basic accuracy is typical value, refer to the detailed catalog
Storage capacity	Instantaneous value mode: 60,000 data, Statistical value mode: 15,000 data
Recording interval	1 to 30 sec., 1 to 60 min., 15 selections
Recording modes	Instantaneous recording: at every recording interval Statistical value recording: Measure at one second intervals, and record the instantaneous, maximum, minimum, and average values within every recording interval
Recording methods	One-time recording: Stop recording when the memory capacity is full Endless recording: Continue recording even when the memory capacity is full (old data is overwritten) Start: Logger button operation or scheduled time Stop: Logger button operation or scheduled time, or auto-stop when the memory capacity is full (at one-time recording)
Other functions	Always backs up last recorded data; backs up recorded data and setting conditions when battery power is low; guarantees approx. 30 sec. of recording operation and clock while battery is replaced
Waterproof and dust-proof	IP54 (EN60529) (with sensor connected, but not including sensor tip)
Interfaces	Infrared optical communications with LR5091, LR5092-20
Power supply	LR6 (AA) Alkaline battery ×1, Battery life: Approx. 2 years (Instantaneous recording, with 1-minute interval and auto power saving, at 20 °C), Approx. 2 months (Instantaneous recording, with 1-second interval at 20 °C)
Dimensions and mass	79 mm (3.11 in.)W × 57 mm (2.246 in.)H × 28 mm (1.10 in.)D, 105 g (3.7 oz.)
Included accessories	LR6 (AA) Alkaline battery (built-in internal) ×1, Instruction manual ×1, Operation guide ×1, Kickstand ×1

For data acquisition to PC

Options

COMMUNICATION ADAPTER LR5091  
Dock logger and transfer data via optical communication

DATA COLLECTOR LR5092-20  
Dock logger or transfer data to internal memory/SD memory card

For Fixing

MAGNETIC STRAP Z5004

WALL-MOUNTED HOLDER LR9901  
Not compatible with Model LR5051

Optional Sensors

(Molded plastic type)  
Temperature range: -40 to 180 °C (-40 to 356 °F)  
Response time: 100 sec (90% response time)  
Sensor head size: φ6 × 28 mm (0.24 in × 1.10 in.)

(Lug type)  
Temperature range: -30 to 180 °C (-22 to 356 °F)  
Response time: <45 sec (90% response time)  
Outer diameter: φ7 mm (0.26 in.)  
Inner diameter: φ2 mm (0.13 in.)

(Sheath type)  
Temperature range: -40 to 120 °C (-40 to 248 °F)  
Response time: 90 sec (90% response time)  
Sensor head size: φ4 × 180 mm (0.16 in × 7.09 in.)

LR9601 1 m (3.28 ft.) length  
LR9602 5 m (16.41 ft.) length  
LR9603 10 m (32.81 ft.) length  
LR9604 45 mm (1.77 in.) length

LR9611 1 m (3.28 ft.) length  
LR9612 5 m (16.41 ft.) length  
LR9613 10 m (32.81 ft.) length

LR9621 1 m (3.28 ft.) length

(Needle type)  
Temperature range: -40 to 120 °C (-40 to 248 °F)  
Response time: 20 sec (90% response time)  
Sensor head size: φ1.3 × 25 mm (0.05 in × 0.98 in.)

LR9631 1 m (3.28 ft.) length

## For 4-20 mA Instrumentation Measurement

### INSTRUMENTATION LOGGER LR5031



\*Bundled accessory (LR9801)  
Not covered by warranty

IP54  
(splash-proof construction)

- 4 - 20 mA DC measurement only
- Easily mount the light-weight , pocket-sized loggers in tight spaces
- Easy-to-see dual display
- Transfer data to PC even during recording
- Replace batteries while recording (30 second limit)
- 3 times the memory capacity than predecessor (Record 60,000 data per channel)
- Measurement data is preserved even after the battery dies
- Worry-free backup preserves recorded data even if a new measurement is started by mistake

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement items	DC current (1 ch), for Instrumentation
Measurement range	-30.00 to 30.00 mA
Accuracy	±0.5 %rdg ±5 dgt
Storage capacity	Instantaneous value mode: 60,000 data, Statistical value mode: 15,000 data
Recording interval	1 to 30 sec., 1 to 60 min., 15 selections
Recording modes	Instantaneous recording: at every recording interval Statistical value recording: Measure at one second intervals, and record the instantaneous, maximum, minimum, and average values within every recording interval
Recording methods	One-time recording: Stop recording when the memory capacity is full Endless recording: Continue recording even when the memory capacity is full (old data is overwritten) Start: Logger button operation or scheduled time Stop: Logger button operation or scheduled time, or auto-stop when the memory capacity is full (at one-time recording)
Other functions	Always backs up last recorded data; backs up recorded data and setting conditions when battery power is low; guarantees approx. 30 sec. of recording operation and clock while battery is replaced
Waterproof and dust-proof	IP54 (EN60529) (with connection cable connected, but not including cable tip)
Interfaces	Infrared optical communications with LR5091, LR5092-20
Power supply	LR6 (AA) Alkaline battery ×1, Battery life: Approx. 2 years (Instantaneous recording, with 1-minute interval and auto power saving, at 20 °C), Approx. 2 months (Instantaneous recording, with 1-second interval at 20 °C)
Dimensions and mass	79 mm (3.11 in.)W × 57 mm (2.246 in.)H × 28 mm (1.10 in.)D, 105 g (3.7 oz.)
Included accessories	LR6 (AA) Alkaline battery (built-in internal) ×1, Connection cable LR9801 ×1, Instruction manual ×1, Operation guide ×1, Kickstand ×1

Model No. (Order Code) **LR5031** (mA DC, 1ch)

Note: Communication Adapter LR5091 or Data Collector LR5092-20 is necessary to collect data from the LR5000 series Logger and transfer data to a PC.

Options	For data acquisition to PC	For Fixing	Bundled Accessory
	<p>COMMUNICATION ADAPTER LR5091 Dock logger and transfer data via optical communication</p> <p>DATA COLLECTOR LR5092-20 Dock logger or transfer data to internal memory/SD memory card</p>		

## Record Instrumentation Signals and Measure Analog Output from Sensors and other Devices

### VOLTAGE LOGGER (50mV) LR5041, (5V) LR5042, (50V) LR5043



\*Bundled accessory (LR9802)  
Not covered by warranty

IP54  
(splash-proof construction)

- Easily mount the light-weight , pocket-sized loggers in tight spaces
- Easy-to-see dual display
- Transfer data to PC even during recording
- Replace batteries while recording (30 second limit)
- 3 times the memory capacity than predecessor (Record 60,000 data per channel)
- Record without missing fluctuations in STAT mode
- Measurement data is preserved even after the battery dies
- Worry-free backup preserves recorded data even if a new measurement is started by mistake

#### Basic specifications (Accuracy guaranteed for 1 year)

	LR5041	LR5042	LR5043
Measurement items	DC voltage 1ch	DC voltage 1ch	DC voltage 1ch
Measurement range	-50.00 to 50.00 mV	-5.000 to 5.000 V	-50.00 to 50.00 V
Accuracy	±0.5 %rdg ±5 dgt		
Storage capacity	Instantaneous value mode: 60,000 data, Statistical value mode: 15,000 data		
Recording interval	1 to 30 sec., 1 to 60 min., 15 selections		
Recording modes	Instantaneous recording: at every recording interval Statistical value recording: Measure at one second intervals, and record the instantaneous, maximum, minimum, and average values within every recording interval		
Recording methods	One-time recording: Stop recording when the memory capacity is full Endless recording: Continue recording even when the memory capacity is full (old data is overwritten) Start: Logger button operation or scheduled time Stop: Logger button operation or scheduled time, or auto-stop when the memory capacity is full (at one-time recording)		
Other functions	Pre-heat function (requires external power supply during use of function), Always backs up last recorded data; backs up recorded data and setting conditions when battery power is low; guarantees approx. 30 sec. of recording operation and clock while battery is replaced		
Waterproof and dust-proof	IP54 (EN60529) (with connection cable connected, but not including cable tip)		
Interfaces	Infrared optical communications with LR5091, LR5092-20		
Power supply	LR6 (AA) Alkaline battery ×1, Battery life: Approx. 2 years (Instantaneous recording, with 1-minute interval and auto power saving, at 20 °C), Approx. 2 months (Instantaneous recording, with 1-second interval at 20 °C)		
Dimensions and mass	79 mm (3.11 in.)W × 57 mm (2.246 in.)H × 28 mm (1.10 in.)D, 105 g (3.7 oz.)		
Included accessories	LR6 (AA) Alkaline battery (built-in internal) ×1, Connection cable LR9802 ×1, Instruction manual ×1, Operation guide ×1, Kickstand ×1		

Model No. (Order Code) **LR5041** (±50mV DC)  
**LR5042** (±5V DC)  
**LR5043** (±50V DC)

Note: Communication Adapter LR5091 or Data Collector LR5092-20 is necessary to collect data from the LR5000 series Logger and transfer data to a PC.

Options	For data acquisition to PC	For Fixing	Bundled Accessory
	<p>COMMUNICATION ADAPTER LR5091 Dock logger and transfer data via optical communication</p> <p>DATA COLLECTOR LR5092-20 Dock logger or transfer data to internal memory/SD memory card</p>		



## Easily Record Load Current of 50Hz/60Hz Lines and Leak Current

### CLAMP LOGGER LR5051



\*Clamp sensor is sold separately (Sensor warranted for one year)

- Easily mount the light-weight, pocket-sized loggers in tight spaces
- Easy-to-see dual display
- Transfer data to PC even during recording
- Replace batteries while recording (30 second limit)
- 3 times the memory capacity compared to predecessor (Record 60,000 data per channel)
- Record without missing fluctuations in STAT mode
- Measurement data is preserved even after the battery dies
- Worry-free backup preserves recorded data even if a new measurement is started by mistake

Model No. (Order Code) **LR5051** (2ch, clamp sensor is sold separately)

Note: the Clamp Logger LR5051 may be affected by high-frequency noise while measuring leak current. Please contact Hioki for more information if you plan to use the instrument in an environment where it would be subject to the effects of high-frequency noise.

Customers using the previous Model 3636-20 Clamp Logger should note that the LR5051 can only record 15,000 points of average data, vs. 32,000 data points available in the 3636-20.

Note: Communication Adapter LR5091 or Data Collector LR5092-20 is necessary to collect data from the LR5000 series Logger and transfer data to a PC.

For data acquisition to PC

**COMMUNICATION ADAPTER LR5091**  
Dock logger and transfer data via optical communication

Options

**DATA COLLECTOR LR5092-20**  
Dock logger or transfer data to internal memory/SD memory card

For Fixing

**MAGNETIC STRAP Z520**  
Extra strength

#### ■ Basic specifications (Accuracy guaranteed for 1 year)

Measurement items	AC Current 2 channels (used with the optional current sensor; load current 2ch, leak current 2ch, or load/leak each 1ch) <i>Caution: Current and leak current that occur intermittently cannot be measured.</i>
Measurement range	500.0 mA to 1000 A AC rms, 5 range (depends on current sensor in use)
Basic accuracy	±2.0% rdg ±0.13% f.s. (main unit + current sensor accuracy, at 500.0 A range, 50/60 Hz) <i>Note: basic accuracy is typical value, only main unit accuracy: ±0.5%rdg ±5 dgt, must added clamp sensor accuracy, refer to the detailed catalog</i>
Storage capacity	Instantaneous value mode: 60,000 data/ch, Statistical value mode: 15,000 data/ch
Recording interval	1 to 30 sec., 1 to 60 min., 15 selections
Recording modes	Instantaneous recording: at every recording interval Statistical value recording: Measure at one second intervals, and record the instantaneous, maximum, minimum, and average values within every recording interval
Recording methods	One-time recording: Stop recording when the memory capacity is full Endless recording: Continue recording even when the memory capacity is full (old data is overwritten) Start: Logger button operation or scheduled time Stop: Logger button operation or scheduled time, or auto-stop when the memory capacity is full (at one-time recording)
Other functions	Always backs up last recorded data; backs up recorded data and setting conditions when battery power is low; guarantees approx. 30 sec. of recording operation and clock while battery is replaced
Waterproof and dust-proof	N/A
Interfaces	Infrared optical communications with LR5091, LR5092-20
Power supply	LR6 (AA) Alkaline battery ×2, Battery life: Approx. 1 year (Instantaneous recording, with 1-minute interval and auto power saving, at 20 °C), Approx. 1 month (Instantaneous recording, with 1-second interval at 20 °C)
Dimensions and mass	79 mm (3.11 in.)W × 70 mm (2.76 in.)H × 37 mm (1.46 in.)D, 165 g (5.8 oz.)
Included accessories	LR6 (AA) Alkaline battery (built-in internal) ×2, Instruction manual ×1, Operation guide ×1

AC load current

**CLAMP ON SENSOR CT6500**  
500 A AC

AC load current

**CLAMP ON SENSOR 9669**  
1000 A AC

Clamp on Leak Sensor 9657-10, 9675: Rated primary current 5 A AC  
\*Maximum measurable current when used with the LR5051.

AC leak current

**CLAMP ON LEAK SENSOR 9657-10**  
500 A AC  
Rated primary current: \*5 A AC

AC leak current

**CLAMP ON LEAK SENSOR 9675**  
500 A AC  
Rated primary current: \*5 A AC

AC load current

**CLAMP ON SENSOR 9695-02**  
50 A AC, Cable 9219 required

CONNECTION CABLE 9219  
Connect with the 9695-02/-03, Output BNC terminal, 3 m (9.84 ft.) cord length

## Transfer Data from a LR5000 Series Data Logger to PC

### COMMUNICATION ADAPTER LR5091 DATA COLLECTOR LR5092



LR5091 (USB cable is bundled)

LR5092 (USB cable is bundled)

- Bring the data logger LR5000 series back from the field and transfer data to a PC
- Save data from data loggers in the built-in memory or on an SD card (LR5092-20)
- Send settings from a PC to a data logger
- Use the included software to easily graph and print data
- Use the included software to calculate maximum, minimum, and average values and more between cursors

Model No. (Order Code) **LR5091** (For the LR5000 series)  
**LR5092-20** (For the LR5000 series)

Note: Communication Adapter LR5091 or Data Collector LR5092-20 is necessary to collect data from the LR5000 series Logger and transfer data to a PC.

<How to use> Transferring data from the LR5000 series Logger to a PC

- (1) Place the LR5000 series Logger on the Communications Adapter LR5091 and connect the adapter to the computer with a USB cable.
- (2) Take the Data Collector LR5092 to the location where the Data Mini was placed and capture the data via optical communications. Transfer data from the device to a PC via the SD card or connect with a USB cable.

For the LR5092

**SD MEMORY CARD 2GB Z4001**  
2GB capacity

**SD Card Precaution**  
Use only SD Cards sold by Hioki. Compatibility and performance are not guaranteed for SD cards made by other manufacturers. You may be unable to read from or save data to such cards.

**LR5000 Utility (PC communication software; included)**

Table and graph display, data analysis, data processing, transmission of settings to data loggers, print functionality, etc.  
\*The utility can also display data collected using the Data Logger 3630 series

#### ■ Basic specifications

	LR5091	LR5092-20
Function	Transfer data from a data logger to a PC Send settings and the time from a PC to a data logger.	Send data from a data logger to the internal memory or an SD card, then display a graph. Send settings and the time from the internal memory or SD card to a data logger. Send data from a data logger to a PC. Send settings and the time from a PC to a data logger.
Communication method	Between data loggers: Infrared communication With PC: USB 2.0	Between data loggers: Infrared communication With PC: USB 2.0
Display	N/A	Data logger setting conditions Collected data (as list, graph, values, etc.)
Internal memory capacity of data	N/A	60,000 data elements ×16ch (instantaneous value mode) 15,000 data elements ×16ch (statistical value mode) Data logger settings (max. 1 set)
Removable storage media	N/A	SD Memory card Save data and max. 16 items configuration
Power supply	USB bus power	DC 3 V (LR6 (AA) Alkaline battery ×2) USB bus power (12 hours or 500 times of data collection)
Dimensions and mass	83 mm (3.27 in.)W × 61 mm (2.40 in.)H × 19 mm (0.75 in.)D, 43 g (1.5 oz.)	91 mm (3.58 in.)W × 141 mm (5.55 in.)H × 31 mm (1.22 in.)D, 215 g (7.6 oz.) (excluding batteries and SD memory card)
Included accessories	USB cable (1m) ×1, CD (Application software "LR5000 Utility") ×1	Instruction manual ×1, Operation guide ×1, LR6 (AA) Alkaline battery ×2, USB cable (1m) ×1, CD (Application software "LR5000 Utility") ×1

#### ■ LR5000 Utility Specifications

Operating environment	OS: Windows 11, 10, 7 (32/64bit, .NET Framework 2.0 or more), Vista (32bit, SP1 or more), XP (SP2 or more) *USB interface (when using the Communication Base 3910/3911, a COM port is required)
Function	<ul style="list-style-type: none"> <li>• Settings: Communicates via infrared light with LR5000 series loggers to send and receive settings.</li> <li>• Graph function: Displays graphs of up to 16 channels, displays statistical data, etc.</li> <li>• Print function: Print graphs, Print statistical data.</li> <li>• Export function (data CSV output, paste into Excel)</li> <li>• Import function (loads text files from the Clamp On Power HiTester 3169-20/-21 [only demand parameter with a recording interval of at least 1 sec.]</li> <li>• Processing of data: Scaling, Power calculation, Energy cost calculation, Operating ratio calculation, Integration, Dew point temperature, Calculate between channels</li> </ul>

## Choose from 5 Models

A complete product line to fully meet your measurement frequency and applications.



Photo: IM7581

### IMPEDANCE ANALYZER IM7580A

Measurement frequency: **1 MHz to 300 MHz**  
 Measurement range: L : 0.0531 nH to 0.795 mH  
 C : 0.1061 pF to 1.59  $\mu$ F  
 (Depending on the measurement frequency)  
 Measurement signal level: -40.0 dBm to +7.0 dBm  
 Basic accuracy: Z : 0.72% rdg  $\theta$ : 0.41°

### IMPEDANCE ANALYZER IM7581

Measurement frequency: **100 kHz to 300 MHz**  
 Measurement range: L : 0.0531 nH to 7.95 mH  
 C : 0.1061 pF to 15.9  $\mu$ F  
 (Depending on the measurement frequency)  
 Measurement signal level: -40.0 dBm to +7.0 dBm  
 Basic accuracy: Z : 0.72% rdg  $\theta$ : 0.41°

### IMPEDANCE ANALYZER IM7583

Measurement frequency: **1 MHz to 600 MHz**  
 Measurement range: L : 0.0265 nH to 0.795 mH  
 C : 0.0531 pF to 1.59  $\mu$ F  
 (Depending on the measurement frequency)  
 Measurement signal level: -40.0 dBm to +1.0 dBm  
 Basic accuracy: Z : 0.65% rdg  $\theta$ : 0.38°

### IMPEDANCE ANALYZER IM7585

Measurement frequency: **1 MHz to 1.3 GHz**  
 Measurement range: L : 0.0123 nH to 0.795 mH  
 C : 0.0245 pF to 1.59  $\mu$ F  
 (Depending on the measurement frequency)  
 Measurement signal level: -40.0 dBm to +1.0 dBm  
 Basic accuracy: Z : 0.65% rdg  $\theta$ : 0.38°


### IMPEDANCE ANALYZER IM7587

Measurement frequency: **1 MHz to 3 GHz**  
 Measurement range: L : 0.0053 nH to 0.795 mH  
 C : 0.011 pF to 1.59  $\mu$ F  
 (Depending on the measurement frequency)  
 Measurement signal level: -40.0 dBm to +1.0 dBm  
 Basic accuracy: Z : 0.65% rdg  $\theta$ : 0.38°




Photo: IM7585

A rich lineup covering a wide range of measurement frequencies

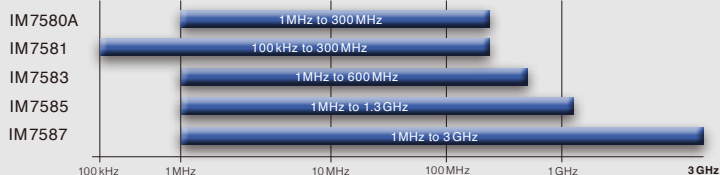

## 3 GHz High Frequency Testing

### IMPEDANCE ANALYZER IM7587

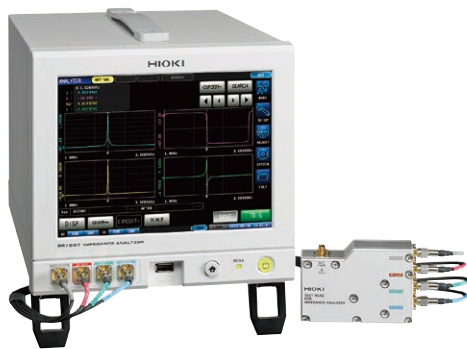

LAN

USB 2.0

GP-IB  
option

RS-232C  
option

CE

3 Year  
Warranty

- 1 MHz to 3 GHz testing source frequency
- Fastest test speed of 0.5 msec (Analog measurement time)
- 0.07% measured value variability (When measuring a 1 nH coil at 3 GHz)
- $\pm 0.65\%$  rdg basic accuracy
- Half-rack size body and palm-sized test head
- Comprehensive contact check (via DCR testing, Hi-Z reject or waveform judgment)
- Make frequency sweeps, level sweeps and time interval measurements in Analyzer Mode

Model No. (Order Code) **IM7587-01** (Connection cable 1 m is bundled)  
**IM7587-02** (Connection cable 2 m is bundled)

The instrument does not ship with a test fixture or probe. A test fixture designed specifically for use with the Impedance Analyzer is required.

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR mode, Analyzer mode (sweeps with measurement frequency and measurement level), Continuous measurement mode
Measurement parameters	Z, Y, $\theta$ , Rs (ESR), Rp, X, G, B, Cs, Cp, Lp, Ls, D (tan $\delta$ ), Q
Measurable range	100 m $\Omega$ to 5 k $\Omega$
Display range	Z: 0.00 m to 9.99999 G $\Omega$ / Rs, Rp, X: $\pm$ (0.00 m to 9.99999 G $\Omega$ ) Ls, Lp: $\pm$ (0.00000 n to 9.99999 GH) / Q: $\pm$ (0.00 to 9999.99) $\theta$ : $\pm$ (0.000° to 180.000°), Cs, Cp: $\pm$ (0.00000 p to 9.99999 GF) D: $\pm$ (0.00000 to 9.99999), Y: (0.000 n to 9.99999 GS) G, B: $\pm$ (0.000 n to 9.99999 GS), $\Delta\%$ : $\pm$ (0.000 % to 999.999 %)
Basic accuracy	Z: $\pm 0.65\%$ rdg $\theta$ : $\pm 0.38^\circ$
Measurement frequency	1 MHz to 3 GHz (100 kHz setting resolution)
Measurement signal level	Power: -40.0 dBm to +1.0 dBm Voltage: 4 mV to 502 mVrms Current: 0.09 mA to 10.04 mArms
Output impedance	50 $\Omega$ (at 10 MHz)
Display	8.4-inch color TFT with touch screen
Measurement speeds	FAST: 0.5 ms (Analog measurement time, typical value)
Functions	Contact check, Comparator, BIN measurement (classification), Panel loading/saving, Memory function, Equivalent circuit analysis, Correlation compensation
Interfaces	EXT I/O (Handler), USB communication, USB memory, LAN, RS-232C (optional), GP-IB (optional)
Power supply	100 to 240 V AC, 50/60 Hz, 70 VA max.
Dimensions and mass	Main unit: 215 mm (8.46 in.) W $\times$ 200 mm (7.87 in.) H $\times$ 348 mm (13.70 in.) D, 8.0 kg (282.2 oz.) Test head: 90 mm (3.54 in.) W $\times$ 64 mm (2.52 in.) H $\times$ 24 mm (0.94 in.) D, 300 g (10.58 oz.)
Included accessories	Test head $\times$ 1, Connection cable $\times$ 1, Instruction manual $\times$ 1, LCR application disc (Communications user manual) $\times$ 1, Power cord $\times$ 1



**TEST FIXTURE IM9202**  
 Combination use with the IM9200



**SMD TEST FIXTURE IM9201**  
 Combination use with the IM9200



**TEST FIXTURE STAND IM9200**  
 Includes magnifying glass



**ADAPTER IM9906**  
 3.5 mm (0.14 in.) male to 7 mm (0.28 in.) conversion



**CALIBRATION KIT IM9905**  
 Open/Short/Load set



**GP-IB INTERFACE Z3000**



**GP-IB CONNECTOR CABLE 9151-02**  
 2 m (6.56 ft.) length



**RS-232C INTERFACE Z3001**




**RS-232C CABLE 9637**  
 For the PC, 9 pin - 9 pin, cross, 1.8 m (5.91 ft.) length

# Impedance Analyzers/LCR Meters

**Fastest Measurement Time of 0.5ms and Measurement Stability of 0.07% to Boost Your Production Volume**

## IMPEDANCE ANALYZER IM7585

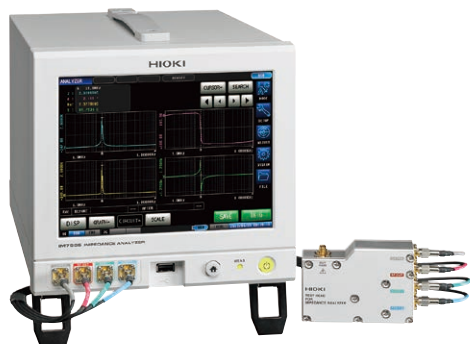

- LAN**
- USB<sub>2.0</sub>**
- GP-IB**  
option
- RS-232C**  
option
- CE**
- 3 year Warranty**

- 1 MHz to 1.3 GHz testing source frequency
- Fastest test speed of 0.5 msec (Analog measurement time)
- 0.07% measured value variability (when measuring at 1GHz)
- ±0.65% rdg basic accuracy
- Half-rack size body and palm-sized test head
- Comprehensive contact check (via DCR testing, Hi-Z reject or waveform judgment)
- Make frequency sweeps, level sweeps and time interval measurements in Analyzer Mode

Model No. (Order Code) **IM7585-01** (Connection cable 1 m is bundled)  
**IM7585-02** (Connection cable 2 m is bundled)

The instrument does not ship with a test fixture or probe. A test fixture designed specifically for use with the Impedance Analyzer is required.

### Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR mode, Analyzer mode (sweeps with measurement frequency and measurement level), Continuous measurement mode
Measurement parameters	Z, Y, $\theta$ , Rs (ESR), Rp, X, G, B, Cs, Cp, Ls, Lp, D (tan $\delta$ ), Q
Measurable range	100 m $\Omega$ to 5 k $\Omega$
Display range	Z: 0.00 m to 9.99999 G $\Omega$ / Rs, Rp, X: $\pm$ (0.00 m to 9.99999 G $\Omega$ ) Ls, Lp: $\pm$ (0.00000 n to 9.99999 GHz) / Q: $\pm$ (0.00 to 9999.99) $\theta$ : $\pm$ (0.000° to 180.000°), Cs, Cp: $\pm$ (0.00000 p to 9.99999 GF) D: $\pm$ (0.00000 to 9.99999), Y: (0.000 n to 9.99999 GS) G, B: $\pm$ (0.000 n to 9.99999 GS), $\Delta\%$ : $\pm$ (0.000 % to 999.999 %)
Basic accuracy	Z: $\pm$ 0.65 % rdg $\theta$ : $\pm$ 0.38°
Measurement frequency	1 MHz to 1.3 GHz (100 kHz setting resolution)
Measurement signal level	Power: -40.0 dBm to +1.0 dBm Voltage: 4 mV to 502 mVrms Current: 0.09 mA to 10.04 mArms
Output impedance	50 $\Omega$ (at 10 MHz)
Display	8.4-inch color TFT with touch screen
Measurement speeds	FAST: 0.5 ms (Analog measurement time, typical value)
Functions	Contact check, Comparator, BIN measurement (classification), Panel loading/saving, Memory function, Equivalent circuit analysis, Correlation compensation
Interfaces	EXT I/O (Handler), USB communication, USB memory, LAN, RS-232C (optional), GP-IB (optional)
Power supply	100 to 240 V AC, 50/60 Hz, 70 VA max.
Dimensions and mass	Main unit: 215 mm (8.46 in.) W $\times$ 200 mm (7.87 in.) H $\times$ 348 mm (13.70 in.) D, 8.0 kg (282.2 oz.) Test head: 90 mm (3.54 in.) W $\times$ 64 mm (2.52 in.) H $\times$ 24 mm (0.94 in.) D, 300 g (10.58 oz.)
Included accessories	Test head $\times$ 1, Connection cable $\times$ 1, Instruction manual $\times$ 1, LCR application disc (Communications user manual) $\times$ 1, Power cord $\times$ 1

Probe and Test Fixtures



**TEST FIXTURE IM9202**  
Combination use with the IM9200


**SMD TEST FIXTURE IM9201**  
Combination use with the IM9200

**TEST FIXTURE STAND IM9200**  
Includes magnifying glass

**ADAPTER IM9906**  
3.5 mm (0.14 in.) male to 7 mm (0.28 in.) conversion

**CALIBRATION KIT IM9905**  
Open/Short/Load set

PC Communication

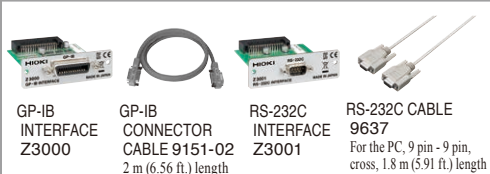

**GP-IB INTERFACE Z3000**

**GP-IB CONNECTOR CABLE 9151-02**  
2 m (6.56 ft.) length

**RS-232C INTERFACE Z3001**

**RS-232C CABLE 9637**  
For the PC, 9 pin - 9 pin, cross, 1.8 m (5.91 ft.) length

**Fastest Measurement Time of 0.5ms to Boost Your Production Volume**

## IMPEDANCE ANALYZER IM7583



- LAN**
- USB<sub>2.0</sub>**
- GP-IB**  
option
- RS-232C**  
option
- CE**
- 3 year Warranty**

- 1 MHz to 600 MHz testing source frequency
- Fastest test speed of 0.5 msec (Analog measurement time)
- ±0.65% rdg basic accuracy
- Half-rack size body and palm-sized test head
- Comprehensive contact check (via DCR testing, Hi-Z reject or waveform judgment)
- Make frequency sweeps, level sweeps and time interval measurements in Analyzer Mode


Model No. (Order Code) **IM7583-01** (Connection cable 1 m is bundled)  
**IM7583-02** (Connection cable 2 m is bundled)

The instrument does not ship with a test fixture or probe. A test fixture designed specifically for use with the Impedance Analyzer is required.

### Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR mode, Analyzer mode (Sweeps with measurement frequency and measurement level), Continuous measurement mode
Measurement parameters	Z, Y, $\theta$ , Rs (ESR), Rp, X, G, B, Cs, Cp, Ls, Lp, D (tan $\delta$ ), Q
Measurable range	100 m $\Omega$ to 5 k $\Omega$
Display range	Z: 0.00 m to 9.99999 G $\Omega$ / Rs, Rp, X: $\pm$ (0.00 m to 9.99999 G $\Omega$ ) Ls, Lp: $\pm$ (0.00000 n to 9.99999 GHz) / Q: $\pm$ (0.00 to 9999.99) $\theta$ : $\pm$ (0.000° to 180.000°), Cs, Cp: $\pm$ (0.00000 p to 9.99999 GF) D: $\pm$ (0.00000 to 9.99999), Y: (0.000 n to 9.99999 GS) G, B: $\pm$ (0.000 n to 9.99999 GS), $\Delta\%$ : $\pm$ (0.000 % to 999.999 %)
Basic accuracy	Z: $\pm$ 0.65 % rdg $\theta$ : $\pm$ 0.38°
Measurement frequency	1 MHz to 600 MHz (100 kHz setting resolution)
Measurement signal level	Power: -40.0 dBm to +1.0 dBm Voltage: 4 mV to 502 mVrms Current: 0.09 mA to 10.04 mArms
Output impedance	50 $\Omega$ (at 10 MHz)
Display	8.4-inch color TFT with touch screen
Measurement speeds	FAST: 0.5 ms (Analog measurement time, typical value)
Functions	Contact check, Comparator, BIN measurement (classification), Panel loading/saving, Memory function, Equivalent circuit analysis, Correlation compensation
Interfaces	EXT I/O (Handler), USB communication, USB memory, LAN, RS-232C (optional), GP-IB (optional)
Power supply	100 to 240 V AC, 50/60 Hz, 70 VA max.
Dimensions and mass	Main unit: 215 mm (8.46 in.) W $\times$ 200 mm (7.87 in.) H $\times$ 348 mm (13.70 in.) D, 8.0 kg (282.2 oz.) Test head: 90 mm (3.54 in.) W $\times$ 64 mm (2.52 in.) H $\times$ 24 mm (0.94 in.) D, 300 g (10.58 oz.)
Included accessories	Test head $\times$ 1, Connection cable $\times$ 1, Instruction manual $\times$ 1, LCR application disc (Communications user manual) $\times$ 1, Power cord $\times$ 1

Probe and Test Fixtures

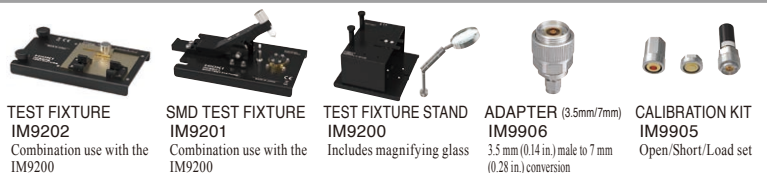

**TEST FIXTURE IM9202**  
Combination use with the IM9200


**SMD TEST FIXTURE IM9201**  
Combination use with the IM9200

**TEST FIXTURE STAND IM9200**  
Includes magnifying glass

**ADAPTER IM9906**  
3.5 mm (0.14 in.) male to 7 mm (0.28 in.) conversion

**CALIBRATION KIT IM9905**  
Open/Short/Load set

PC Communication

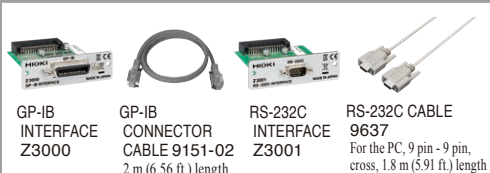

**GP-IB INTERFACE Z3000**

**GP-IB CONNECTOR CABLE 9151-02**  
2 m (6.56 ft.) length

**RS-232C INTERFACE Z3001**

**RS-232C CABLE 9637**  
For the PC, 9 pin - 9 pin, cross, 1.8 m (5.91 ft.) length

LCR Meters



## 100kHz to 300MHz Measurement Frequency at High Speeds with Superior Repeatability

### IMPEDANCE ANALYZER IM7581



LAN

USB 2.0

GP-IB  
option

RS-232C  
option

CE

3 YEAR  
Warranty

- 100 kHz to 300 MHz testing source frequency
- Fastest test speed of 0.5 msec (Analog measurement time)
- $\pm 0.72\%$  rdg basic accuracy
- Half-rack size body and palm-sized test head
- Comprehensive contact check (via DCR testing, Hi-Z reject or waveform judgment)
- Make frequency sweeps, level sweeps and time interval measurements in Analyzer Mode

Model No. (Order Code) **IM7581-01** (Connection cable 1 m is bundled)  
**IM7581-02** (Connection cable 2 m is bundled)

The instrument does not ship with a test fixture or probe. A test fixture designed specifically for use with the Impedance Analyzer is required.

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR mode, Analyzer mode (Sweeps with measurement frequency and measurement level), Continuous measurement mode
Measurement parameters	Z, Y, $\theta$ , Rs (ESR), Rp, X, G, B, Cs, Cp, Ls, Lp, D (tan $\delta$ ), Q
Measurable range	100 m $\Omega$ to 5 k $\Omega$
Display range	Z: 0.00 m to 9.99999 G $\Omega$ / Rs, Rp, X: $\pm$ (0.00 m to 9.99999 G $\Omega$ ) Ls, Lp: $\pm$ (0.00000 n to 9.99999 GH) / Q: $\pm$ (0.00 to 9999.99) $\theta$ : $\pm$ (0.000 $^\circ$ to 180.000 $^\circ$ ), Cs, Cp: $\pm$ (0.00000 p to 9.99999 GF) D: $\pm$ (0.00000 to 9.99999), Y: (0.000 n to 9.99999 GS) G, B: $\pm$ (0.000 n to 9.99999 GS), $\Delta\%$ : $\pm$ (0.000 % to 999.999 %)
Basic accuracy	Z: $\pm 0.72\%$ rdg $\theta$ : $\pm 0.41^\circ$
Measurement frequency	100.00 kHz to 300.00 MHz (5 digits resolution)
Measurement signal level	Power: -40.0 dBm to +7.0 dBm Voltage: 4 mV to 1001 mVrms Current: 0.09 mA to 20.02 mA rms User-configured power, voltage, and current
Output impedance	50 $\Omega$
Display	8.4-inch color TFT with touch screen
Measurement speeds *1	FAST: 0.5 ms / MED: 0.9 ms / SLOW: 2.1 ms / SLOW2: 3.7 ms *1 Analog measurement time
Functions	Contact check, Comparator, BIN measurement (classification), Panel loading/saving, Memory function, Equivalent circuit analysis, Correlation compensation
Interfaces	Handler, USB, LAN, GP-IB (optional), RS-232C (optional)
Power supply	100 to 240 V AC, 50/60 Hz, 70 VA max.
Dimensions and mass	Main unit: 215 mm (8.46 in.) W $\times$ 200 mm (7.87 in.) H $\times$ 268 mm (10.55 in.) D, 6.5 kg (229.3 oz.) Test head: 61 mm (2.40 in.) W $\times$ 55 mm (2.17 in.) H $\times$ 24 mm (0.94 in.) D, 175 g (6.2 oz.)
Included accessories	Test head $\times$ 1, Connection cable $\times$ 1, Power cord $\times$ 1, Instruction manual $\times$ 1, LCR application disc (Communications user manual) $\times$ 1

Probe and Test Fixtures



TEST FIXTURE IM9202  
Combination use with the IM9200



SMD TEST FIXTURE IM9201  
Combination use with the IM9200



TEST FIXTURE STAND IM9200  
Includes magnifying glass



ADAPTER (3.5mm/7mm) IM9906  
3.5 mm (0.14 in.) male to 7 mm (0.28 in.) conversion



CALIBRATION KIT IM9905  
Open/Short/Load set

PC Communication



GP-IB INTERFACE Z3000



GP-IB CONNECTOR CABLE 9151-02  
2 m (6.56 ft.) length



RS-232C INTERFACE Z3001



RS-232C CABLE 9637  
For the PC, 9 pin - 9 pin, cross, 1.8 m (5.91 ft.) length

## 1MHz to 300MHz Measurement Frequency at High Speeds with Superior Repeatability

### IMPEDANCE ANALYZER IM7580A



LAN

USB 2.0

GP-IB  
option

RS-232C  
option

CE

3 YEAR  
Warranty

- 1 MHz to 300 MHz testing source frequency
- Fastest test speed of 0.5 msec
- $\pm 0.72\%$  rdg basic accuracy
- Half-rack size body and palm-sized test head
- Comprehensive contact check (via DCR testing, Hi-Z reject or waveform judgment)
- Make frequency sweeps, level sweeps and time interval measurements in Analyzer Mode

Model No. (Order Code) **IM7580A-1** (Connection cable 1 m is bundled)  
**IM7580A-2** (Connection cable 2 m is bundled)

The instrument does not ship with a test fixture or probe. A test fixture designed specifically for use with the Impedance Analyzer is required.

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR mode, Analyzer mode (Sweeps with measurement frequency and measurement level), Continuous measurement mode
Measurement parameters	Z, Y, $\theta$ , Rs (ESR), Rp, X, G, B, Cs, Cp, Ls, Lp, D (tan $\delta$ ), Q
Measurable range	100 m $\Omega$ to 5 k $\Omega$
Display range	Z: 0.00 m to 9.99999 G $\Omega$ / Rs, Rp, X: $\pm$ (0.00 m to 9.99999 G $\Omega$ ) Ls, Lp: $\pm$ (0.00000 n to 9.99999 GH) / Q: $\pm$ (0.00 to 9999.99) $\theta$ : $\pm$ (0.000 $^\circ$ to 180.000 $^\circ$ ), Cs, Cp: $\pm$ (0.00000 p to 9.99999 GF) D: $\pm$ (0.00000 to 9.99999), Y: (0.000 n to 9.99999 GS) G, B: $\pm$ (0.000 n to 9.99999 GS), $\Delta\%$ : $\pm$ (0.000 % to 999.999 %)
Basic accuracy	Z: $\pm 0.72\%$ rdg $\theta$ : $\pm 0.41^\circ$
Measurement frequency	1.0000 MHz to 300.00 MHz (5 digits resolution)
Measurement signal level	Power: -40.0 dBm to +7.0 dBm Voltage: 4 mV to 1001 mVrms Current: 0.09 mA to 20.02 mA rms
Output impedance	50 $\Omega$
Display	8.4-inch color TFT with touch screen
Measurement speeds	FAST: 0.5 ms (Analog measurement time, typical value)
Functions	Contact check, Comparator, BIN measurement (classification), Panel loading/saving, Memory function, Equivalent circuit analysis, Correlation compensation
Interfaces	EXT I/O (Handler), USB communication, USB memory, LAN, RS-232C (optional), GP-IB (optional)
Power supply	100 to 240 V AC, 50/60 Hz, 70 VA max.
Dimensions and mass	Main unit: 215 mm (8.46 in.) W $\times$ 200 mm (7.87 in.) H $\times$ 268 mm (10.55 in.) D, 6.5 kg (229.3 oz.) Test head: 61 mm (2.40 in.) W $\times$ 55 mm (2.17 in.) H $\times$ 24 mm (0.94 in.) D, 175 g (6.2 oz.)
Included accessories	Test head $\times$ 1, Connection cable $\times$ 1, Instruction manual $\times$ 1, LCR application disc (Communications user manual) $\times$ 1, Power cord $\times$ 1

Probe and Test Fixtures



TEST FIXTURE IM9202  
Combination use with the IM9200



SMD TEST FIXTURE IM9201  
Combination use with the IM9200



TEST FIXTURE STAND IM9200  
Includes magnifying glass



ADAPTER (3.5mm/7mm) IM9906  
3.5 mm (0.14 in.) male to 7 mm (0.28 in.) conversion



CALIBRATION KIT IM9905  
Open/Short/Load set

PC Communication



GP-IB INTERFACE Z3000



GP-IB CONNECTOR CABLE 9151-02  
2 m (6.56 ft.) length



RS-232C INTERFACE Z3001



RS-232C CABLE 9637  
For the PC, 9 pin - 9 pin, cross, 1.8 m (5.91 ft.) length

# Impedance Analyzers/LCR Meters

## For R & D applications of Electrochemical Components and Materials, Batteries, and EDLCs

### CHEMICAL IMPEDANCE ANALYZER IM3590



- Broad 1 mHz to 200 kHz signal source range supports measurements of ion behavior and solution resistance
- Continuous measuring and high-speed testing of LCR and sweep measurements with a single instrument
- Measure internal impedance of batteries with no load
- Perform high-speed sweep measurements in as little as 2 ms
- Basic accuracy of  $\pm 0.05\%$  is ideal for applications from component testing to R&D
- Measure LCR impedance for Cole-Cole plots and equivalent-circuit analyses of electro-chemical components and materials

Model No. (Order Code) **IM3590** (For electrochemical components)

*This product is not supplied with measurement probes or test fixtures. Please select and purchase the measurement probe or test fixture options appropriate for your application separately. For an RS-232C connection: A crossover cable for interconnection can be used. You can use the RS-232C Cable 9637 without hardware flow control.*

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR mode, Continuous measurement mode (LCR mode / Analyzer mode), Analyzer mode (Sweeps with measurement frequency and measurement level, temperature characteristics, equivalent circuit analysis)
Measurement parameters	Z, Y, $\theta$ , Rs (ESR), Rp, Rdc (DC resistance), X, G, B, Cs, Cp, Ls, Lp, D (tan $\delta$ ), Q, T, $\sigma$ (conductivity), $\epsilon$ (dielectric constant)
Measurement range	100 m $\Omega$ to 100 M $\Omega$ , 10 ranges (All parameters are determined according to Z)
Display range	Z, Y, Rs, Rp, Rdc, X, G, B, Ls, Lp, Cs, Cp, $\sigma$ , $\epsilon$ : $\pm(0.00000$ [unit] to $9.999999$ [unit]). Absolute value display for Z and Y only $\theta$ : $\pm(0.000^\circ$ to $180.000^\circ)$ , D : $\pm(0.00000$ to $9.99999)$ Q : $\pm(0.00$ to $99999.9)$ , $\Delta$ % : $\pm(0.00000\%$ to $999.999\%$ ) T : $-10.0^\circ\text{C}$ to $99.9^\circ\text{C}$ $\sigma$ , $\epsilon$ : $\pm(0.00000$ [unit] to $999.9999$ [unit])
Basic accuracy	Z: $\pm 0.05\%$ rdg $\theta$ : $\pm 0.03^\circ$
Measurement frequency	1 mHz to 200 kHz (5 digits setting resolution, minimum resolution 1 mHz)
Measurement signal level	Normal mode: V mode/CV mode: 5 mV to 5 Vrms, 1 mVrms steps CC mode: 10 $\mu\text{A}$ to 50 mArms, 10 $\mu\text{A}$ rms steps Low impedance high repeatability mode: V mode/CV mode: 5 mV to 2.5 Vrms, 1 mVrms steps CC mode: 10 $\mu\text{A}$ to 100 mArms, 10 $\mu\text{A}$ rms steps
Output impedance	Normal mode: 100 $\Omega$ , Low impedance high repeatability mode: 25 $\Omega$
Display	5.7-inch color TFT, display can be set to ON/OFF
Measurement time	2 ms (1 kHz, FAST, display OFF, representative value)
Functions	DC bias measurement, DC resistance temperature compensation (converted reference temperature is displayed), Temperature measurement, Battery measurement (Automatic DC biasing system), Comparator, BIN measurement (classification), Panel loading/saving, Memory function
Interfaces	EXT I/O (Handler), USB communication (high-speed), USB memory Optional: Choose 1 from RS-232C, GP-IB, or LAN
Power supply	100 to 240 V AC, 50/60 Hz, 50 VA max.
Dimensions and mass	330 mm (12.99 in.) W $\times$ 119 mm (4.69 in.) H $\times$ 168 mm (6.61 in.) D, 3.1 kg (109.3 oz.)
Included accessories	Power cord $\times$ 1, Instruction manual $\times$ 1, CD-R (Communication instruction manual and sample software [Communications control, accuracy calculation, and screen capture functionality]) $\times$ 1

LCR Meters

#### Shared options for IM3590, IM3533, IM3523

\*Please see the individual product catalog for more information

**SMD TEST FIXTURE IM9110**  
Direct connection two-terminal measurement type for measuring SMDs, DC to 1 MHz, measurable sample sizes: 008004 (inch)

**SMD TEST FIXTURE IM9100**  
Direct connection type, For measuring SMDs with electrodes on the bottom, DC to 8 MHz, measurable sample sizes: 01005 to 0402 (inch), 0402 to 1005 (metric)

**4-TERMINAL PROBE L2000**  
Cable length 1 m (3.28 ft), DC to 8 MHz, impedance characteristics of 50  $\Omega$ , 4-terminal pair configuration, measurable conductor diameter:  $\phi 0.3$  (0.01 in.) to 5 mm (0.20 in.)

**PINCHER PROBE L2001**  
Cable length 73 cm (28.74 ft.), DC to 8 MHz, impedance characteristics of 50  $\Omega$ , 4-terminal pair configuration, tip electrode spacing: 0.3 (0.01 in.) to 6 mm (0.24 in.)

**CONTACT TIPS IM9901**  
To replace the tip on the L2001, regular size, bundled with the L2001

**CONTACT TIPS IM9902**  
To replace the tip on the L2001, small size

**4-TERMINAL PROBE 9140-10**  
Cable length 1 m (3.28 ft.), DC to 200 kHz, 50  $\Omega$ , measurable conductor diameter:  $\phi 0.3$  mm (0.01 in.) to 5 mm (0.20 in.)

**TEST FIXTURE 9261-10**  
Cable length 1 m (3.28 ft.), DC to 8 MHz, impedance characteristics of 50  $\Omega$ , 4-terminal pair configuration, measurable conductor diameter:  $\phi 0.3$  (0.01 in.) to 1.5 mm (0.06 in.)

**TEST FIXTURE 9262**  
Direct connection type, DC to 8 MHz, measurable conductor diameter:  $\phi 0.3$  (0.01 in.) to 2 mm (0.08 in.)

**SMD TEST FIXTURE 9263**  
Direct connection type, DC to 8 MHz, test sample dimensions: 1 mm (0.04 in.) to 10 mm (0.39 in.)

**4-TERMINAL PROBE 9500-10**  
Cable length 1 m (3.28 ft.), DC to 200 kHz, impedance characteristics of 50  $\Omega$ , measurable conductor diameter:  $\phi 0.3$  mm (0.01 in.) to 2 mm (0.08 in.)

**SMD TEST FIXTURE 9677**  
Direct connection type, For measuring SMDs with electrodes on the side; DC to 120 MHz, test sample dimensions: 3.5 mm  $\pm$  0.5 mm (0.14 in.  $\pm$  0.02 in.)

**SMD TEST FIXTURE 9699**  
Direct connection type, For measuring SMDs with electrodes on the bottom; DC to 120 MHz, test sample dimensions: 1.0 mm (0.04 in.) to 4.0 mm (0.16 in.) wide, max. 1.5 mm (0.06 in.) high

**DC BIAS VOLTAGE UNIT 9268-10**  
Direct connection type, 40 Hz to 8 MHz, maximum applied voltage of DC  $\pm$  40 V

**DC BIAS CURRENT UNIT 9269-10**  
Direct connection type, 40 Hz to 2 MHz, maximum applied current of DC 2 A

When using the 9268-10 or 9269-10, external constant-voltage and constant-current sources are required.

**Temperature probe**

**SHEATH TYPE TEMPERATURE PROBE 9478**  
Pt100, Tip dia.  $\phi 2.3$  mm (0.09 in.), Cord length 1 m (3.28 ft.), Waterproof construction

\*Use with only for the IM3590, IM3533

**PC Communication**

Not available for IM3523A

**GP-IB INTERFACE Z3000**

**RS-232C INTERFACE Z3001**

**LAN INTERFACE Z3002**

**GP-IB CONNECTOR CABLE 9151-02**  
2 m (6.56 ft.) length

## Single Device Solution for High Speed Testing and Frequency Sweeping

### IMPEDANCE ANALYZER IM3570



LAN

USB 2.0

GP-IB

RS-232C

CE

3 Year Warranty

- LCR measurement, DCR measurement, sweep measurement, continuous measurement and high-speed testing achieved with one instrument
- High-speed testing, achieving maximum speeds of 1.5ms (1 kHz) and 0.5ms (100kHz) in LCR mode
- High-accuracy measurements, basic accuracy of Z parameter:  $\pm 0.08\%$
- Perfect impedance analyzer for testing the resonance characteristics of piezoelectric elements, C-D and low ESR measurement of functional polymer capacitors, DCR and L-Q measurement of inductors (coils and transformers)
- Perform frequency sweeps, level sweeps, and time interval measurements in analyzer mode

Model No. (Order Code) **IM3570**

This product is not supplied with measurement probes or test fixtures. Please select and purchase the measurement probe or test fixture options appropriate for your application separately. For an RS-232C connection: A crossover cable for interconnection can be used. You can use the RS-232C CABLE 9637 without hardware flow control.

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR mode, Analyzer mode (Sweeps with measurement frequency and measurement level), Continuous measurement mode
Measurement parameters	Z, Y, $\theta$ , Rs (ESR), Rp, Rdc (DC resistance), X, G, B, Cs, Cp, Ls, Lp, D (tan $\delta$ ), Q
Measurement range	100 m $\Omega$ to 100 M $\Omega$ , 12 ranges (All parameters are determined according to Z)
Display range	Z, Y, Rs, Rp, Rdc, X, G, B, Ls, Lp, Cs, Cp : $\pm(0.000000[\text{unit}] \text{ to } 9.999999\text{G}[\text{unit}])$ , Absolute value display for Z and Y only $\theta$ : $\pm(0.000^\circ \text{ to } 180.000^\circ)$ , D : $\pm(0.000000 \text{ to } 9.999999)$ Q : $\pm(0.00 \text{ to } 99999.99)$ , $\Delta$ % : $\pm(0.0000\% \text{ to } 999.9999\%)$
Basic accuracy	Z $\pm 0.08\%$ rdg $\theta$ : $\pm 0.05^\circ$
Measurement frequency	4 Hz to 5 MHz (5 digits setting resolution, minimum resolution 10 mHz)
Measurement signal level	Normal mode: V mode/CV mode: 5 mV to 5 Vrms (up to 1 MHz) 10 mV to 1 Vrms (1.0001 MHz to 5 MHz), 1 mVrms steps CC mode: 10 $\mu$ A to 50 mArms (up to 1 MHz) 10 $\mu$ A to 10 mArms (1.0001 MHz to 5 MHz), 10 $\mu$ Arms steps Low impedance high repeatability mode: V mode/CV mode: 5 mV to 1 Vrms (up to 100 kHz), 1 mVrms steps CC mode: 10 $\mu$ A to 100 mArms (100 m $\Omega$ and 1 $\Omega$ ranges of up to 100 kHz), 10 $\mu$ Arms steps
Output impedance	Normal mode: 100 $\Omega$ , Low impedance high repeatability mode: 10 $\Omega$
Display	5.7-inch color TFT, display can be set to ON/OFF
Measurement time	0.5 ms (100 kHz, FAST, display OFF, representative value)
Functions	DC bias measurement, Comparator, BIN measurement (classification), Panel loading/saving, Memory function
Interfaces	EXT I/O (handler), RS-232C, GP-IB, USB communication, USB memory, LAN
Power supply	90 to 264 V AC, 50/60 Hz, 150 VA max.
Dimensions and mass	330 mm (12.99 in.) W $\times$ 119 mm (4.69 in.) H $\times$ 307 mm (12.09 in.) D, 5.8 kg (204.6 oz.)
Included accessories	Power cord $\times$ 1, Instruction manual $\times$ 1, CD-R (Communication instruction manual and sample software) $\times$ 1

LCR Meters

**SMD TEST FIXTURE IM9110**  
Direct connection two-terminal measurement type for measuring SMDs, DC to 1 MHz, measurable sample sizes: 008004 (inch)

**SMD TEST FIXTURE IM9100**  
Direct connection type, For measuring SMDs with electrodes on the bottom, DC to 8 MHz, measurable sample sizes: 01005 to 0402 (inch), 0402 to 1005 (metric)

**4-TERMINAL PROBE L2000**  
Cable length 1 m (3.28 ft), DC to 8 MHz, impedance characteristics of 50  $\Omega$ , 4-terminal pair configuration, measurable conductor diameter:  $\phi$ 0.3 (0.01 in.) to 5 mm (0.20 in.)

**PINCHER PROBE L2001**  
Cable length 73 cm (28.74 ft), DC to 8 MHz, impedance characteristics of 50  $\Omega$ , 4-terminal pair configuration, tip electrode spacing: 0.3 (0.01 in.) to 6 mm (0.24 in.)

**CONTACT TIPS IM9901**  
To replace the tip on the L2001, regular size, bundled with the L2001

**CONTACT TIPS IM9902**  
To replace the tip on the L2001, small size

**4-TERMINAL PROBE 9140-10**  
Cable length 1 m (3.28 ft), DC to 200 kHz, 50  $\Omega$ , measurable conductor diameter:  $\phi$ 0.3 mm (0.01 in.) to 5 mm (0.20 in.)

**TEST FIXTURE 9261-10**  
Cable length 1 m (3.28 ft), DC to 8 MHz, impedance characteristics of 50  $\Omega$ , 4-terminal pair configuration, measurable conductor diameter:  $\phi$ 0.3 (0.01 in.) to 1.5 mm (0.06 in.)

**TEST FIXTURE 9262**  
Direct connection type, DC to 8 MHz, measurable conductor diameter:  $\phi$ 0.3 (0.01 in.) to 2 mm (0.08 in.)

**SMD TEST FIXTURE 9263**  
Direct connection type, DC to 8 MHz, test sample dimensions: 1 mm (0.04 in.) to 10 mm (0.39 in.)

**4-TERMINAL PROBE 9500-10**  
Cable length 1 m (3.28 ft), DC to 200 kHz, impedance characteristics of 50  $\Omega$ , measurable conductor diameter:  $\phi$ 0.3 mm (0.01 in.) to 2 mm (0.08 in.)

**SMD TEST FIXTURE 9677**  
Direct connection type, For measuring SMDs with electrodes on the side, DC to 120 MHz, test sample dimensions: 3.5 mm  $\pm$ 0.5 mm (0.14 in.  $\pm$ 0.02 in.)

**SMD TEST FIXTURE 9699**  
Direct connection type, For measuring SMDs with electrodes on the bottom, DC to 120 MHz, test sample dimensions: 1.0 mm (0.04 in.) to 4.0 mm (0.16 in.) wide, max. 1.5 mm (0.06 in.) high

**DC BIAS VOLTAGE UNIT 9268-10**  
Direct connection type, 40 Hz to 8 MHz, maximum applied voltage of DC  $\pm$ 40 V


**DC BIAS CURRENT UNIT 9269-10**  
Direct connection type, 40 Hz to 2 MHz, maximum applied current of DC 2 A

**Factory-installed Option**  
Note: customers who have purchased the Impedance Analyzer IM3570 can add the Equivalent Circuit Analysis Firmware IM9000 function. Please contact your local Hioki representative.  
**EQUIVALENT CIRCUIT ANALYSIS FIRMWARE IM9000** For the IM3570 (Factory-installed option)

**PC Communication**  
**GP-IB CONNECTOR CABLE 9151-02**  
2 m (6.56 ft) length

## Simple Circuit Analysis & Detailed Acceptance/Rejection Decision-Making

### EQUIVALENT CIRCUIT ANALYSIS FIRMWARE IM9000

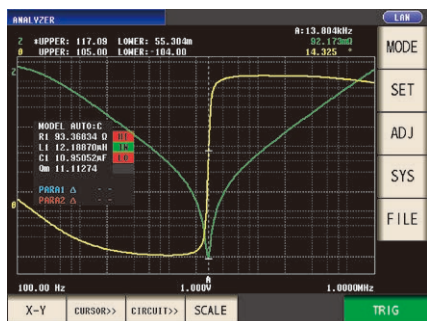

- The IM9000 can automatically select the equivalent circuit model from the five typical models to minimize the differences between the measured values and the ideal frequency characteristics derived from the analysis results
- An acceptance/rejection decision can be made for the L, C, and R elements comprising a part and the resonance sharpness (mechanical quality coefficient)
- A detailed decision can be made on the elements using the resonance of a piezoelectric element or inductor

Model No. (Order Code) **IM9000** (Factory option firmware for the IM3570)


Note: the IM9000 is not included in the standard package. To use the IM9000 function, specify the option upon purchase. Customers who have purchased the Impedance Analyzer IM3570 can add the Equivalent Circuit Analysis Firmware IM9000 function. Please contact your local Hioki representative.

#### Basic specifications


Three-element model	Equivalent circuit model: Four models for Coil, Resistance, Capacitor Measurement items: L1 (Inductance), C1 (Capacitance), R1 (Resistance), Qm (Resonance sharpness), fr (Resonance frequency) / fa (Anti-resonance frequency)
Four-element model	Equivalent circuit model: One model for Piezoelectric element Measurement items: L1 (Inductance), C1 (Capacitance), R1 (Resistance), C0 (Parallel capacitance), Qm (Resonance sharpness or mechanical quality coefficient) fr (Resonance frequency), fa (Anti-resonance frequency), fs (Series resonance frequency), fp (Parallel resonance frequency), fm (Maximum admittance frequency), fn (Minimum admittance frequency), fl (Maximum susceptance frequency), f2 (Minimum susceptance frequency)
Other functions	Simulation: Enables displaying and comparing the ideal frequency characteristics graph derived from the analysis results or the values specified by the user Comparator: Runs a comparator on the analysis results and outputs the decision results to screen, EXT. I/O
X-Y display	Cole-Cole plot, Admittance circle display

#### Equivalent Circuit Model and Measurement Items

##### Three-element model



##### Four-element model





## Measurement Frequency from DC, 4 Hz to 8 MHz

### LCR METER IM3536



LAN

USB 2.0

GP-IB

RS-232C

CE

3 Year Warranty

- DC, 4 Hz to 8 MHz\* measurement frequency  
\*Can be customized up to 10 MHz. Please contact your Hioki distributor or subsidiary for more information.
- High-speed measurement of 1 ms (fastest time)
- High-precision measurement of  $\pm 0.05\%$  rdg (representative value)
- Guaranteed accuracy range from 1 m $\Omega$ , low-impedance measurement with unmatched repeatability
- DC bias function: Measure under conditions simulating actual use or in accordance with industry standards
- Exceptional specifications and cost-performance for a wide range of applications, from R&D to production lines

Model No. (Order Code) **IM3536**  
**IM3536-01** (Special order products up to 10 MHz)

This product is not supplied with measurement probes or test fixtures. Please select and purchase the measurement probe or test fixture options appropriate for your application separately. All probes are constructed with a 1.5D-2V coaxial cable. For an RS-232C connection: A crossover cable for interconnection can be used. You can use the RS-232C CABLE 9637 without hardware flow control.

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement modes	LCR (Measurement with single condition), Continuous testing (Continuous measurement under saved conditions)
Measurement parameters	Z, Y, $\theta$ , X, G, B, Q, Rdc (DC resistance), Rs (ESR), Rp, Ls, Lp, Cs, Cp, D (tan $\delta$ ), $\sigma$ , $\epsilon$
Measurement range	100 m $\Omega$ to 100 M $\Omega$ , 10 ranges (All parameters are determined according to Z)
Display range	Z: 0.00 m to 999999 G $\Omega$ , Y: 0.000 n to 999999 GS, $\theta$ : $\pm$ (0.000° to 180.000°), Q: $\pm$ (0.00 to 9999.99), Rdc: $\pm$ (0.00 m to 999999 G $\Omega$ ), D: $\pm$ (0.00000 to 9.99999), $\Delta\%$ : $\pm$ (0.000% to 999.999%), or other
Basic accuracy	Z: $\pm 0.05\%$ rdg $\theta$ : $\pm 0.03^\circ$ (representative value, Measurable range: 1 m $\Omega$ to 200 M $\Omega$ )
Measurement frequency	4 Hz to 8 MHz (5 digits setting resolution, minimum resolution 10 mHz)
Measurement signal level	[Normal mode: V mode/CV mode] 4 Hz to 1.0000 MHz: 10 mV to 5 Vrms (maximum 50 mArms) 1.0001 MHz to 8 MHz: 10 mV to 1 Vrms (maximum 10 mArms) [Low impedance high repeatability mode: V mode/CV mode] 4 Hz to 1.0000 MHz: 10 mV to 1 Vrms (maximum 100 mArms) [Normal mode: CC mode] 4 Hz to 1.0000 MHz: 10 $\mu$ A to 50 mArms (maximum 5 Vrms) 1.0001 MHz to 8 MHz: 10 $\mu$ A to 10 mArms (maximum 1 Vrms) [Low impedance high repeatability mode: CC mode] 4 Hz to 1.0000 MHz: 10 $\mu$ A to 100 mArms (maximum 1 Vrms) [DC resistance measurement] Measurement signal level: Fixed at 1 V
DC bias measurement	Generating range: DC voltage 0 V to 2.50 V (10 mV resolution) In low Z high repeatability mode: 0 V to 1 V (10 mV resolution)
Output impedance	Normal mode: 100 $\Omega$ , Low impedance high repeatability mode: 10 $\Omega$
Display	5.7-inch color TFT with touch panel
Functions	Comparator, BIN measurement (10 categories for 2 measurement parameters), Trigger function, Open/short compensation, Contact check, Panel loading/saving, Memory function
Interfaces	EXT. I/O (HANDLER), USB, USB flash drive, LAN, GP-IB, RS-232C, BCD
Power supply	100 to 240 V AC, 50/60 Hz, 50 VA max.
Dimensions and mass	330 mm (12.99 in.) W $\times$ 119 mm (4.69 in.) H $\times$ 230 mm (9.06 in.) D, 4.2 kg (148.1 oz.)
Included accessories	Power cord $\times$ 1, Instruction manual $\times$ 1, LCR application disc (Communications user manual) $\times$ 1

LCR Meters

**SMD TEST FIXTURE IM9110**  
Direct connection two-terminal measurement type for measuring SMDs, DC to 1 MHz, measurable sample sizes: 008004 (inch)

**SMD TEST FIXTURE IM9100**  
Direct connection type, For measuring SMDs with electrodes on the bottom, DC to 8 MHz, measurable sample sizes: 01005 to 0402 (inch), 0402 to 1005 (metric)

**4-TERMINAL PROBE L2000**  
Cable length 1 m (3.28 ft.), DC to 8 MHz, impedance characteristics of 50  $\Omega$ , 4-terminal pair configuration, measurable conductor diameter:  $\phi$ 0.3 (0.01 in.) to 5 mm (0.20 in.)

**PINCHER PROBE L2001**  
Cable length 73 cm (28.74 ft.), DC to 8 MHz, impedance characteristics of 50  $\Omega$ , 4-terminal pair configuration, tip electrode spacing: 0.3 (0.01 in.) to 6 mm (0.24 in.)

**CONTACT TIPS IM9901**  
To replace the tip on the L2001, regular size, bundled with the L2001

**CONTACT TIPS IM9902**  
To replace the tip on the L2001, small size

**4-TERMINAL PROBE 9140-10**  
Cable length 1 m (3.28 ft.), DC to 200 kHz, 50  $\Omega$ , measurable conductor diameter:  $\phi$ 0.3 mm (0.01 in.) to 5 mm (0.20 in.)

**TEST FIXTURE 9261-10**  
Cable length 1 m (3.28 ft.), DC to 8 MHz, impedance characteristics of 50  $\Omega$ , 4-terminal pair configuration, measurable conductor diameter:  $\phi$ 0.3 (0.01 in.) to 1.5 mm (0.06 in.)

**TEST FIXTURE 9262**  
Direct connection type, DC to 8 MHz, measurable conductor diameter:  $\phi$ 0.3 (0.01 in.) to 2 mm (0.08 in.)

**SMD TEST FIXTURE 9263**  
Direct connection type, test sample dimensions: 1 mm (0.04 in.) to 10 mm (0.39 in.)

**4-TERMINAL PROBE 9500-10**  
Cable length 1 m (3.28 ft.), DC to 200 kHz, impedance characteristics of 50  $\Omega$ , measurable conductor diameter:  $\phi$ 0.3 mm (0.01 in.) to 2 mm (0.08 in.)

**SMD TEST FIXTURE 9677**  
Direct connection type, For measuring SMDs with electrodes on the side; DC to 120 MHz, test sample dimensions: 3.5 mm  $\pm$  0.5 mm (0.14 in.  $\pm$  0.02 in.)

**SMD TEST FIXTURE 9699**  
Direct connection type, For measuring SMDs with electrodes on the bottom; DC to 120 MHz, test sample dimensions: 1.0 mm (0.04 in.) to 4.0 mm (0.16 in.) wide, max. 1.5 mm (0.06 in.) high

**DC BIAS VOLTAGE UNIT 9268-10**  
Direct connection type, 40 Hz to 8 MHz, maximum applied voltage of DC  $\pm$  40 V

**DC BIAS CURRENT UNIT 9269-10**  
Direct connection type, 40 Hz to 2 MHz, maximum applied current of DC  $\pm$  2 A

**RS-232C CABLE 9637**  
1.8 m (5.91 ft.) length

**GP-IB CONNECTOR CABLE 9151-02**  
2 m (6.56 ft.) length

When using the 9268-10 or 9269-10, external constant-voltage and constant-current sources are required.

## Ideal for Production Lines of Electronic Parts and Automated Testing

### LCR METER IM3523



USB 2.0

LAN

GP-IB

RS-232C

CE

3 Year Warranty

- $\pm 0.05\%$  accuracy with wide measurement range (DC, 40Hz to 200kHz, 5mV to 5V, 10 $\mu$ A to 50mA)
- Non-stop testing over mixed measurement conditions such as C-D (120 Hz) and ESR (100 kHz) at 10 times the speed of previous models (compared with Model 3532-50)
- Built-in comparator and BIN functions
- Rapid 2msec test time

Model No. (Order Code) **IM3523**  
**IM3523A**

This product is not supplied with measurement probes or test fixtures. Please select and purchase the measurement probe or test fixture options appropriate for your application separately. All probes are constructed with a 1.5D-2V coaxial cable. For an RS-232C connection: A crossover cable for interconnection can be used. You can use the RS-232C CABLE 9637 without hardware flow control.

#### Basic specifications (Accuracy guaranteed for 1 year)

	IM3523	IM3523A
Measurement modes	LCR (Measurement with single condition), Continuous testing (Continuous measurement under saved conditions)	
Measurement parameters	Z, Y, $\theta$ , X, G, B, Q, Rdc (DC resistance), Rs (ESR), Rp, Ls, Lp, Cs, Cp, D (tan $\delta$ )	
Measurement range	100 m $\Omega$ to 100 M $\Omega$ , 10 ranges (All parameters defined in terms of Z.)	
Displayable range	Z, Y, Rs, Rp, Rdc, X, G, B, Ls, Lp, Cs, Cp : $\pm$ (0.00000 [unit] to 9.99999G [unit]) Real value display for Z and Y only $\theta$ : $\pm$ (0.000° to 180.000°), D: $\pm$ (0.00000 to 9.99999) Q: $\pm$ (0.00 to 99999.9), $\Delta\%$ : $\pm$ (0.00000% to 999.999%)	
Basic accuracy	Z: $\pm 0.05\%$ rdg $\theta$ : $\pm 0.03^\circ$	
Measurement frequency	40 Hz to 200 kHz (5 digits setting resolution)	
Measurement signal level	V mode, CV mode: 5 mV to 5 Vrms, 1 mVrms steps CC mode: 10 $\mu$ A to 50 mArms, 10 $\mu$ Arms steps	
Output impedance	100 $\Omega$	
Display	Monochrome LCD	
Measurement time	2 ms (1 kHz, FAST, representative value)	
Functions	Comparator, BIN measurement (classify function), Panel loading/saving, Memory function	
Interfaces	EXT I/O (handler), USB communication (high-speed) Optional: choose 1 from RS-232C, GP-IB, or LAN	EXT I/O (handler), USB communication (high-speed), LAN (100BASE-T)
Power supply	100 to 240 V AC, 50/60 Hz, 50 VA max	
Dimensions	260 mm (10.24 in.) W $\times$ 88 mm (3.46 in.) H $\times$ 203 mm (7.99 in.) D	
Mass	2.4 kg (84.7 oz.)	2.1 kg (74.1 oz.)
Included accessories	Power cord $\times$ 1, Instruction manual $\times$ 1, CD-R (Includes PC commands and sample software) $\times$ 1	Power cord $\times$ 1, CD-R (Includes instruction manual, PC commands and sample software) $\times$ 1

IM3590, IM3533, IM3523 shared options

Please see shared options for model IM3590

## From R&D Applications to Windings, Coil and Transformer Manufacturing

### LCR METER IM3533



- USB 2.0** option
- LAN** option
- GP-IB** option
- RS-232C** option
- CE**
- 3 Year Warranty**

- $\pm 0.05\%$  accuracy with wide measurement range (DC, 1mHz to 200kHz, 5mV to 5V, 10uA to 50mA)
- Non-stop testing over mixed measurement conditions such as C-D and ESR at 10 times the speed of previous models
- Built-in low impedance high repeatability mode effective for testing low inductance or the ESR of aluminum electrolysis capacitance
- Dedicated modes for measuring transformer winding ratio, mutual inductance and temperature compensated DCR
- Frequency sweep testing (IM3533-01 only)
- 2m/4m cable setting in addition to the standard 0m/1m
- Touch screen with intuitive operation

Model No. (Order Code) **IM3533**  
**IM3533-01** (Advanced function model)

This product is not supplied with measurement probes or test fixtures. Please select and purchase the measurement probe or test fixture options appropriate for your application separately. All probes are constructed with a 1.5D-2V coaxial cable.  
 For an RS-232C connection: A crossover cable for interconnection can be used. You can use the RS-232C CABLE 9637 without hardware flow control.

#### Basic specifications (Accuracy guaranteed for 1 year)

	IM3533	IM3533-01
Measurement modes	LCR (Measurement with single condition), Transformer testing (N, M, $\Delta$ L), Continuous testing (Continuous measurement under saved conditions) (LCR mode)	LCR (Measurement with single condition), Transformer testing (N, M, $\Delta$ L), Analyzer (sweep testing), Continuous Testing (LCR/Analyzer mode)
Measurement parameters	Z, Y, $\theta$ , X, G, B, Q, Rdc (DC resistance), Rs (ESR), Rp, Ls, Lp, Cs, Cp, D (tan $\delta$ ), N, M, $\Delta$ L, T	
Measurement range	100 m $\Omega$ to 100 M $\Omega$ , 10 ranges (All parameters defined in terms of Z.)	
Displayable range	Z, Y, Rs, Rp, Rdc, X, G, B, Ls, Lp, Cs, Cp : $\pm$ (0.00000 [unit] to 9.99999 [unit]) Real value display for Z and Y only $\theta$ : $\pm$ (0.000° to 180.000°), D: $\pm$ (0.00000 to 9.99999) Q: $\pm$ (0.00 to 99999.9), $\Delta$ %: $\pm$ (0.0000% to 999.999%), T: -10.0°C to 99.9°C	
Basic accuracy	Z: $\pm 0.05\%$ rdg $\theta$ : $\pm 0.03^\circ$	
Measurement frequency	1 mHz to 200 kHz (5 digits setting resolution, minimum resolution 1 mHz)	
Measurement signal level	[Normal mode] V mode, CV mode: 5 mV to 5 Vrms, 1 mVrms steps CC mode: 10 $\mu$ A to 50 mArms, 10 $\mu$ Arms steps [Low impedance high repeatability mode] V mode, CV mode: 5 mV to 2.5 Vrms, 1 mVrms steps CC mode: 10 $\mu$ A to 100 mArms, 10 $\mu$ Arms steps	
Output impedance	Normal mode: 100 $\Omega$ , Low impedance high repeatability mode: 25 $\Omega$	
Display	5.7-inch touch-screen color TFT, display can be set to ON/OFF	
Measurement time	2 ms (1 kHz, FAST, display OFF, representative value)	
Functions	DC bias measurement, DC resistance temperature compensation (converted reference temperature display), Comparator, BIN measurement (classify function), Panel loading/saving, Memory function	
Interfaces	EXT I/O (Handler), USB communication (high-speed), USB memory Optional: Choose 1 from RS-232C, GP-IB, or LAN	
Power supply	100 to 240 V AC, 50/60 Hz, 50 VA max	
Dimensions and mass	330 mm (12.99 in.) W $\times$ 119 mm (4.69 in.) H $\times$ 168 mm (6.61 in.) D, 3.1 kg (109.3 oz.)	
Included accessories	Power cord $\times$ 1, Instruction manual $\times$ 1, CD-R (Includes PC commands and sample software) $\times$ 1	

#### IM3590, IM3533, IM3523 shared options

Please see shared options for model IM3590

## High-speed 1MHz C Tester Delivering Super Precise Measurements Even from Low Capacitance Levels

### C METER 3506-10



- GP-IB** option
- RS-232C** option
- CE**
- 3 Year Warranty**

- High-speed analog test time of 0.6 ms (at 1 MHz)
- Improved noise resistance and enhanced repeatability in measurement precision even for production lines
- 1 kHz and 1 MHz measurement frequency supports stable low capacitance testing with taping machines
- BIN function, for easy component screening

Model No. (Order Code) **3506-10** (Measurement frequencies: 1 kHz and 1 MHz)

This product is not supplied with measurement probes or test fixtures. Please select and purchase the measurement probe or test fixture options appropriate for your application separately.  
 For an RS-232C connection: A crossover cable for interconnection can be used. You can use the RS-232C cable 9637 without hardware flow control.

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement parameters	C (Capacitance), D (loss coefficient, tan $\delta$ ), Q (1/tan $\delta$ )
Measurement range	C: 0.001 fF to 15.0000 $\mu$ F, D: 0.00001 to 1.99999, Q: 0.0 to 19999.9
Basic accuracy	(Typ.) C: $\pm 0.14\%$ rdg, D: $\pm 0.0013$
Measurement frequency	1 kHz, 1 MHz
Measurement signal level	500 mV, 1 V rms
Output impedance	1 $\Omega$ (at 1 kHz in 2.2 $\mu$ F and higher ranges), 20 $\Omega$ (in ranges other than the above)
Display	LED (six digits, full scale count depends on measurement range)
Measurement time	1.5 ms: 1 MHz, 2.0 ms: 1 kHz (Typ. value. Depends on measurement configuration settings)
Functions	BIN (measurement values can be classified by rank), Trigger-synchronous output, Setting configurations can be stored, Comparator, Averaging, Low-C reject (bad contact detection), Chatter detection, Current detection circuit monitoring, Applied voltage value monitoring, EXT. I/O, RS-232C, GP-IB
Power supply	Selectable from 100, 120, 220 or 240 V AC $\pm 10\%$ , 50/60 Hz 40 VA max.
Dimensions and mass	260 mm (10.24 in.) W $\times$ 100 mm (3.94 in.) H $\times$ 298 mm (11.73 in.) D, 4.8 kg (169.3 oz.)
Included accessories	Power cord $\times$ 1, Instruction manual $\times$ 1, Spare fuse $\times$ 1

PC Communication  
**GP-IB CONNECTOR CABLE 9151-02**  
 2m (6.56 ft.) length

#### Probe and Test Fixtures

<b>SMD TEST FIXTURE IM9110</b> Direct connection two-terminal measurement type for measuring SMDs, DC to 1 MHz, measurable sample sizes: 0.0804 (inch)	<b>SMD TEST FIXTURE IM9100</b> Direct connection type, For measuring SMDs with electrodes on the bottom, DC to 8 MHz, measurable sample sizes: 0.1005 to 0.402 (inch), 0.402 to 10.05 (metric)	<b>4-TERMINAL PROBE L2000</b> Cable length 1 m (3.28 ft.), DC to 8 MHz, impedance characteristics of 50 $\Omega$ , 4-terminal pair configuration, measurable conductor diameter: $\phi$ 0.3 (0.01 in.) to 5 mm (0.20 in.)	<b>PINCHER PROBE L2001</b> Cable length 73 cm (2.40 ft.), DC to 8 MHz, impedance characteristics of 50 $\Omega$ , 4-terminal pair configuration, tip electrode spacing: 0.3 (0.01 in.) to 6 mm (0.24 in.)	<b>CONTACT TIPS IM9901</b> To replace the tip on the L2001, regular size, bundled with the L2001	<b>CONTACT TIPS IM9902</b> To replace the tip on the L2001, small size	<b>4-TERMINAL PROBE 9140-10</b> Cable length 1 m (3.28 ft.), DC to 200 kHz, 50 $\Omega$ , measurable conductor diameter: $\phi$ 0.3 mm (0.01 in.) to 5 mm (0.20 in.)	<b>TEST FIXTURE 9261-10</b> Cable length 1 m (3.28 ft.), DC to 8 MHz, impedance characteristics of 50 $\Omega$ , 4-terminal pair configuration, measurable conductor diameter: $\phi$ 0.3 (0.01 in.) to 1.5 mm (0.06 in.)
<b>TEST FIXTURE 9262</b> Direct connection type, DC to 8 MHz, measurable conductor diameter: $\phi$ 0.3 (0.01 in.) to 2 mm (0.08 in.)	<b>SMD TEST FIXTURE 9263</b> Direct connection type, DC to 8 MHz, test sample dimensions: 1 mm (0.04 in.) to 10 mm (0.39 in.)	<b>SMD TEST FIXTURE 9677</b> Direct connection type, For measuring SMDs with electrodes on the side, DC to 120 MHz, test sample dimensions: 3.5 mm $\pm$ 0.5 mm (0.14 in. $\pm$ 0.02 in.)	<b>SMD TEST FIXTURE 9699</b> Direct connection type, For measuring SMDs with electrodes on the bottom, DC to 120 MHz, test sample dimensions: 1.0 mm (0.04 in.) to 4.0 mm (0.16 in.) wide, max. 1.5 mm (0.06 in.) high	<b>4-TERMINAL PROBE 9500-10</b> Cable length 1 m (3.28 ft.), DC to 200 kHz, impedance characteristics of 50 $\Omega$ , measurable conductor diameter: $\phi$ 0.3 mm (0.01 in.) to 2 mm (0.08 in.)			

## High-speed, Large-capacitance MLCC Inspection with Constant Voltage

### C HiTESTER 3504



GP-IB

RS-232C

CE

3 Year Warranty


- High speed measurement of 2ms
- Supports C measurements with voltage dependency characteristics through the use of constant voltage testing (CV)
- Model 3504-60 can detect contact failure on all 4 terminals for increased reliability
- BIN function on the 3504-60/-50 is ideal for sorting machines
- Model 3504-40 offers high speed and affordability, perfect for integrating into taping machines
- In all models, contact error is constantly monitored during measurement, contributing to increased yield

Model No. (Order Code)	<b>3504-40</b>	(Built-in RS-232C interface)
	<b>3504-50</b>	(Built-in GP-IB, RS-232C)
	<b>3504-60</b>	(Built-in GP-IB, RS-232C)

*This product is not supplied with measurement probes or test fixtures. Please select and purchase the measurement probe or test fixture options appropriate for your application separately. For an RS-232C connection: A crossover cable for interconnection can be used. You can use the RS-232C CABLE 9637 without hardware flow control.*

#### Basic specifications (Accuracy guaranteed for 6 months)

Measurement parameters	C (capacitance), D (loss coefficient tan δ)
Measurement range	C: 0.9400 pF to 20.0000 mF, D: 0.00001 to 1.99999
Basic accuracy	(Typ.) C: ±0.09 % rdg ±10 dgt, D: ±0.0016
Measurement frequency	120 Hz, 1 kHz
Measurement signal level	100 mV (3504-60 only), 500 mV, 1 V rms CV 100 mV Measurement range: up to 170 μF range (Source frequency 1 kHz), up to 1.45 mF range (Source frequency 120 Hz) CV 500 mV Measurement range: up to 170 μF range (Source frequency 1 kHz), up to 1.45 mF range (Source frequency 120 Hz) CV 1V Measurement range: up to 70 μF range (Source frequency 1 kHz), up to 700 μF range (Source frequency 120 Hz)
Output impedance	5Ω (In open terminal voltage mode outside of the CV measurement range)
Display	LED (six digits, full scale count depends on measurement range)
Measurement time	2 ms (Typ. value. Depends on measurement configuration settings)
Functions	4-terminal contact check function (3504-60 only) BIN (measurement values can be classified by rank) (3504-50, 3504-60), Trigger-synchronous output, Setting configurations can be stored, Comparator, Averaging, Low-C reject (bad contact detection), Chatter detection, EXT. I/O, RS-232C GP-IB (3504-50, 3504-60)
Power supply	Selectable from 100, 120, 220 or 240 V AC ±10 %, 50/60 Hz, 110 VA max.
Dimensions and mass	260 mm (10.24 in.)W × 100 mm (3.94 in.)H × 220 mm (8.66 in.)D, 3.8 kg(134.0 oz.)
Included accessories	Power cord ×1, Instruction manual ×1, Spare fuse ×1



LCR Meters

Probe and Test Fixtures



**PINCHER PROBE L2001**  
Cable length 73 cm (2.40 ft.), DC to 8 MHz, impedance characteristics of 50 Ω, 4-terminal pair configuration, tip electrode spacing: 0.3 (0.01 in.) to 6 mm (0.24 in.)



**CONTACT TIPS IM9901**  
To replace the tip on the L2001, regular size, bundled with the L2001



**CONTACT TIPS IM9902**  
To replace the tip on the L2001, small size



**SMD TEST FIXTURE 9699**  
Direct connection type, For measuring SMDs with electrodes on the bottom; DC to 120 MHz, test sample dimensions: 1.0 mm (0.04 in.) to 4.0 mm (0.16 in.) wide, max. 1.5 mm (0.06 in.) high



**SMD TEST FIXTURE 9677**  
Direct connection type, For measuring SMDs with electrodes on the side; DC to 120 MHz, test sample dimensions: 3.5 mm ±0.5 mm (0.14 in ±0.02 in.)



**SMD TEST FIXTURE 9263**  
Direct connection type, DC to 8 MHz, test sample dimensions: 1 mm (0.04 in.) to 10 mm (0.39 in.)



**TEST FIXTURE 9262**  
Direct connection type, DC to 8 MHz, measurable conductor diameter: ø0.3 (0.01 in.) to 2 mm (0.08 in.)



**TEST FIXTURE 9261**  
DC to 8 MHz, 1 m (3.28 ft.) length, impedance characteristics of 75 Ω



**4-TERMINAL PROBE 9140**  
DC to 100 kHz, 1 m (3.28 ft.) length, impedance characteristics of 75 Ω




## For LCR Meters and Impedance Analyzers


# Probes & Test Fixtures and Applicable SMD size

Please use the probes specified below. For probe characteristic impedance of 50 Ω, a 50 Ω coaxial cable is used. For probe characteristic impedance of 75 Ω, a 75 Ω coaxial cable is used.

### Probes and Test Fixtures for Lead Components

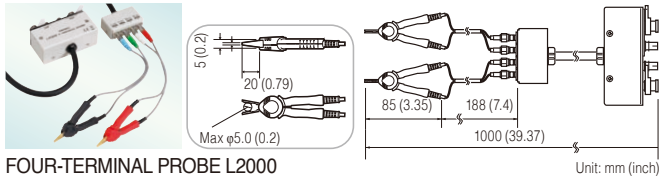

**FOUR-TERMINAL PROBE L2000**  
Cable length 1 m (3.28 ft), DC to 8 MHz, impedance characteristics of 50 Ω, 4-terminal pair configuration, measurable conductor diameter:  $\phi$ 0.3 (0.01 in.) to 5 mm (0.20 in.)

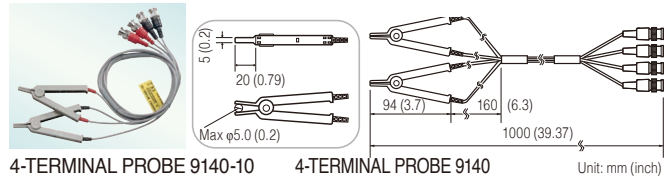

**4-TERMINAL PROBE 9140-10**  
Cable length 1 m (3.28 ft), DC to 200 kHz, impedance characteristics of 50 Ω, 4-terminal pair configuration, measurable conductor diameter:  $\phi$ 0.3 (0.01 in.) to 5 mm (0.20 in.)

**4-TERMINAL PROBE 9140**  
Cable length 1 m (3.28 ft), DC to 100 kHz, impedance characteristics of 75 Ω, 4-terminal pair configuration, measurable conductor diameter:  $\phi$ 0.3 (0.01 in.) to 5 mm (0.20 in.)



**TEST FIXTURE 9261-10**  
Cable length 1 m (3.28 ft), DC to 8 MHz, impedance characteristics of 50 Ω, 4-terminal pair configuration, measurable conductor diameter:  $\phi$ 0.3 (0.01 in.) to 1.5 mm (0.06 in.)



**TEST FIXTURE 9261**  
Impedance characteristics of 75 Ω, 4-terminal configuration, Other specifications are the same as for the 9261-10



**TEST FIXTURE 9262**  
Direct connection type, DC to 8 MHz, measurable conductor diameter:  $\phi$ 0.3 (0.01 in.) to 2 mm (0.08 in.)

### Test Fixtures for SMDs

Applicable SMD size ✓ : Measurable ▲ : Not recommended

SMD type	Length: L	Width: W	IM9202	IM9201	IM9110	IM9100	L2001 with tip IM9901	L2001 with tip IM9902	9699	9677	9263
0201	0.25 mm (0.01 in.)	0.125 mm (0.005 in.)			✓						
0402	0.40 mm (0.02 in.)	0.20 mm (0.01 in.)				✓					
0603	0.60 mm (0.02 in.)	0.30 mm (0.01 in.)		✓		✓		✓		▲	
1005	1.00 mm (0.04 in.)	0.50 mm (0.02 in.)		✓		✓		✓		✓	
1608	1.60 mm (0.06 in.)	0.80 mm (0.03 in.)	✓	✓			✓	✓	✓	✓	▲
2012	2.00 mm (0.08 in.)	1.25 mm (0.05 in.)	✓	✓			✓	✓	✓	▲	✓
3216	3.20 mm (0.13 in.)	1.60 mm (0.06 in.)	✓	✓			✓	✓	▲		✓
3225	3.20 mm (0.13 in.)	2.50 mm (0.10 in.)	✓	✓			✓	✓	▲		✓
4532	4.50 mm (0.18 in.)	3.20 mm (0.13 in.)	✓				✓	✓			✓
5750	5.70 mm (0.22 in.)	5.00 mm (0.20 in.)	✓				✓	✓			✓



**TEST FIXTURE STAND IM9200**  
Includes magnifying glass




**ADAPTER (3.5mm/7mm) IM9906**  
3.5 mm (0.14 in.) male to 7 mm (0.28 in.) conversion



**CALIBRATION KIT IM9905**  
Open/Short/Load set



**SMD TEST FIXTURE IM9110**  
Direct connection two-terminal measurement type for measuring SMDs, DC to 1 MHz, measurable sample sizes: 008004 (inch)



**TEST FIXTURE IM9202**  
Use in combination with the IM9200



**SMD TEST FIXTURE IM9201**  
Use in combination with the IM9200



**SMD TEST FIXTURE IM9100**  
Direct connection type, SMDs with electrodes on the bottom, DC to 8 MHz, metric (inch): 0402(01005), 0603(0201), 1005(0402)

#### SMD positioning mechanism

Test pieces can be positioned easily and reliably using templates and guide grooves for various SMD sizes.




#### High-precision four-terminal measurement


The fixture uses stable, high-precision four-terminal measurement to reliably apply four probes to the SMD's small electrodes.




**SMD TEST FIXTURE 9699**  
Direct connection type, For measuring SMDs with electrodes on the bottom; DC to 120 MHz, test sample dimensions: 1.0 mm (0.04 in.) to 4.0 mm (0.16 in.) wide, max. 1.5 mm (0.06 in.) high



**SMD TEST FIXTURE 9677**  
Direct connection type, For measuring SMDs with electrodes on the side; DC to 120 MHz, test sample dimensions: 3.5 mm  $\pm$  0.5 mm (0.14 in.  $\pm$  0.02 in.)



**SMD TEST FIXTURE 9263**  
Direct connection type, DC to 8 MHz, Test sample dimensions: 1 mm (0.04 in.) to 10 mm (0.39 in.)



**PINCHER PROBE L2001**  
Cable length 73 cm (2.40 ft), DC to 8 MHz, impedance characteristics of 50 Ω, 4-terminal pair configuration, tip electrode spacing: 0.3 (0.01 in.) to 6 mm (0.24 in.)



**CONTACT TIPS IM9901**  
To replace the tip on the L2001, regular size, bundled with the L2001



**CONTACT TIPS IM9902**  
To replace the tip on the L2001, small size

# Resistance Meters

## Market Leading Precision Tests for Testing Every Weld or Connection on Your Production Line

### RESISTANCE METER RM3545A



- Equipped with advanced features, ensuring precise resistance measurement (OVC, temperature measurement, and correction function)
- 0.045% basic accuracy, 1 nΩ max. resolution, 1A max. testing current
- Measure from 1 nΩ (testing current 1 A) to 100 MΩ
- The RM3545A-2 can be equipped with up to two optional Z3003 Multiplexer Units, allowing it to measure up to 20 channels (using the 4-terminal method)
- High path resistance tolerance allows seamless integration into an automatic test system, eliminating concerns about wiring or contact resistance

Model No. (Order Code) **RM3545A-1** (Single-channel model)  
**RM3545A-2** (Support for the multiplexer unit)

The Z2001 is bundled with the RM3545A.  
 The L2100 is for low resistance measurement. Accuracy is guaranteed only for the following ranges with a measurement current is 100 mA or more. 1000 μΩ range (HIGH, LOW), 10 mΩ range (HIGH, LOW), 100 mΩ range (HIGH, LOW), 1000 mΩ range (HIGH only)

**PIN TYPE LEAD L2100**  
A: 300 mm (11.81 in.), B: 172 mm (6.77 in.), L: 1.4 m (4.59 ft.), 1000 V DC

**TIP PIN 9772-90**  
To replace the tip on the pin type lead 9772, L2100/L2110, (one piece)

**CLIP TYPE LEAD L2101**  
A: 250 mm (9.84 in.), B: 84 mm (3.31 in.), L: 1.5 m (4.92 ft.), 60 V DC

**TIP PIN 9770-90**  
Replacement tip for pin type lead 9770, L2102 (one piece)

**PIN TYPE LEAD L2102**  
A: 250 mm (9.84 in.), B: 178 mm (7.01 in.), L: 1.5 m (4.92 ft.), 60V DC

**TIP PIN 9771-90**  
Replacement tip for pin type lead 9771, L2103 (one piece)

**PIN TYPE LEAD L2103**  
A: 250 mm (9.84 in.), B: 176 mm (6.93 in.), L: 1.5 m (4.92 ft.), 60V DC

**About lead length**

A: From junction to probe  
B: Probe length  
L: Overall length

Note: for L2101 to L2104, length "A" can be extended by roughly 1.1 m (3.61 ft.) by cutting the binding tube.

**4-TERMINAL LEAD L2104**  
A: 280 mm (11.02 in.), B: 149 mm (5.87 in.), L: 1.5 m (4.92 ft.), 60 V DC

**MULTIPLEXER UNIT Z3003**  
4-wire 10ch or 2-wire 21ch input scanning

**TEMPERATURE SENSOR Z2001**  
1.75 m (5.74 ft.) length

**LED COMPARATOR ATTACHMENT L2105**  
2 m (6.56 ft.) length

**RS-232C CABLE L9637**  
For external control, double shielding, 9-pin /9-pin, 3 m (9.84ft.) cord length

**USB CABLE (A-B) L1002**  
1 m (3.28 ft.) length

**LAN CABLE 9642**  
Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft.) length

Measurement Leads / Input Scanner

PC Communication

#### Basic specifications (Accuracy guaranteed for 1 year)

Resistance range (13 ranges)	[Range, max. display value, resolutions, testing current (measurement current)] 1000 μΩ: 1200.000 μΩ, 1 nΩ, 1 A 10 mΩ: 12.000 00 mΩ, 10 nΩ, 1 A 100 mΩ: 120.000 0 mΩ, 100 nΩ, 1 A 1000 mΩ: 1200.000 mΩ, 1 μΩ, 100 mA 10 Ω: 12.000 00 Ω, 10 μΩ, 10 mA 100 Ω: 120.000 0 Ω, 100 μΩ, 10 mA 1000 Ω: 1200.000 Ω, 1 mΩ, 1 mA 10 kΩ: 12.000 00 kΩ, 10 mΩ, 1 mA 100 kΩ: 120.000 0 kΩ, 100 mΩ, 100 μA 1000 kΩ: 1200.000 kΩ, 1 Ω, 10 μA 10 MΩ: 12.000 00 MΩ, 10 Ω, 1 μA 100 MΩ (100 MΩ range high-precision mode): 120.000 0 MΩ, 100 Ω, 100 nA 1000 MΩ: 1200.0 MΩ, 100 kΩ, 1 μA or less
Representative accuracy (high mode, OVC function enabled, SLOW2, no zero adjustment)	1000 μΩ range: ±0.045% rdg ±0.010 % f.s. 10 mΩ range: ±0.045% rdg ±0.001 % f.s. 100 mΩ range: ±0.045% rdg ±0.001 % f.s. 1000 mΩ range: ±0.012% rdg ±0.001 % f.s. 1000 Ω range: ±0.006% rdg ±0.001 % f.s.
Testing current (Measurement current)	High mode: 1000 μΩ (1 A) to 1000 MΩ (up to 1 μA) Low mode: 100 mΩ (100 mA) to 100 Ω (1 mA) Low power mode (LP): Low power measurement with measurement current and open circuit voltage down to 20 mV LP1000 mΩ (1 mA) to LP1000 Ω (5 μA)
Measurement speed	Representative value: FAST (2.3 ms) / MED (50 Hz: 22 ms, 60 Hz: 19 ms) / SLOW1 (102 ms) / SLOW2 (202 ms) Pure Resistance 10 mΩ range: FAST (21 ms) / MED (50 Hz: 41 ms, 60 Hz: 37 ms) / SLOW1 (121 ms) / SLOW2 (221 ms)
Path resistance tolerance (reference values)	Range: 100 mΩ or less (Pure Resistance mode off) : 2.6 Ω Range: 100 mΩ or less (Pure Resistance mode on) : 3.5 Ω
Path resistance between SOURCE B and SOURCE A (other than measurement target)	Range: 1000 mΩ: 15 Ω Range: 10 Ω: 150 Ω Range: 100 Ω: 100 Ω Range: 10 kΩ: 500 Ω Range: 100 kΩ or greater: 1 kΩ
Maximum open-terminal voltage	Range: 1000 Ω or less: 8.0 V Range: 10 kΩ or greater: 20 V
Temperature measurement	Temperature Sensor (Z2001[included accessories]): -10.0 °C to 99.9 °C Analog input (Ex: Infrared thermometer): 0 V to 2.0 V DC
Multiplexer (built-in option)*	Multiplexer unit Z3003 Number of installable units: Max. 2 Max. number of channels : 20 channels (4-wire method), 42 channels (2-wire method) Switching time : 30 ms
Multiplexer (external option)	Switch Mainframe Maximum number of channels (SW1001): 33 channels (4-wire method) Maximum number of channels (SW1002): 132 channels (4-wire method) Switching time: 11 ms
Communication interfaces	LAN (TCP/IP, 10BASE-T/100BASE-TX), RS-232C (Max. 115200 bps, also used as printer interface), USB, EXT I/O (D-sub 37-pin, Analog output (D/A output voltage range: 0 V to 1.5 V DC))
Functions	Contact check, Zero adjustment (within each range ±50% f.s.) <sup>1</sup> , Zero-adjustment-free accuracy guaranteed, OVC function, Contact improvement function (max. applied voltage: 5V; max. applied current: 10 mA), Low-power mode (maximum open voltage: 20 mV), Auto-hold function, Comparator, Temperature measurement function, Temperature correction (TC) function, Temperature conversion (ΔT) function, Statistical calculation function, Delay function, Averaging function, Saving panels (saving of measurement conditions), Data memory function, Command monitor function (display of send/receive status of commands and queries), LabVIEW® Driver compatible <sup>2</sup> 1: Zero adjustment forcibly disabled for 100 MΩ or greater 2: LabVIEW Driver is the trademark or registered trademark of National Instruments.
Power supply	100 V to 240 V AC, 50 Hz/60 Hz, Rated power consumption: 40 VA max.
Normal power consumption (reference value)	16 W (testing current 1 A, LCD on)
Dimensions	215 mm (8.46 in.) W × 80 mm (3.15 in.) H × 306.5 mm (12.07 in.) D,
Mass	RM3545A-1: 2.7 kg (95.2 oz.), RM3545A-2: 3.4 kg (119.9 oz.)
Included accessories	Power cord ×1, Temperature sensor Z2001 ×1, Male EXT I/O connector ×1, EXT. I/O connector cover ×1, Spare fuse (F1.6AH 250 V)×1, Start up guide ×1, Operating Precautions ×1, Instruction manual ×1

Resistance Meters

# Resistance Meters

Featuring Super-high Accuracy and Multi-channel Capabilities (20 channels with 4-terminal measurement)

## RESISTANCE METER RM3545



**GP-IB**  
RM3545-01

**RS-232C**

**USB 2.0**

**CE**

**SP**  
C Us

**3 Year**  
Warranty

- 0.006% basic accuracy, 10 nΩ max. resolution, 1A max. testing current
- Measure from 0.00 μΩ (testing current 1 A) to 1200 MΩ
- With Multiplexer unit Z3003 (number of installable units: 2), max. 20 channels (4-wire method), 42 channels (2-wire method), switching time: 30 ms (RM3545-02 only)
- Low-power resistance measurement with an open voltage not exceeding 20 mV
- High-speed, comprehensive productivity support delivers decisions in as little as 2.0 ms from start to finish

Model No. (Order Code) **RM3545**

**RM3545-01** (Built-in GP-IB interface)

**RM3545-02** (Support for the multiplexer unit)

### Basic specifications (Accuracy guaranteed for 1 year)

Resistance range	10 mΩ (12.00000 mΩ display max., 10 nΩ resolution) to 1000 MΩ range (1200.0 MΩ display max., 100 kΩ resolution), 12 steps [LP ON] 1000 mΩ (1200.00 mΩ display max., 10 μΩ resolution) to 1000 Ω range (1200.00 Ω display max., 10 mΩ resolution), 4 steps Measurement accuracy: ±0.006 % rdg ±0.001 % f.s.
Testing current	1 A DC to 100 nA DC [LP ON] 1 mA to 5 μA DC
Open-terminal voltage	20 V DC max. (10 kΩ range or more), 5.5 V DC max. (1000 Ω range or less) [LP ON] 20 mV DC max.
Temperature measurement	-10.0°C to 99.9 °C, accuracy: ±0.5 °C (Temperature Sensor Z2001 and RM3545 combined accuracy), -99.9°C to 999.9°C (analog input)
Measurement speed	FAST (2.0ms) / MED (50Hz: 22ms, 60Hz: 19ms) / SLOW1 (102ms) / SLOW2 (202ms) * Measurement speed is different at each range, 2.0 ms is the fastest value
Functions	Temperature correction, temperature conversion, offset voltage compensation (OVC), comparator (ABS/ REF%), BIN, key-lock (OFF, menu lock, all lock), display digit count selection function (7- digit/ 6-digit/ 5-digit), automatic power supply frequency settings (AUTO/ 50Hz/ 60Hz), scaling, judgment sound setting, auto hold, averaging, statistical calculations, panel store/panel load, D/A output.
Multiplexer	[Only RM3545-02] Support unit: Z3003 (Install up to 2 units)
Communication interfaces	Select from GP-IB (RM3545-01 only), RS-232C, PRINTER (RS-232C), or USB . Remote function, communications monitor function, data output function, memory (50)
Power supply	100 V to 240 V AC, 50 Hz/60 Hz, Rated power consumption: 40 VA max.
Dimensions and mass	215 mm (8.46 in.) W × 80 mm (3.15 in.) H × 306.5 mm (12.07 in.) D [RM3545/RM3545-01] 2.5 kg (88.2 oz.), [RM3545-02] 3.2 kg (112.9 oz.)
Included accessories	Power cord ×1, Clip type lead L2101 ×1, temperature sensor Z2001 ×1, Male EXT I/O connector ×1, Instruction manual ×1, Application disc ×1, USB cable (A-to-B type) ×1, Spare fuse ×1

The L2101, Z2001 are bundled with the RM3545 series.  
The L2100 is for low resistance measurement. Accuracy is guaranteed only for the following ranges with a measurement current is 100 mA or more. 10 mΩ range, 100 mΩ range (HIGH, LOW), 1000 mΩ range (HIGH only)

Measurement Leads / Input Scanner




**PIN TYPE LEAD L2100**  
A:300 mm (11.81 in.), B:172 mm (6.77 in.), L:1.4 m (4.59 ft.), 1000 V DC max.



**TIP PIN 9772-90**  
To replace the tip on the Pin type lead 9772, L2100/L2110, (one piece)



**CLIP TYPE LEAD L2101**  
A: 250 mm (9.84 in.), B:84 mm (3.31 in.), L:1.5 m (4.92 ft.)



**TIP PIN 9770-90**  
Replacement tip for pin type lead 9770, L2102



**PIN TYPE LEAD L2102**  
A: 250 mm (9.84 in.), B:178 mm (7.01 in.), L:1.5 m (4.92 ft.)



**TIP PIN 9771-90**  
Replacement tip for pin type lead 9771, L2103



**PIN TYPE LEAD L2103**  
A: 250 mm (9.84 in.), B:176 mm (6.93 in.), L:1.5 m (4.92 ft.)



**4-TERMINAL LEAD L2104**  
A: 280 mm (11.02 in.), B:149 mm (5.87 in.), L:1.5 m (4.92 ft.)



**FOUR-POINT ARRAY PROBE RM9010-01**  
A:1215 mm (47.83 in.), B:73.5 mm (2.89 in.), L:1.5 m (4.92 ft.)




**FOUR-POINT ARRAY PROBE RM9010-02**  
A:1120 mm (44.09 in.), B:84 mm (3.31 in.), L:1.5 m (4.92 ft.)



**TEMPERATURE SENSOR Z2001**  
1.75 m (5.74 ft.) length




**LED COMPARATOR ATTACHMENT L2105**  
2 m (6.56 ft.) length




**MULTIPLEXER UNIT Z3003**  
4-wire 10ch or 2-wire 21ch input scanning

#### About lead length



Note: for L2101 to L2104, length "A" can be extended by roughly 1.1 m (3.61 ft.) by cutting the binding tube.

PC Communication



**RS-232C CABLE 9637**  
For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length



**GP-IB CONNECTOR CABLE 9151-02**  
2m (6.56 ft.) length

\*The 9151-02 is only for the RM3545-01



## Long-Selling Model for Low Resistance Measurement

### RESISTANCE METER RM3544



USB<sup>2.0</sup>  
RM3544-01  
RS-232C  
RM3544-01



3 Year  
Warranty

- 0.02 % basic accuracy, 1  $\mu\Omega$  max. resolution, 300 mA max. measurable current
- Measure from 0.000 m $\Omega$  (testing current 300 mA) to 3.5 M $\Omega$
- Probe for guard jack use and increased measurement current yield an instrument that's more resistant to noise
- Optional LED COMPARATOR ATTACHMENT and high-volume judgment tones combine to ensure PASS/FAIL judgments are communicated reliably in the noisy environment of the production floor
- EXT I/O interface with NPN/PNP support can accommodate a variety of automated production lines (-01 model)

Model No. (Order Code) **RM3544** (No interfaces)  
**RM3544-01** (Built-in EXT I/O, RS-232C, USB)

#### Basic specifications (Accuracy guaranteed for 1 year)

Resistance range	30 m $\Omega$ (35,000 m $\Omega$ display max., 1 $\mu\Omega$ resolution) to 3 M $\Omega$ range (3.5000 M $\Omega$ display max., 100 $\Omega$ resolution), 9 steps Measurement accuracy: $\pm 0.020\%$ rdg $\pm 0.007\%$ f.s.
Testing current	[at 30 m $\Omega$ range] 300 mA DC to [at 3 M $\Omega$ range] 500 nA DC
Open-terminal voltage	5.5 V DC max.
Temperature measurement	-10.0 $^{\circ}\text{C}$ to 99.9 $^{\circ}\text{C}$ , accuracy: $\pm 0.5\text{ }^{\circ}\text{C}$ (Temperature Sensor Z2001 and RM3544 combined accuracy)
Measurement speed	FAST (50Hz: 21ms, 60Hz: 18ms) / MED (101ms) / SLOW (401ms)
Display refresh rate	N/A
Functions	Temperature correction, comparator (ABS/REF%), key-lock (OFF, menu lock, all lock), display digit count selection function (5 digits/ 4 digits), automatic power supply frequency settings (AUTO/50Hz/60Hz), scaling, judgment sound setting, auto hold, averaging, panel store/panel load
Memory storage	N/A
Communication interfaces	[Only RM3544-01] Select from RS-232C, PRINTER (RS-232C), or USB Remote function, communications monitor function, data output function
Power supply	100 V to 240 V AC, 50 Hz/60 Hz, Rated power consumption: 15 VA max.
Dimensions and mass	215 mm (8.46 in.) W $\times$ 80 mm (3.15 in.) H $\times$ 166 mm (6.54 in.) D [RM3544] 0.9 kg (31.7 oz.), [RM3544-01] 1.0 kg (35.3 oz.)
Included accessories	[RM3544] Power cord $\times$ 1, Clip type lead L2101 $\times$ 1, Instruction manual $\times$ 1, Spare fuse $\times$ 1 [RM3544-01] Power cord $\times$ 1, Clip type lead L2101 $\times$ 1, Male EXT I/O connector $\times$ 1, Instruction manual $\times$ 1, Application disc $\times$ 1, USB cable (A-to-B type) $\times$ 1, Spare fuse $\times$ 1


Resistance Meters

\*The L2101 is bundled with the RM3544 series

Measurement Leads / Input Scanner



**CLIP TYPE LEAD L2101**  
A: 250 mm (9.84 in.), B: 84 mm (3.31 in.), L: 1.5 m (4.92 ft.)

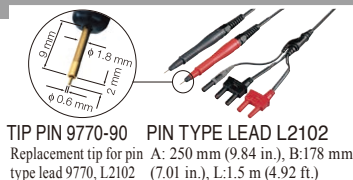

**TIP PIN 9770-90** Replacement tip for pin A: 250 mm (9.84 in.), B: 178 mm (7.01 in.), L: 1.5 m (4.92 ft.)  
**PIN TYPE LEAD L2102**



**TIP PIN 9771-90** Replacement tip for pin type lead 9771, L2103  
**PIN TYPE LEAD L2103**  
A: 250 mm (9.84 in.), B: 176 mm (6.93 in.), L: 1.5 m (4.92 ft.)



**4-TERMINAL LEAD L2104**  
A: 280 mm (11.02 in.), B: 149 mm (5.87 in.), L: 1.5 m (4.92 ft.)





**TEMPERATURE SENSOR Z2001**  
1.75 m (5.74 ft.) length



**LED COMPARATOR ATTACHMENT L2105**  
2 m (6.56 ft.) length

#### About lead length

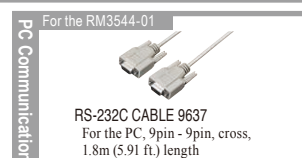

**RS-232C CABLE 9637**  
For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length

## Resistance Meter for Ultra-low and Low Shunt Resistance

### RESISTANCE HiTESTER RM3543



GP-IB/  
RM3543-01

RS-232C



3 Year  
Warranty

- Advanced enough to measure 0.1 m $\Omega$  shunts with room to spare at  $\pm 0.16\%$  accuracy & 0.01  $\mu\Omega$  resolution performance
- Superb repeatable measurement accuracy
- Advanced contact-check, comparator, and data export functions
- Intuitive user interface and strong noise immunity are ideal for automated systems

Model No. (Order Code) **RM3543**  
**RM3543-01** (Built-in GP-IB interface)


Test fixtures are not supplied with the unit. Select an optional test fixture when ordering.

#### Basic specifications (Accuracy guaranteed for 1 year)


Measurement method	Four-terminal, constant-current DC
Resistance range	10 m $\Omega$ (max. 12,000,000 m $\Omega$ , 0.01 $\mu\Omega$ resolution) to 1000 $\Omega$ range (max. 1200,000 $\Omega$ , 1 m $\Omega$ resolution), 6 steps
Display	Monochrome graphic LCD 240 $\times$ 64 dot, white LED backlight
Measurement accuracy	[at 10 m $\Omega$ range, with SLOW mode, average 16 times settings] $\pm 0.060\%$ rdg $\pm 0.001\%$ f.s.
Testing current	[at 10 m $\Omega$ range] 1 A DC to [at 1000 $\Omega$ range] 1 mA DC
Open-terminal voltage	20 V DC max. Note: voltage when not measuring is 20 mV or less, with current mode set at PULSE and Contact Improver Setting set at OFF/PULSE (measured with a voltmeter having 10 M $\Omega$ )
Sampling rate	FAST, MEDIUM, SLOW, 3 settings
Integration time	[at 10 m $\Omega$ range, default value] FAST 2.0 ms, MED 5.0 ms, SLOW 1 PLC, Setting range: 0.1 ms to 100.0 ms, or 1 to 5 PLC at 50 Hz, 1 to 6 PLC at 60 Hz Note: PLC = one power line cycle (mains wave-form period)
Other functions	Comparator (compare setting value with measurement value), Delay, OVC (offset voltage compensation), Average, Measurement fault detection, Probe short-circuit detection, Improve contact, Current mode setting (A pulse application function that applies current only during measurement), Auto-memory, Statistical calculations, Settings monitor (when using two instruments, a difference in settings causes warning notification), Retry, Trigger function, etc.
Interfaces	External I/O, RS-232C, Printer (RS-232C), GP-IB (Model RM3543-01)
External I/O	Trigger, Hold input, Comparator output, Settings monitor terminal, Service power output +5V, +12V, etc.
Power supply	100 V to 240 V AC, 50 Hz/60 Hz, 40 VA max.
Dimensions and mass	260 mm (10.24 in.) W $\times$ 88 mm (3.46 in.) H $\times$ 300 mm (11.81 in.) D, 3.0 kg (105.8 oz.)
Included accessories	Power cord $\times$ 1, EXT I/O male connector $\times$ 1, Instruction manual $\times$ 1, Operation guide $\times$ 1




**4-TERMINAL PROBE 9500**  
DC to 1 MHz, 1 m (3.28 ft.) length




**4-TERMINAL PROBE 9140**  
DC to 100 kHz, 1 m (3.28 ft.) length, impedance characteristics of 75  $\Omega$



**TEST FIXTURE 9262**  
Direct connection type, DC to 8 MHz, measurable conductor diameter:  $\phi 0.3$  (0.01 in.) to 2 mm (0.08 in.)



**SMD TEST FIXTURE 9263**  
Direct connection type, DC to 8 MHz, Test sample dimensions: 1 mm (0.04 in.) to 10 mm (0.39 in.)

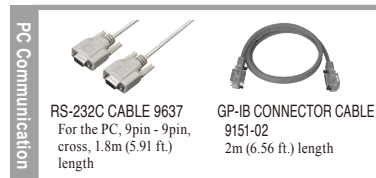

**RS-232C CABLE 9637**  
For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length  
**GP-IB CONNECTOR CABLE 9151-02**  
2m (6.56 ft.) length

# Resistance Meters

## High-Speed Resistance Meter Ideal for Automated Lines; Compatible with Super-Small Electronic Components

### RESISTANCE METER RM3542A



GP-IB  
RM3542-51  
RS-232C



#### Basic specifications (Accuracy guaranteed for 1 year)

Resistance range	[at Low Power OFF] 100 mΩ range (max. 120.0000 mΩ, 0.1 μΩ resolution) to 100 MΩ range (max. 120.0000 MΩ, 100 Ω resolution), 16 steps [at Low Power ON] 1000 mΩ range (max. 1200.000 mΩ, 1 μΩ resolution) to 1000 Ω range (max. 1200.000 Ω, 1 mΩ resolution), 6 steps
Display	Monochrome graphic LCD 240 × 64 dot, white LED backlight
Measurement accuracy	[with SLOW mode, at 100 mΩ range] ±0.015 % rdg ±0.002 % f.s. [with SLOW mode, at 1000 Ω range] ±0.006 % rdg ±0.001 % f.s. (best case)
Testing current	[at 100 mΩ range] 100 mA DC to [at 100 MΩ range] 100 nA DC
Open-terminal voltage	20 V DC max. (with applied voltage limit function enabled: 10 V DC max.)
Sampling rate	FAST, MEDIUM, SLOW, 3 settings
Measurement times	[at 100 Ω / 300 Ω / 1000 Ω ranges, with Low Power OFF] FAST: 0.9 ms, MED: 3.6 ms, SLOW: 17 ms (minimum time)
Integration time	0.1 ms to 100.0 ms, or 1 to 5 PLC at 50 Hz, 1 to 6 PLC at 60 Hz <i>Note: PLC = one power line cycle (mains wave-form period)</i>
Other functions	Comparator (compare setting value with measurement value), Delay (set to allow for mechanical delay of trigger input and probing, or set to allow for measurement object response), Applied Voltage Limit Function, Scaling Function, OVC (offset voltage compensation), Measurement fault detection, Probe short-circuit detection, Improve contact, Auto-memory, Statistical calculations, Settings monitor (when using two instruments, a difference in settings causes warning notification), Retry, Trigger function, Sample printing, etc.
Interfaces	RS-232C, Printer (RS-232C), GP-IB (Model RM3542-51)
External I/O	Trigger, Hold input, Comparator output, Settings monitor terminal
Power supply	100 V to 240 V AC, 50 Hz/60 Hz, 30 VA max.
Dimensions and mass	260 mm (10.24 in.) W × 88 mm (3.46 in.) H × 300 mm (11.81 in.) D, 2.9 kg (102.3 oz.)
Included accessories	Power cord ×1, EXT. I/O male connector ×1, Instruction manual ×1, Operation guide ×1

- Applied voltage limit function lets you switch the detection voltage to 5 V or less
- Contact improvement function suppresses rush current to aid in probing of super-small components
- Extensive selection of measurement ranges ensures the right detection voltage and delivers stable measurement
- Scaling function corrects for mounting state and test stage differences

Model No. (Order Code) **RM3542-50**  
**RM3542-51** (Built-in GP-IB interface)

Test fixtures are not supplied with the unit. Please select an optional test fixture when ordering.

Probe and Test Fixtures

**4-TERMINAL PROBE 9140-10**  
Cable length 1 m (3.28 ft), DC to 200 kHz, 50 Ω, measurable conductor diameter: φ0.3 mm (0.01 in.) to 5 mm (0.20 in.)

**SMD TEST FIXTURE IM9100**  
Direct connection type. For measuring SMDs with electrodes on the bottom, DC to 8 MHz. Measurable sample sizes: 01005 to 0402 (EIA), 0402 to 1005 (JIS)

**TEST FIXTURE 9262**  
Direct connection type, DC to 8 MHz, measurable conductor diameter: φ0.3mm (0.01 in.) to 2 mm (0.08 in.)

**SMD TEST FIXTURE 9263**  
Direct connection type, DC to 8 MHz, Test sample dimensions: 1 mm (0.04 in.) to 10 mm (0.39 in.)

Other options: refer to the detailed catalog

PC Communication

**RS-232C CABLE 9637**  
For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length

**GP-IB CONNECTOR CABLE 9151-02**  
2m (6.56 ft.) length

## Measure in as Fast as 0.9 ms, Optimized for Automated Systems

### RESISTANCE HiTESTER RM3542



GP-IB  
RM3542-01  
RS-232C



#### Basic specifications (Accuracy guaranteed for 1 year)

Resistance range	[at Low Power OFF] 100 mΩ range (max. 120.0000 mΩ, 0.1 μΩ resolution) to 100 MΩ range (max. 120.0000 MΩ, 100 Ω resolution), 10 steps [at Low Power ON] 1000 mΩ range (max. 1200.000 mΩ, 1 μΩ resolution) to 1000 Ω range (max. 1200.000 Ω, 1 mΩ resolution), 4 steps
Display	Monochrome graphic LCD 240 × 64 dot, white LED backlight
Measurement accuracy	[with SLOW mode, at 100 mΩ range] ±0.015 % rdg ±0.002 % f.s. [with SLOW mode, at 1000 Ω range] ±0.006 % rdg ±0.001 % f.s. (the best case)
Testing current	[at 100 mΩ range] 100 mA DC to [at 100 MΩ range] 100 nA DC
Open-terminal voltage	20 V DC max.
Sampling rate	FAST, MEDIUM, SLOW, 3 settings
Measurement times	[at 100 Ω / 1000 Ω ranges, with Low Power OFF] FAST: 0.9 ms, MED: 3.6 ms, SLOW: 17 ms (minimum time)
Integration time	0.1 ms to 100.0 ms, or 1 to 5 PLC at 50 Hz, 1 to 6 PLC at 60 Hz <i>Note: PLC = one power line cycle (mains wave-form period)</i>
Other functions	Comparator (compare setting value with measurement value), Delay (set to allow for mechanical delay of trigger input and probing, or set to allow for measurement object response), OVC (offset voltage compensation), Measurement fault detection, Probe short-circuit detection, Improve contact, Auto-memory, Statistical calculations, Settings monitor (when using two instruments, a difference in settings causes warning notification), Retry, Trigger function, etc.
Interfaces	RS-232C, Printer (RS-232C), GP-IB (Model RM3542-01)
External I/O	Trigger, Hold input, Comparator output, Settings monitor terminal
Power supply	100 V to 240 V AC, 50 Hz/60 Hz, 30 VA max.
Dimensions and mass	260 mm (10.24 in.) W × 88 mm (3.46 in.) H × 300 mm (11.81 in.) D, 2.9 kg (102.3 oz.)
Included accessories	Power cord ×1, EXT. I/O male connector ×1, Instruction manual ×1, Operation guide ×1

- High speed and accuracy maximize productivity in automated systems
- Multiple checking functions ensure proper contact for reliable measurements
- Low-power resistance mode measures chip inductors and EMC suppression components
- Supports sample inspections during the manufacturing process

Model No. (Order Code) **RM3542**  
**RM3542-01** (Built-in GP-IB interface)

Test fixtures are not supplied with the unit. Please select an optional test fixture when ordering.

Probe and Test Fixtures

**4-TERMINAL PROBE 9140**  
DC to 100 kHz, 1 m (3.28 ft.) length, impedance characteristics of 75 Ω

**TEST FIXTURE 9262**  
Direct connection type, DC to 8 MHz, measurable conductor diameter: φ0.3 (0.01 in.) to 2 mm (0.08 in.)

**SMD TEST FIXTURE 9263**  
Direct connection type, DC to 8 MHz, Test sample dimensions: 1 mm (0.04 in.) to 10 mm (0.39 in.)

Other options: refer to the detailed catalog

PC Communication

**RS-232C CABLE 9637**  
For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length

**GP-IB CONNECTOR CABLE 9151-02**  
2m (6.56 ft.) length



# Resistance Meters

## Simplify Precision Resistance Measurements with User-friendly Design and Instant Connectivity

### RESISTANCE METER RM3548-50



USB 2.0



3 Year Warranty

Bluetooth

When Z3210 is installed

- 0.02% basic accuracy, 0.1  $\mu\Omega$  max. resolution, 1 A max. testing current
- Measure from 0.1  $\mu\Omega$  (testing current 1 A) to 3.5 M $\Omega$
- Automatic temperature correction ensures accurate results & faster testing
- Advanced Connectivity: seamlessly integrate data with Excel® and a mobile app to manage & analyze data efficiently (Wireless Adapter Z3210 is necessary)
- Protections for safe operation: halts operation & triggers alerts when incorrect voltage inputs are detected
- Versatile Applications: Ideal for EV, aircraft, & motor/transformer maintenance with various probe options

Model No. (Order Code) **RM3548-50**

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement parameters	Resistance measurement, temperature measurement
Measurement method	Resistance: DC four-terminal method, Temperature: thermistor
Resistance range	3 m $\Omega$ (3.5000 m $\Omega$ display max., 0.1 $\mu\Omega$ resolution) to 3 M $\Omega$ range (3.5000 M $\Omega$ display max., 100 $\Omega$ resolution), 10 steps Measurement accuracy: $\pm 0.020\%$ rdg $\pm 0.007\%$ f.s.
Temperature measurement	-10.0°C to 99.9°C, accuracy: $\pm 0.5^\circ\text{C}$ (Temperature Sensor Z2002 and RM3548 combined accuracy)
Operating temperature and humidity range	0°C to 40°C (32°F to 104°F), 80% RH or less (non-condensing)
Storage temperature and humidity range	-10°C to 50°C (14°F to 122°F), 80% RH or less (non-condensing)
Applicable standards	EN61010 (safety), EN61326 (EMC)
Circuit protection	The circuit is protected until 42.4 V peak AC, 60 V DC is reached
Memory storage	Number of recordable data points: up to 1,000 for manual/auto, up to 6,000 for interval; interval: 0.2 s to 10.0 s (0.2 s step); acquisition of data from memory: display, USB mass storage (CSV, TXT files)
Communication functions	USB, wireless communications via Bluetooth® (Z3210 is necessary)
Power supply	LR6 alkaline battery $\times 8$ or HR6 nickel-metal hydride battery $\times 8$
Maximum rated voltage	5 VA
Continuous operating time	Approx. 10 hours (when eight fresh LR6 alkaline batteries or eight HR6 nickel-metal hydride batteries are used)
Dimensions and weight	Approx. 199 W $\times$ 132 H $\times$ 60.6 D mm (7.83 W $\times$ 5.20 H $\times$ 2.39 D in.), Approx. 890 g (31.4 oz.)
Included accessories	Clip Type Lead L2107 $\times 1$ , Temperature Sensor Z2002 $\times 1$ , Protector Z5041 $\times 1$ , LR6 alkaline battery $\times 8$ , instruction manual $\times 1$ , USB cable (A to mini-B) $\times 1$ , strap $\times 1$ , spare fuse

Resistance Meters

## High-precision Portable Resistance Meter Measures from $\mu\Omega$ to M $\Omega$

### RESISTANCE METER RM3548



USB 2.0



3 Year Warranty

- 0.02% basic accuracy, 0.1  $\mu\Omega$  max. resolution, 1A max. testing current
- Measure from 0.0  $\mu\Omega$  (testing current 1 A) to 3.5 M $\Omega$
- Easily record up to 1,000 data points in memory simply by applying the instrument's probes
- Smoothly capture temperature-rise test data using interval measurement
- Portable design is ideal for maintenance and testing of large equipment

Model No. (Order Code) **RM3548**

#### Basic specifications (Accuracy guaranteed for 1 year)


Resistance range	3 m $\Omega$ (3.5000 m $\Omega$ display max., 0.1 $\mu\Omega$ resolution) to 3 M $\Omega$ range (3.5000 M $\Omega$ display max., 100 $\Omega$ resolution), 10 steps Measurement accuracy: $\pm 0.020\%$ rdg $\pm 0.007\%$ f.s.
Testing current	[at 3 m $\Omega$ range] 1 A DC to [at 3 M $\Omega$ range] 500 nA DC
Open-terminal voltage	5.5 V DC max.
Temperature measurement	-10.0°C to 99.9°C, accuracy: $\pm 0.5^\circ\text{C}$ (Temperature Sensor Z2002 and RM3548 combined accuracy)
Measurement speed	Fixed
Display refresh rate	Without OVC: approx. 100ms, With OVC: approx. 230ms
Functions	Temperature correction, temperature conversion, offset voltage compensation (OVC), comparator (ABS/REF%), length conversion, judgment sound setting, auto hold, auto power save (APS), Averaging, panel store/panel load, USB communication interface (RM3548 internal memory is recognized as a mass storage device when connected to a PC)
Memory storage	Number of recordable data points: (manual/auto) Up to 1,000, (interval) Up to 6,000; Interval: 0.2s to 10.0s (0.2s steps); Acquisition of data from memory: display, USB mass storage (CSV, TXT files)
Power supply	LR6 (AA) Alkaline batteries $\times 8$ , Continuous use: 10 hours (Under our company's conditions), Rated power consumption: 5 VA max.
Dimensions and mass	192 mm (7.56 in.) W $\times$ 121 mm (4.76 in.) H $\times$ 55 mm (2.17 in.) D, 770 g (27.2 oz.)
Included accessories	Clip type lead L2107 $\times 1$ , Temperature sensor Z2002 $\times 1$ , LR6 Alkaline battery $\times 8$ , Instruction manual $\times 1$ , USB Cable (A-to-mini B type) $\times 1$ , Strap $\times 1$ , Spare fuse $\times 1$

### Shared options for RM3548-50, RM3548

Please see the individual product brochure for more information

\* L2107 and Z2002 are bundled with both the RM3548-50 and the RM3548.

#### About lead length



A: From junction to probe  
B: Probe length  
L: Overall length

#### TEST LEADS L2140

For the RM3548-50. B: 177 mm (6.97 in.) red, L: 1840 mm (72.44 in.) red, 3160 mm (124.41 in.) black, 60 V DC

#### PIN TYPE LEAD L2141

For the RM3548-50. A: 1832 mm (72.13 in.) red, 1832 mm (72.13 in.) black, B: 168 mm (6.61 in.), L: 3000 mm (118.11 in.) red, 1000 V DC

#### PIN TYPE LEAD L2142


For the RM3548-50. A: 1832 mm (72.13 in.) red, 1832 mm (72.13 in.) black, B: 168 mm (6.61 in.), L: 3000 mm (118.11 in.) red, 1000 V DC

#### PIN TYPE LEAD 9465-10

A: (red) 45 mm (1.77 in.), (black) Max. 400 mm (15.75 in.), B: 177 mm (6.97 in.), L: 1925 mm (6.32 ft.) (red)

#### TIP PIN 9465-90


To replace the tip on the 9465-10, 9465-11, L2140 (one piece)



**PIN TYPE LEAD 9465-11**  
A: (red) 45 mm (1.77 in.), (black) 1970 mm (6.46 ft.), B: 177 mm (6.97 in.), L: (red) 1980 mm (6.5 ft.), (black) 3900 mm (12.8 ft.)



**PIN TYPE LEAD 9772**  
A: (red) 45 mm (1.77 in.), (black) Max. 400 mm (15.75 in.), B: 173 mm (6.81 in.), L: 1921 mm (6.30 ft.) (red)



**TIP PIN 9772-90**  
To replace the tip on the 9772 (one pin)



**FOUR TERMINAL LEAD 9453**  
A: 280 mm (11.02 in.), B: 118 mm (4.65 in.), L: 136 mm (4.46 ft.), 60 V DC



**LARGE CLIP TYPE LEAD 9467**  
A: 300 mm (11.81 in.), B: 131 mm (5.16 in.), L: 1350 mm (4.43 ft.), tip  $\phi$  28 mm (1.10 in.), 50 V DC



**CLIP TYPE LEADS L2107**  
A: 130 mm (5.12 in.), B: 84 mm (3.31 in.), L: 1.1 m (3.61 ft.), 60 V DC



**TEST LEAD (RED) L2140-01**  
L2140 red lead

**TEST LEAD (BLACK) L2140-02**  
L2140 black lead



**TEMPERATURE SENSOR Z2002**  
100 mm (3.94 in.) length



**LED COMPARATOR ATTACHMENT L2105**  
2 m (6.56 ft.) length



**ZERO ADJUSTMENT BOARD 9454**  
For 9465-10 and 9465-11



**0 ADJ BOARD Z5038**  
For 9465-10 and 9772



**PROTECTOR Z5041**



**WIRELESS ADAPTER Z3210**  
For the RM3548-50. Bluetooth® for additional wireless communication functions



**CARRYING CASE C1015**  
For the RM3548-50



**CARRYING CASE C1006**  
For the RM3548



# Battery Testers

## All-in-one Solution for Powder Material Evaluation of Solid-state Batteries & Dry Processes in a Glove Box Environment

### Powder Impedance Measurement System

**New**




- Simultaneously control powder press unit (pressure, thickness) while measuring impedance
- Accurate analysis: calculate bulk density and ionic conductivity with precision
- All-in-one glove box operation: from loading to pressing & measuring, all tasks are completed safely inside
- Enhanced safety: prevents hydrogen sulfide gas leakage & preserves material integrity
- Time-saving efficiency: no sample removal required—streamline the entire process
- Optimized testing: continually measure multiple conditions on a single sample

#### Basic specifications

Frequency at which measurements can be made	DC to 5 MHz (Three types of measuring instruments used)
Load application method	Manual operation (constant control of load is not possible)
Load range (compressing range)	0 to 60 kN (0 to 764 MPa, when using the SA9004-01 Test Fixture electrode $\phi$ 10 mm)
Load measurement accuracy	$\pm 3\%$ f.s.
Thickness measurement error	$\pm 10 \mu\text{m}$ (under a constant temperature environment, after calibration is performed) (within a load range of 10 kN to 60 kN, only with increasing load)
Electrode size	$\phi$ 10 mm (SA9004-01)
Powder filling section size	$\phi$ 10 mm, depth: 7 mm
Operating temperature and humidity range	23°C $\pm$ 5°C (73°F $\pm$ 9°F), 80% RH or less (non-condensing)
Rated supply voltage	100 V to 240 V AC (SA2654, IM3570, IM3533, RM3545A)
Dimensions and weight	SA9003: 300 mm (11.81 in.) W $\times$ 322 mm (12.68 in.) H $\times$ 300 mm (11.81 in.) D SA2654: 180 mm (7.09 in.) W $\times$ 120 mm (4.72 in.) H $\times$ 245 mm (9.65 in.) D Weight: SA9003 approx. 20.7 kg (45.6 lb.), SA2654 approx. 2.3 kg (5.1 lb.)

Model No. (Order Code)	<b>SA2653</b>	Measurement software for obtaining data and viewer
	<b>SA2654</b>	Sensor unit for displaying pressure and displacement
	<b>SA9003</b>	Unit for pressing powder and sensing pressure/thickness
	<b>SA9004</b>	Container for powder and measurement electrode
	<b>SA9005</b>	Jig for releasing the hardened powder sample

\*An optional measuring instrument and connection cable must be combined with the system to perform measurements. Please purchase the optional measuring instruments and connection cables separately according to your purpose of measurement.

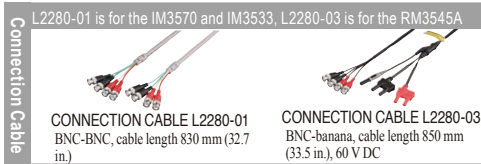


### Cut your measurement time dramatically compared to older methods

#### Conventional methods


Every time you want to measure:

- With a different pressure, you must refill the test cell with a new sample
- You must take the cell in and out of the glove box

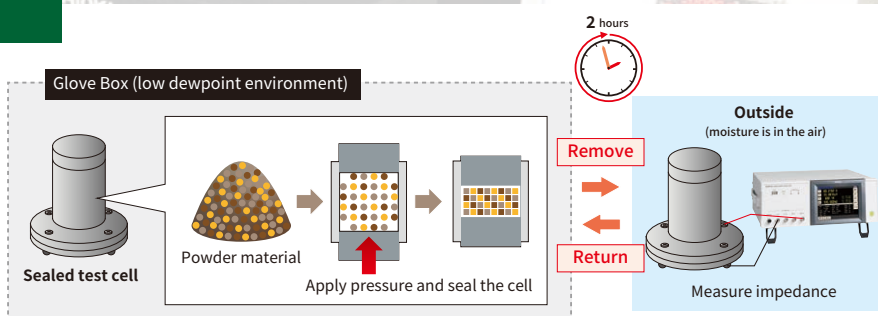


#### Hioki Powder Impedance Measurement System's method

You can measure impedance while repeatedly changing pressure on the same sample and in the glove box. This dramatically reduces work time, cost, and toxic gas risk.

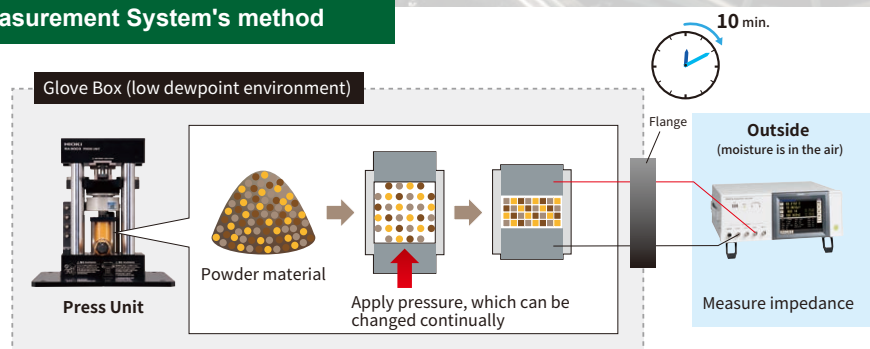

## For Estimating and Approaching the Ideal Slurry Internal State

### Slurry Analytical System

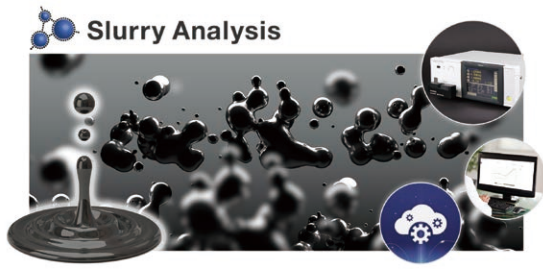

- A proprietary Hioki algorithm analyzes impedance measured values for LiB electrode slurries.
- Analysis Results "DCR, Rratio, Uniformity" indicate electron conductivity of Slurry.
- The latest version is available anytime by a Cloud-based, easy-to-use analysis tool.
- Able to choose license plan, fit the right solution for your needs.
- Easily measure the impedance of slurry in the measurement environment recommended by Hioki.

Model No. (Order Code)	<b>SA2631-01</b>	(License card, the period of use is 3 consecutive days.)
	<b>SA2631-03</b>	(License card, the period of use is 30 consecutive days.)
	<b>SA2631-05</b>	(License card, the period of use is 365 consecutive days.)
	<b>SA9001</b>	(Electrode Cell, sold in lots of 50.)
	<b>SA9002</b>	(SA9001 dedicated test fixture.)
	<b>IM3536</b>	(DC, or 4 Hz to 8 MHz)
	<b>IM3536-01</b>	(Special order product: DC, or 4 Hz to 10 MHz.)

\*Please purchase electrode cells and licenses as necessary based on your expected frequency of use and experimental plan.  
 \*Sensitive information will be shared with customers, including during use of analysis functionality.  
 Customers are responsible for determining whether to make purchases through a retailer.

#### Basic specifications (Electrode Cell SA9001)

Material	Container: polypropylene (PP), electrode: brass (nickel plated)
Capacity	Approx. 1 mL
Electrode pin	Diameter (Area where liquid to be measured comes in contact): 3 mm ±0.1 mm Electrode interval: 6 mm ±0.3 mm
Dimensions and mass	Approx. 27W × 42H × 37D mm (1.06"W × 1.65"H × 1.46"D) (including the electrode), approx. 2.3 g (0.1 oz.)

#### Basic specifications (Test Fixture SA9002)

Measurable frequency	DC to 10 MHz
Connectable sample	SA9001 Electrode Cell
Residual impedance	Residual resistance during short circuit 200 mΩ or less (reference for 100 Hz) Inter-electrode stray capacitance 0.2 pF or less (reference for 1 MHz)
Dimensions and mass	Approx. 98W × 38H × 24D mm (3.86"W × 1.50"H × 0.94"D) (excluding protruding parts), approx. 210 g (7.4 oz.)
Included accessory	Shorting plate for compensation

#### Measurement conditions\*

\*If using an instrument other than the IM3536 or IM3536-01 - Use the Electrode Cell SA9001. The analytical algorithm assumes use of the SA9001. - Check whether the Test Fixture SA9002 can be connected to the instrument. - Acquire data under the measurement conditions listed below. - Prepare a CSV file to send to the system.

Measurement parameters	Frequency, Rs (ReZ), X (ImZ)
Frequency sweep range	4 Hz (+3 Hz) to 10 MHz (-5 MHz)
Number of measurement points	Logarithmic interval, 500 points (±10 points)
Applied signal	Constant-voltage, ±100 mV

#### Available material categories

- The system uses the appropriate analytical algorithm to analyze the data based on the selected material category combination. - You may not be able to select some combinations, and some material categories may not be available. If you encounter this issue, perform the analysis using the default model. - There's no need to specify material proportions. - In some cases, the system may not be able to perform analysis. - Hioki plans to add material categories over time.

Active materials	LCO, NMC, NCA, LMO, LFP, Graphite, LTO, Si, SiO, None
Conductive aid	Acetylene black, Carbon nanotube, Graphite
Binder	PVDF, SBR, None
Dispersant	CMC, MC, PVP, None
Solvent	NMP, Water

## Quantify Composite Layer Resistance and Interface Resistance in Li-ion Battery Electrode Sheets

### ELECTRODE RESISTANCE MEASUREMENT SYSTEM RM2610



- Isolate and quantify composite layer resistance and interface resistance\* in positive- and negative-electrode sheets used in lithium-ion batteries.
- Composite layer resistance values and interface resistance\* values are helping LIBs to evolve and improve.

\*Contact resistance of current collector and material layer.

- Verify the uniformity of LIB electrode sheets.
- Visualize variations in composite layer resistance and interface resistance caused by differences in materials, composition, and manufacturing conditions.

Model No. (Order Code) **RM2610** (System product)

#### Basic specifications

Measurement target	Positive and negative electrode sheets for rechargeable lithium-ion batteries
Measurement parameters	Composite resistivity [ $\Omega\text{cm}$ ] Interface resistance (contact resistance) between the composite layer and current collector [ $\Omega\text{cm}^2$ ]
Computation method	Inverse problem analysis of potential distribution using the finite volume method
Information necessary for computation	• Composite layer thickness [ $\mu\text{m}$ ] (for 1 side) • Current collector thickness [ $\mu\text{m}$ ] • Current collector volume resistivity [ $\Omega\text{cm}$ ]
Measurement time	- Contact check + potential measurement : approx. 30 sec. - Calculation : approx. 35 sec. (on a PC with Intel core i5-7200U CPU) The measurement time may vary depending on the measurement target and the processing capacity of the PC.
Measurement current	1 $\mu\text{A}$ (min.) to 10 mA (max.)
Number of probes	46
Recommended PC specifications	CPU: 4 or more threads RAM: 8 GB or greater (4 GB required) Operating system: Windows 7 (64-bit), 8 (64-bit), 10 (64-bit), 11
Temperature measurement function	Measures temperature near the test fixture
Included accessories	TEMPERATURE SENSOR Z2001 ×1, USB cable ×1, USB license key ×1, Probe check board ×1, Power cord ×1, Instruction manual ×1

\*The RM2611 Electrode Resistance Meter requires regular calibration. For more information about calibration, please contact your Hioki distributor



## Packed with Features to Ensure Accuracy in Multi-channel Battery Testing

### SWITCH MAINFRAME SW1001, SW1002






- Switch between voltmeter and battery tester while testing
- SW1001: max. 66 channels (2-wire) to max. 18 channels (4-terminal pair)
- SW1002: max. 264 channels (2-wire) to max. 72 channels (4-terminal pair)
- Circuit-design-friendly for impedance measurements that minimize errors between channels (Effect: 0.01% f.s.\*)

\* For BT4560 100 mΩ range, R measurements, and a measurement frequency of 1 kHz

- For OCV measurement, internal resistance measurement, and external potential measurement of battery cells
- Measure battery modules up to 60 V DC

Model No. (Order Code) **SW1001** (3 slots)  
**SW1002** (12 slots)

Note: Multiplexer Modules not included with the Switch Mainframe SW1001 / SW1002. Modules must be purchased separately.

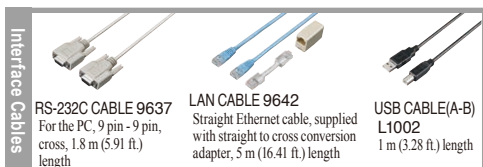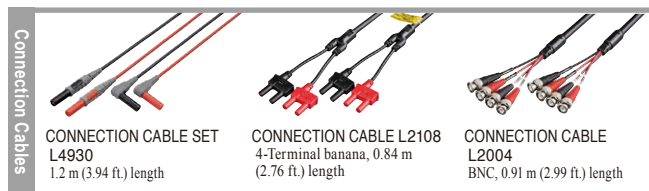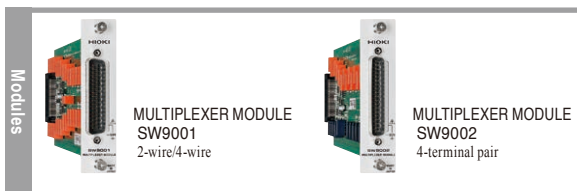

### Basic specifications (Accuracy guaranteed for 1 year)

Number of channels	12 ch
Maximum in-series connections	In-series connections of instrument up to and including a maximum in-series output voltage of 1000 V
Output range	DC voltage: 0.0000 V to 5.0250 V (set independently for all channels) Maximum output current: ±1.00000 A (set independently for all channels)
Measurement range	DC voltage: -0.00100 V to 5.10000 V DC current (2-range architecture): ±1.20000 A (1 A range), ±120.0000 μA (100 μA range)
Integration time	1 PLC (50 Hz: 20 ms; 60 Hz: 16.7 ms) × number of smoothing iterations (user-configured)
Voltage output accuracy	±0.0150% of setting ±500 μV
Voltage measurement accuracy	±0.0100% of reading ±100 μV
Current measurement accuracy	1 A range: ±0.0700% of reading ±100 μA 100 μA range: ±0.0350% of reading ±10 nA
Interfaces	LAN
Power supply	Universal (100 V to 240 V AC), 50 Hz / 60 Hz
Dimensions and mass	430 (16.93 in.)W × 132 (5.20 in.)H × 483 (19.02 in.)D, 10.3 kg (363.3 oz.)
Included accessories	User manual × 1, power cord × 1, rack frame × 1, disk with computer application × 1 (Available within the range of application specifications)

- Build a highly accurate BMS\* validation environment easily and safely (\*BMS: Battery Management System)
- Use as voltage generator or simulated battery in place of actual batteries and power supplies to establish an efficient testing environment

Model No. (Order Code) **SS7081-50**

Control PC, control software, BMS wiring, etc., not included.



# Battery Testers

## Reliable for EIS Measurement of High-capacity Batteries for EVs & ESSs

### BATTERY IMPEDANCE METER BT4560



- EIS measurement frequency: 0.01 Hz to 1.05 kHz
- Simultaneous measurement of impedance, voltage, & temperature
- Convenient evaluation application software for R&D use
- Data compatibility with third-party equivalent circuit analysis software
- For production lines: LAN interface & advanced multi-channel solutions

Model No. (Order Code) **BT4560-50**

Note: this product is not supplied with measurement probes. Please select and purchase the measurement probe options appropriate for your application separately.

#### Basic specifications (Accuracy guaranteed for 1 year)

Allowable input voltage	Up to 5 V
Measured items	Impedance, voltage, temperature
Impedance measurement	Parameters: R (resistance), X (reactance), Z (impedance), $\theta$ (phase angle) Frequency: 0.01 Hz to 1050 Hz Measurement ranges: 3.0000 m $\Omega$ , 10.0000 m $\Omega$ , 100.000 m $\Omega$ Measurement current: 3 m $\Omega$ range: 1.5 A rms, 10 m $\Omega$ range: 500 mA rms, 100 m $\Omega$ range: 50 mA rms
Voltage measurement	Measurement range: 5.00000 V (single range), measurement time: 0.1 s (FAST) to 1.0 s (SLOW)
Temperature measurement	Range: -10.0°C to 60.0°C, measurement time: 2.3 s
Basic accuracy	Z: $\pm 0.4\%$ rdg. $\theta$ : $\pm 0.1^\circ$ , V: $\pm 0.0035\%$ rdg. $\pm 5$ dgt., Temperature: $\pm 0.5^\circ\text{C}$ (at 10.0°C to 40.0°C)
Functions	Comparator, self-calibration, sample delay, average, voltage limit, potential gradient compensation for impedance measurement, charge/discharge prevention during AC signal application, key lock, system test, panel saving and loading (up to 126 condition sets)
Interfaces	LAN, RS-232C, USB, EXT. I/O (NPN/PNP can be switched)
Power supply	100 to 240 V AC (50/60 Hz) (80 VA max)
Dimensions and weight	Approx. 330W $\times$ 80H $\times$ 293D mm (12.99W $\times$ 3.15H $\times$ 11.54D in.), approx. 3.8 kg (134.0 oz.)
Included accessories	Power cord $\times$ 1, instruction manual $\times$ 1, zero-adjustment board $\times$ 1, USB cable (A-B type) $\times$ 1, CD-R (comes with communication instruction manual, PC application software, and USB driver) $\times$ 1

**CLIP TYPE PROBE L2002**  
Cable length: 1.5 m (4.92 ft.)

**PIN TYPE PROBE L2003**  
Cable length: 1.5 m (4.92 ft.)

**TIP PIN 9772-90**  
To replace the tip on the Pin type lead L2003 (one piece)

**SENSORS**  
**TEMPERATURE SENSOR Z2005**  
Cable length: 1 m (3.28 ft.)

**PC Communication**  
**RS-232C CABLE 9637**  
For the PC, 9-pin - 9-pin, cross, 1.8m (5.91 ft.) length

## Precision OCV/IR Testing for Next-gen High-capacity Battery

### PRECISION BATTERY TESTER BT6065, BT6075



- Industry's most accurate & high-speed OCV/IR test performance
- Shorter testing times while maintaining exceptional reproducibility
- Two testers work in tandem without interference
- Channel-specific correction and optional multiplexer
- Supports seamless setup of inspection systems
- High durability and long-term, stable test system operations

Model No. (Order Code) **BT6065** (Max. DCV resolution: 10  $\mu\text{V}$ )  
**BT6075** (Max. DCV resolution: 1  $\mu\text{V}$ )

#### Basic specifications (Accuracy guaranteed for 1 year)

Resistance measurement ranges (HIGH RESOLUTION ON)	[Range (Measurement current), Accuracy (SLOW2), Maximum display value, Resolution] 3 m $\Omega$ (300 mA), $\pm 0.08\%$ rdg. $\pm 0.08$ $\mu\Omega$ , 5.10000 m $\Omega$ , 0.01 $\mu\Omega$ 3 m $\Omega$ (100 mA), $\pm 0.08\%$ rdg. $\pm 0.50$ $\mu\Omega$ , 5.10000 m $\Omega$ , 0.01 $\mu\Omega$ 30 m $\Omega$ (100 mA), $\pm 0.08\%$ rdg. $\pm 0.5$ $\mu\Omega$ , 51.0000 m $\Omega$ , 0.1 $\mu\Omega$ 300 m $\Omega$ (10 mA), $\pm 0.08\%$ rdg. $\pm 5$ $\mu\Omega$ , 510.000 m $\Omega$ , 1 $\mu\Omega$ 3 $\Omega$ (1 mA), $\pm 0.10\%$ rdg. $\pm 50$ $\mu\Omega$ , 5.10000 $\Omega$ , 10 $\mu\Omega$ 30 $\Omega$ (100 $\mu\text{A}$ ), $\pm 0.15\%$ rdg. $\pm 0.5$ m $\Omega$ , 51.0000 $\Omega$ , 100 $\mu\Omega$ Measurement-current frequency: 1 kHz $\pm 0.2$ Hz Additional accuracy deterioration Temperature coefficient: add the following value to the measurement accuracy if the temperature is 0°C to 18°C or 28°C to 40°C: (measurement accuracy $\times 0.1$ ) / °C Addition when resistance measurement MIR mode is enabled: add $\pm 0.01\%$ rdg. to the resistance measurement accuracy.
DC-voltage measurement range	[Product model: Range, SLOW2, Maximum display value, Resolution] BT6065: 10 V, $\pm 0.002\%$ rdg. $\pm 20$ $\mu\text{V}$ , $\pm 12.00000$ V, 10 $\mu\text{V}$ BT6065: 100 V, $\pm 0.004\%$ rdg. $\pm 0.6$ mV, $\pm 120.0000$ V, 100 $\mu\text{V}$ BT6075: 10 V, $\pm 0.0012\%$ rdg. $\pm 11$ $\mu\text{V}$ , $\pm 12.000000$ V, 1 $\mu\text{V}$ BT6075: 100 V, $\pm 0.003\%$ rdg. $\pm 0.60$ mV, $\pm 120.00000$ V, 10 $\mu\text{V}$ Additional accuracy deterioration Temperature coefficient: add the following value to the measurement accuracy if the temperature is 0°C to 18°C or 28°C to 40°C: (measurement accuracy $\times 0.1$ ) / °C
Temperature measurement range	Range: -10.0°C to 60.0°C (14°F to 140°F) Accuracy (instrument + Z2005): $\pm 0.5^\circ\text{C}$ (measurement temperature of 10.0°C to 40.0°C), $\pm 1.0^\circ\text{C}$ (measurement temperature of -10.0°C to 9.9°C, 40.1°C to 60.0°C)
Route resistance measurement range	[Resistance range, Measurement current, Maximum display value] 3 m $\Omega$ , 300 mA, 10.0 $\Omega$ / 3 m $\Omega$ , 100 mA, 50.0 $\Omega$ / 30 m $\Omega$ , 100 mA, 50.0 $\Omega$ / 300 m $\Omega$ , 10 mA, 50.0 $\Omega$ / 3 $\Omega$ , 1 mA, 50.0 $\Omega$ / 30 $\Omega$ , 100 $\mu\text{A}$ , 500 $\Omega$
Sampling time (*1)	[Power frequency, FAST1, FAST2, MEDIUM1(MED1), MEDIUM2(MED2), SLOW1, SLOW2] 50 Hz, 4 ms, 10 ms, 20 ms, 40 ms, 100 ms, 200 ms 60 Hz, 4 ms, 10 ms, 17 ms, 33 ms, 100 ms, 200 ms *1: All common to measurement functions $\Omega\text{V}$ , $\Omega$ , and V.
Response time	Approx. 8 ms (when measuring only resistance and voltage of a 4 V battery) Averaging (up to 256 times), contact check, resistance self calibration, DC voltage self-calibration, zero adjustment (528 channels), referential adjustment (528 channels), route resistance monitor, resistance measurement MIR mode, comparator, command compatibility (BT3562A Battery HiTester compatible), panel save (number of savable sets: 6), command monitor, EXT. I/O test
Interface	LAN (10BASE T/100BASE-T, TCP/IP), USB (COM mode, Connector Type-C), USB (MEM mode, Connector Type-A, the Z4006 USB Drive is used), RS-232C (9600 bps, 19200 bps, 38400 bps), EXT. I/O
Power supply	100 V to 240 V AC (50Hz, 60Hz) (40 VA max.)
Dimensions and weight	Approx. 215W $\times$ 88H $\times$ 313D mm (8.5W $\times$ 3.5H $\times$ 12.3D in.), Approx. 3.1 kg (6.8 lb.) (excluding protrusions)
Included accessories	Power cord $\times$ 1, Startup Guide $\times$ 1, Operating Precautions $\times$ 1

**CLIP TYPE LEAD L2121**  
A: 130 mm (5.1 in.), B: 84 mm (3.3 in.), L: 1.2 m (3.9 ft.), 60 V DC

**PIN TYPE LEAD L2120**  
A: 300 mm (11.8 in.), B: 172 mm (6.8 in.), L: 1.4 m (4.6 ft.), 1000 V DC

**PIN TYPE LEAD L2100**  
A: 300 mm (11.8 in.), B: 172 mm (6.8 in.), L: 1.4 m (4.6 ft.), 1000 V DC

**TIP PIN 9772-90**  
To replace the tip on the Pin type lead L2003 (one piece)

**0 ADJ BOARD Z5038**  
For L2100, L2110, L2020, 9465-10, 9772

**TEMPERATURE SENSOR Z2005**  
Cable length: 1 m (3.28 ft.)


**RS-232C CABLE L9637**  
9-pin/9-pin, Cord length 3 m (9.8 ft.)

**USB CABLE L9510**  
USB A-C type, Cord length 1 m (3.3 ft.)

**LAN CABLE 9642**  
5 m (16.4 ft.)

**USB DRIVE Z4006**  
16 GB, SLC Flash Memory

#### About probe length



A: From junction to probe  
B: Probe part  
L: Whole length

# Battery Testers

## Fully Automated Production Line Testing of Small Cells for Power Motors or Small Packs of up to 60 V

### BATTERY HiTESTER BT3561A



LAN

RS-232C

CE

SR

3 Year Warranty

- Simultaneous measurement of internal resistance and open circuit voltage
- Fully automated production line testing of small cells for power motors or small packs of up to 60 V
- Resistance measurement ranges: 30 mΩ/300 mΩ/3 Ω/30 Ω/300 Ω/3 kΩ
- Voltage measurement ranges: 6 V/60 V
- Equipped with LAN

Model No. (Order Code) **BT3561A**

Note: measurement leads are not included. Purchase the appropriate lead option for your application separately. The male (system side) of the EXT I/O connector is also available. Please contact your authorized Hioki distributor or reseller.

#### Basic specifications (Accuracy guaranteed for 1 year)

Resistance measurement ranges	30 mΩ (Max. display: 31.000 mΩ, resolution: 1 μΩ, measurement current: 100 mA)
	300 mΩ (Max. display: 310.00 mΩ, resolution: 10 μΩ, measurement current: 10 mA)
Voltage measurement ranges	3 Ω (Max. display: 3.1000 Ω, resolution: 100 μΩ, measurement current: 1 mA)
	30 Ω (Max. display: 31.000 Ω, resolution: 1 mΩ, measurement current: 100 μA)
Response time	300 Ω (Max. display: 310.00 Ω, resolution: 10 mΩ, measurement current: 10 μA)
	3 kΩ (Max. display: 3.1000 kΩ, resolution: 100 mΩ, measurement current: 10 μA)
Sampling period	Basic accuracy: ±0.5% rdg ±5 dgt (±3 dgt. (EX.FAST), ±2 dgt. (FAST, MEDIUM) add.)
	Measurement frequency: 1 kHz ±0.2 Hz
Functions	Measurement method: AC four-terminal method
	6 V (Max. display: 6.00000 V, resolution: 10 μV)
Interfaces	60 V (Max. display: 60.0000 V, resolution: 100 μV)
	Basic accuracy: ±0.01% rdg. ±3 dgt. (±3 dgt. (EX.FAST), ±2 dgt. (FAST, MEDIUM) add.)
Power supply	Response time 10 ms
	Ω or V (60 Hz): 4 ms (EX.FAST), 12 ms (FAST), 35 ms (MEDIUM), 150 ms (SLOW)
Dimensions and mass	ΩV (60 Hz): 8 ms (EX.FAST), 24 ms (FAST), 70 ms (MEDIUM), 253 ms (SLOW)
	Ω or V (50 Hz): 4 ms (EX.FAST), 12 ms (FAST), 42 ms (MEDIUM), 157 ms (SLOW)
Included accessories	ΩV (50 Hz): 8 ms (EX.FAST), 24 ms (FAST), 84 ms (MEDIUM), 259 ms (SLOW)
	Contact check, Zero adjustment (±1000 counts), Pulse measurement, Comparator (Hi/IN/Lo), Statistical calculations (Max. 30,000), Delay, Average, Panel saving/loading, Memory storage, LabVIEW® driver
LAN (TCP/IP, 10BASE-T/100BASE-TX)	RS-232C (Max. 38.4 kbps, Available as printer I/F)
	EXT I/O (37-pin Handler interface)
Power supply	Analog output (DC 0 V to 3.1 V)
	100 to 240 V AC, 50 Hz/60 Hz, 35 VA max.
Dimensions and mass	215 mm (8.46 in.) W × 80 mm (3.15 in.) H × 295 mm (11.61 in.) D, 2.4 kg (84.7 oz.)
	215 mm (8.46 in.) W × 80 mm (3.15 in.) H × 295 mm (11.61 in.) D, 2.4 kg (84.7 oz.)
Included accessories	Instruction manual ×1, Power cord ×1, Operating Precautions ×1

## Fully Automated Production Line Testing of Large Cells for xEVs or Mid-sized Packs of up to 100 V

### BATTERY HiTESTER BT3562A



LAN

RS-232C

CE

SR

3 Year Warranty

- Simultaneous measurement of internal resistance and open circuit voltage
- Fully automated production line testing of large cells for xEVs or mid-sized packs of up to 100 V
- Resistance measurement ranges: 3 mΩ/30 mΩ/300 mΩ/3 Ω/30 Ω/300 Ω/3 kΩ
- Voltage measurement ranges: 6 V/60 V/100 V
- Equipped with LAN

Model No. (Order Code) **BT3562A**

Note: measurement leads are not included. Purchase the appropriate lead option for your application separately. The male (system side) of the EXT I/O connector is also available. Please contact your authorized Hioki distributor or reseller.

#### Basic specifications (Accuracy guaranteed for 1 year)

Resistance measurement ranges	3 mΩ (Max. display: 3.1000 mΩ, resolution: 0.1 μΩ, measurement current: 100 mA)
	30 mΩ (Max. display: 31.000 mΩ, resolution: 1 μΩ, measurement current: 100 mA)
Voltage measurement ranges	300 mΩ (Max. display: 310.00 mΩ, resolution: 10 μΩ, measurement current: 10 mA)
	3 Ω (Max. display: 3.1000 Ω, resolution: 100 μΩ, measurement current: 1 mA)
Response time	30 Ω (Max. display: 31.000 Ω, resolution: 1 mΩ, measurement current: 100 μA)
	300 Ω (Max. display: 310.00 Ω, resolution: 10 mΩ, measurement current: 10 μA)
Sampling period	3 kΩ (Max. display: 3.1000 kΩ, resolution: 100 mΩ, measurement current: 10 μA)
	Basic accuracy: ±0.5% rdg ±10 dgt (3 mΩ range: ±30 dgt. (EX.FAST), ±10 dgt. (FAST), ±5 dgt. (MEDIUM) add.)
Functions	±0.5% rdg ±5 dgt (30 mΩ range or more: ±3 dgt. (EX.FAST), ±2 dgt. (FAST, MEDIUM) add.)
	Measurement frequency: 1 kHz ±0.2 Hz
Interfaces	Measurement method: AC four-terminal method
	6 V (Max. display: 6.00000 V, resolution: 10 μV)
Power supply	60 V (Max. display: 60.0000 V, resolution: 100 μV)
	100 V (Max. display: 100.000 V, resolution: 1 mV)
Dimensions and mass	Basic accuracy: ±0.01% rdg. ±3 dgt. (±3 dgt. (EX.FAST), ±2 dgt. (FAST, MEDIUM) add.)
	Response time 10 ms
Included accessories	Ω or V (60 Hz): 4 ms (EX.FAST), 12 ms (FAST), 35 ms (MEDIUM), 150 ms (SLOW)
	ΩV (60 Hz): 8 ms (EX.FAST), 24 ms (FAST), 70 ms (MEDIUM), 253 ms (SLOW)
LAN (TCP/IP, 10BASE-T/100BASE-TX)	Ω or V (50 Hz): 4 ms (EX.FAST), 12 ms (FAST), 42 ms (MEDIUM), 157 ms (SLOW)
	ΩV (50 Hz): 8 ms (EX.FAST), 24 ms (FAST), 84 ms (MEDIUM), 259 ms (SLOW)
Power supply	Contact check, Zero adjustment (±1000 counts), Pulse measurement, Comparator (Hi/IN/Lo), Statistical calculations (Max. 30,000), Delay, Average, Panel saving/loading, Memory storage, LabVIEW® driver
	100 to 240 V AC, 50 Hz/60 Hz, 35 VA max.
Dimensions and mass	RS-232C (Max. 38.4 kbps, Available as printer I/F)
	EXT I/O (37-pin Handler interface)
Included accessories	Analog output (DC 0 V to 3.1 V)
	215 mm (8.46 in.) W × 80 mm (3.15 in.) H × 295 mm (11.61 in.) D, 2.4 kg (84.7 oz.)
Included accessories	Instruction manual ×1, Power cord ×1, Operating Precautions ×1


BT3561A/BT3562A/BT3563A/BT3564/BT3563/BT3562 Series Shared Options

#### Measurement Leads A (for measuring high voltage batteries)



#### PIN TYPE LEAD L2100

A:300 mm (11.81 in.),  
B:172 mm (6.77 in.),  
L:1400 mm (4.59 ft.),  
for high voltage battery measurements, 1000 V DC max.



#### PIN TYPE LEAD L2110

A:750 mm (29.53 in.),  
B:215 mm (8.46 in.),  
L:1880 mm (6.17 ft.),  
for high voltage battery measurements, 1000 V DC max.



TIP PIN 9772-90  
To replace the tip on the Pin type lead 9772, L2100/L2110, (one piece)



# Battery Testers

## Fully Automated Production Line Testing of Large Packs for xEVs or Large Packs of up to 300 V

### BATTERY HiTESTER BT3563A



LAN

RS-232C



- Simultaneous measurement of internal resistance and open circuit voltage
- Fully automated production line testing of large packs for xEVs or large packs of up to 300 V
- Resistance measurement ranges: 3 mΩ/30 mΩ/300 mΩ/3 Ω/30 Ω/300 Ω/3 kΩ
- Voltage measurement ranges: 6 V/60 V/300 V
- Equipped with LAN

Model No. (Order Code) **BT3563A**

Note: measurement leads are not included. Purchase the appropriate lead option for your application separately. The male (system side) of the EXT I/O connector is also available. Please contact your authorized Hioki distributor or reseller.

#### Basic specifications (Accuracy guaranteed for 1 year)

Resistance measurement ranges	3 mΩ (Max. display: 3.1000 mΩ, resolution: 0.1 μΩ, measurement current: 100 mA) 30 mΩ (Max. display: 31.000 mΩ, resolution: 1 μΩ, measurement current: 100 mA) 300 mΩ (Max. display: 310.00 mΩ, resolution: 10 μΩ, measurement current: 10 mA) 3 Ω (Max. display: 3.1000 Ω, resolution: 100 μΩ, measurement current: 1 mA) 30 Ω (Max. display: 31.000 Ω, resolution: 1 mΩ, measurement current: 100 μA) 300 Ω (Max. display: 310.00 Ω, resolution: 10 mΩ, measurement current: 10 μA) 3 kΩ (Max. display: 3.1000 kΩ, resolution: 100 mΩ, measurement current: 10 μA)
Voltage measurement ranges	6 V (Max. display: 6.00000 V, resolution: 10 μV) 60 V (Max. display: 60.0000 V, resolution: 100 μV) 300 V (Max. display: 300.000 V, resolution: 1 mV)
Response time	10 ms
Sampling period	Ω or V (60 Hz): 4 ms (EX.FAST), 12 ms (FAST), 35 ms (MEDIUM), 150 ms (SLOW) ΩV (60 Hz): 8 ms (EX.FAST), 24 ms (FAST), 70 ms (MEDIUM), 253 ms (SLOW) Ω or V (50 Hz): 4 ms (EX.FAST), 12 ms (FAST), 42 ms (MEDIUM), 157 ms (SLOW) ΩV (50 Hz): 8 ms (EX.FAST), 24 ms (FAST), 84 ms (MEDIUM), 259 ms (SLOW)
Functions	Contact check, Zero adjustment (±1000 counts), Pulse measurement, Comparator (Hi/IN/Lo), Statistical calculations (Max. 30,000), Delay, Average, Panel saving/loading, Memory storage, LabVIEW® driver
Interfaces	LAN (TCP/IP, 10BASE-T/100BASE-TX) RS-232C (Max. 38.4 kbps, Available as printer I/F) EXT I/O (37-pin Handler interface) Analog output (DC 0 V to 3.1 V)
Power supply	100 to 240 V AC, 50 Hz/60 Hz, 35 VA max.
Dimensions and mass	215 mm (8.46 in.) W × 80 mm (3.15 in.) H × 295 mm (11.61 in.) D, 2.4 kg (84.7 oz.)
Included accessories	Instruction manual ×1, Power cord ×1, Operating Precautions ×1

Battery Testers

## 1000V Maximum Input Voltage, High-Voltage Battery Tester for Measuring EV and PHEV Battery Packs

### BATTERY HiTESTER BT3564



GP-IB

RS-232C



- Measure high-voltage battery packs up to 1000V
- Production line testing of high-voltage battery packs for EV, PHEV
- 0.1 μΩ to 3000 Ω internal resistance range (pack total resistance, bus bar resistance)
- Spark discharge reduction function
- Analog output function
- Optional measurement probe available for 1000 V and high-voltage battery packs


Model No. (Order Code) **BT3564**

Note: measurement leads are not included. Purchase the appropriate lead option for your application separately. The male (system side) of the EXT I/O connector is also available. Please inquire with your Hioki distributor.

#### Basic specifications (Accuracy guaranteed for 1 year)

Max. applied measurement voltage	± 1000 VDC rated input voltage ± 1000 VDC max. rated voltage to earth
Resistance measurement ranges	3 mΩ (max. display 3.1000 mΩ, resolution 0.1 μΩ) to 3000 Ω (max. display 3100.0 Ω, resolution 0.1 Ω), 7 ranges Accuracy: ±0.5% rdg ±5 dgt (30 mΩ to 3000 Ω range), ±0.5% rdg ±10 dgt (3 mΩ range) to 10 μA (3000 Ω range) Testing source frequency: 1 kHz ±0.2 Hz, testing current: 100 mA (3 mΩ range) to 10 μA (3000 Ω range) Open terminal Voltage: 25 V peak (3/30 mΩ ranges), 7 V peak (300 mΩ range), 4 V peak (3 Ω to 3000 Ω range)
Voltage measurement ranges	10 V DC (resolution: 10 μV) to 1000V DC (resolution: 1 mV), 3 ranges Accuracy: ±0.01% rdg ±3 dgt
Display	31000 full digits (resistance), 999999 full digits (voltage, 1000 V range: 999999 or 110000), LED
Sampling time	FAST: 12 ms, MEDIUM: 35 ms, SLOW: 253 ms (Typ., sampling time depends on supply frequency settings and function.)
Total measurement time	Response time + sampling time (Response time for both resistance and voltage are reference value of about 700 ms, depends on measurement object.)
Comparator functions	Judgment result: Hi/IN/Lo (resistance and voltage judged independently) Setting: Upper and lower limit, Deviation (%) from reference value Logical ANDed result: PASS/FAIL, calculates the logical AND of resistance and voltage judgment results. Result display, beeper, or external I/O output (open-collector, 35 V, 50 mA DC max.)
Analog output	Measured resistance (displayed value, from 0 to 3.1 V DC)
Interfaces	External I/O, RS-232C, Printer (RS-232C), GP-IB
Power supply	100 to 240 V AC, 50/60 Hz, 30 VA max.
Dimensions and mass	215 mm (8.46 in.) W × 80 mm (3.29 in.) H × 295 mm (12.95 in.) D, 2.4 kg (84.7 oz.)
Included accessories	Instruction manual ×1, Power cord ×1, Operating Precautions ×1

#### About probe length




#### BT3561A/BT3562A/BT3563A/BT3564/BT3563/BT3562 Series Shared Options


##### Measurement Leads B (for measuring batteries up to 60 V)

1.8 mm dia. single-axis type for measuring small electrodes

0.2 mm parallel pyramid-type pins for measuring at thru holes and sub-millimeter objects



**PIN TYPE LEAD 9770**  
A: 260 mm (10.24 in.),  
B: 140 mm (5.51 in.),  
L: 850 mm (2.79 ft), 60V DC



**TIP PIN 9770-90**  
Replacement tip for pin type lead 9770, L2102  
A: 260 mm (10.24 in.),  
B: 138 mm (5.43 in.),  
L: 850 mm (2.79 ft), 60V DC

##### Measurement Leads C (for measuring batteries up to 60 V)



**CLIP TYPE LEAD L2107**  
A: 130 mm (5.12 in.),  
B: 83 mm (3.27 in.),  
L: 1100 mm (3.61 ft), 60 VDC

**FOUR TERMINAL LEAD 9453**  
A: 280 mm (11.02 in.),  
B: 118 mm (4.65 in.),  
L: 1360 mm (4.46 ft), 60V DC

**LARGE CLIP TYPE LEAD 9467**  
A: 300 mm (11.81 in.),  
B: 131 mm (5.16 in.),  
L: 1350 mm (4.43 ft), tip φ 28 mm (1.10 in.), 50 V DC

Can not be used for PIN TYPE LEAD 9770, 9771

Option



**0 ADJ BOARD Z5038**  
For L2100, L2110, L2020, 9465-10, 9772

PC Communication



**RS-232C CABLE 9637**  
For the PC, 9-pin - 9-pin, cross, 1.8 m (5.91 ft) length



**GP-IB CONNECTOR CABLE 9151-02**  
2 m (6.56 ft) length



# Battery Testers

## High-speed Measurement from Large-cell to High-voltage Battery Testing

### BATTERY HITESTER BT3563-01, BT3562-01



GP-IB  
BT3563-01, BT3562-01  
RS-232C



3 Year  
Warranty

- Measure high-voltage battery packs up to 300V (BT3563-01)
- Measure the voltage of battery packs up to 60 V (BT3562-01)
- Production line testing of high-voltage battery packs and battery modules
- Large (low-resistance) cell testing
- Choice of PC interfaces for full remote operation

Note: the comparison threshold values depend on the battery manufacturer, type, and capacity, and these must be established by the user.

Model No. (Order Code) **BT3563-01** (Built-in GP-IB and analog output)  
**BT3562-01** (Built-in GP-IB and analog output)

Note: measurement leads are not included. Purchase the appropriate lead option for your application separately. The male (system side) of the EXT I/O connector is also available. Please inquire with your Hioki distributor.

#### Basic specifications (Accuracy guaranteed for 1 year)

	BT3563-01	BT3562-01
Max. applied measurement voltage	± 300 VDC rated input voltage ± 300 VDC max. rated voltage to earth	± 60 VDC rated input voltage ± 70 VDC max. rated voltage to earth
Resistance measurement ranges	3 mΩ (max. display 3.1000 mΩ, resolution 0.1 μΩ) to 3000 Ω (max. display 3100.0 Ω, resolution 100 mΩ), 7 ranges Accuracy: 30 mΩ to 3000 Ω ranges, ± 0.5% rdg ± 5 dgt (Add ± 3 dgt for EX.FAST, or ± 2 dgt for FAST and MEDIUM) 3 mΩ range, ± 0.5% rdg ± 10 dgt (Add ± 30 dgt for EX.FAST, or ± 10 dgt for FAST, or ± 5 dgt for MEDIUM) Testing source frequency: 1 kHz ± 0.2 Hz, testing current: 100 mA (3 mΩ range) to 10 μA (3000 Ω range) Open terminal Voltage: 25 V peak (3/30 mΩ ranges), 7 V peak (300 mΩ range), 4 V peak (3 Ω to 3000 Ω ranges)	
Voltage measurement ranges	6 VDC (resolution 10 μV) to 300 VDC (resolution 1 mV), 3 ranges Accuracy: ± 0.01% rdg ± 3 dgt (Add ± 3 dgt for EX.FAST, or ± 2 dgt for FAST and MEDIUM)	6 VDC (resolution 10 μV) to 60 VDC (resolution 100 μV), 2 ranges
Display	31000 full digits (resistance), 600000 full digits (voltage), LED	
Sampling rate	Four steps, 4 ms (Extra-FAST), 12 ms (FAST), 35 ms (Medium), 150 ms (Slow) (Typ., sampling time depends on supply frequency settings and function.)	
Measurement time	Response time + sampling rate, approx. 10 ms for measurements (Response time depends on reference values and the measurement object.)	
Comparator functions	Judgment result: Hi/IN/Lo (resistance and voltage judged independently) Setting: Upper and lower limit, Deviation (%) from reference value Logical ANDed result: PASS/FAIL, calculates the logical AND of resistance and voltage judgment results. Result display, beeper, or external I/O output, Open-collector (35 V, 50 mA DC max.)	
Analog output	Measured resistance (displayed value, from 0 to 3.1 V DC)	
Interfaces	External I/O, RS-232C, Printer (RS-232C), GP-IB (-01 suffix models only)	
Power supply	100 to 240 VAC, 50/60 Hz, 30 VA max.	
Dimensions and mass	215 mm (8.46 in.) W × 80 mm (3.15 in.) H × 295 mm (11.61 in.) D, 2.4 kg (84.7 oz.)	
Included accessories	Instruction manual ×1, Power cord ×1	

## For High-speed Production Line Testing of Small Battery Packs

### BATTERY HITESTER 3561



GP-IB  
3561-01  
RS-232C



3 Year  
Warranty

- High-speed testing for production lines of small battery packs for mobile and portable communications devices
- Measure internal resistance and battery voltage
- For process control such as in high-speed automated assembly lines

Note: the comparison threshold values depend on the battery manufacturer, type, and capacity, and these must be established by the user.

Model No. (Order Code) **3561**  
**3561-01** (Built-in GP-IB interface)


Note: measurement leads are not included. Purchase the appropriate lead option for your application separately. The male (system side) of the EXT I/O connector is also available. Please inquire with your Hioki distributor.

#### Basic specifications (Accuracy guaranteed for 1 year)

Max. applied measurement voltage	±22 V DC ±60 V DC maximum rated voltage above ground
Resistance measurement ranges	300 mΩ (max. display 310.00 mΩ, resolution 10 μΩ) to 3 Ω (max. display 3.1000 Ω, resolution 100 μΩ), 2 ranges Accuracy: ±0.5 % rdg ±5 dgt (Add ±3 dgt for EX.FAST, or ±2 dgt for FAST and MEDIUM) Testing source frequency: 1 kHz ±0.2 Hz, testing current: 10 mA (300 mΩ range), 1 mA (3 Ω range) Open terminal Voltage: 7 V peak
Voltage measurement ranges	DC 20 V, resolution 0.1 mV, Accuracy: ±0.01 % rdg ±3 dgt (Add ±3 dgt for EX.FAST, or ±2 dgt for FAST and MEDIUM)
Display	31000 full digits (resistance), 199999 full digits (voltage), LED
Sampling rate	Four steps, 4 ms (Extra-FAST), 12 ms (FAST), 35 ms (Medium), 150 ms (Slow) (Typ., sampling time depends on supply frequency settings and function.)
Measurement time	Response time + sampling rate, approx. 3 ms for measurements (Response time depends on reference values and the measurement object.)
Comparator functions	Judgment result: Hi/IN/Lo (resistance and voltage judged independently) Setting: Upper and lower limit, Deviation (%) from reference value Logical ANDed result: PASS/FAIL, calculates the logical AND of resistance and voltage judgment results. Result display, beeper, or external I/O output, Open-collector (35 V, 50 mA DC max.)
Interfaces	External I/O, RS-232C, Printer (RS-232C), GP-IB (-01 suffix models only)
Power supply	100 to 240 V AC, 50/60 Hz, 30 VA max.
Dimensions and mass	215 mm (8.46 in.) W × 80 mm (3.15 in.) H × 295 mm (11.61 in.) D, 2.4 kg (84.7 oz.)
Included accessories	Instruction manual ×1, Power cord ×1


#### Measurement Leads B (for measuring batteries up to 60 V)

1.8 mm dia. single-axis type for measuring small electrodes



**PIN TYPE LEAD 9770**

A: 260 mm (10.24 in.),  
B: 140 mm (5.51 in.),  
L: 850 mm (2.79 ft.), 60V DC



**TIP PIN 9770-90**


Replacement tip for pin type lead 9770, L: 2102

0.2 mm parallel pyramid-type pins for measuring at thru holes and sub-millimeter objects



**PIN TYPE LEAD 9771**

A: 260 mm (10.24 in.),  
B: 138 mm (5.43 in.),  
L: 850 mm (2.79 ft.), 60V DC



**TIP PIN 9771-90**

Replacement tip for pin type lead 9771, L: 2103

#### Measurement Leads C (for measuring batteries up to 60 V)



**CLIP TYPE LEAD L2107**

A: 130 mm (5.12 in.), B: 83 mm (3.27 in.), L: 1100 mm (3.61 ft.), 60 VDC


**FOUR TERMINAL LEAD 9453**

A: 280 mm (11.02 in.), B: 118 mm (4.65 in.), L: 1360 mm (4.46 ft.), 60V DC

**LARGE CLIP TYPE LEAD 9467**


A: 300 mm (11.81 in.), B: 131 mm (5.16 in.), L: 1350 mm (4.43 ft.), tip φ 28 mm (1.10 in.), 50 V DC

#### About probe length



A: From junction to probe  
B: Probe part  
L: Whole length

PC Communication



**RS-232C CABLE 9637**  
For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length

**GP-IB CONNECTOR CABLE 9151-02**  
2 m (6.56 ft.) length

## Even Speedier Diagnosis of the Deterioration of Lead-acid Batteries Including UPS

### BATTERY TESTER BT3554-50



When Z3210 is installed



- Battery measurement can be performed while the battery is connected to its host device, without taking it offline
- Measure and save data in as fast as 2 seconds, a 60% improvement from the legacy 3554
- Instantaneously diagnose battery degradation (PASS, WARNING, FAIL) by measuring internal resistance and voltage\*1
- Noise reduction technology improves noise resistance
- Screen and audio\*2 guidance simplifies measurement
- Measurement data is linked to site information and saved, reducing management man-hours
- A variety of measurement data can be centrally managed using Hioki's GENNECT Cross app\*3
- Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel® file. (Wireless Adapter Z3210 is necessary)
- New protector delivers better ergonomic hold and durability in the field.

Model No. (Order Code)	<b>BT3554-50</b> (Pin Type Lead not included)
	<b>BT3554-51</b> (Bundled with Pin Type Lead 9465-10)
	<b>BT3554-52</b> (Bundled with Pin Type Lead L2020)
	<b>BT3554-91</b> (BT3554-51 + Wireless Adapter Z3210)
	<b>BT3554-92</b> (BT3554-52 + Wireless Adapter Z3210)

\*1: The thresholds for determining the pass/fail condition of a battery depends on the specifications and standards of the battery manufacturer, battery type, capacity, etc. It is important and necessary to always conduct battery testing against the internal resistance and terminal voltage of a new or reference battery. In some cases, it may be difficult to determine the deterioration state of traditional open type (liquid) lead-acid or alkaline batteries which demonstrate smaller changes in internal resistance than sealed lead acid batteries. \*2: Audio generated by Bluetooth®-connected device. \*3: Data can be downloaded to tablets and smartphones using Hioki's dedicated apps available from the Google Play or App Store. (When using the Z3210)

■ Data can be downloaded to tablets and smartphones using Hioki's dedicated apps available from the Google Play or App Store. Search for "HIOKI" and download the "GENNECT Cross" app.



\*Android, Google Play and the Google Play logo are trademarks of Google Inc.  
 \*IOS is a registered trademark of Cisco Technology, Inc. and/or its affiliates in the United States and certain other countries.  
 \*Phone, iPad, iPad mini, iPad Pro and iPod touch are trademarks of Apple Inc.  
 \*Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.  
 \*Microsoft, Windows, Windows Vista, and Excel are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.  
 \*Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.  
 \*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license.  
 \*For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website.

### ■ Basic specifications (Accuracy guaranteed for 1 year)

	BT3554-50	BT3554-51	BT3554-52
Resistance measurement range	3 mΩ (max. display 3.100 mΩ, resolution 1 μΩ) to 3 Ω (max. display 3.100 Ω, resolution 1 mΩ), 4 ranges Accuracy: ±0.8% rdg ±6 dgt (3 mΩ range: ±1.0% rdg ±8 dgt) Testing source frequency: 1 kHz ±30 Hz With function for avoiding noise frequency enabled: 1 kHz ±80 Hz Testing current: 160 mA (3m/30 mΩ range), 16 mA (300 mΩ range), 1.6 mA (3 Ω range) Open terminal Voltage: 5 V peak		
Voltage measurement range	± 6 V (max. display ±6.000 V, resolution: 1 mV) to ± 60 V (max. display ±60.00 V, resolution: 10 mV), 2 ranges, Accuracy: ±0.08% rdg ±6 dgt		
Temperature measurement accuracy	Measurement range: -10°C to 60°C (14°F to 140°F), Maximum display: 60.0°C (140.0°F), Resolution 0.1°C (0.1°F), Measurement accuracy*: ±1.0°C (±1.8°F) * When using the Clip Type Lead with Temperature Sensor 9460. * When using the Temperature Probe 9451, add ±0.5°C (±0.9°F) (cable length: 1.5 m [59.1"]) * When using the Temperature Probe 9451S, add ±0.5°C (±0.9°F) (cable length: 0.1 m [3.94"]) BT3554-50 standalone accuracy with simulated input: ±0.5°C (±0.9°F)		
Absolute max. input voltage	60 V DC max. (No AC input)		
Measurement time	100 ms		
Response time	Approx. 1.6 sec.		
Comparator	Compares measured values with set threshold values to make judgments and reports them to the user. Judgment notification method: Results are displayed as shown below (segment) and beeping tones sound When the Voltage value (high): Resistance value (low)= PASS, Resistance value (medium)= WARNING, Resistance value (high)= FAIL When the Voltage value (low): Resistance value (low)= WARNING, Resistance value (medium)= WARNING, Resistance value (high)= FAIL If the judgment result is WARNING or FAIL, the audio tone is accompanied by a red backlight. User-selectable voltage judgment method: ABS (absolute value judgment), POL (polarity judgment) Savable settings: 200 tables		
Memory functionality	Operation: Save, load, and delete measurement data, Save and delete profile information, Number of data sets: 6000, Memory architecture: 500 data sets per unit (12 units) Saved data: Saved measurement data is linked to profile information.  1. Measurement data: Data can be saved, loaded, and deleted by operating the instrument. -1. Date and time -2. Resistance value, voltage value, and temperature -3. Comparator threshold value and judgment result  2. Profile information: Profile information can be saved, loaded, and deleted using a supported application (GENNECT Cross or GENNECT One). -1. Profile numbers: 1 to 100 (Data (2), (3), and (4) below are saved for each profile number) -2. Location: User-defined comment such as location of UPS -3. Device information: User-defined comment such as UPS management number -4. Battery number: 1 to 500 (start number, end number)		
Measurement Navigator	Operation: Announces the next battery number to be measured via a screen display and audio guidance. Audio output is generated by a connected mobile device when using the Z3210 and a supported application (GENNECT Cross). Preparations: Profile information that's been registered with a supported application (GENNECT Cross or GENNECT One) must be transferred to the instrument.		
Communication interface	USB Bluetooth® wireless communications (when Z3210 installed)		
Other functions	Temperature measurement (-10.0 to 60.0 °C), Zero-adjustment, Hold, Auto-hold, Auto-memory, Auto-power-save, Clock		
Power supply	LR6 (size AA) alkaline battery × 8 Rated supply voltage: 1.5 V DC × 8 (Nickel metal hydride batteries may be used. However, the battery life display is not supported in this configuration.) Continuous operating time: Approx. 8.3 hr. (without Z3210 installed), Approx. 8.2 hr. (with Z3210 installed and wireless communications active)		
Dimensions and mass	199 mm (7.83 in.)W × 132 mm (5.20 in.)H × 60.6 mm (2.39 in.)D (with protector), 960 g (33.9 oz.) (including batteries and protector)		
Included accessories	Carrying Case C1014 ×1, Protector Z5041 ×1, Fuse Set Z5050 ×1, 0 Adj Board ×1, Neck strap ×1, USB cable ×1, Application software CD (GENNECT One) ×1, AA alkaline battery (LR6) ×8, User Manual ×1		
	Instrument only	With Pin Type Lead 9465-10	With Pin Type Lead L2020

Battery Testers

Easy 4-terminal measurement, 2.7 mm dia. single-axis type

**MEASUREMENT LEADS A**

**PIN TYPE LEAD L2020**  
A: 70 mm (2.76 in.) (Red), 150 mm (5.91 in.) (Black, up to 630 mm (24.8 in.)), B: 164 mm (6.46 in.), L: 1941 mm (76.42 in.) (red)

**TIP PIN 9465-90**  
To replace the tip on the 9465-10, L2020, (one piece)

**PIN TYPE LEAD 9465-10**  
A: (red) 45 mm (1.77 in.), (black) Max. 400 mm (15.75 in.), B: 177 mm (6.97 in.), L: 1925 mm (6.32 ft.) (red)

Large angle of probe application, 2.5 mm pitch 2-axis pin type

**MEASUREMENT LEADS B**

**PIN TYPE LEAD 9772**  
A: (red) 45 mm (1.77 in.), (black) Max. 400 mm (15.75 in.), B: 173 mm (6.81 in.), L: 1921 mm (6.3 ft.) (red)

**TIP PIN 9772-90**  
To replace the tip on the Pin type lead 9772, L2100/L2110, (one piece)

**MEASUREMENT LEADS C**

**LARGE CLIP TYPE LEAD 9467**  
A: 300 mm (11.81 in.), B: 131 mm (5.16 in.), L: 1350 mm (4.43 ft.), tip φ 28 mm (1.10 in.), 50 V DC

**CLIP TYPE LEAD WITH TEMPERATURE SENSOR 9460**  
For the 3554, 3540, A: 300 mm (11.81 in.), B: 106 mm (4.17 in.), L: 2268 mm (7.44 ft.)

**REMOTE CONTROL SWITCH 9466**  
Can hold the values while measuring them, for the BT3554 (use with the L2020, 9772, 9465-10)

**About probe length**

A: From junction to probe  
B: Probe part  
L: Whole length

**TEMPERATURE PROBE**

**TEMPERATURE PROBE 9451S**  
L: 100 mm (3.941 in.)  
Order code **9451-01**

**TEMPERATURE PROBE 9451**  
L: 1500 mm (59.06 in.)

**Option**

**0 ADJ BOARD Z5038**  
For L2020, 9465-10, and 9772

**FUSE SET Z5050**  
Replacement fuse set (5 pieces), for the BT3554

**PROTECTOR Z5041**  
For BT3554 and BT3554-50

**CARRYING CASE C1014**  
Hard case

**PC Peripherals**

**GENNECT One SF4000**  
Application for Windows

**GENNECT Cross SF4071, SF4072**  
Mobile app for iOS, Android



# Super Megohm Testers (High Resistance Meters)

## Test System Ideal for MLCC Leakage Current Measurement

### SUPER MΩ HiTESTER SM7810



GP-IB

RS-232C

Not CE Marked



- Test the leakage current of MLCCs at the fastest speed of 6.8ms simultaneously over 8 channels
- Conduct high-speed leakage current testing of large-capacity MLCCs in the high current range (1mA)
- Improve testing reliability using the contact check function
- Build a flexible system by making best use of the individual settings of each channel

Model No. (Order Code) **SM7810** (100/110V AC power supply)  
**SM7810-20** (220V AC power supply)

The Super MΩ HiTESTER SM7810 is produced to order. An input/output terminal connection cable\*1 is required separately. Please contact your local Hioki representative.

\*1 Input/output terminal connector/plug and connection cable

• Current input terminal connector and voltage output terminal plug are not included. Voltage input terminal connector is included.

• Input/output terminal connection cables are available in various lengths to suit Hioki measurement systems. Please consult with your Hioki representative.

#### Basic specifications (Accuracy guaranteed for 1 year)

Number of channels	8 channels (parallel and simultaneous measurement)
Applied voltage	Supply voltage from external power source (voltage input terminal on the rear panel)
Measurement range	Current: 1 pA to 1 mA, Ranges: 100 pA/ 1 nA/ 10 nA/ 100 nA/ 1 μA/ 10 μA/ 100 μA/ 1 mA Resistance: $1 \times 10^2 \Omega$ to $1 \times 10^{15} \Omega$
Measurement speed INDEX typical time	FAST: 6.8 ms, MED: 26.0 ms, SLOW: 100.0 ms, SLOW2: 320.0 ms
Basic measurement accuracy (1pA range, FAST)	Current accuracy: $\pm(2.0 + (0.5 \mu A / (\text{Measured current value})) \%)$ Resistance accuracy: Current accuracy + Voltage generation accuracy of external power supply
Testing voltage setting	0.1 V to 1000.0 V (Resolution: 0.1 V)
Contact check	Judges the contact state by comparing the measured capacitance to a reference value
Other functions	Trigger delay, averaging, contact check, jig capacity open correction, Measured value comparison and judgment, jig resistance open correction functions
Interfaces	GP-IB, RS-232C, EXT I/O
Power supply	SM7810: AC 100 V/110 V, 50/60 Hz, 30 VA SM7810-20: AC 220 V, 50/60 Hz, 30 VA
Dimensions and mass	425 mm (16.73 in.) W × 99 mm (3.90 in.) H × 488 mm (19.21 in.) D, 10.5 kg (370.4 oz.)
Included accessories	Power cord ×1, Instruction manual ×1, Voltage input connector L.2220 ×1, Spare fuse (built into inlet) ×1, Rubber feet ×4

Input/Output Cables	MEASURING LEAD (RED) 0GA00019 1 m (3.28 ft.) length	MEASURING LEAD (RED) 0GA00021 2 m (6.56 ft.) length	MEASURING LEAD (RED) 0GA00027 5 m (16.41 ft.) length
---------------------	--	--	---

PC Communication	RS-232C CABLE 9637 For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length	GP-IB CONNECTOR CABLE 9151-02 2 m (6.56 ft.) length
------------------	--	--

Bundled Accessories	CONNECTOR L2220 Voltage input connector for SM7810
---------------------	---

## The Power Source Unit Ideal for MLCC Leakage Current Measurement

### POWER SOURCE UNIT SM7860 series



GP-IB

RS-232C

Not CE Marked



Combination example of the SM7610

Model No. (Order Code) **SM7860-51, SM7860-52, SM7860-53, SM7860-54, SM7860-55, SM7860-56, SM7860-57, SM7860-58** (100V AC power supply)  
**SM7860-61, SM7860-62, SM7860-63, SM7860-64, SM7860-65, SM7860-66, SM7860-67, SM7860-68** (220V AC power supply)

The Power Source Unit SM7860 is produced to order. An output terminal connection cable\*2 is required separately. Please contact your local Hioki representative, or if you need to use a power supply voltage other than 100VAC or 220VAC.

\*2 Output terminal cable

• Voltage output terminal connection cables are available in various lengths to suit Hioki measurement systems. Please consult with your Hioki representative.

- Support for multi-channel systems up to 32-channel output
- 8-channels or 16-channels dual-line output voltage setting
- Positive and negative polarities required for the MLCC test line included in a single unit
- Output ON/OFF and current limitation can be performed for each channel
- Support for the discharge of the charge capacitor
- Output voltage of 1 kV is available
- Large current output of 50 mA \*channel allows for reducing the number of backup charges

\* Output voltage of 1 kV is limited to 10 mA/channel

#### Basic specifications (Accuracy guaranteed for 1 year)

Supported device	Super MΩ HiTester SM7810 Object to which voltage is applied: MLCC (the Multilayer Ceramic Capacitor)
Generation accuracy	Output voltage accuracy: $\pm 2\%$ of set value $\pm 0.5$ V (with no load) Inter-channel error: $\pm 0.01$ V or less (between outputs on the same line with no load)
Interfaces	GP-IB, RS-232C, EXT I/O
Power supply	SM7860-51 to -58: 100 V AC, SM7860-61 to -68: 220 V AC, 50/60 Hz, 860 VA
Dimensions and mass	425 mm (16.73 in.) W × 249 mm (9.80 in.) H × 581 mm (22.87 in.) D, 47 kg (105.79 oz.) [SM7860-57 / -67]: 34 kg (1199.3 oz.)
Included accessories	Power cable ×1, Instruction manual ×1, Operating precautions ×1

Other	CONNECTOR L2221 Voltage output connector for SM7860
-------	--

#### SM7860 Functions & output channel configuration

Model No.	SM7860-51 SM7860-61	SM7860-52 SM7860-62	SM7860-53 SM7860-63	SM7860-54 SM7860-64	SM7860-55 SM7860-65	SM7860-56 SM7860-66	SM7860-57 SM7860-67	SM7860-58 SM7860-68	
OUT1 to 4 output content	OUT1 +500V OUT2 +500V OUT3 +500V OUT4 +500V	+1kV +1kV +1kV +1kV	+500V +500V -500V -500V	+1kV +1kV -1kV -1kV	+500V discharge -500V discharge	+1kV discharge -1kV discharge	+10V +10V +10V discharge	+500V +500V +500V discharge	
Overview (Total number of channels and output voltage)	32ch + 500V	32ch + 1000V	32ch ±500V	32ch ±1000V	32ch ±500V, discharge	32ch ±1000V, discharge	32ch + 10V, discharge	32ch + 500V, discharge	
Line A	Number of OUT1 channels	8 ch	8 ch	8 ch	8 ch	8 ch	8 ch	8 ch	
	OUT1 output voltage range *2	+1.0 V to +500.0 V	+250.0 V to +1000.0 V	+1.0 V to +500.0 V	+250.0 V to +1000.0 V	+1.0 V to +500.0 V	+250.0 V to +1000.0 V	+1.0 V to +10.0 V	+1.0 V to +500.0 V
	Number of OUT2 channels	8 ch	8 ch	8 ch	8 ch	8 ch	8 ch	8 ch	8 ch
	OUT2 output voltage range *2	+1.0 V to +500.0 V	+250.0 V to +1000.0 V	+1.0 V to +500.0 V	+250.0 V to +1000.0 V	discharge	discharge	+1.0 V to +10.0 V	+1.0 V to +500.0 V
	Current limitation	±50 mA/ch	±10 mA/ch	±50 mA/ch	±10 mA/ch	±50 mA/ch	±10 mA/ch	±50 mA/ch	±50 mA/ch
Maximum output current *2	430 mA (200 VA)	100 mA (100 VA)	430 mA (200 VA)	100 mA (100 VA)	430 mA (200 VA)	100 mA (100 VA)	430 mA (4 VA)	430 mA (200 VA)	
Line B	Number of OUT3 channels	8 ch	8 ch	8 ch	8 ch	8 ch	8 ch	8 ch	
	OUT3 output voltage range *2	+1.0 V to +500.0 V	+250.0 V to +1000.0 V	-1.0 V to -500.0 V	-250.0 V to -1000.0 V	-1.0 V to -500.0 V	-250.0 V to -1000.0 V	+1.0 V to +10.0 V	+1.0 V to +500.0 V
	Number of OUT4 channels	8 ch	8 ch	8 ch	8 ch	8 ch	8 ch	8 ch	8 ch
	OUT4 output voltage range *2	+1.0 V to +500.0 V	+250.0 V to +1000.0 V	-1.0 V to -500.0 V	-250.0 V to -1000.0 V	discharge	discharge	discharge	discharge
	Current limitation	±50 mA/ch	±10 mA/ch	±50 mA/ch	±10 mA/ch	±50 mA/ch	±10 mA/ch	±50 mA/ch	±50 mA/ch
Maximum output current *3	430 mA (200 VA)	100 mA (100 VA)	430 mA (200 VA)	100 mA (100 VA)	430 mA (200 VA)	100 mA (100 VA)	430 mA (4 VA)	430 mA (200 VA)	

\*1 SM7860-51 to -58: Power supply 100 V AC, SM7860-61 to -68: Power supply 220 V AC \*2 The resolution of the output voltage range is 0.1 V.

\*3 Only when the operating conditions as stated in the restriction warnings of the specifications are met.



# Super Megohm Testers (High Resistance Meters)

## 4ch Micro Current Model, Perfect for Automated-Systems Integration

### SUPER MEGOHM METER SM7420



USB 2.0

GP-IB

RS-232C

CE

3 Year Warranty

- 300 times better noise resistance
- 6000 ps/minute - ideal for mass production
- Channel-independent low capacity contact check
- Perfect for equipping on automated machines
- Max.  $2 \times 10^{19} \Omega$  display
- Min. 0.1 fA resolution
- Built-in EXT I/O, RS-232C, GP-IB and USB
- Ideal for mounting in automated lines, easy to construct MLCC leakage current inspection lines

Model No. (Order Code) **SM7420** (4ch, Dedicated micro current measurement)

Note: measurement leads are not included. Purchase the appropriate lead option for your application separately.

#### Basic specifications (Accuracy guaranteed for 1 year)

Number of channels	4ch
DC current measurement	20 pA range (0.1 fA resolution), Accuracy: $\pm(2.0\% \text{ of rdg} + 30 \text{ dgt})$ 200 pA range (1.0 fA resolution), Accuracy: $\pm(1.0\% \text{ of rdg} + 30 \text{ dgt})$ 2 nA range (10 fA resolution), Accuracy: $\pm(0.5\% \text{ of rdg} + 20 \text{ dgt})$ 20 nA range (100 fA resolution), Accuracy: $\pm(0.5\% \text{ of rdg} + 10 \text{ dgt})$ 200 nA range (1 pA resolution), Accuracy: $\pm(0.5\% \text{ of rdg} + 10 \text{ dgt})$ 2 $\mu$ A range (10 pA resolution), Accuracy: $\pm(0.5\% \text{ of rdg} + 10 \text{ dgt})$ 20 $\mu$ A range (100 pA resolution), Accuracy: $\pm(0.5\% \text{ of rdg} + 10 \text{ dgt})$ 200 $\mu$ A range (1 nA resolution), Accuracy: $\pm(0.5\% \text{ of rdg} + 10 \text{ dgt})$ *2 mA range (1 nA resolution), Accuracy: $\pm(0.5\% \text{ of rdg} + 30 \text{ dgt})$ (1) Measurement speed SLOW2 (internal integration time 13PLC) (2) At a temperature of $23 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$ with humidity of 85% rh (3) 2 mA range (Measurement speed FAST only)
Resistance measurement capabilities	50 $\Omega$ to $2 \times 10^{19} \Omega$ Note: resistance measurement accuracy is defined by the current range accuracy and voltage setting accuracy.
Measurement time setting	Delay: 0 to 9,999 msec
Functions	CH independent low capacity contact checks, CH independent cable length correction, CH independent jig capacity open compensation, comparator
Display	LCD (8 lines of 30 characters), with backlight, high voltage warning indicator
Interfaces	USB, RS-232C, GP-IB, EXT I/O (NPN/PNP can be switched)
Power supply	100 to 240V AC, 50/60 Hz, 45 VA
Dimensions and mass	330 mm (12.99 in.)W $\times$ 80 mm (3.15 in.)H $\times$ 450 mm (17.72 in.)D, 6.5 kg (229.3 oz.)
Included accessories	Power cord $\times$ 1, Instruction manual $\times$ 1, CD-R (Communications command instruction manual, USB driver) $\times$ 1, EXT I/O male connector $\times$ 1

Super Megohm Testers

## Min. 6.4 ms Measurement of Super Megohm or Very Small Current

### SUPER MEGOHM METER SM7110, SM7120



USB 2.0

GP-IB

RS-232C

CE

3 Year Warranty

- 300 times better noise resistance
- Max. 2000 V output : SM7120
- Max. 1000 V output : SM7110
- Max.  $2 \times 10^{19} \Omega$  display
- Min. 0.1 fA resolution
- Built-in EXT I/O, RS-232C, GP-IB and USB
- Flexible, Multipurpose Design, High Resistance Meter/Electrometer/Picoammeter/IR Meter
- Measure resistance of materials by combining with optional electrode

Model No. (Order Code) **SM7110** (1 ch, 1000 V)  
**SM7120** (1 ch, 2000 V)

Note: measurement leads are not included. Purchase the appropriate lead option for your application separately.

#### Basic specifications (Accuracy guaranteed for 1 year)

Number of channels	1 ch
DC current measurement	20 pA range (0.1 fA resolution), Accuracy: $\pm(2.0\% \text{ of rdg} + 30 \text{ dgt})$ 200 pA range (1.0 fA resolution), Accuracy: $\pm(1.0\% \text{ of rdg} + 30 \text{ dgt})$ 2 nA range (10 fA resolution), Accuracy: $\pm(0.5\% \text{ of rdg} + 20 \text{ dgt})$ 20 nA range (100 fA resolution), Accuracy: $\pm(0.5\% \text{ of rdg} + 10 \text{ dgt})$ 200 nA range (1 pA resolution), Accuracy: $\pm(0.5\% \text{ of rdg} + 10 \text{ dgt})$ 2 $\mu$ A range (10 pA resolution), Accuracy: $\pm(0.5\% \text{ of rdg} + 10 \text{ dgt})$ 20 $\mu$ A range (100 pA resolution), Accuracy: $\pm(0.5\% \text{ of rdg} + 10 \text{ dgt})$ 200 $\mu$ A range (1 nA resolution), Accuracy: $\pm(0.5\% \text{ of rdg} + 10 \text{ dgt})$ *2 mA range (1 nA resolution), Accuracy: $\pm(0.5\% \text{ of rdg} + 30 \text{ dgt})$ (1) Measurement speed SLOW2 (internal integration time 13PLC) (2) At a temperature of $23 \text{ }^\circ\text{C} \pm 5 \text{ }^\circ\text{C}$ with humidity of 85% rh (3) 2 mA range (Measurement speed FAST only)
Resistance measurement capabilities	$1 \times 10^3 \Omega$ to $2 \times 10^{19} \Omega$ Note: resistance measurement accuracy is defined by the current range accuracy and voltage setting accuracy.
Setting voltage range (Accuracy)	0.1 to 100.0 V, 100 mV resolution, Accuracy: $\pm 0.1\% \text{ of setting} \pm 0.05\% \text{ f.s.}$ 100.1 to 1000 V, 1 V resolution, Accuracy: $\pm 0.1\% \text{ of setting} \pm 0.05\% \text{ f.s.}$ [SM7120 only] 1000 to 2000 V, 1 V resolution, Accuracy: $\pm 0.2\% \text{ of setting} \pm 0.10\% \text{ f.s.}$
Current Limiter	0.1 to 250.0 V: 5/10/50 mA, 251 to 1000 V: 5/10 mA, to 2000 V: 1.8 mA
Measurement time setting	Delay: 0 to 9,999 ms
Functions	Comparator, averaging, self-calibration, jig Capacity open correction, cable length correction, surface resistivity, volume resistivity, voltage monitor, contact check
Program function	10 types of discharge, charge, measure and measurement sequence discharge patterns can be programmed.
Display	LCD (8 lines of 30 characters), with backlight, High voltage warning indicator
Interfaces	USB, RS-232C, GP-IB, EXT I/O (NPN/PNP can be switched)
Power supply	100 to 240V AC, 50/60 Hz, 45 VA
Dimensions and mass	330 mm (12.99 in.)W $\times$ 80 mm (3.15 in.)H $\times$ 450 mm (17.72 in.)D, 5.9 kg (208.1 oz.)
Included accessories	Power cord $\times$ 1, Instruction manual $\times$ 1, CD-R (Communications command instruction manual, USB driver) $\times$ 1, EXT I/O male connector $\times$ 1, Short plug $\times$ 1

### Shared options with the SUPER MEGOHM METER SM7110, SM7120 and SM7420

Measurement Leads							Humidity Sensor
	PIN TYPE LEAD (RED) L2230 1 m (3.28 ft.) length	CLIP TYPE LEAD (RED) L2232 1 m (3.28 ft.) length	OPEN LEAD (RED) L2234 3 m (9.84 ft.) length	PIN TYPE LEAD (BLACK) L2231 1 m (3.28 ft.) length	CLIP TYPE LEAD (BLACK) L2233 1 m (3.28 ft.) length	OPEN LEAD (BLACK) L2235 3 m (9.84 ft.) length	
PC Communication			Other				
	RS-232C CABLE 9637 For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length	GP-IB CONNECTOR CABLE 9151-02 2 m (6.56 ft.) length					
For the SM7110, SM7120							
<p>CONVERSION ADAPTER Z5010 (custom order product) Connection between electrode / shielding box and SM7110, SM7120</p>							

# Super Megohm Testers (High Resistance Meters)

When connecting electrodes and shield boxes to SM7110/SM7120, note that CONVERSION ADAPTER Z5010 (custom order product) or a change of connectors is required. Please contact your local Hioki distributor for assistance.

## Options for Super megohm meters (for surface resistance or volume resistance measurement)

### SURFACE/VOLUME RESISTANCE MEASUREMENT ELECTRODE SM9001





Not CE Marked

- Electrodes compliant with the JIS C 2170 and IEC 61340-2-3 standards
  - Measurement voltage up to 1000 V, and measurement resistance up to  $10^{13} \Omega$
  - Surface and volume resistance of sheets and films can be measured just as they are without the need to cut samples
  - Measure the surface resistance of antistatic flooring and molded products
- \*When used with the SM-8200 series (discontinued), measurement can take full advantage of the instrument's voltage and resistance ranges.

Dimensions:  $\phi$  100mm (3.94in)  $\times$  223mm (8.78in), Mass: 2.5 kg (88.2oz)  
Cable length: 1 m (3.28 ft.)

Model No. (Order Code) **SM9001**  
**SM9002**

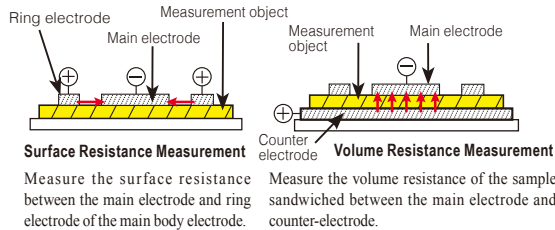

#### VERIFICATION FIXTURE FOR SURFACE RESISTANCE MEASUREMENT SM9002

The SM9002 Verification Fixture for Surface Resistance Measurement (option) allows you to check the operation of the electrode to increase the reliability of measurement results.

Not CE Marked

### Electrode for surface resistance SME-8301



Not CE Marked

Surface resistance can be easily measured by simply pushing the electrode against the specimen. It measures surface resistance of anti-static related goods in combination of mainly Model SM-8213 (discontinued). Measure resistance up to  $10^{11} \Omega$ .

Dimensions:  $\phi$  60mm (2.36in)  $\times$  50mm (1.97in)  
Lead length 1m (3.28ft.)

Model No. (Order Code) **SME-8301**

### Electrode for surface resistance SME-8302



Not CE Marked

Electrode for surface resistance of curved samples such as resin and rubber processed goods, TV cathode tubes or small samples. Surface resistance can be measured by pressing the rubber tips at the tip onto the sample. Measure electrodes up to  $10^{11} \Omega$  at 10 mm (0.39 in.) intervals or greater.

An electrode distance: 4mm (0.16in)

Dimensions:  $\phi$  40mm (1.57in)  $\times$  115mm (4.53in),  
Lead length 1m (3.28ft.)

Model No. (Order Code) **SME-8302**

### Electrode for plate samples SME-8310



Not CE Marked

Sample of 100 mm (3.94 in.) square by up to 8 mm (0.31 in.) in thickness is measurable. The main electrode dia. is 50 mm (1.97 in.) and inner & outer dia. of ring electrode are 70 mm (2.76 in.) & 80 mm (3.15 in.) respectively. Measurement voltage becomes "OFF" while the lid is open to ensure safety. A selector switch allows selection of voltage or surface resistivity.

\*A separately purchased interlock cable (DSM8104F) is required in order to use the product with the SM7110/SM7120, and DSM-8104.

Dimensions: 215mm (8.46in) W  $\times$  78mm (3.07in)H  
 $\times$  165mm (6.50in)D  
Lead length 75cm (2.46ft.)

Model No. (Order Code) **SME-8310**

### Electrode for plates SME-8311



Not CE Marked

Sample of 40 to 100 mm (1.57 to 3.94 in.) square by up to 8 mm (0.31 in.) in thickness is measurable. The main electrode dia. is 19.6 mm (0.77 in.) and inner & outer dia. of ring electrode are 24.1 mm (0.95 in.) & 28.8 mm (1.13 in.) respectively. Measurement voltage becomes "OFF" while the lid is open to ensure safety. The fundamental specifications are the same as SME-8310.

\*A separately purchased interlock cable (DSM8104F) is required in order to use the product with the SM7110/SM7120, and DSM-8104.

Dimensions: 215mm (8.46in) W  $\times$  78mm (3.07in)H  $\times$  165mm (6.50in)D  
Lead length 75cm (2.46ft.)

Model No. (Order Code) **SME-8311**

### Weight electrode SME-8320



Not CE Marked

This is an electrode for plate sample for use together with SME-8350 shield box. This electrode enables extremely easy measurement of surface resistivity and volume of sample with coarse surface such as carpets, etc. The main electrode dia. is 50 mm (1.97 in.), and the ring electrode inner-dia. and outer-dia. are 70 mm (2.76 in.) and 80 mm (3.15 in.) respectively.

Photo is Combination with Shield box SME-8350

Model No. (Order Code) **SME-8320**

Note: includes banana plug  $\times$  2

### Shield box SME-8350



Not CE Marked

This is used as a sample accommodation box during measurement of a high-insulation resistance samples, or inductive or capacitive samples to perform electromagnetic shielding. When used in combination with mass electrode SME-8320, the electrode can be used as a counter electrode or a guard electrode. When measuring electronic components such as capacitors and transducers, external noise and leakage currents are prevented to ensure stable measurement.

\*A separately purchased interlock cable (DSM8104F) is required in order to use the product with the SM7110/SM7120, and DSM-8104.

Dimensions: 250mm (9.84in) W  $\times$  100mm (3.94in)H  $\times$  200mm (7.87in)D  
Lead length 80cm (2.62ft.)

Model No. (Order Code) **SME-8350**

Note: includes rubber sheet

### Standard resistor box SR-2



Not CE Marked

This is a resistor box for calibration of the super megohmmeters. Max. voltage is 1000 V DC and resistor value covers from 1 M to 10000 M $\Omega$  in 24 points.

Dimensions: 270mm (10.63in) W  $\times$  90mm (3.54in)H  $\times$  195mm (7.68in)D

Model No. (Order Code) **SR-2**

Note: includes inspection data sheet

### Electrode for liquid samples SME-8330



Not CE Marked

Electrode for liquid samples which is electrically guarded. Total volume is 25 ml. Capacitance between main and counter electrode is approx. 45 pF. Electrode constant is approx. 500 cm (16.41 ft.). Distance between both electrodes is 1 mm (0.04 in.). Outer dia. is 36 mm (1.42 in.), height is approx. 140 mm (5.51 in.). Measure resistance up to  $10^{19} \Omega$  (at 1000 V) when used together with Model SM-8220. Electrodes compliant with the JIS C 2101 standard.

Included: Connection cable 60cm (1.97ft.) length (Red) 0GA00029  $\times$  1 (Black) 0GA00030  $\times$  1

Dimensions:  $\phi$  36mm (1.42in)  $\times$  140mm (5.51in)

Model No. (Order Code) **SME-8330**

Note: Includes inspection data sheet

### Electrode for chip capacitor SME-8360



Not CE Marked

For measuring the resistance of tip capacitors, with adjustable jig from 0 to 11 mm (0 to 0.43 in.). When connected to the meter by an interlock cable, measurement voltage becomes "OFF" while the lid is open to ensure safety. The interlock cable must be modified in order to use the product with the SM-8220 series.

Dimensions: 200mm (7.87in) W  $\times$  52 mm (2.05in.)H  $\times$  150mm (5.91in)D  
Lead length 85cm (2.79 ft.)

Model No. (Order Code) **SME-8360**



## 7-1/2 Digit DC Voltmeter for R&D to Production Lines

### PRECISION DC VOLTMETER DM7276, DM7275



LAN

USB 2.0

GP-IB  
-02 model

RS-232C  
-03 model



- High-accuracy model with 1-year 9ppm Accuracy: DM7276
- Basic model with 1-year 20ppm Accuracy: DM7275
- Capacitance contact check (using built-in C-monitor)
- Supports global production with built-in variable power supply
- Built-in EXT I/O, LAN, and USB

Model No. (Order Code)	<b>DM7275-01</b>
	<b>DM7275-02</b> (Built-in GP-IB)
	<b>DM7275-03</b> (Built-in RS-232C)
	<b>DM7276-01</b>
	<b>DM7276-02</b> (Built-in GP-IB)
	<b>DM7276-03</b> (Built-in RS-232C)

Note: measurement probes are not included. Purchase the probes appropriate for your application separately

#### Basic specifications (Accuracy guaranteed for 1 year)

	DM7275	DM7276
DC Voltage	100 mV ( $\pm 120.00000$ mV) to 1000 V ( $\pm 1000.0000$ V), 5 ranges	
Basic accuracy	10 V range: $\pm 0.0020\%$ rdg $\pm 12$ $\mu$ V	10 V range: $\pm 0.0009\%$ rdg $\pm 12$ $\mu$ V
Temperature	-10.0°C to 60.0°C (14.0°F to 140°F), combined with sensor Z2001: $\pm 0.5^\circ$ C (5.0°C to 35°C)	
Integration time	Integration time unit: PLC/ms (PLC setting: 0.02/0.2/1/10/100, ms setting: 1 ms to 9999 ms)	
Measurement support functions	Smoothing function, null, temperature compensation, scaling, over-range display, self-calibration, auto-hold, contact check	
Management support functions	Comparator, BIN, absolute value judgment, label display, statistics, measurement information, communication monitor, EXT. I/O TEST	
Contact check	Check signal: 10 mV rms, threshold value: 0.5 nF to 50 nF (Cannot use in the 100 V/1000 V ranges), Contact check integration time: 1 ms to 100 ms	
Interfaces	Standard: LAN (100BASE-TX), EXT. I/O, USB flash drive / USB device (USB2.0 Full-Speed) Optional: GP-IB (-02 type only) / RS-232C (-03 type only) / PRINTER (-03 type only)	
Power supply	100 to 240 V AC, 50/60 Hz, 30 VA	
Dimensions and mass	215 mm (8.46 in.) W $\times$ 88 mm (3.46 in.) H $\times$ 232 mm (9.13 in.) D (-01 type); 2.3 kg (81.1 oz.), (-02/-03 type): 2.4 kg (84.7 oz.)	
Included accessories	Instruction manual $\times$ 1, power cord $\times$ 1, application disk (CD-R) $\times$ 1	

#### Options for the L9207-10

Test leads

Discontinuation scheduled

**TEST LEAD L9207-10**  
90 cm (2.95 ft.) length

**CONTACT PIN SET L4933**  
Attaches to the tip of the Test Lead L9207-10/DT4911, L9206, 60V DC / 30V AC

**SMALL ALLIGATOR CLIP SET L4934**  
Attaches to the tip of the L4932, L9207-10/DT4911, L9206, CAT III 300V, CAT II 600V

#### Options for the L4930, Test Pin Set L4932 is required when using the Small Alligator Clip Set L4934.

Options for Test leads

**CONNECTION CABLE SET L4930**  
1.2 m (3.94 ft.) length

**EXTENSION CABLE SET L4931**  
Expands the length of the cable with banana plug, 1.5 m (4.92 ft.) length

**TEST PIN SET L4932**  
Attaches to the tip of the banana plug cable, CAT IV 600V, CAT III 1000V

**SMALL ALLIGATOR CLIP SET L4934**  
Attaches to the tip of the L4932, L9207-10/DT4911, L9206, CAT III 300V, CAT II 600V

**ALLIGATOR CLIP SET L4935**  
Attaches to the tip of the banana plug cable, CAT IV 600V, CAT III 1000V

**BUS BAR CLIP SET L4936**  
Attaches to the tip of the banana plug cable, CAT III 600V

**GRABBER CLIP L9243**  
Attaches to the tip of the banana plug cable, CAT II 1000 V, 185 mm (7.28 in.) length

Temperature Measurement

**TEMPERATURE SENSOR Z2001**  
1.75 m (5.74 ft.) length

PC Communication

**USB CABLE (A-B) L1002**  
1 m (3.28 ft.) length

**GP-IB CONNECTOR CABLE 9151-02**  
2 m (6.56 ft.) length

**RS-232C CABLE 9637**  
For the PC, 9 pins - 9 pins, cross, 1.8m (5.91 ft.) length

**LAN CABLE 9642**  
Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft.) length

## Introducing a New Digital, Multi-module DMM (Digital-Multi-Module) Station

### DMM STATION MR8990+MR8741, MR8740



USB 2.0

LAN




Model No. (Order Code)	<b>MR8990</b> (For the MR6000, MR8740, MR8848, MR8827, and similar products)
	<b>MR8740</b> (Max. 54ch, 864MW memory, main unit only)
	<b>MR8741</b> (Max. 16ch, 256MW memory, main unit only)

#### DMM Unit MR8990 Basic specifications (Accuracy guaranteed for 1 year)

Measurement functions	Install into Memory HiCorder MR6000/MR8848/MR8827, MR8740/MR8741/MR8740T for use 2 channels of DC voltage measurement
Measurement ranges (20 div. f.s.)	100 mV range (5 mV/div.): -120.0000 mV to 120.0000mV, 0.1 $\mu$ V resolution to 500 V range (50 V/div.): -500.000 V to 500.000 V, 1 mV resolution, 5 ranges
Measurement accuracy	Basic accuracy: $\pm 0.01\%$ rdg $\pm 0.0025\%$ f.s.
Max. allowable input	500 V DC (upper limit voltage that can be applied between input terminals without damage)
Max. rated voltage to earth	300 V AC/DC (input and instrument are isolated; upper limit voltage that can be applied between input channels or between input channels and chassis without damage)
Max. sampling rate	2 ms (500 samples/s)

### DMM STATION U8991+MR8740T

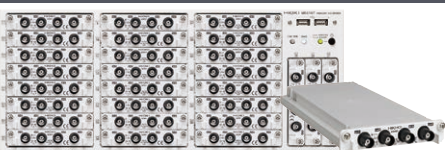

USB 2.0

LAN



DIGITAL VOLTMETER UNIT U8991

- Install in a Memory HiCorder to measure DC voltage with high accuracy and high resolution
- High-precision measurement for applications such as investigating minute voltage fluctuations in sensor output
- The MR8740T is packed with 27 units of U8991 and stores 108ch data at once
- Unlike standard multi-channel scan-type loggers, these instruments can perform simultaneous sampling

Model No. (Order Code)	<b>U8991</b> (For the MR8740-50)
	<b>MR8740-50</b> (Max. 108ch, 1GW memory, main unit only)

#### DMM Unit U8991 Basic specifications (Accuracy guaranteed for 1 year)

Measurement functions	Install into Memory HiCorder MR8740T for use 4 channels of DC voltage measurement
Measurement ranges	1 V f.s. range : -1.000 000 V to 1.000 000 V, 1 $\mu$ V resolution, to 100 V f.s. range : -100.0 000 V to 100.0 000 V, 100 $\mu$ V resolution, 3 ranges
Measurement accuracy	Basic accuracy: $\pm 0.02\%$ rdg $\pm 0.0025\%$ f.s.
Max. allowable input	100 V DC (upper limit voltage that can be applied between input terminals without damage)
Max. rated voltage to earth	100 V AC/DC (input and instrument are isolated; upper limit voltage that can be applied between input channels or between input channels and chassis without damage)
Max. sampling rate	20 ms (50 samples/s)

Note: it can not be used with the Digital Voltmeter Unit alone. Memory HiCorder body is required. Moreover, input code is not attached.

Other options refer to the detailed catalog



# Signal Generators

## Output the Signal the Recorder Measured, Which Is Ideal for Abnormality Simulation Test

### ARBITRARY WAVEFORM GENERATOR UNIT U8793



- Output arbitrary waveform signals up to 2 channels
- Output problematic waveforms recorded with the Memory Hicorder up to 15 V
- Output customized arbitrary waveforms signals up to 15 V
- For use with Hioki Memory Hicorder series (cannot use with 8847 or MR8847)
- Built-in function generator and sweep function
- Isolated between unit and output, and between all channels

Model No. (Order Code) **U8793** (For the MR6000, MR8848, and similar products)

Note: this module must be used with the Memory HiCorder. Output cords are not included. Please purchase them separately.

#### Basic specifications (Accuracy guaranteed for 1 year)

Output terminal	Number of channels: 2, SMB terminal (Output impedance: 1 Ω or less) Max. rated voltage to ground: 33 V rms AC or 70 V DC
Output voltage range	-10 V to 15 V (Amplitude setting range: 0 V to 20 V p-p, Setting resolution: 1 mV)
Max. output current	10 mA (Allowable load resistance: 1.5 kΩ or more)
Function generator	DC, Sine wave, Square wave, Pulse wave, Triangular wave, Ramp wave, Output frequency: 0 Hz to 100 kHz
Arbitrary waveform generator mode	Waveforms measured by MR8848, etc., generated by Hioki Model 7075, PQ3198, or SF8000, CSV waveforms D/A refresh rate: 2 MHz (using 16-bit D/A)
Sweep function	Frequency, Amplitude, Offset, Duty (Pulse only)
Program function	Max. 128 steps (Number of loops for each step, Number of total loops)
Other	Self-test function (Voltage), External input/output control
Dimensions and mass	106 mm (4.17 in.) W × 19.8 mm (0.78 in.) H × 196.5 mm (7.74 in.) D, 250 g (8.8 oz.)
Included accessories	None



\* Main products are listed below. For more information, please see each product page.



### Related products

For options, please see the product catalog.

#### WAVEFORM GENERATOR UNIT MR8790



- Output sine waves (20 kHz max.) and DC voltage signals up to 4 channels per unit
- Output signals up to ±10V or 5mA
- For use with Hioki Memory Hicorder series (cannot use with 8847 or MR8847-01/-02/-03)
- Isolated between unit and output, and between all channels

Model No. (Order Code) **MR8790**

#### PULSE GENERATOR UNIT MR8791



- Output pulse waves, pattern waves up to 8 channels per unit (output signals of TTL level or open-collector)
- For use with Hioki Memory Hicorder series (cannot use with 8847 or MR8847-01/-02/-03)
- Isolated between unit and output (Not isolated between each channel (common ground))

Model No. (Order Code) **MR8791**

#### VIR GENERATOR UNIT U8794



- When used as an ECU testing device, generate simulated signals from various sensors, which is indispensable for testing electronic parts and maintaining equipment.
- 8 ch, DC current, DC resistance (simulated output)
- For use with Hioki Memory Hicorder MR8740T (MR8740-50) (cannot use with MR8740 or MR8741)
- Isolated between unit and output, and between all channels

Model No. (Order Code) **U8794** (Note: for the MR8740-50)

## Generate and Measure Signals Simultaneously

### DC SIGNAL SOURCE SS7012



Discontinuation scheduled

- Improve stability and reduce calibration costs compared with the previous Hioki model
- For instrumentation systems (4 - 20 mA) and loop testing
- Check temperature control equipment and electric distribution
- 8 types of thermocouples to test thermoelectric power generation
- Ideal for electrical device evaluating and routine maintenance of production equipment such as calibrators
- Use the max. 25 mA DC sink as an electric load

Model No. (Order Code) **SS7012**

Note: use of the AC Adapter and/or rechargeable batteries and dedicated charger is recommended.

#### Basic specifications (Accuracy guaranteed for 1 year)

##### [Generation functions]

Circuit method	Bipolar sink and source
Constant Voltage	2.5 V: 0 to ±2,500 V (±0.03 % of setting ±300 μV, 100 μV resolution) 25 V: 0 to ±25,000 V (±0.03 % of setting ±3 mV, 1 mV resolution)
Constant Current	25 mA: 0 to ±25,000 mA (±0.03 % of setting ±3 μA, 1 μA resolution)
Thermoelectric power generation	K: at TC: 0 °C, -174.0 to 1372.0 °C (±0.05 % of setting ±0.5 °C, 0.1 °C resolution), Other types: E, J, T, R, S, B, N selectable
Thermoelectric power generation	K: at TC: RJ, -174.0 to 1372.0 °C (±0.05 % of setting ±1.0 °C, 0.1 °C resolution), Other types: E, J, T, R, S, B, N selectable
Standard resistance (Rs)	100 Ω (±0.2 Ω)
Automatic generation	Number of memory steps: 20, Interval time: 1 to 99 sec (at CV, CC, TC mode)

##### [Measurement functions]

Voltage	2.5 V: 0 to ±2,800 V (±0.03 % rdg ±300 μV, 100 μV resolution, 1 MΩ input resistance) 25 V: 0 to ±28,000 V (±0.03 % rdg ±3 mV, 1 mV resolution, 1 MΩ input resistance)
Current	25 mA: 0 to ±28,000 mA (±0.03 % rdg ±3 μA, 1 μA resolution, 25 Ω input resistance)
Temperature	-25.0 to 80.0 °C (±0.5 °C at 23 ±5 °C, 0.1 °C resolution, use with the RJ sensor 9184)
Sampling rate	Approx. 1.67 times/sec

Additional functions: Zero adjustment, Overflow display, USB communication, Monitor

Power supply	AC adapter 9445-02/-03 (100 to 240 V AC 50/60 Hz, 9 VA), Ni-MH battery HR6 × 4, 6 VA, (fully charged 2500 mAh Ni-MH batteries: 170 minutes continuous use), or LR6 (AA) alkaline battery × 4, 6 VA
Dimensions and mass	104 mm (4.09 in.) W × 180 mm (7.09 in.) H × 58 mm (2.28 in.) D, 660 g (23.3 oz.) (including LR6 × 4 batteries)
Included accessories	Input cord 9168 × 1, Test lead L9170-10 × 1, Fuse × 1, LR6 (AA) alkaline battery × 4, Instruction manual × 1

#### \*Bundled accessories



Cables

Options

Commercially available rechargeable batteries (AA Ni-MH batteries × 4) may also be used to power the SS7012. Using locally purchased rechargeable batteries and dedicated battery chargers is recommended; however, Hioki will not be able to guarantee operating time as different rechargeable batteries exhibit different power specifications per charge. The SS7012 cannot be used to recharge batteries.



## Dual Partial-discharge Detector with High Noise Resistance for EV Motors

### PARTIAL DISCHARGE DETECTOR ST4200

**New**



LAN

RS-232C

USB2.0

USB3.0

CE

3 Year Warranty

- Dual-mode PD detection: AC PD and surge PD detection
- Noise-resistance through high-frequency CT
- Compatible with the SW2001 High Voltage Multiplexer

Model No. (Order Code) **ST4200-50**

Note: Partial Discharge Sensor is necessary when not used with the SW2001. Feel free to contact us for surge PD sensors. Use only Storage Media sold by Hioki.

Options				
	<b>HIGH VOLTAGE MULTIPLEXER SW2001</b>	<b>PD SENSOR ST9210</b> For AC partial discharge	<b>RS-232C CABLE L9637</b> For external control, double shielding, 9-pin/9-pin, cord length 3m(9.8ft.)	<b>USB CABLE(A-B) L1002</b> 1m
	<b>SSD UNIT U8332</b> Specified upon order, internal drive, 256 GB	<b>SD MEMORY CARD Z4001</b> 2 GB capacity	<b>SD MEMORY CARD Z4003</b> 8 GB capacity	<b>USB DRIVE Z4006</b> 16 GB, Long-life, high-reliability SLC Flash Memory

## Durable Multiplexer for Comprehensive Motor Testing Systems

### HIGH VOLTAGE MULTIPLEXER SW2001

**New**



LAN

USB2.0

CE

3 Year Warranty

- A single multiplexer that lets you consolidate six different tests
- Safe switching between high-voltage testing and 4-terminal low-voltage measurement
- Reliable multiplexing design with extended operational lifespan
- Up to 24 channels significantly reduce connection man-hours and test time

Model No. (Order Code) **SW2001-04** (4ch)  
**SW2001-08** (8ch)  
**SW2001-16** (16ch)  
**SW2001-24** (24ch)

Note: please specify built-in PD sensors at the time of order if necessary.

Options	<b>PD SENSOR ST9200</b> For AC partial discharge detection. Specify at time of order; built into SW2001.	<b>UNTERMINATED LEAD CABLE L2265</b> Red: For connecting DUT to SW2001, 3 m
	<b>PD SENSOR ST9201</b> For surge partial discharge detection. Specify at time of order; built into SW2001.	<b>UNTERMINATED LEAD CABLE L2266</b> Black: For connecting DUT to SW2001, 3 m
	<b>CONNECTION CABLE L2005</b> 4-terminal: For connecting the IM3533, 1.5 m	<b>CONNECTION CABLE L2270</b> Red Hi: For connecting the 3153, 1.5 m
	<b>CONNECTION CABLE L2111</b> 4-terminal: For connecting the RM3545, 1.5 m	<b>CONNECTION CABLE L2271</b> Black Low: For connecting the 3153, 1.5 m
	<b>CONNECTION CABLE L2255</b> Red and black set: For connecting the ST4030A, 1.5 m	<b>CONNECTION CABLE L9218</b> For connecting the ST4200 and SW2001, 1.5 m
		<b>USB CABLE (A-B) L1002</b> 1 m

#### Basic specifications

AC PD measurement	
Detection method	Discharge charge-quantity measurement method using detected impedance and a band-pass filter in compliance with IEC 60270 and IEC 60034-27-1
Test frequency range	(applied voltage) 45 Hz to 1.1 kHz
Charge quantity measurement range	10 pC ≤ Q ≤ 500 pC (test piece capacitance C: 200 pF ≤ C < 2 nF) 10 pC ≤ Q ≤ 2500 pC (test piece capacitance C: 2 nF ≤ C ≤ 10 nF)
Measurement parameters	[Normal mode] Maximum repeating PD strength (Q max), PD pulse count (m, m+, m-), PD pulse incidence (n), voltage RMS value (U rms), voltage crest value (Up+, Up-), average discharge current (I), discharge power (P), second-order rate (D), PD pulse apparent charge (q), PD pulse phase angle (φ) [PDIV mode] (normal mode parameters plus the following) PD inception voltage (Ui), PD extinction voltage (Ue)
Impulse PD (surge PD) measurement	
Detection method	Discharge current detection using a CT and digital filter in compliance with IEC 61934 Edition 2.0 and IEC 60034-27-5
Sampling rate	200 MS/s
Measurement parameters	[Normal mode] PD peak discharge magnitude (Qpk), pulse sequence PD count (m) [PDIV mode] (normal mode parameters plus the following) PD inception voltage (PDIV), repetitive PD inception voltage (RPDIV), repetitive PD extinction voltage (RPDEV), PD extinction voltage (PDEV), repeating PD peak discharge magnitude (RQpk)
High-voltage source control	
Control description	Cooperative control of withstanding voltage tester and impulse winding tester used as high-voltage generators for partial discharge testing
Compatible instruments (as of Feb. 2025)	Automatic Insulation/Withstanding HiTester 3153, Impulse Winding Tester ST4030A, etc
Specifications shared by AC PD and impulse PD (surge PD) measurement	
Functions	Graph display function, judgment function
Save destination	SD memory card, USB drive, SSD (Use only storage media sold by Hioki.)
Electromagnetic compatibility	50 pC or less (at 10 V/m) 50 pC or less (at 10 V) 50 pC or less (with pulse noise of 1 kV and pulse width of 50 ns)
Interfaces	LAN, USB, RS-232C (please use a commercially available USB-serial conversion cable.), monitor output, EXT. I/O
Power supply	Rated supply voltage: 100 to 240 V AC; rated power: 300 VA
External dimensions	Approx. 353 mm (13.9 in.) W × 235 mm (9.25 in.) H × 154.8 mm (6.09 in.) D (excluding protruding parts)
Mass	Approx. 7.3 kg (257.5 oz.) (with U8332); approx. 7.1 kg (250.4 oz.) (without U8332)
Included accessories	Approx. 353 mm (13.9 in.) W × 235 mm (9.25 in.) H × 154.8 mm (6.09 in.) D (excluding protruding parts)

#### Basic specifications

Input channels	2 channels of high-voltage, 2-terminal input: insulation and withstanding voltage tester input, impulse winding tester input 2 channels of low-voltage, 4-terminal input: LCR meter input, resistance meter input
Output channels	CH1 to CH4 (SW2001-04), CH1 to CH8 (SW2001-08), CH1 to CH16 (SW2001-16), CH1 to CH24 (SW2001-24) SOURCE terminal (or 2-terminal output terminals) and SENSE terminal for each channel
Partial discharge sensor output	AC voltage monitoring, AC partial discharge current, impulse partial discharge current (Current output is available only when equipped with current sensor ST9200 or ST9201 which are options that must be specified when ordering.) (Each is output through a BNC terminal.)
Maximum input voltage	Between high-voltage 2-terminal input and withstand voltage tester input terminal: 5 kV AC, 5 kV DC, 7.07 kV peak Between high-voltage 2-terminal input and impulse input terminal: 8 kV peak (impulse) Between low-voltage 4-terminal input and LCR meter input terminal or resistance meter input terminal: 30 V AC rms, 60 V DC, 42.4 V peak
Rated output voltage	5 kV AC rms, 5 kV DC, 8 kV peak (impulse)
Maximum rated	• Between high-voltage 2-terminal input and withstand voltage tester input terminal: 5 kV AC, 5 kV DC, 7.07 kV peak • Between high-voltage 2-terminal input and impulse input terminal: 8 kV peak (impulse) • Between low-voltage 4-terminal input and LCR meter input terminal or resistance meter input terminal: 30 V AC RMS, 60 V DC, 42.4 V peak
Maximum allowable impulse current	• Between high-voltage 2-terminal input and withstand voltage tester input terminal: 5 kV AC, 5 kV DC, 7.07 kV peak • Between high-voltage 2-terminal input and impulse input terminal: 8 kV peak (impulse) • Between low-voltage 4-terminal input and LCR meter input terminal or resistance meter input terminal: 30 V AC RMS, 60 V DC, 42.4 V peak
Primary circuit relay service life	Open/close cycles: 5 million or more (reference value, not guaranteed)
General specifications	
Functions	Channel switching, interlock, channel delay, settings backup, panel function, communications settings mode switching, protective discharge function, accelerated discharge function
Interfaces	LAN, USB, EXT. I/O
Power supply	Rated supply voltage: 100 to 240 V AC, Rated power: 120 VA
External dimensions	Approx. 439.2 mm (17.29 in.) W × 265.9 mm (10.47 in.) H × 770 mm (30.31 in.) D (excluding protruding parts)
Weight	SW2001-04: approx. 20.5 kg (723.1 oz.); SW2001-08: approx. 22.5 kg (793.7 oz.); SW2001-16: approx. 27.0 kg (952.4 oz.); SW2001-24: approx. 31.5 kg (1111.1 oz.) (All figures do not include weight from factory options ST9200/ST9201.) Add 1.2 kg (42.3 oz.) for each ST9200 and add 139 g (4.9 oz.) for each ST9201.
Included accessories	Power cord × 1, operating precautions × 1, startup guide × 1, support feet for installation × 4, EXT I/O connector × 1, connector for disengaging EXT I/O interlock × 1



## Diagnose the Insulation Quality and Deterioration of Rotor Windings while in Assembled State via Response Waveform Quantification

### IMPULSE WINDING TESTER ST4030A



LAN

USB 2.0

GP-IB  
option

RS-232C  
option



- Identify previously undetectable defects
- Detect waveforms with high precision (200 MHz high speed sampling × high 12-bit resolution)
- Identify single-fault turns via quantification of response waveforms into LC and RC values
- Diagnose defective insulation (pseudo-shorts) between motor windings by testing for microscopic partial discharges hidden in noise (option)

Model No. (Order Code) **ST4030A**

Note: the Discharge Detection Upgrade ST9000 is a factory option for the Impulse Winding Tester ST4030A. Please specify at time of order.

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement items	<ul style="list-style-type: none"> <li>Quantification (LC value, RC value) of the response waveform obtained when impulse voltage is applied, pass / fail judgment</li> <li>Waveform judgment using AREA value, Flutter, Laplacian etc.</li> <li>Equipped with dielectric breakdown voltage test function</li> </ul>
Applied voltage	100 V to 4200 V (Setting resolution: 10 V steps) Maximum applied energy: approx. 88 mJ
Testable inductance range	10 μH to 100 mH
Sampling	200 M / 100 M / 50 M / 20 M / 10 MHz, Resolution: 12 bits, Number of data: 1001 to 800 points (1000 point steps)
Voltage detection accuracy	[DC accuracy] ± 5% of setting, [AC band] 100 kHz: ± 1 dB
Determination method	LC · RC value judgment, waveform judgment, discharge judgment (when incorporating the ST9000)
Number of test condition tables	255 (test condition setting, judgment condition setting, master waveform)
Test time	About 60 ms (3000 V, 1 pulse, reference value at decision OFF)
Display	8.4-inch SVGA color TFT liquid crystal (800 × 600 dots), touch panel
Interface	Standard: EXT I/O, USB host (memory), USB device (communication), LAN Optional: RS-232C (Z3001), GP-IB (Z3000)
Power supply	100 V to 240 V AC, 50/60 Hz, 80 VA max.
Dimensions and mass	215 mm (8.46 in.)W × 200 mm (7.87 in.)H × 348 mm (13.7 in.)D, 6.7 kg (236.3 oz.)
Included accessories	Power cord ×1, Instruction Manual ×1, Application disc ×1, Usage notes ×1

Safety Testing

Must specify when ordering

Factory-Installed Option

**DISCHARGE DETECTION UPGRADE ST9000**  
Highly accurate detection of insulation failure (pseudo short) between motor windings

Input/Output Cords

**CLIP TYPE LEAD L2250**  
Max. rated voltage: 3300 V AC peak, 1.5 m (4.92 ft.) length

**UNPROCESSED LEAD CABLE L2252**  
Max. rated voltage: 4200 V AC peak, 2 m (6.56 ft.) length

Note: effect of cable parasitic component  
Vibration waveform changes according to cable length. For consultation on special order products with cable capacity within a certain range, please contact your Hioki distributor.

PC Communication

**GP-IB INTERFACE Z3000**

**GP-IB CONNECTOR CABLE 9151-02**  
2 m (6.56 ft.) length

**RS-232C INTERFACE Z3001**

**RS-232C CABLE 9637**  
9 pin - 9 pin, cross, 1.8 m (5.91 ft.) length

## Leak Current Measurement, an Essential Part of Electrical Safety (for medical-use electrical devices)

### LEAK CURRENT HIESTER ST5540



USB 1.1

RS-232C



- Compliance with IEC 60601-1:2005 Ed 3.0, JIS T 0601-1:2012 for medical-use electrical devices and essential to electrical safety (\*Starting on June 1, 2012, medical electrical equipment sold in the EU must comply). Model ST5540 comply with IEC 60601-1:2005+ A1:2012 (Ed 3.1), and IEC 62353 of 2017
- Compliance with Electrical Appliances and Materials Safety Act, JIS, IEC, and UL standards for general-use electrical devices
- Uninterrupted polarity switching function dramatically reduces cycle time
- Support for rated currents up to 20 A gives the instrument more than adequate capability for testing products designed to comply with new standards
- Touch panel features simple, interactive operation
- Communications functionality and external I/O support allow automatic testing on production lines

Model No. (Order Code) **ST5540** (For medical-use and electrical devices)

Note: always use an isolation transformer when measuring leak current for medical-use electrical devices. The ST5540 does not include an isolation transformer. When measuring medical-use electrical devices, use a step-up isolation transformer or similar component operating at 110% of the rated supply voltage as the power supply for the device under test.

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement methods	Measurement of voltage drop across body simulated resistance points, Calculation and display of current values, True rms measurement, Measurement unit floats relative to instrument ground.
Measurement modes	Leak current measurement, voltage measurement, safety conductor current measurement
Standards compliance (NW: Body simulated resistance)	<p>[NW-A] • Electrical Appliances and Materials Safety Act</p> <p>[NW-B1] • Medical electrical equipment: IEC 60601-1:1988+ A1:1993+ A2:1995, JIS T 0601-1:1999</p> <p>[NW-B2] • Medical electrical equipment: IEC 60601-1:2005+ A1:2012, JIS T 0601-1:2012 and complement 1:2014, IEC 62353</p> <p>[NW-C]</p> <ul style="list-style-type: none"> <li>Measurement of touch current and protective conductor current: IEC 60990:2016</li> <li>Electrical equipment for measurement, control, and laboratory use: IEC 61010-1:2010+ A1:2016</li> <li>Information technology equipment: IEC 60950-1:2005+ A1:2009+ A2:2013</li> <li>Audio, video and similar electronic apparatus: IEC 60065:2014</li> <li>Personnel Protection Systems for EV: UL 2231-1:2012 (Amended 2016), UL-2231-2:2012 (Amended 2016)</li> </ul> <p>[NW-D] • For UL: UL 1492:1996 (Amended 2013)</p> <p>[NW-G] • Electrical equipment for measurement, control, and laboratory use; current measurement circuits in damp conditions: IEC 61010-1:2010+ A1:2016</p>
Leak current measurement	Ground leak current, 3 types of contact current, 7 types of patient leak current, patient measurement current, 4 types of total patient leak current, free current measurement, 3 types of enclosure leak current
Measurement current	DC, AC (true rms, 0.1 Hz to 1 MHz), AC+DC (true rms, 0.1 Hz to 1 MHz), AC peak (15 Hz to 1 MHz)
Measurement ranges	DC / AC / AC+DC mode: 50.00 mA / 5.000 mA / 500.0 μA / 50.00 μA AC peak mode: 75.0 mA / 10.00 mA / 1.000 mA / 500.0 μA
Measurement accuracy (current measurement)	DC measurement: ±2.0% rdg ±6 dgt (typ.) AC / AC+DC measurement: ±2.0% rdg ±6 dgt (15 Hz to 100 kHz, typ.) AC peak measurement: ±2.0% rdg ±6 dgt (15 Hz to 10 kHz, typ.)
Interfaces	External I/O, medical device relay output, USB 1.1 (communications), RS-232C
Functionality	110% voltage application, automatic test, data storage for 100 target devices, clock, data backup, printed output (optional), etc.
Power supply	100/120/220/240 V AC (specify at time of order), 50/60 Hz, 30 VA rated power
Target device power supply input	100 to 250 V AC, 50/60 Hz Rated current input from terminal block: 20 A
Target device power supply output	Output from terminal block: 20 A Output from outlet: 15 A
Dimensions and mass	320 mm (12.60 in.)W × 110 mm (4.33 in.)H × 253 mm (9.96 in.)D, 4.5 kg (158.7 oz.)
Included accessories	Test lead L2200 (for ST5540, Red ×2, Black ×1) ×1 set, Enclosure probe 9195 ×1, Power cord ×3, Spare fuse for measurement line ×1, Instruction manual ×1, CD-ROM ×1

\*The L2200 (for ST5540, Red ×2, Black ×1) ×1 set and the 9195 are bundled

Test Probes

**TEST LEAD L2200**  
70 cm (2.30ft) length, detachable large alligator clips or needle tips are bundled, CAT IV 600V, CAT III 1000V

**ENCLOSURE PROBE 9195**  
For the ST5540 series, 3156/3155



## Leak Current Measurement, an Essential Part of Electrical Safety (for electrical devices)

### LEAK CURRENT HITESTER ST5541



USB 1.1

RS-232C

CE

3 Year Warranty

- Compliance with Electrical Appliances and Materials Safety Act, JIS/IEC/UL standards
- Uninterrupted polarity switching function dramatically reduces cycle time
- Support for rated currents up to 20 A gives the instrument more than adequate capability for testing products designed to comply with new standards
- Touch panel features simple, interactive operation
- Communications functionality and external I/O support allow automatic testing on production lines

Model No. (Order Code) **ST5541** (For electrical devices)

Note: for applications involving leak current measurement of medical-use electrical devices, use the ST5540.

#### ST5540, ST5541 shared options

Test Probes	The L2200 and the 9195 are bundled	PC Communication
	<p><b>TEST LEAD L2200</b> 70 cm (2.30ft) length, detachable large alligator clips or needle tips are bundled, CAT IV 600V, CAT III 1000V</p> <p><b>ENCLOSURE PROBE 9195</b> For the ST5540 series, 3156/3155</p>	

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement methods	Measurement of voltage drop across body simulated resistance points, Calculation and display of current values, True rms measurement, Measurement unit floats relative to instrument ground.
Measurement modes	Leak current measurement, voltage measurement, safety conductor current measurement
Standards compliance (NW: Body simulated resistance)	[NW-A] • Electrical Appliances and Materials Safety Act [NW-C] • Measurement of touch current and protective conductor current: IEC 60990:2016 • Electrical equipment for measurement, control, and laboratory use: IEC 61010-1:2010+ A1:2016 • Information technology equipment: IEC60950-1:2005+ A1:2009+ A2:2013 • Audio, video and similar electronic apparatus: IEC 60065:2014 • Personnel Protection Systems for EV: UL 2231-1:2012 (Amended 2016), UL-2231-2:2012 (Amended 2016) [NW-D] • For UL: UL 1492:1996 (Amended 2013) [NW-G] • Electrical equipment for measurement, control, and laboratory use; current measurement circuits in damp conditions: IEC 61010-1:2010+ A1:2016
Leak current measurement	Ground leak current, 3 types of contact current, free current measurement, 3 types of enclosure leak current
Measurement current	DC, AC (true rms, 15 Hz to 1 MHz), AC+DC (true rms, 15 Hz to 1 MHz), AC peak (15 Hz to 1 MHz)
Measurement ranges	DC / AC / AC+DC mode: 50.00 mA/ 5.000 mA/ 500.0 μA/ 500.0 μA AC peak mode: 75.0 mA/ 10.00 mA/ 1.000 mA/ 500.0 μA
Measurement accuracy (current measurement)	DC measurement: ±2.0% rdg ±6 dgt (typ.) AC / AC+DC measurement: ±2.0% rdg ±6 dgt (15 Hz to 100 kHz, typ.) AC peak measurement: ±2.0% rdg ±6 dgt (15 Hz to 10 kHz, typ.)
Interfaces	External I/O, USB 1.1 (communications), RS-232C
Functionality	Automatic test, data storage for 100 target devices, clock, data backup, printed output (optional), etc.
Power supply	100/120/220/240 V AC (specify at time of order), 50/60 Hz, 30 VA rated power
Target device power supply input	100 to 250 V AC, 50/60 Hz Rated current input from terminal block: 20 A
Target device power supply output	Output from terminal block: 20 A Output from outlet: 15 A
Dimensions and mass	320 mm (12.60 in.)W × 110 mm (4.33 in.)H × 253 mm (9.96 in.)D, 4.5 kg (158.7 oz.)
Included accessories	Test lead L2200 (Red ×1, Black ×1) ×1 set, Enclosure probe 9195 ×1, Power cord ×3, Spare fuse for measurement line ×1, Instruction manual ×1, CD-ROM ×1

Safety Testing

#### ST5540, ST5541 List of functions

	Item	ST5540	ST5541
Network	Network A (Electrical Appliances and Materials Safety Act)	✓	✓
	Network B (Medical-use electrical devices)	✓	-
	Network C (IEC 60990)	✓	✓
	Network D (UL)	✓	✓
	Network E (General-purpose 1)	✓	✓
	Network F (General-purpose 2)	✓	✓
	Network G (IEC 61010-1)	✓	✓
Major functions	Power on polarity switching function	✓	✓
	Rated current 20 A	✓	✓
	Function for checking for blown fuses	✓	✓
	Frequency band switching	✓	-
	110% voltage output terminal (T3 terminal)	✓	-
	S10, S12, S13, E terminal	✓	-

#### ST5540, ST5541 List of functions

	Item	ST5540	ST5541
Testing leakage current mode	Earth leakage current	✓	✓
	Touch current	✓	✓
	Patient auxiliary current	✓	-
	Patient leakage current	✓	-
	Total patient leakage current	✓	-
	Free current	✓	✓
	Enclosure - Earth leakage current	✓	✓
	Enclosure - Enclosure leakage current	✓	✓
	Enclosure - Line leakage current	✓	✓
	Patient leakage current I	✓	-
	Patient leakage current II	✓	-
Patient leakage current III	✓	-	

## Ensure Insulation Resistance Testing in the Battery Production Processes

### BATTERY INSULATION TESTER BT5525



- Ideal for battery production lines
- BDD function for detecting minuscule short-circuits caused by contamination
- Stable insulation resistance testing even in noisy environments
- Contact check function (Prevents errors due to poor contact)
- High cost performance thanks to accessible pricing, high-speed testing, and compact footprint
- Contact check function reduces the number of false negatives caused by equipment issues

Model No. (Order Code) **BT5525**

Note: the instrument is not able to perform measurement by itself. Please purchase optional test leads separately as appropriate for your measurement application. The LOW terminal is a dedicated Hioki connector, so only our optional L2131 or L2133 can be connected.

**Input/Output Cords**

<p>CLIP TYPE LEAD L2130 For HIGH terminal, banana/alligator clip, red, 1.5 m (4.92ft) cord length</p>	<p>CLIP TYPE LEAD L2131 For LOW terminal, special triaxial/alligator clip, black, 1.5 m (4.92ft) cord length</p>	<p>UNTERMINATED LEAD L2132 For HIGH terminal, banana/cut wire, red, 5 m (16.41ft) cord length</p>
<p>UNTERMINATED LEAD L2133 For LOW terminal, special triaxial/cut wire, black, 5 m (16.41ft) cord length</p>	<p>OUTPUT CORD L9094 For analog output, banana plugs (red, black), 1.5m (4.92ft) length</p>	<p>RS-232C CABLE L9637 For external control, double shielding, 9-pin/9-pin, 3 m (9.84ft) cord length</p>

#### Basic specifications (Accuracy guaranteed for 1 year)

Main functions	Insulation resistance test, Break Down Detect (BDD) function, Contact check function
Output specifications	Output voltage: 25 V to 500 V, Setting resolution 1 V Charging current (current limit function): 50 μA to 50 mA*1*2*3, minimum setting resolution 10 μA Short-circuit current: 60 mA or less Discharge current: 40 mA or greater
Measurement specifications	Resistance value display range: 0.050 MΩ to 9999 MΩ Resistance range: 2 MΩ, 20 MΩ, 200 MΩ, 2000 MΩ, AUTO
Basic specifications	±1.5% rdg.±2 dgt. 25 V ≤ V < 100 V [0.05 MΩ to 2 MΩ], 100 V ≤ V ≤ 500 V [0.2 MΩ to 20 MΩ] Test time: 0.050 s to 999.999 s, OFF Comparator delay time: 0.001 s to 999.999 s, AUTO Display update speed: 1 PLC Sampling time: 1 PLC to 100 PLC
Time specifications	Panel save function: Saves up to 15 sets of measurement conditions
Memory functions	Measured value memory function: Saves up to 999 measured values in the instrument's internal memory
Judgment functions	Test modes : Continuous test, PASS STOP, FAIL STOP Comparator function: UPPER_FAIL: Measured value > upper limit value PASS: Upper limit value ≥ measured value ≥ lower limit value LOWER_FAIL: Measured value < lower limit value
Various functions	Break Down Detect function (BDD) : Detecting minuscule insulation defects caused by contamination Contact check function : 2-terminal capacitance measurement method Automatic data output function : Automatic output of measurement results via communication interface after completion of test Command monitor function : Screen display of commands being sent and received External I/O monitor function : Screen display of output signal ON/OFF and input signal status Analog output function : Converts measured values to 0 to 4 V DC and outputs
Interfaces	USB, LAN, RS-232C, EXT. I/O
Power supply	100 V to 240 V AC
Maximum rated power	100 VA
Dimensions and mass	Approx. 215 mm (8.46 in.) W × 80 mm (3.15 in.) H × 306.5 mm (12.07 in.) D (excluding protruding parts), Approx. 2.8 kg (98.8 oz.)
Included accessories	Power cord ×1, EXT. I/O male connector ×1, EXT. I/O connector cover ×1, EXT. I/O interlock cancellation jig ×1, Startup Guide ×1

\*1: Constraints involving the output generator will result in an error, making measurement impossible, if a capacitive load of approximately 50 μF or greater is connected while using a current limit setting of 5.1 mA or greater.  
\*2: When using a current limit setting of 5.1 mA or greater, measurement will be forcibly stopped if the output voltage is not at least 20 V at 200 ms after the start of measurement. Measurement will be possible 1 s after forcibly stopped.  
\*3: If the set current limit value is from 5.1 mA to 50.0 mA, the current will be limited to 5 mA after the output voltage reaches the set voltage.

## Industry's Fastest Testing Speed

### INSULATION TESTER ST5520



- Rapidly assess in as fast as 50 ms
- Quick discharge of residual voltage
- Freely configurable test voltage (Set from 25 V to 1000 V, 1 V resolution)
- Contact check function (Prevents errors due to poor contact)
- Short-circuit check function (Stops potential defects from reaching the market)
- Ideal for battery production lines

Model No. (Order Code) **ST5520** (Built-in external I/O output)  
**ST5520-01** (Built-in BCD output)

Note: the ST5520 and ST5520-01 cannot be operated alone. Please select and purchase the optional test leads to accommodate your application.

\*Please contact your Hioki distributor for extending the L2200 cable length

<p>TEST LEAD L2200 70 cm (2.30ft) length, detachable large alligator clips or needle tips are bundled, CAT IV 600V, CAT III 1000V</p>	<p>CONNECTION CORD L9257 L4930, L4935 bundled model, 1.2 m (3.94 ft.) length</p>
<p>SWITCHED PROBE 9299 80 cm (2.62 ft.) length</p>	<p>OUTPUT CORD L9094 3.5 mm (0.14in) dia. mini plug to banana, 1.5m (4.92ft) length</p>
<p>CONVERSION ADAPTER 9199 Receiving side banana (female), output BNC (male)</p>	

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement items	Insulation resistance (Applied DC voltage method)
Testing voltage	(Measurement range: AUTO/MANUAL setting is possible) 25 V ≤ V < 100 V (2.000/20.00/200.0 MΩ), 100 V ≤ V < 500 V (2.000/20.00/200.0/2000 MΩ), 500 V ≤ V ≤ 1000 V (2.000/20.00/200.0/4000 MΩ)
Basic accuracy	±2 % rdg.±5 dgt. 25 V ≤ V < 100 V [0 to 20 MΩ], 100 V ≤ V < 500 V [0 to 20 MΩ], 500 V ≤ V ≤ 1000 V [0 to 20 MΩ]
Measurement speed	Fast: 30 ms/time, Slow: 500 ms/time (selectable)
Display	LCD (service life: 100,000 hours), 4-level backlight
Internal memory	Saved items: rated measurement voltage, comparator upper limit /lower limit values, test mode, beep sound to distinguish the result, test time, response time, resistance range, measurement speed Memory capacity: up to 10 items (can be saved/loaded)
Comparator setting	UPPER_FAIL: Measured value ≥ upper limit value PASS: Upper limit value > measured value > lower limit value LOWER_FAIL: Measured value ≤ lower limit value
Judgement process	Beep sound, PASS / U.FAIL/L. FAIL: light up on LED display, When UL_FAIL, U.FAIL / L.FAIL light up simultaneously, EXT.I/O output, judgement result can be obtained via RS-232C
Test duration	Definition of test duration: Test duration = Response time + Measurement time Function: Set the time from voltage application until pass/fail assessment Configuration range: 0.045 s to 999.999 s (0.001 s resolution)
Response time timer	After the start of the test, comparator judgment operation can be prohibited until a set interval from 0.005 sec. to 999.999 sec. (at 0.001 sec. resolution) has passed.
Analog output	DC +4 V f.s.
Interface	RS-232C (standard), External I/O (External control input, Judgment result) BCD output (ST5520-01 only)
Power supply	100 to 240 V AC, 50/60 Hz, 25 VA max.
Dimensions and mass	215 mm (8.46 in.)W × 80 mm (3.15 in.)H × 166 mm (6.54 in.)D, 1.1 kg (38.8 oz.)
Included accessories	Instruction Manual ×1, Power cord ×1, EXT. I/O Connector ×1, Connector Cover ×1

**RS-232C CABLE 9637**  
For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length

## Ensure Insulation and Withstand Voltage with Contact Check

### AC AUTOMATIC INSULATION/WITHSTANDING HITESTER 3174



RS-232C



- Continuous testing of insulation (500/1000 V) and withstand voltage (100 VA transformer capacity)
- Full remote operation when used in combination with the Safety Test Data Management Software 9267
- Save up to 8 test settings each for the withstanding and insulation testing modes
- Precise test voltage without power voltage dependency is generated using the PWM method

Model No. (Order Code) **3174** (Insulation/Withstanding Voltage [AC])

Note: to perform contact checks, please purchase another High Voltage Test Lead 9615 set separately.

#### Basic specifications (Accuracy guaranteed for 1 year)

##### [Withstanding test section]

Testing voltage	0.2 V AC to 5.00 kV AC
Voltage setting	Digital setting, Setting resolution: 0.01 kV
Waveform/Frequency	Sine wave (Distortion ratio 5% or less at no load), 50/60 Hz selectable
Current measurement	0.01 mA to 20.0 mA, True RMS rectified (digital display)
Measurement range	10 mA (0.01 mA resolution), 20 mA (0.1 mA resolution)
Voltage meter	Accuracy: $\pm 1.5\%$ rdg (1000 V or more), $\pm 15\%$ V (less than 1000 V), True RMS rectified
Judgment function	Window comparator method (Digital setting)

##### [Insulation test section]

Testing voltage	500 V DC, 1000 V DC
Unloaded voltage	1 to 1.2 times rated voltage
Rated testing current	1 to 1.2 mA, Shorted current: 4 to 5 mA (at 500 V), 2 to 3 mA (at 1000 V)
Measurement range, Accuracy	0.5 M $\Omega$ to 999 M $\Omega$ (at 500 V), and 1 M $\Omega$ to 999 M $\Omega$ (at 1000 V): $\pm 4\%$ rdg, 1000 M $\Omega$ to 2000 M $\Omega$ : $\pm 8\%$ rdg
Judgment function	Window comparator method (Digital setting)

##### [Timer section] \*Test times may differ from set timer times depending on the load.

Setting range	0.3 to 999 s
Ramp, Delay	Testing voltage ramp-up, or down, Insulation test delay: 0.1 to 99.9 s

##### [General section]

Functions	Saving 8 testing conditions, hold, buzzer, contact check
Monitor function	Output voltage, detected current, insulation resistance, Refresh rate: 2 times/s
Power supply	100 to 240 V AC, (50/60 Hz), 200 VA max.
Dimensions and mass	320 mm (12.60 in.)W $\times$ 155 mm (6.10 in.)H $\times$ 395 mm (15.55 in.)D, 15 kg (529.1 oz.)
Included accessories	H.V. Test lead 9615 (high voltage side and return, 1 each) $\times$ 1, Power cord $\times$ 1, Instruction manual $\times$ 1, Disconnection prevention plate $\times$ 1

\*The 9615 is bundled

Input/Output cords



H.V. TEST LEAD 9615  
Red, Black each 1, 1.5 m  
(4.92 ft.) length



REMOTE CONTROL BOX (SINGLE) 9613  
For Start/Stop control, 1.5m (4.92 ft.) cord length

REMOTE CONTROL BOX (DUAL) 9614  
For Start/Stop control, 1.5m (4.92 ft.) cord length

PC Communication



SAFETY TEST DATA  
MANAGEMENT  
SOFTWARE 9267  
For PC control application  
software



RS-232C CABLE 9637  
For the PC, 9pin - 9pin, cross,  
1.8m (5.91 ft.) length



# Safety Testing

## All-in-one Model that Combines Withstand Voltage and Insulation Resistance (AC/DC)

### AUTOMATIC INSULATION / WITHSTANDING HiTESTER 3153



GP-IB

RS-232C

CE

3 Year Warranty

- Programmable insulation (50 to 1200 V DC) and dielectric strength (AC/DC) testing
- Program up to 32 files of test types, test points (50 steps), and measurement settings
- Optional scanner for multipoint automatic testing
- Uses the PWM method to generate accurate test voltages that do not depend on the supply voltage
- Ramp timer function for increasing or decreasing the applied voltage during dielectric strength testing at user-specified times

Model No. (Order Code) **3153** (Insulation, AC/DC Withstanding Voltage)

#### Basic specifications (Accuracy guaranteed for 1 year)

[Withstanding test section]	
Testing voltage	0.2 kV to 5.00 kV AC, 500 VA (max. 30 minutes), 0.2 kV to 5.00 kV DC, 50 VA (continuance)
Voltage setting	Digital setting (0.01 kV setting resolution)
Waveform/Frequency	Sine wave (5% or less distortion, unloaded), 50/60 Hz selectable
Current measurement	0.01 mA to 100.0 mA, Average rectified display (Digital)
Measurement range	10 mA (0.01 mA resolution), 100 mA (0.1 mA resolution)
Voltmeter	Digital: accuracy $\pm 1.5\%$ f.s. (f.s.=5.00 kV) (Average rectified display)
Decision method	Window comparison (digital settings)
[Insulation test section]	
Rated testing voltage	50 to 1,200 V DC (in 1 V steps)
Rated testing current	1 mA, Short-circuit current: 200 mA or less
Measurement range / accuracy	0.10 to 9999 M $\Omega$ , 4 ranges, $\pm 4\%$ rdg (representative values for 0.5 M $\Omega$ to 1,000 M $\Omega$ )
Decision method	Window comparison (digital settings)
[Timer section] *Test times may differ from set timer times depending on the load.	
Setting range	0.3 to 999 s
Ramp, Delay	Testing voltage ramp-up, or down, Insulation test delay: 0.1 to 99.9 s
[General section]	
Functions	Program up to 32 files of 50 step test settings. 10 sets each of dielectric strength and insulation test settings, hold, buzzer
Monitor functions	Output voltage, detected current, measured resistance, Refresh rate: 2 times/s
Power supply	100 to 120 V, 200 to 240 V AC, (50/60 Hz), 1000 VA max.
Dimensions and mass	320 mm (12.60 in.)W $\times$ 155 mm (6.10 in.)H $\times$ 480 mm (18.9 in.)D, 18 kg (634.9 oz.)
Included accessories	H.V. Test lead 9615 (high voltage side and return, 1 each) $\times$ 1, Power cord $\times$ 1, Instruction manual $\times$ 1, Spare fuse $\times$ 1

The 9615 is bundled

**Input/Output cords**

- H.V. TEST LEAD 9615  
Red, Black each 1, 1.5 m (4.92 ft.) length
- REMOTE CONTROL BOX (SINGLE) 9613  
For Start/Stop control, 1.5m (4.92 ft.) cord length
- REMOTE CONTROL BOX (DUAL) 9614  
For Start/Stop control, 1.5m (4.92 ft.) cord length

**PC Communication**


- SAFETY TEST DATA MANAGEMENT SOFTWARE 9267  
For PC control application software
- RS-232C CABLE 9637  
For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length
- GP-IB CONNECTOR CABLE 9151-02  
2 m (6.56 ft.) length

**Other**

- HIGH VOLTAGE SCANNER 3930  
Automatic multipoint testing of high voltages

## For Multi-point, High-voltage Automatic Testing and Automation of Insulation and Dielectric Strength Testing

### HIGH VOLTAGE SCANNER 3930

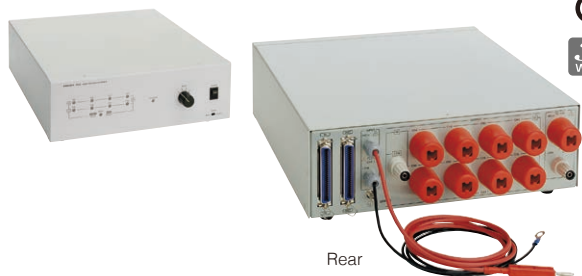

CE

3 Year Warranty

- Output of the input high voltage from a user-selected channel
- 8 ch per unit (single mode), with up to 32 ch (4 connected units)
- Isolated high-voltage I/O, control signal lines, and power supply
- Control using the 3153 program function or with a standard sequencer

Model No. (Order Code) **3930** (For the 3153 and similar products)

#### Basic Specifications


Operation modes	Multi-mode: Scanning of user-selected points for high 4 ch / low 4 ch Single mode: Common scan of high 8 ch - common
Rated voltage used	5 kV AC / 5 kV DC
Operation indications	Lamps light up when power is supplied and when a specified channel is operating
[Relay area]	
Max. open and closed voltage	5000 V DC, 5000 V AC
Max. open and closed current	1.0 A (open and closed capacity: 50 W)
Contact point indirect contact resistance	500 m $\Omega$ or less, with 1 mA AC
Contact point max. capacity	50 W
Time	Operation time: 6 ms or less, Recovery time: 6 ms or less
Power supply	VSCV 24 V DC, $\pm 10\%$ (applied using the control signal input connector), 12 VA max.
Dimensions and mass	316 mm (12.44 in.)W $\times$ 100 mm (3.94 in.)H $\times$ 350 mm (13.78 in.)D, 4.2 kg (148.1 oz.)
Included accessories	Control input connector connection cable $\times$ 1, H.V. Test lead 9615-01 (red) $\times$ 8, H.V. Test lead (black) $\times$ 1, Grounding cable $\times$ 1, Instruction manual $\times$ 1

The 9615-01 is bundled

**Options**

- H.V. TEST LEAD 9615-01  
Red, high voltage side, 1.5 m (4.92 ft.) length

### SAFETY TEST DATA MANAGEMENT SOFTWARE 9267



#### Control insulation, dielectric strength, protective continuity, and leak current testing from a PC

Model No. (Order Code) **9267**

- Control the ST5520\*/ST5540 as well as the 3153/3154/3156/3157, 3174, and other instruments from a computer
- \*Control of the ST5520 is subject to certain limitations.
- Perform automatic insulation and dielectric strength testing of up to 32 points with the High Voltage Scanner 3930

# Power Analyzers

Providing the Ultimate Power Analyzer for Use by All Engineers Pursuing Power Conversion Efficiency

## POWER ANALYZER PW8001



### Basic specifications

(Accuracy guaranteed for 6 months, multiply the 6-month accuracy reading error by 1.5 to obtain the 1-year accuracy.)

Measurement lines	1-phase-2-wire, 1-phase-3-wire, 3-phase-3-wire, 3-phase-4-wire
No. of input units	Max. 8 units (mix and match)
Type of input unit	U7001 2.5 MS/s INPUT UNIT, U7005 15 MS/s INPUT UNIT
Measurement frequency band	U7001: DC, 0.1 Hz to 1 MHz U7005: DC, 0.1 Hz to 5 MHz
Sampling	U7001: 2.5 MHz, 16-bit, U7005: 15 MHz, 18-bit
Data update rate	1 ms, 10 ms, 50 ms, 200 ms
Accuracy for power	± (% of reading + % of range) U7001: (50 Hz/60 Hz) 0.02% + 0.05%, (DC) 0.02% + 0.05%, (50 kHz) 0.4% + 0.1% U7005: (50 Hz/60 Hz) 0.01% + 0.02%, (DC) 0.02% + 0.03%, (50 kHz) 0.15% + 0.05%
Measurement range	Voltage: 6 V/ 15 V/ 30 V/ 60 V/ 150 V/ 300 V/ 600 V/ 1500 V Current: (Probe1) 40 mA to 2 kA, (Probe2) 100 mA to 50 kA (Probe1: Hioki's high-accuracy current sensor interface supports automatic identification and phase shift. Probe 2: BNC I/F only for U7001)
Measurement parameters	Voltage (U), Current (I), Active power (P), Apparent power (S), Reactive power (Q), Power factor (λ), Phase angle (φ), Voltage frequency (fU), Current frequency (fI), Efficiency (η), Loss (Loss), Voltage ripple factor (Urf), Current ripple factor (Irf), Current integration (Ih), Power integration (WP), Voltage peak (Upk), Current peak (Ipk) - Harmonics measurement: (wideband mode: Max. analysis order 500th, IEC measurement mode) - Waveform recording: recording capacity 5M words × ([voltage/current]) × No. of channels + motor waveforms - Motor analysis (option): voltage, torque, RPM, frequency, slip, motor power power spectrum analysis, IEC harmonics, voltage-fluctuation/flicker measurement
Calculation function	Efficiency-loss calculations, User-defined formula, Delta conversion, Current sensor automatic phase shift
External interface	USB flash drive, LAN, GP-IB, RS-232C, external control, optical link, BNC sync., CAN or CAN FD
Power supply	100 V to 240 V AC, 50 Hz/60 Hz, 230 VA
Dimensions and mass	Approx. 430 mm (16.93 in.) W × 221 mm (8.70 in.) H × 361mm (14.21 in.) D Approx. 14kg (493.84 oz.)
Included accessories	Power cord ×1, Instruction manual ×1, GENNECT One (PC Applications) CD ×1, D-sub 25-pin connector ×1 (PW8001-02, -05, -12, -15 Only)

- World-class measurement accuracy
  - Basic accuracy ±0.03%, DC accuracy ±0.05%, 50 kHz accuracy 0.2%<sup>1</sup>
- Accurate frequency distribution of active power with superior noise resistance and Power Spectrum Analysis
  - Sampling performance 18-bit\*<sup>1</sup>; noise resistance (CMRR) 110 dB, 100 kHz<sup>1</sup>
- 1 ms data refresh while maintaining maximum accuracy
- Real-time synchronization of two units via optical link
- Maximum number of measurement channels: 16 CH
  - settings and analysis can be performed for each channel<sup>2</sup>
- Current sensor automatic phase shift function
- Simultaneous analysis of 4 motors (option)
- Integration of measurement data into CAN networks (option)
- Safe evaluation of increasingly high-voltage solar inverters
  - 1500 V DC CAT II / 1000 V DC CAT III<sup>3</sup>

1: When using the Input Unit U7005

2: BNC synchronization is for data acquisition only

3: When using the Input Unit U7001

Model No. (Order Code)	<b>PW8001-01</b>
	<b>PW8001-02</b> (D/A output)
	<b>PW8001-03</b> (CAN/CAN FD)
	<b>PW8001-04</b> (Optical link)
	<b>PW8001-05</b> (D/A output, optical link)
	<b>PW8001-06</b> (CAN/CAN FD, optical link)
	<b>PW8001-11</b> (Motor analysis)
	<b>PW8001-12</b> (Motor analysis, D/A output)
	<b>PW8001-13</b> (Motor analysis, CAN/CAN FD)
	<b>PW8001-14</b> (Motor analysis, optical link)
	<b>PW8001-15</b> (Motor analysis, D/A output, optical link)
	<b>PW8001-16</b> (Motor analysis, CAN/CAN FD, optical link)

- Input units must be specified at the time of ordering

- Optional input units, voltage cords, and current sensors are required for measurement.

**Input Units**

2.5MS/S INPUT UNIT U7001    15MS/S INPUT UNIT U7005

**Direct Current Input**

AC/DC CURRENT BOX PW9100A-3  
3 channels, DC to 3.5 MHz, CMRR 120dB, 50 A AC/DC input, ±0.02% amplitude accuracy, ±0.1° phase accuracy

AC/DC CURRENT BOX PW9100A-4  
4 channels, DC to 3.5 MHz, CMRR 120dB, 50 A AC/DC input, ±0.02% amplitude accuracy, ±0.1° phase accuracy

### High-precision, High-voltage Measurement

**AC/DC HIGH VOLTAGE DIVIDER VT1005**  
Divides voltage of up to 5000 V and outputs  
Measurement band: DC to 4 MHz (-3 dB)  
Measurement accuracy: ±0.08% (DC), ±0.04% (50/60 Hz), ±0.17% (50 kHz)

Voltage Input	 <b>VOLTAGE CORD L1025</b> 1500 V DC CAT II, 1 A, 1000 V CAT III, 1 A, banana - banana (red, black each), alligator clip, 3 m (9.84 ft.) length	 <b>VOLTAGE CORD L9438-50</b> Black/ Red, 3 m (9.84 ft.) length, Alligator clip ×2	 <b>VOLTAGE CORD L1000</b> 1000 V specifications, Red/ Yellow/ Blue/ Gray each 1, Black 4, Alligator clip ×8, 3m (9.84ft) length	 <b>CONNECTION CORD L9257</b> 1000 V CAT III, 10 A, 600 V CAT IV, 10 A, banana-banana (red, black each), alligator clip, 1.2 m (3.94 ft.) length	 <b>PATCH CORD L1021-01</b> Banana branch-banana, Red: 1, Cable length: 0.5 m, for branching from the L9438 series or L1000 series, CAT IV 600 V, CAT III 1000 V	 <b>PATCH CORD L1021-02</b> Banana branch-banana, Black: 1, Cable length: 0.5 m, for branching from the L9438 series or L1000 series, CAT IV 600 V, CAT III 1000 V	 <b>GRABBER CLIP L9243</b> Attaches to the tip of the banana plug cable, Red/Black: 1 each, 185 mm (7.28 in.) length, CAT II 1000 V	 <b>CONNECTION CABLE SET L4940</b> 1000 V CAT III, 10 A, 600 V CAT IV, 10 A, banana banana (red, black each), 1.5 m (4.92 ft.) length	 <b>ALLIGATOR CLIP SET L4935</b> 1000 V CAT III, 10 A, 600 V CAT IV, 10 A, (red, black each 1)
---------------	---	--	--	--	--	--	---	---	--

Connection Options	 <b>OPTICAL CONNECTION CABLE L6000</b> 50/125 μm wavelength multimode fiber, 10 m (32.81 ft.) length	 <b>LAN CABLE 9642</b> Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft.) length	 <b>RS-232C CABLE 9637</b> For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length	 <b>CONNECTION CABLE 9444</b> For external control interface, 9 pin - 9 pin, 1.5 m (4.92 ft.) length	 <b>GP-IB CONNECTOR CABLE 9151-02</b> 2 m (6.56 ft.) length	 <b>CONNECTION CORD L9217</b> Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft.) length	 <b>CONNECTION CORD 9165</b> Cord has metallic BNC connectors at both ends, use at metallic terminal, 1.5 m (4.92 ft.) length	 <b>CAN CABLE 9713-01</b> For the MR8904, unprocessed on one end, 1.8 m (5.91 ft.) length
--------------------	--	--	---	--	---	---	---	---

The following made-to-order items are also available. Please contact your Hioki distributor or subsidiary for more information

- CARRYING CASE C8001 (hard trunk, with casters)
- D/A OUTPUT CABLE L3000 D-sub 25-pin/BNC (male) 20-channel conversion cable
- BNC TERMINAL BOX Z5200 D-sub 25-pin/BNC (female) 20-channel conversion box
- RACKMOUNT FITTINGSZ5300 (For EIA standard rack)
- RACKMOUNT FITTINGSZ5301 (For JIS standard rack)

Shared optional current sensors for PW8001, PW6001 and PW3390

## Improve Power Conversion Efficiency

### POWER ANALYZER PW6001



USB2.0  
LAN  
GP-IB  
RS-232C  
True RMS

CE  
3 Year Warranty

- Exclusive current sensor phase shift function lets you maintain accuracy even in high frequency, low power factor applications
- Basic accuracy of  $\pm 0.02\%$ \*1 for power measurement  
\*1 PW6001 accuracy only. Instrument delivers accuracy of  $\pm 0.07\%$  even after the current sensor accuracy has been added.
- High noise resistance and stability (80 dB/100 kHz CMRR,  $\pm 0.01\%/^{\circ}\text{C}$  temperature characteristics)
- Accurate measurement even when the load is characterized by large fluctuations; TrueHD 18-bit resolution
- 10 ms data refresh while maintaining maximum accuracy (using a specially designed IC to make all measurements independently while performing simultaneous calculations.)
- DC accuracy of  $\pm 0.07\%$ , which is key for stable, accurate efficiency measurement
- Wide frequency bandwidth of DC, or 0.1 Hz to 2 MHz
- Achieve true frequency analysis with high-speed 5MS/s sampling (18 bit)
- Synchronize 2 units for up to 12 channels\*2 in real time  
\*2 Two 6-channel models can be connected with an optical connection cable
- Special triggers to enable waveform analysis and motor analysis without the need for an oscilloscope
- Wideband harmonic analysis up to the 100th order with a 1.5 MHz band
- Send measured values to Hioki data loggers using a Bluetooth® wireless technology compatible adapter (LR8410 Link-compatible products)

Model No. (Order Code)	PW6001-01 (1ch)	PW6001-11 (1ch, motor analysis, D/A output)
	PW6001-02 (2ch)	PW6001-12 (2ch, motor analysis, D/A output)
	PW6001-03 (3ch)	PW6001-13 (3ch, motor analysis, D/A output)
	PW6001-04 (4ch)	PW6001-14 (4ch, motor analysis, D/A output)
	PW6001-05 (5ch)	PW6001-15 (5ch, motor analysis, D/A output)
	PW6001-06 (6ch)	PW6001-16 (6ch, motor analysis, D/A output)

Note: optional voltage cords and current sensor are required for taking measurements. \*Specify the number of built-in channels and inclusion of Motor analysis & D/A output upon order for factory installation. These options cannot be changed or added at a later date.

#### Basic specifications (Accuracy guaranteed for 6 months, multiply the 6-month accuracy by 1.5 to obtain the 1-year accuracy.)

Measurement line type	Single-phase 2-wire, single-phase 3-wire, three-phase 3-wire, three-phase 4-wire
Number of input channels	Max. 6 channels; each input unit provides 1 channel for simultaneous voltage and current input (Voltage measurement unit: Photoisolated input, resistance voltage divider, Current measurement unit: Isolated input from current sensor)
Measurement items	Voltage (U), current (I), active power (P), apparent power (S), reactive power (Q), power factor ( $\lambda$ ), phase angle ( $\phi$ ), frequency (f), efficiency ( $\eta$ ), loss (Loss), voltage ripple factor (Urf), current ripple factor (Irf), current integration (Ih), power integration (WP), voltage peak (Upk), current peak (Ipk) Harmonic measurement: Harmonic active power, select calculation order from 2nd order to 100th order Waveform recording: Voltage and current waveforms/ Motor pulse: Always 5 MS/s Motor waveforms: Always 50 kS/s, 16 bits Recording capacity: 1 Mword $\times$ (voltage + current) $\times$ number of channels + motor waveforms Motor analysis (PW6001-11 to -16 only): Voltage, Torque, Rotation, Frequency, Slip, or Motor output
Measurement range	Voltage range: 6 to 1500 V, 8 ranges Current range (Probe 1): 400 mA to 1 kA (depends on current sensor) Current range (Probe 2): 100 mA to 50 kA (depends on current sensor) Power range: 2.40000W to 4.50000MW (depends on combination of voltage and current range) Frequency range: 0.1 Hz to 2 MHz
Basic accuracy	Voltage: $\pm 0.02\%$ rdg $\pm 0.02\%$ f.s. Current: $\pm 0.02\%$ rdg $\pm 0.02\%$ f.s. Active power: $\pm 0.02\%$ rdg $\pm 0.03\%$ f.s.
Synchronization frequency range	Power measurement: 0.1 Hz to 2 MHz Harmonic measurement: 45 Hz to 66 Hz (IEC standard mode), 0.1 Hz to 300 kHz (Wideband mode)
Frequency band	DC, 0.1 Hz to 2 MHz
Data update rate	Power measurement: 10 ms/ 50 ms/ 200 ms Harmonic measurement: 200 ms (IEC standard mode), 50 ms (Wideband mode)
Data save interval	OFF, 10 msec to 500 msec, 1 sec to 30 sec, 1 minute to 60 minutes, User-selected from all measured values, including harmonic measured values, Specified measured values can be saved in internal memory or USB flash drive.
External interfaces	USB (memory), LAN, GP-IB, RS-232C (for communication/LR8410 link), External control, Synchronization control
Logger connectivity	Sends measured values wirelessly to logger by using a Bluetooth® wireless technology serial conversion adapter. (Supported devices: Hioki LR8410 Link-compatible loggers), Ver. 2.0 and later
Power supply	100 to 240 V AC, 50/60 Hz, 200 VA max.
Dimensions and mass	430 mm (16.93 in.)W $\times$ 177 mm (6.97 in.)H $\times$ 450 mm (17.72 in.)D, 14 kg (49.4 oz.) (PW6001-16)
Included accessories	Instruction Manual $\times$ 1, Power cord $\times$ 1, D-sub connector $\times$ 1 (PW6001-1x only)

<p><b>Up to 5 A (High speed)</b></p> <p><b>CURRENT PROBE CT6700</b> Wide DC to 50 MHz bandwidth, 1 mA to 5 A rms</p> <p><b>CURRENT PROBE CT6701</b> Wide DC to 120 MHz bandwidth, 1 mA to 5 A rms</p>	<p><b>Up to 30 A (High speed)</b></p> <p><b>CLAMP ON PROBE 3273-50</b> Wide DC to 50 MHz bandwidth, 10 mA-class to 30 Arms</p> <p><b>CLAMP ON PROBE 3276</b> Wide DC to 100 MHz bandwidth, 10 mA-class to 30 Arms</p>	<p><b>Up to 500 A (High speed)</b></p> <p><b>CLAMP ON PROBE 3274</b> Wide DC to 10 MHz bandwidth, up to 150 A rms</p> <p><b>CLAMP ON PROBE 3275</b> Wide DC to 2 MHz bandwidth, up to 500 A rms</p>	<p>* To connect to the Probe2 input terminal</p>
---	---	---	--

<p><b>VOLTAGE CORD L9438-50</b> Black/ Red, 3 m (9.84 ft.) length, Alligator clip <math>\times</math> 2</p>	<p><b>VOLTAGE CORD L1000</b> 1000 V specifications, Red/ Yellow/ Blue/ Gray each 1, Black 4, Alligator clip <math>\times</math> 8, 3 m (9.84 ft.) length</p>	<p><b>GRABBER CLIP L9243</b> Attaches to the tip of the banana plug cable, Red/ Black: 1 each, 185 mm (7.28 in.) length, CAT II 1000 V</p>	<p><b>PATCH CORD L1021-01</b> Banana branch-banana, Red: 1, Cable length: 0.5 m, For branching from the L9438 series or L1000 series, CAT IV 600 V, CAT III 1000 V</p>	<p><b>PATCH CORD L1021-02</b> Banana branch-banana, Black: 1, Cable length: 0.5 m, For branching from the L9438 series or L1000 series, CAT IV 600 V, CAT III 1000 V</p>	<p><b>Other options</b></p> <p>The following made-to-order items are also available. Please contact your Hioki distributor or subsidiary for more information</p> <ul style="list-style-type: none"> <li>• Carrying case (hard trunk, with casters)</li> <li>• D/A output cable, D-sub 25-pin- BNC (male), 20 ch conversion</li> <li>• Bluetooth® serial converter adapter cable 1 m (3.28 ft.)</li> <li>• Rackmount fittings (EIA, JIS)</li> <li>• Optical connection cable, Max. 500 m (1640.55 ft.) length</li> <li>• PW9100 5 A rating version</li> </ul>
---	--	--	--	--	---

<p><b>OPTICAL CONNECTION CABLE L6000</b> 50/125 <math>\mu</math>m wavelength multimode fiber, 10 m (32.81 ft.) length</p>	<p><b>LAN CABLE 9642</b> Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft.) length</p>	<p><b>RS-232C CABLE 9637</b> For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length</p>	<p><b>CONNECTION CABLE 9444</b> For external control interface, 9 pin - 9pin, 1.5 m (4.92 ft.) length</p>	<p><b>GP-IB CONNECTOR CABLE 9151-02</b> 2 m (6.56 ft.) length</p>	<p><b>CONNECTION CORD L9217</b> Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft.) length</p>	<p>* L9217: for motor analysis input</p>
---	--	---	---	---	---	--

<p>* To connect to the HIOKI ME15W (12 pin) terminal</p> <p><b>AC/DC CURRENT BOX PW9100A-3</b> 3 channels, DC to 3.5 MHz, CMRR 120dB, 50 A AC/DC input, <math>\pm 0.02\%</math> amplitude accuracy, <math>\pm 0.1^{\circ}</math> phase accuracy</p>	<p><b>AC/DC CURRENT BOX PW9100A-4</b> 4 channels, DC to 3.5 MHz, CMRR 120dB, 50 A AC/DC input, <math>\pm 0.02\%</math> amplitude accuracy, <math>\pm 0.1^{\circ}</math> phase accuracy</p>	<p><b>High-Precision, high-voltage measurement</b></p> <p><b>AC/DC HIGH VOLTAGE DIVIDER VT1005</b></p> <p>Divides voltage of up to 5000 V and outputs Measurement band: DC to 4 MHz (-3 dB) Measurement accuracy: <math>\pm 0.08\%</math> (DC), <math>\pm 0.04\%</math> (50/60 Hz), <math>\pm 0.17\%</math> (50 kHz)</p>
---	--	--

Shared optional current sensors for PW8001, PW6001 and PW3390



## High-accuracy Power Analysis - Anywhere, Anytime

### POWER ANALYZER PW3390



- $\pm 0.04\%$  basic power accuracy, among the best in its class
- 200 kHz measurement band with flat amplitude and phase accuracy that extend to high frequencies
- Remarkably small and light footprint, enabling high-accuracy measurement to be easily carried out even in the field
- High-accuracy, high-speed calculation of transient-state power in 50 ms; harmonic analysis; display of instantaneous waveforms; noise analysis; and simultaneous parallel calculation of all parameters, including efficiency loss
- Send measured values to Hioki data loggers using a Bluetooth® wireless technology compatible adapter (LR8410 Link-compatible products)
- Simultaneous measurement of multiple circuits and ability to acquire synchronized data using up to 8 devices (for 32 channels)
- Simple power measurement using clamp-on current sensors
- Measurement of current and power inputs and outputs as part of the new international WLTP fuel efficiency standard

Model No. (Order Code)	<b>PW3390-01</b>
	<b>PW3390-02</b> (D/A output)
	<b>PW3390-03</b> (D/A output, motor analysis)

Note: PW3390 by itself does not support current and power measurements. Optional current sensor and voltage cord are necessary to measure current or power parameters. Specify inclusion of Motor analysis & D/A output upon order for factory installation. These options cannot be changed or added after delivery.

#### Basic specifications (Accuracy guaranteed for 6 months, multiply the 6-month accuracy by 1.25 to obtain the 1-year accuracy.)

Measurement line type	Single-phase 2-wire, single-phase 3-wire, three-phase 3-wire, three-phase 4-wire, voltage 4 channels, current 4 channels, isolated between each channel
Basic measurement parameters	Frequency, rms voltage, voltage mean value, rectification rms equivalent, voltage AC component, voltage simple average, voltage fundamental wave component, voltage waveform peak +, voltage waveform peak -, voltage total harmonic distortion, voltage ripple factor, voltage unbalance factor, rms current, current mean value, rectification rms equivalent, current AC component, current simple average, current fundamental wave component, current waveform peak +, current waveform peak -, current total harmonic distortion, current ripple factor, current unbalance factor, active power, apparent power, reactive power, power factor, voltage phase angle, current phase angle, power phase angle, positive-direction current magnitude, negative-direction current magnitude, sum of positive- and negative-direction current magnitude, positive-direction power magnitude, negative-direction power magnitude, sum of positive- and negative-direction power magnitude, efficiency, loss
	Current integration, active power integration
	PW3390-03 only: Torque, Rotation, Frequency, Slip, or Motor power
Harmonic measurement	Input: 4 ch, Synchronization frequency range: 0.5 Hz to 5 kHz, Number of harmonic orders: Max. 100th order
Noise measurement	Number of channels: 1 ch (select one channel from CH1 to CH4), Maximum analysis frequency: 200, 50, 20, 10, 5, 2 kHz
Motor Analysis (PW3390-03 only)	Input: 3 ch (CH A, CH B, CH Z), Measurement parameters: Voltage, torque, rotation rate, frequency, slip, and motor power
Measurement range	Voltage range: 15 to 1500 V, 7 ranges Current range: 0.1 A to 20 kA (depends on current sensor)
Effective measuring power range	0.0150 W to 39.600 MW (determined automatically by the combination of voltage range, current range, and measurement line)
Basic accuracy (45 to 66 Hz)	Voltage: $\pm 0.04\%$ rdg. $\pm 0.05\%$ f.s. Current: $\pm 0.04\%$ rdg. $\pm 0.05\%$ f.s. Active power: $\pm 0.04\%$ rdg. $\pm 0.05\%$ f.s.
Synchronization frequency range	0.5 Hz to 5 kHz
Frequency band	DC, 0.5 Hz to 200 kHz
Data update rate	50 ms (For harmonic/frequency measurement, depends on the synchronization frequency when less than 45 Hz)
Display refresh rate	200 ms (Independent of internal data update rate; waveform and FFT depend on the screen)
Auto-Save Functions	Each value is stored to CF card during every measurement interval (not available for USB storage), OFF, 50 ms to 500 ms, 1 s to 30 s, 1 min. to 60 min., 15 settings
External interfaces	LAN, USB (for communication/memory), RS-232C (for communication/LR8410 link), CF card, Synchronization control, External Control
Logger connectivity	Sends measured values wirelessly to logger by using a Bluetooth® wireless technology serial conversion adapter. (Supported devices: Hioki LR8410 Link-compatible loggers)
Power supply	100 to 240 V AC, 50/60 Hz, 140 VA max.
Dimensions and mass	340 mm (13.39 in.) W × 170 mm (6.69 in.) H × 156 mm (6.14 in.) D, 4.6 kg (10.13 lb)
Included accessories	Instruction Manual × 1, power cord × 1, Measurement Guide × 1, USB cable × 1, input cord label × 2, D-sub connector × 1 (PW3390-02, PW3390-03)

Power Analyzers

\* To connect to the HIOKI ME15W (12 pin) terminal

**AC/DC CURRENT BOX PW9100A-3**  
3 channels, DC to 3.5 MHz, CMRR 120dB, 50 A AC/DC input,  $\pm 0.02\%$  amplitude accuracy,  $\pm 0.1^\circ$  phase accuracy

**AC/DC CURRENT BOX PW9100A-4**  
4 channels, DC to 3.5 MHz, CMRR 120dB, 50 A AC/DC input,  $\pm 0.02\%$  amplitude accuracy,  $\pm 0.1^\circ$  phase accuracy

**High-Precision, High-voltage Measurement**

**AC/DC HIGH VOLTAGE DIVIDER VT1005**

Divides voltage of up to 5000 V and outputs Measurement band: DC to 4 MHz (-3 dB) Measurement accuracy:  $\pm 0.08\%$  (DC),  $\pm 0.04\%$  (50/60 Hz),  $\pm 0.17\%$  (50 kHz)

**Current Input 2000A AC/DC**

The CT9920 is necessary for connecting a current sensor with a HIOKI PL14 connector to the PW3390

**AC/DC CURRENT SENSOR CT7642**  
DC to 10kHz, 2000A AC/DC,  $\phi$  55 mm (2.17 in.), 2.5 m (8.20 ft.) cord length, Output connector: PL14 terminal

**AC/DC AUTO ZERO CURRENT SENSOR CT7742**  
DC to 5 kHz, 2000A AC/DC,  $\phi$  55 mm (2.17 in.), 2.5 m (8.20 ft.) cord length, Output connector: PL14 terminal

**CONVERSION CABLE CT9920**  
Required to connect the PW3390 or other instrument's ME15W terminal to a current sensor with a PL14 output connector.

**Current Input 6000A**

The CT9920 is necessary for connecting a current sensor with a HIOKI PL14 connector to the PW3390

**AC FLEXIBLE CURRENT SENSOR CT7044**  
6000 A AC,  $\phi$ 100 mm (3.94 in.), 2.5 m (8.20 ft.) cord length, PL14 terminal

**AC FLEXIBLE CURRENT SENSOR CT7045**  
6000 A AC,  $\phi$ 180 mm (7.09 in.), 2.5 m (8.20 ft.) cord length, PL14 terminal

**AC FLEXIBLE CURRENT SENSOR CT7046**  
6000 A AC,  $\phi$ 254 mm (10.00 in.), 2.5 m (8.20 ft.) cord length, PL14 terminal

**CONVERSION CABLE CT9920**  
Required to connect the PW3390 or other instrument's ME15W terminal to a current sensor with a PL14 output connector.

**Voltage Input**

**VOLTAGE CORD L9438-50**  
Black/ Red, 3 m (9.84 ft.) length, Alligator clip × 2

**VOLTAGE CORD L1000**  
1000 V specifications, Red/ Yellow/ Blue/ Gray each 1, Black 4, Alligator clip × 8, 3m (9.84ft) length

**EXTENSION CABLE SET L4931**  
1.5 m (4.92 ft.) length

**WIRING ADAPTER PW9000**  
When three-phase 3-wire (3P3W3M) connection, this product allows you to reduce the number of voltage cords from 6 to 3.

**WIRING ADAPTER PW9001**  
When three-phase 4-wire (3P4W) connection, this product allows you to reduce the number of voltage cords from 6 to 4.

**PATCH CORD L1021-01**  
Banana branch-banana, Red: 1, Cable length: 0.5 m, For branching from the L9438 series or L1000 series, CAT IV 600 V, CAT III 1000 V

**PATCH CORD L1021-02**  
Banana branch-banana, Black: 1, Cable length: 0.5 m, For branching from the L9438 series or L1000 series, CAT IV 600 V, CAT III 1000 V

**GRABBER CLIP L9243**  
Attaches to the tip of the banana plug cable, Red/ Black: 1 each, 185 mm (7.28 in.) length, CAT II 1000 V

**Connection Options**

**CONNECTION CORD L9217**  
Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft.) length

**LAN CABLE 9642**  
Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft.) length

**CONNECTION CABLE 9683**  
For synchronization, cable length 1.5 m (4.92 ft.)

**RS-232C CABLE 9637**  
For the PC, 9-pin - 9-pin, cross, 1.8m (5.91 ft.) length

**Storage Media**

\*PC Card Precaution  
Use only PC Cards sold by Hioki. Compatibility and performance are not guaranteed for PC cards made by other manufacturers. You may be unable to read from or save data to such cards.

**PC CARD 2G 9830**

**PC CARD 1G 9729**

**PC CARD 512M 9728**

**Case**

**CARRYING CASE 9794**  
Hard trunk to protect your PW3390 during transportation, with casters.

**Other Options**

- D/A output cable D-sub 25-pin - BNC (male)
- Rackmount fittings (For EIA or JIS)
- PW9100 5A-rated model

Shared optional current sensors for PW8001, PW6001 and PW3390

## New Wideband High-Accuracy Current Measurement Option

### AC/DC CURRENT BOX PW9100A



- Combined accuracy with Hioki power analyzer PW8001, PW6001 and PW3390 is specified (DC, 45 Hz  $\leq$  f  $\leq$  65 Hz). For details of combined accuracy, refer to the instruction manual.
- World-leading measurement bands and accuracy
- Wide-band DC to 3.5MHz, 50A AC/DC rated input
- $\pm 0.055\%$  power accuracy in combination with PW8001 (using U7005, 45 Hz  $<$  f  $\leq$  65 Hz)
- 120dB CMRR (100 kHz)
- Full-rack size suitable for test/evaluation benches
- Current measurement option for POWER ANALYZERS

Model No. (Order Code) **PW9100A-3** (For the PW8001/PW6001/PW3390, 3 ch)  
**PW9100A-4** (For the PW8001/PW6001/PW3390, 4 ch)

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement line type	Isolated input, DCCT input
Rated primary current	50 A AC/DC
Number of input channels	PW9100A-3: 3 channels, PW9100A-4: 4 channels
Maximum input current	60 A, within derating. However, up to $\pm 200$ A peak is allowable if within 20 ms (design value)
Amplitude and Phase accuracy	DC ( $\pm 0.02\%$ rdg $\pm 0.007\%$ f.s.) 45 Hz $<$ f $\leq$ 65 Hz ( $\pm 0.02\%$ rdg $\pm 0.005\%$ f.s., Phase: $\pm 0.1$ deg) Accuracy is defined to 1 MHz
Output voltage	2 V/50 A
Measurement terminals	Terminal block (with safety cover), M6 screws
Input resistance	1.5 m $\Omega$ or less (50 Hz/60 Hz)
Input capacitance	Between measurement terminals and case (secondary side), 40 pF or less, defined at 100 kHz
Operating temperature and humidity	Temperature: 0°C to 40°C (32°F to 104°F), Humidity: 80% RH or less (no condensation)
Power supply	Power supply from PW8001, PW6001, PW3390
Dimensions and mass	430 mm (16.93 in.) W $\times$ 88 mm (3.46 in.) H $\times$ 260 mm (10.24 in.) D, Cable length: 0.8 m (2.62 ft.) PW9100A-3: 3.7 kg (130.5 oz.), PW9100A-4: 4.3 kg (151.7 oz.)
Included accessory	Instruction Manual $\times$ 1

Option	Only 1 unit of CT9902 can be used at any one time.	
	EXTENSION CABLE CT9902 5 m (16.41 ft.) length, ME15W (12 pin) - ME15W (12 pin) connector	Rack mount hardware Made-to-order, for EIA/JIS Contact your local Hioki distributor for more information

## Accurately Measure High Voltages up to 5000V, Ideal for Measuring the Efficiency of High-voltage Inverters

### AC/DC HIGH VOLTAGE DIVIDER VT1005



- Divides high voltage by 1000:1 and outputs
- Max. Input 5000 V <sup>(\*)1</sup>, 2000 V CAT II, 1500 V CAT III
- Measure the efficiency of high-efficiency inverters with a high degree of precision
- Measurement accuracy:  $\pm 0.08\%$  (DC),  $\pm 0.04\%$  (50/60 Hz),  $\pm 0.17\%$  (50 kHz)
- Frequency flatness:  $\pm 0.1\%$  amplitude band 200 kHz typical,  $\pm 0.1^\circ$  phase band 500 kHz typical <sup>(\*)2</sup>
- Measurement band: DC to 4 MHz (-3 dB)
- Noise resistance: CMRR 80 dB typical (100 kHz), differential input method

<sup>(\*)1</sup>:  $\pm 7100$  V peak, no measurement category, anticipated transient overvoltage of 0 V  
<sup>(\*)2</sup>: After phase correction by the power analyzer

Model No. (Order Code) **VT1005**

#### Basic specifications (Accuracy guaranteed for 1 year)

Maximum rated voltage	5000 V rms, $\pm 7100$ V peak (within the frequency derating range)
Maximum rated voltage (line-to-ground)	No measurement category: 5000 V AC/DC <sup>(*)3</sup> Measurement category II: 2000 V AC/DC <sup>(*)4</sup> Measurement category III: 1500 V AC/DC <sup>(*)5</sup>
Measurement accuracy	$\pm 0.08\%$ (DC), $\pm 0.04\%$ (50/60 Hz), $\pm 0.17\%$ (50 kHz)
Frequency flatness	Band where amplitude falls within $\pm 0.1\%$ range: 200 kHz (typical)
Measurement bandwidth	DC to 4 MHz (amplitude and phase accuracy specified up to 1 MHz)
Voltage dividing ratio	1000 : 1
Common-mode voltage rejection ratio (CMRR)	50 Hz/60 Hz: 90 dB (typical) 100 kHz: 80 dB (typical)
Measurement method	Differential input
Operating temperature and humidity range	-10°C to 50°C (14°F to 122°F), 80% RH or less (non-condensing)
Power supply	100 V to 240 V AC (50/60 Hz)
Dimensions and mass	Approx. 195.0 mm (7.68 in.) W $\times$ 83.2 mm (3.28 in.) H $\times$ 346.0 mm (13.62 in.) D mm, approx. 2.2 kg (77.6 oz.)
Included accessory	L1050-01 Voltage Cord (1.6 m/ 5.25 ft.) $\times$ 1, L9217 Connection Cord (insulated BNC, 1.6 m/ 5.25 ft.) $\times$ 1, 9704 Conversion Adapter (insulated-female BNC-to-banana plug) $\times$ 1, Power cord $\times$ 1

<sup>(\*)2</sup>: After phase correction by the power analyzer  
<sup>(\*)3</sup>:  $\pm 7100$  V peak, anticipated transient overvoltage 0 V  
<sup>(\*)4</sup>: Anticipated transient overvoltage 12000 V  
<sup>(\*)5</sup>: Anticipated transient overvoltage 10000 V

Options						
	VOLTAGE CORD L1050-01 1.6 m (5.25 ft.) length	VOLTAGE CORD L1050-03 3.0 m (9.84 ft.) length	CONNECTION CORD L9217 Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft.) length	CONNECTION CORD L9217-01 Cord has insulated BNC connectors at both ends, 3.0 m (9.84 ft.) length	CONNECTION CORD L9217-02 Cord has insulated BNC connectors at both ends, 10 m (32.81 ft.) length	CONVERSION ADAPTER 9704 Receiving side BNC (female), output banana (male)

## Shared optional current sensors for PW8001, PW6001, and PW3390

### Up to 20 A (High precision)



**AC/DC CURRENT PROBE CT6830, CT6831**  
 CT6830: DC to 100 kHz, 2 A input,  $\pm 0.3\%$  amplitude accuracy,  $\pm 0.1^\circ$  phase accuracy,  $\phi$  5 mm (0.20 in.), ME15W terminal  
 CT6831: DC to 100 kHz, 20 A input,  $\pm 0.3\%$  amplitude accuracy,  $\pm 0.1^\circ$  phase accuracy,  $\phi$  5 mm (0.20 in.), ME15W terminal

**AC/DC CURRENT PROBE CT6841A**  
 DC to 1 MHz, 20 A input,  $\pm 0.2\%$  amplitude accuracy,  $\pm 0.1^\circ$  phase accuracy, ME15W terminal

### Up to 50 A (High precision)



**AC/DC CURRENT SENSOR CT6872**  
 High accuracy pass-through, DC to 10 MHz, 50 A input,  $\pm 0.03\%$  amplitude accuracy,  $\pm 0.05^\circ$  phase accuracy, ME15W terminal

**AC/DC CURRENT SENSOR CT6862-05**  
 High-precision pull-through type, DC to 1 MHz, 50 A input,  $\pm 0.05\%$  amplitude accuracy,  $\pm 0.2^\circ$  phase accuracy, ME15W terminal

### Up to 200 A (High precision)



**AC/DC CURRENT SENSOR CT6873**  
 High accuracy pass-through, DC to 10 MHz, 200 A input,  $\pm 0.03\%$  amplitude accuracy,  $\pm 0.05^\circ$  Phase accuracy, ME15W terminal

**AC/DC CURRENT SENSOR CT6863-05**  
 High-precision pull-through type, DC to 500 kHz, 200 A input,  $\pm 0.05\%$  amplitude accuracy,  $\pm 0.2^\circ$  phase accuracy, ME15W terminal

**AC/DC CURRENT PROBE CT6843A**  
 DC to 500 kHz, 200 A input,  $\pm 0.2\%$  amplitude accuracy,  $\pm 0.1^\circ$  phase accuracy, ME15W terminal

**AC/DC CURRENT PROBE CT6834**  
 DC to 50 kHz, 200 A input,  $\pm 0.07\% + 0.007\%$  amplitude accuracy,  $\pm 0.1^\circ$  phase accuracy, ME15W terminal

**CLAMP ON SENSOR 9272-05**  
 1 Hz to 100 kHz, 20/200 A switching input,  $\pm 0.3\%$  amplitude accuracy,  $\pm 0.2^\circ$  phase accuracy, ME15W terminal (9272-05 is not available for PW6001)

### Up to 500 A (High precision)



**AC/DC CURRENT SENSOR CT6904A**  
 High-precision pull-through type, DC to 4 MHz, 500 A input,  $\pm 0.02\%$  amplitude accuracy,  $\pm 0.08^\circ$  phase accuracy, ME15W terminal

**AC/DC CURRENT SENSOR CT6875A**  
 High-precision pull-through type, DC to 2 MHz, 500 A input,  $\pm 0.04\%$  amplitude accuracy,  $\pm 0.08^\circ$  phase accuracy, ME15W terminal

**AC/DC CURRENT PROBE CT6844A**  
 DC to 200 kHz, 500 A input,  $\pm 0.2\%$  amplitude accuracy,  $\pm 0.1^\circ$  phase accuracy, ME15W terminal

**AC/DC CURRENT PROBE CT6845A**  
 DC to 100 kHz, 500 A input,  $\pm 0.2\%$  amplitude accuracy,  $\pm 0.1^\circ$  phase accuracy, ME15W terminal

**AC/DC CURRENT PROBE CT6834**  
 DC to 50 kHz, 500 A input,  $\pm 0.07\% + 0.007\%$  amplitude accuracy,  $\pm 0.1^\circ$  phase accuracy, ME15W terminal

### Up to 1000 A (High precision)



**AC/DC CURRENT SENSOR CT6876A**  
 High-precision pull-through type, DC to 1.5 MHz, 1000 A input,  $\pm 0.04\%$  amplitude accuracy,  $\pm 0.08^\circ$  phase accuracy, ME15W terminal

**AC/DC CURRENT PROBE CT6846A**  
 DC to 20 kHz, 1000 A input,  $\pm 0.2\%$  amplitude accuracy,  $\pm 0.1^\circ$  phase accuracy, ME15W terminal

### Up to 2000 A (High precision)



**AC/DC CURRENT SENSOR CT6877A**  
 High-precision pull-through type, DC to 1 MHz band width, 2000 A input,  $\pm 0.04\%$  amplitude accuracy,  $\pm 0.08^\circ$  phase accuracy, ME15W terminal

### Up to 8000 A (High precision)

#### Aggregate and measure large currents in multi-cable circuits

Use multiple AC/DC Current Sensor CT6877A units with the Sensor Unit CT9557 to measure currents of up to 8000 A in multi-cable circuits. Requires 1 connection cable to connect the PW8001/PW6001/PW3390 to the CT9557.



**SENSOR UNIT CT9557**  
 Power supply for current sensors (4ch, with Waveform/Total Waveform/Total RMS output)



**CONNECTION CABLE CT9904**  
 ME15W (12 pin) terminal to ME15W (12 pin) terminal, 1 m (3.28 ft.) length (for connecting CT9557 total output to PW8001 only)



**AC/DC CURRENT SENSOR CT6877A**  
 High-precision pull-through type, DC to 1 MHz band width, 2000 A input,  $\pm 0.04\%$  amplitude accuracy,  $\pm 0.08^\circ$  phase accuracy, ME15W terminal ( $\pm 0.1\%$  amplitude accuracy,  $\pm 0.18^\circ$  phase accuracy in case of the addition wave output)



**CONVERSION CABLE CT9900**  
 Convert PL23 (10-pin) terminal to ME15W (12-pin) terminal  
 \*When using a PL23 terminal sensor, Conversion Cable CT9900 must be used to connect to ME15W terminal.



## Accurately Measure Devices Up to 1000 V 65 A AC/DC with Direct Input

### POWER METER PW3337



- Compatible with the SPECpower® benchmark for server power consumption  
SPECpower® is a registered trademark of Standard Performance Evaluation Corporation
- Measure DC, and single-phase 2-wire to 3-phase 4-wire with 3-channel input
- For development and production of motors, inverters, power conditioners, power supplies, and other devices
- High-precision basic accuracy of  $\pm 0.1\%$  (\*)  
(\*1) For complete details, please refer to the specifications
- Wide frequency bandwidth of 0.1 Hz to 100 kHz or DC
- High-current measurement up to 65 A of direct input
- Harmonic measurement up to the 50th order according to IEC 61000-4-7
- High-accuracy measurement, even with a low power factor for no-load testing of transformers and motors
- Built-in external sensor input terminals to measure up to 5000 A AC
- Synchronize up to 8 units for multi-unit measurement
- Create a 6-channel power meter by synchronizing two PW3337 units and using the free PC application

Model No. (Order Code)	<b>PW3337</b>	(3ch)
	<b>PW3337-01</b>	(3ch, built-in GP-IB)
	<b>PW3337-02</b>	(3ch, built-in D/A output)
	<b>PW3337-03</b>	(3ch, built-in GP-IB, D/A output)

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement lines	Single-phase 2-wires, single-phase 3-wires, 3-phase 3-wires, 3-phase 4-wires (voltage / current measurement range set for each wiring mode)
Measurement items	Voltage, Current, Active power, Apparent power, Reactive power, Power factor, Phase angle, Frequency, Efficiency, Current integration, Active power integration, Integrated time, Voltage waveform peak value, Current waveform peak value, Voltage crest factor, Current crest factor, Time average current, Time average active power, Voltage ripple factor, Current ripple factor
Harmonic parameters	Synchronization frequency range: 10 Hz to 640 Hz, Analysis order up to 50th Harmonic voltage rms value, harmonic current rms value, harmonic active power, Total harmonic voltage distortion, total harmonic current distortion, voltage fundamental waveform, current fundamental waveform, active power fundamental waveform, apparent power fundamental waveform, reactive power fundamental waveform, power factor fundamental waveform (displacement power factor), voltage current phase difference fundamental waveform, interchannel voltage fundamental wave phase difference, interchannel current fundamental wave phase difference, harmonic voltage content %, harmonic current content %, harmonic active power content % (The following parameters can be downloaded as data during PC communication but not displayed: harmonic voltage phase angle, harmonic current phase angle, harmonic voltage current phase difference)
Measurement range(*2)	[Voltage] 0.15 V to 1000 V AC/DC [Current] Direct input: 2 mA to 65 A AC/DC For AC/DC measurement using the CT6877A as an example: 4 A to 2000 A AC/DC (typical accuracy $\pm 0.348\%$ ) For AC measurement using the CT9667-01 as an example: 10 A to 5000 A AC (typical accuracy $\pm 2.6\%$ )
Integration measurement (Integration time up to 10,000 hours)	[Current] No. of displayed digits: 6 digits (from 0.00000 mAh, Polarity-independent integration and Sum value) [Active power] No. of displayed digits: 6 digits (from 0.00000 mWh, Polarity-independent integration and Sum value)
Input resistance (50/60 Hz)	[Voltage] 2 M $\Omega$ , [Current] 1 m $\Omega$ or less (direct input)
Basic accuracy (Active power)	$\pm 0.1\%$ rdg $\pm 0.1\%$ f.s. (DC) $\pm 0.1\%$ rdg $\pm 0.05\%$ f.s. (45 Hz to 66 Hz, at Input < 50% f.s.) $\pm 0.15\%$ rdg (45 Hz to 66 Hz, at 50% f.s. $\leq$ Input)
Display refresh rate	5 times/s to 20 seconds (depends on average times settings)
Frequency characteristics	DC, 0.1 Hz to 100 kHz
D/A output (-02/-03 model only)	16 channels (selectable from following items): Level output DC $\pm 2$ V, Waveform output 1 V f.s. Level output, instantaneous waveform output (voltage, current, active power), Level output (apparent power, reactive power, power factor, or other), High-speed active power level output
Functions	[Rectification method] AC+DC, AC+DC Umn, AC, DC, FND, Auto-range, Average, VT or CT ratio settings, Synchronized control, MAX/MIN, or other functions
Interfaces	RS-232C / LAN standard, (-01/-03 model also includes GP-IB)
Power supply	100 to 240 V AC, 50/60 Hz, 40 VA max.
Dimensions and mass	305 mm (12.01 in.)W $\times$ 132 mm (5.20 in.)H $\times$ 256 mm (10.08 in.)D, 5.6 kg (197.5 oz.)
Included accessories	Instruction manual $\times 1$ , Measurement guide $\times 1$ , Power cord $\times 1$

(\*2) MIN./MAX. current values and accuracy will vary depending on the current sensor used.

#### Shared options for the POWER METER PW3337, PW3336, and PW3335 series

## Accurately Measure Devices Up to 1000 V 65 A AC/DC with Direct Input

### POWER METER PW3336



- Compatible with the SPECpower® benchmark for server power consumption  
SPECpower® is a registered trademark of Standard Performance Evaluation Corporation
- Measure DC and single-phase 2-wire to 3-phase 3-wire with 2-channel input
- For development and production of motors, inverters, power conditioners, power supplies, and other devices
- High-precision basic accuracy of  $\pm 0.1\%$  (\*)  
(\*1) For complete details, please refer to the specifications
- Wide frequency bandwidth of 0.1 Hz to 100 kHz or DC
- High-current measurement up to 65 A of direct input
- Harmonic measurement up to the 50th order according to IEC 61000-4-7
- High-accuracy measurement, even with a low power factor for no-load testing of transformers and motors
- Built-in external sensor input terminals to measure up to 5000 A AC
- Synchronize up to 8 units for multi-unit measurement

Model No. (Order Code)	<b>PW3336</b>	(2ch)
	<b>PW3336-01</b>	(2ch, built-in GP-IB)
	<b>PW3336-02</b>	(2ch, built-in D/A output)
	<b>PW3336-03</b>	(2ch, built-in GP-IB, D/A output)

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement lines	Single-phase 2-wires, single-phase 3-wires, 3-phase 3-wires, (voltage / current measurement range set for each wiring mode)
Measurement items	Voltage, Current, Active power, Apparent power, Reactive power, Power factor, Phase angle, Frequency, Efficiency, Current integration, Active power integration, Integrated time, Voltage waveform peak value, Current waveform peak value, Voltage crest factor, Current crest factor, Time average current, Time average active power, Voltage ripple factor, Current ripple factor
Harmonic parameters	Synchronization frequency range: 10 Hz to 640 Hz, Analysis order up to 50th Harmonic voltage RMS value, Harmonic current RMS value, Harmonic active power, Total harmonic voltage distortion, Total harmonic current distortion, Voltage fundamental waveform, Current fundamental waveform, Active power fundamental waveform, Apparent power fundamental waveform, Reactive power fundamental waveform, Power factor fundamental waveform (displacement power factor), Voltage current phase difference fundamental waveform, Interchannel voltage fundamental wave phase difference, Interchannel current fundamental wave phase difference, Harmonic voltage content %, Harmonic current content %, Harmonic active power content % (The following parameters can be downloaded as data during PC communication but not displayed: Harmonic voltage phase angle, Harmonic current phase angle, Harmonic voltage current phase difference)
Measurement range(*2)	[Voltage] 0.15 V to 1000 V AC/DC [Current] Direct input: 2 mA to 65 A AC/DC For AC/DC measurement using the CT6877A as an example: 4 A to 2000 A AC/DC (typical accuracy $\pm 0.348\%$ ) For AC measurement using the CT9667-01 as an example: 10 A to 5000 A AC (typical accuracy $\pm 2.6\%$ )
Integration measurement (Integration time up to 10,000 hours)	[Current] No. of displayed digits: 6 digits (from 0.00000 mAh, Polarity-independent integration and Sum value) [Active power] No. of displayed digits: 6 digits (from 0.00000 mWh, Polarity-independent integration and Sum value)
Input resistance (50/60 Hz)	[Voltage] 2 M $\Omega$ , [Current] 1 m $\Omega$ or less (direct input)
Basic accuracy (Active power)	$\pm 0.1\%$ rdg $\pm 0.1\%$ f.s. (DC) $\pm 0.1\%$ rdg $\pm 0.05\%$ f.s. (45 Hz to 66 Hz, at Input < 50% f.s.) $\pm 0.15\%$ rdg (45 Hz to 66 Hz, at 50% f.s. $\leq$ Input)
Display refresh rate	5 times/s to 20 seconds (depend on average times settings)
Frequency characteristics	DC, 0.1 Hz to 100 kHz
D/A output (-02/-03 model only)	16 channels (selectable from following items): Level output DC $\pm 2$ V, Waveform output 1 V f.s. Level output, instantaneous waveform output (voltage, current, active power), Level output (apparent power, reactive power, power factor, or other), High-speed active power level output
Functions	[Rectification method] AC+DC, AC+DC Umn, AC, DC, FND, Auto-range, Average, VT or CT ratio settings, Synchronized control, MAX/MIN, or other functions
Interfaces	RS-232C / LAN standard, (-01/-03 model also includes GP-IB)
Power supply	100 to 240 V AC, 50/60 Hz, 40 VA max.
Dimensions and mass	305 mm (12.01 in.)W $\times$ 132 mm (5.20 in.)H $\times$ 256 mm (10.08 in.)D, 5.2 kg (183.4 oz.)
Included accessories	Instruction manual $\times 1$ , Measurement guide $\times 1$ , Power cord $\times 1$

(\*2) MIN./MAX. current values and accuracy will vary depending on the current sensor used.

#### Shared options for the POWER METER PW3337, PW3336, and PW3335 series

## Measure AC/DC Standby Power Up to Large Power Loads

### POWER METER PW3335



- Compatible with the SPECpower® benchmark for server power consumption  
SPECpower® is a registered trademark of Standard Performance Evaluation Corporation
- High-precision ±0.1% basic accuracy (For complete details, please refer to the specifications)
- Wide 1mA to 20A measurement range, max. continuous input of 30 A
- Wide frequency bandwidth of 0.1 Hz to 100 kHz or DC
- Measure harmonic and standby power consumption according to IEC62301
- Achieve superior accuracy even with a low power factor for no-load testing of transformers and motors
- Synchronized control using up to 8 instruments
- Built-in external sensor input terminals to measure up to 5000 A AC (PW3335-03, PW3335-04 only)
- Send measured values to Hioki data loggers using a Bluetooth® wireless technology compatible adapter (LR8410 Link-compatible products, Ver. 1.1 and later, the PW3335-01 is not supported)

Model No. (Order Code)	PW3335	(Built-in LAN, RS-232C)
	PW3335-01	(Built-in LAN, GP-IB)
	PW3335-02	(Built-in LAN, RS-232C, D/A output)
	PW3335-03	(Built-in LAN, RS-232C, external sensor terminal)
	PW3335-04	(Built-in LAN, RS-232C, GP-IB, D/A output, external sensor terminal)

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement lines	Single-phase/ two-wires
Measurement items	Voltage, current, active power, apparent power, reactive power, power factor, phase angle, frequency, maximum current ratio, current integration, active power integration, integration time, voltage waveform peak value, current waveform peak value, voltage crest factor, current crest factor, time average current, time average active power, voltage ripple rate, current ripple rate
Harmonic parameters	Synchronization frequency range : 10 Hz to 640 Hz Maximum analysis order : 50th Harmonic voltage RMS value, harmonic current RMS value, harmonic active power, total harmonic voltage distortion, total harmonic current distortion, fundamental wave voltage, fundamental wave current, fundamental wave active power, fundamental wave apparent power, fundamental wave reactive power, fundamental wave power factor (displacement power factor), fundamental wave voltage current phase difference, harmonic voltage content percentage, harmonic current content percentage, harmonic active power content percentage (The following parameters can be downloaded as data with only PC communication : Harmonic voltage phase angle, harmonic current phase angle, harmonic voltage current phase difference)
Measurement ranges	[Voltage] AC/DC 6 V to 1000 V, 8 ranges [Current] AC/DC 1 mA to 20 A, 14 ranges [Power] 6.0000 mW to 20.0000 kW (Depends on combination of voltage and current range) Effect of power factor : ±0.1% f.s. or less (45 to 66 Hz, at power factor = 0)
Integration measurement (Integration time up to 10,000 hours)	Switchable between fixed-range integration and auto-range integration. [Current] No. of displayed digits: 6 digits (from 0.00000 mA, polarity-independent integration and sum value) [Active power] No. of displayed digits: 6 digits (from 0.00000 mW, polarity-independent integration and sum value)
Input resistance (50/60 Hz)	[Voltage input terminal] 2 MΩ [Current input terminal] 520 mΩ or less (at 1 mA to 100 mA range), 15 mΩ or less (at 200 mA to 20 A range)
Basic accuracy (Active power)	±0.1% rdg ±0.1% f.s. (DC) ±0.1% rdg ±0.05% f.s. (45 Hz to 66 Hz, at input < 50% f.s.) ±0.15% rdg (45 Hz to 66 Hz, at 50% f.s. ≤ input)
Display refresh rate	5 times/s to 20 seconds (depend on average times settings)
Frequency characteristics	DC, 0.1 Hz to 100 kHz
D/A output (-02/-04 models only)	7 channels (selectable from the following items): level output DC ±2 V f.s. or 5 V f.s., waveform output 1 V f.s., level output, instantaneous waveform output (voltage, current, active power), level output (apparent power, reactive power, power factor, or other), high-speed level output (voltage, current, active power)
Functions	[Rectification method] AC+DC, AC+DC Umm, AC, DC, FND, Auto-range, Average, VT or CT ratio settings, Synchronized control, MAX/MIN, and more
Logger connectivity	Sends measured values wirelessly to logger by using a Bluetooth® wireless technology serial conversion adapter. (Supported devices: Hioki LR8410 Link-compatible loggers), Ver. 1.1 and later, the PW3335-01 is not supported
Interfaces	LAN (all models), RS-232C (except -01 model, for communication/LR8410 link), GP-IB (-01, -04 models only)
Power supply	100 V to 240 V AC, 50/60 Hz, 30 VA max.
Dimensions and mass	210 mm (8.27 in.)W × 100 mm (3.94 in.)H × 245 mm (9.65 in.)D, 3 kg (105.8oz)
Included accessories	Instruction manual ×1, power cord ×1, voltage and current input terminal safety cover ×2, safety cover installation screws (M3 × 6 mm) ×4

### Shared options for the Power Meter PW3337, PW3336, and PW3335 series ...(\*PW3335 is available only for models with external current sensor input terminals, current sensor can be used)

Current sensors are compatible only with versions of Model PW3335 that include the external current sensor terminal. Can be connected to the current sensor input terminals (1 sensor necessary for single-phase measurement, and 2 or 3 sensors required for 3-phase measurements)

<p><b>CLAMP ON SENSOR 9660</b> 100A AC rated current, φ 15 mm (0.59 in.) core dia., 3 m (9.84 ft.) length</p>	<p><b>CLAMP ON SENSOR 9661</b> 500A AC rated current, φ 46 mm (1.81 in.) core dia., 3 m (9.84 ft.) length</p>	<p><b>FLEXIBLE CLAMP ON SENSOR CT9667-01/-02/-03</b> 5000/500 A AC rated current, φ 100 mm (3.94 in.) to 254 mm (10.0 in.) core dia., Cable length: Between sensor - box 2 m (6.56 ft.), Output cable 1 m (3.28 ft.)</p>	<p><b>CLAMP ON SENSOR 9669</b> 1000A AC rated current, φ 55 mm (2.17 in.) core dia., 3 m (9.84 ft.) length</p>
---	---	--	--

\*Current sensors are compatible only with versions of Model PW3335 that include the external current sensor terminal.  
\*To use, requires Sensor Unit CT9555 and Connection Cord L9217.  
\*1 sensor necessary for single-phase measurement, 2 or 3 sensors required for 3-phase measurements. The same number of power supply and connection cord as the sensor is necessary.

High-Precision Current Sensors	<p><b>Up to 50 A (High precision)</b></p> <p><b>AC/DC CURRENT SENSOR CT6872</b> High accuracy pass-through, DC to 10 MHz, 50 A input, ±0.03% amplitude accuracy, ±0.05° phase accuracy, ME15W terminal</p> <p><b>AC/DC CURRENT SENSOR CT6862-05</b> High-precision pull-through type, DC to 1 MHz, 50 A input, ±0.05% amplitude accuracy, ±0.2° phase accuracy, ME15W terminal</p> <p><b>AC/DC CURRENT PROBE CT6841A</b> DC to 1 MHz, 20 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal</p>	<p><b>Up to 500 A (High precision)</b></p> <p><b>AC/DC CURRENT SENSOR CT6904A</b> High-precision pull-through type, DC to 4 MHz, 500 A input, ±0.02% amplitude accuracy, ±0.08° phase accuracy, ME15W terminal</p> <p><b>AC/DC CURRENT SENSOR CT6875A</b> High-precision pull-through type, DC to 2 MHz, 500 A input, ±0.04% amplitude accuracy, ±0.08° phase accuracy, ME15W terminal</p> <p><b>AC/DC CURRENT PROBE CT6844A</b> DC to 200 kHz, 500 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal</p> <p><b>AC/DC CURRENT PROBE CT6845A</b> DC to 100 kHz, 500 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal</p>	<p><b>PC Communication</b></p> <p><b>LAN CABLE 9642</b> Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft.) length</p> <p><b>RS-232C CABLE 9637</b> For the PC, 9pin - 9pin, cross, 1.8m (5.91 ft.) length</p> <p><b>GP-IB CONNECTOR CABLE 9151-02</b> 2m (6.56 ft.) length</p>
	<p><b>Up to 200 A (High precision)</b></p> <p><b>AC/DC CURRENT SENSOR CT6873</b> High accuracy pass-through, DC to 10 MHz, 200 A input, ±0.03% amplitude accuracy, ±0.05° phase accuracy, ME15W terminal</p> <p><b>AC/DC CURRENT SENSOR CT6863-05</b> High-precision pull-through type, DC to 500 kHz, 200 A input, ±0.05% amplitude accuracy, ±0.2° phase accuracy, ME15W terminal</p> <p><b>AC/DC CURRENT PROBE CT6843A</b> DC to 500 kHz, 200 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal</p> <p><b>CLAMP ON SENSOR 9272-05</b> 1 Hz to 100 kHz, 20/200 A switching input, ±0.3% amplitude accuracy, ±0.2° phase accuracy, ME15W terminal</p>	<p><b>Up to 1000 A (High precision)</b></p> <p><b>AC/DC CURRENT SENSOR CT6876A</b> High-precision pull-through type, DC to 1.5 MHz, 1000 A input, ±0.04% amplitude accuracy, ±0.08° phase accuracy, ME15W terminal</p> <p><b>AC/DC CURRENT PROBE CT6846A</b> DC to 20 kHz, 1000 A input, ±0.2% amplitude accuracy, ±0.1° phase accuracy, ME15W terminal</p>	<p><b>Other Options</b></p> <p><b>SYNCHRONIZE MULTIPLE UNITS</b></p> <p><b>CONNECTION CORD 9165</b> Cord has metallic BNC connectors at both ends, use at metallic terminal, 1.5 m (4.92 ft.) length</p>
	<p><b>Up to 2000 A (High precision)</b></p> <p><b>AC/DC CURRENT SENSOR CT6877A</b> High-precision pull-through type, DC to 1 MHz band width, 2000 A input, ±0.04% amplitude accuracy, ±0.08° phase accuracy, ME15W terminal</p>	<p><b>Power supply for sensors</b></p> <p><b>SENSOR UNIT CT9555</b> 1ch, with waveform output</p> <p><b>CONNECTION CORD L9217</b> Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft.) length</p>	
	<p><b>PL23 (10 pin) - ME15W (12 pin) conversion</b></p> <p><b>CONVERSION CABLE CT9900</b> Convert PL23 (10-pin) terminal to ME15W (12-pin) terminal</p> <p>*When using a PL23 terminal sensor, Conversion Cable CT9900 must be used to connect to ME15W terminal.</p>		

## Single Phase Power Meter Compatible with DC Measurement and Current/Power Integration Measurement

### AC/DC POWER HiTESTER 3334




RS-232C  
GP-IB  
-01 Model  
True RMS  
CE  
3 Year Warranty

- Compatible with the SPECpower® benchmarking for server power consumption  
SPECpower® is a registered trademark of Standard Performance Evaluation Corporation
- DC measurement mode, AC, and AC+DC measurement
- Integration function for current and power
- ±0.1% high basic accuracy (For complete details, please refer to the specifications)
- Extended period of guaranteed accuracy of 3 years
- Complete accuracy over a wide input range

Model No. (Order Code) **3334**  
**3334-01** (Built-in GP-IB)

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement lines	Single-phase/ two-wires
Measurement items	Voltage, Current, Active power, Apparent power, Power factor, Frequency, Integration (current, active power), Waveform peak (voltage and current)
Measurement ranges	[Voltage] AC/DC 15.000/ 30.00/ 150.00/ 300.0 V [Current] AC/DC 100.00/ 300.0 mA, 1.0000/ 3.000/ 10.000/ 30.00 A [Power] 1.5000 W to 9.000 kW (combination of voltage and current ranges)
Integration measurement	[Current] No. of displayed digits: 6 digits (from 0.00000 mAh, Polarity-independent integration and Sum value) [Active power] No. of displayed digits: 6 digits (from 0.00000 mWh, Polarity-independent integration and Sum value)
Integration time up to	10,000 hours
Input resistance (50/60 Hz)	[Voltage] 2.4 MΩ, [Current] 10 mΩ or less (direct input)
Basic accuracy	±0.1% rdg ±0.2% f.s. (DC), ±0.1% rdg ±0.1% f.s. (45 Hz to 66 Hz) <i>Note: provided accuracy of 1 year, typical value</i>
Display refresh rate	5 times/s
Frequency characteristics	DC, 45 Hz to 5 kHz
Waveform output	Parameter output representation: voltage, current and power (3 simultaneous channels), Output voltage: 1 V DC f.s.
Analog output (D/A output)	Parameter output representation: voltage, current active power and selected 1 item (4 simultaneous channels), Selected 1 item from apparent power, power factor, current integration, active power integration, Output voltage: ±2 V DC f.s.
Functions	Rectification method switchable between AC+DC (True RMS), DC (simple average), AC (True RMS), Wave peak measurement, VT or CT ratio settings, Average function
Interfaces	RS-232C included as standard, GP-IB (Model 3334-01 only)
Power supply	100 V to 240 V AC, 50/60 Hz, 20 VA max.
Dimensions and mass	210 mm (8.27 in.)W × 100 mm (3.94 in.)H × 245 mm (9.65 in.)D, 2.5 kg (88.2 oz.)
Included accessories	Instruction manual ×1, Power cord ×1



## Single Phase Power Meter for Production and Inspection Lines

### POWER HiTESTER 3333




RS-232C  
GP-IB  
-01 Model  
True RMS  
CE  
3 Year Warranty

- Ideal for replacing portable instruments, ±0.1% basic accuracy
- Extended period of guaranteed accuracy of 3 years
- 50mA to 20A AC current range (300 V Max., Accuracy guaranteed up to 30 A)
- RS-232C interface

Model No. (Order Code) **3333**  
**3333-01** (Built-in GP-IB)

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement lines	Single-phase 2-wires
Measurement items	Voltage, Current, Active power, Apparent power, Power factor
Measurement range	[Voltage] 200 V AC (300 V Max.) [Current] 50/ 200/ 500 mA, 2/ 5/ 20 A AC (30 A Max.) [Power] 10.000 W to 4.000 kW (combination of voltage and current ranges)
Input resistance (50/60 Hz)	[Voltage] 2.4 MΩ, [Current] 7 mΩ or less (direct input)
Basic accuracy	[Guaranteed for 1 year, Voltage, Current, Active power] ±0.1% rdg ±0.1% f.s. (45 Hz to 66 Hz, input current 20 A or less) [Guaranteed for 3 years, Voltage, Current, Active power] ±0.1% rdg ±0.2% f.s. (45 Hz to 66 Hz, input current 20 A or less)
Display refresh rate	5 times/s
Frequency characteristics	45 Hz to 5 kHz
D/A output	3 channels outputs simultaneously for voltage, current, active power +2 V DC f.s.
Functions	Scaling (VT, CT ratio settings), Average function
Interfaces	RS-232C standard, GP-IB (Model 3333-01 only)
Power supply	100 to 240 V AC, 50/60 Hz, 20 VA max.
Dimensions and mass	160 mm (6.30 in.)W × 100 mm (3.94 in.)H × 227 mm (8.94 in.)D, 1.9 kg (67.0 oz.)
Included accessories	Instruction manual ×1, Power cord ×1





# Clamp-on Power Meters

## Quickly Check Current, Voltage, Power, and Power Factor

### AC CLAMP POWER METER CM3286-50



- Display four parameters simultaneously
- A handheld power meter that measures from 5 W of power and 60 mA of current
- Measure power ranging from 5 W at a low current of 60 mA to 360 kW
- In addition to current, voltage, and power, measure simple integral power consumption and phase sequence
- Features and functions deliver fast and efficient testing
- Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel® file (Wireless Adapter Z3210 is necessary)
- Harmonic analysis from 1st to 30th order with GENNECT Cross (Wireless Adapter Z3210 is necessary)

CE  
CAT IV 600 V  
CAT III 1000 V

True RMS

3 Year Warranty

Bluetooth  
When Z3210 is installed

Model No. (Order Code) **CM3286-50** (Wireless Adapter Z3210 not included)  
**CM3286-90** (Bundled with the Wireless Adapter Z3210)

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement line	Single-phase, Three-phase (balanced with no distortion)
Measurement items	Voltage, Current, Voltage/current peak, Active/reactive/apparent power, Power factor, Phase angle <sup>*1</sup> , Frequency, Simple Active Energy Consumption (Single-phase) [With Z3210 installed (*2)] Voltage/current harmonics
AC voltage range	[Measurement range] 80.0 V to 600.0 V, Single range, Basic accuracy 45 - 66 Hz: $\pm 0.7\%$ rdg $\pm 3$ dgt (Frequency characteristics: 45 - 1 kHz, True RMS)
AC current range	[Measurement range] 0.060 A to 600.0 A, 3 range, Basic accuracy: $\pm 1.3\%$ rdg $\pm 3$ dgt (Frequency characteristics: 45 - 1 kHz, True RMS)
Power range	[Single phase] 0.005 kW to 360.0 kW Basic accuracy: $\pm 2.0\%$ rdg $\pm 7$ dgt (50/60 Hz, Power factor=1) [Balanced three-phase 3-wire] 0.020 kW to 623.5 kW Basic accuracy: $\pm 3.0\%$ rdg $\pm 10$ dgt (50/60 Hz, Power factor=1) [Balanced three-phase 4-wire] 0.040 kW to 1080 kW Basic accuracy: $\pm 2.0\%$ rdg $\pm 3$ dgt (50/60 Hz, Power factor=1)
Harmonic levels	[With Z3210 installed (*2)] Voltage/current harmonic levels up to 30th, Content factor, Total harmonic distortion ratio
Other functions	[Phase angle (*1)] lead -180.0° to lag 179.9°, [Power factor] -1.000 to 1.000 [Frequency] 45.0 Hz to 999.9 Hz, PEAK, Phase detection, Max / Min / Avg value display, Auto hold, electric meter comparison, unbalanced 3-phase power estimate display, etc.
Dustproof and waterproof	IP20 (Voltage measurement in a completely dry condition. When jaw closes) IP50 (While in storage)
Power supply	L R03 Alkaline battery $\times 2$ , Continuous use: approx. 25 hr (without Z3210 installed), approx. 18 hr. (with Z3210 installed and using wireless communications) Other conditions: 100 A AC measurement, backlight off, 23°C reference value
Core jaw dia.	$\phi$ 46 mm (1.81 in.), Jaw dimensions: 92 mm (3.62 in.) W $\times$ 18 mm (0.71 in.) D mm
Dimensions and mass	65 mm (2.56 in.) W $\times$ 241 mm (9.49 in.) H $\times$ 35 mm (1.38 in.) D, 450 g (15.9 oz.)
Included accessories	Connection Cord L9257 $\times 1$ , L R03 Alkaline battery $\times 2$ , Carrying Case C0203 $\times 1$ , Instruction Manual $\times 2$ , Operating Precautions $\times 1$

\*1) Phase angle obtained from zero cross of current / voltage.  
\*2) Harmonics can be displayed with our free app GENNECT Cross.

**Bundled Accessories**

**CONNECTION CORD L9257**  
L4930, L4935 bundled model, 1.2 m (3.94 ft.) length

**CARRYING CASE C0203**

**Test Lead**

**TEST LEAD L9207-10**  
90 cm (2.95 ft.) length

**TEST LEAD L9300**  
95 cm (37.4 in.), Integrated cap and protective finger guard

**Clamp Adapter**

**CLAMP ON ADAPTER 9290-10**  
CT for 1000A AC, secondary current 1/10 of primary

Options for the L4930. Test Pin Set L4932 is required when using the Small Alligator Clip Set L4934. \* accepts only rated currents under 10 A.

<p><b>CONNECTION CABLE SET L4930</b> 1.2 m (3.94 ft.) length, CAT IV 600V, CAT III 1000V</p>	<p><b>EXTENSION CABLE SET L4931</b> Expands the length of the L4930/ L4940, 1.5 m (4.92 ft.) length</p>	<p><b>TEST PIN SET L4932</b> Attaches to the tip of the L4930/L4940, CAT IV 600V, CAT III 1000V</p>	<p><b>SMALL ALLIGATOR CLIP SET L4934 *</b> Attaches to the tip of the L4932, L9207-10/DT4911, L9206, CAT III 300V, CAT II 600V</p>	<p><b>ALLIGATOR CLIP SET L4935</b> Attaches to the tip of the L4930/L4940, CAT IV 600V, CAT III 1000V</p>	<p><b>BUS BAR CLIP SET L4936 *</b> Attaches to the tip of the L4930/ L4940, CAT III 600V</p>	<p><b>MAGNETIC ADAPTER SET L4937 *</b> Attaches to the tip of the L4930/ L4940, CAT III 1000V</p>	<p><b>MAGNETIC ADAPTER 9804 *</b> Attaches to the tip of voltage cord, <math>\phi</math> 11 mm (0.43 in.), compatible M6 pan screws</p>	<p><b>TEST PIN SET L4938</b> Attaches to the tip of the L4930/ L4940, CAT III 600V</p>	<p><b>BREAKER PIN SET L4939</b> Attaches to the tip of the L4930/ L4940, CAT III 600V</p>	<p><b>GRABBER CLIP L9243 *</b> Attaches to the tip of the L4930/L4940, CAT II 1000 V, 185 mm (7.28 in.) length</p>
--	---	---	--	---	--	---	---	--	---	--

**Wireless Communication**

**WIRELESS ADAPTER Z3210**  
Simply plug in the Z3210 wireless adapter and your compatible Hioki device is Bluetooth® ready

**When using Z3210.**

**PC Peripherals**

**GENNECT Cross SF4071, SF4072**  
Mobile app for iOS, Android

# Power Quality Analyzers

## Investigate Power Characteristics and Analyze the Causes of Problems

### POWER QUALITY ANALYZER PQ3198



Current sensors : Sold separately



- Verify power problems in accordance with the IEC61000-4-30 Class A standard
- High accuracy and continuous gapless recording  
(V:  $\pm 0.1\%$  of nominal voltage, A:  $\pm 0.1\%$  rdg  $\pm 0.1\%$  f.s., W:  $\pm 0.2\%$  rdg  $\pm 0.1\%$  f.s.)
- Broadband voltage range lets you measure even high-order harmonic (supraharmonic) components of up to 80 kHz
- Maximum 6000 V peak transient voltage up to 700 kHz
- Measure up to 6000 A AC
- Two systems of power measurement and efficiency calculation for (ch 1, ch 2, ch 3) and ch 4
- Make simple measurements of inverters with 40 to 70 Hz fundamental frequency and max. 20 kHz carrier frequency
- Easily create reports with bundled PQ ONE application software
- Optional GPS BOX for synchronizing multiple devices

Model No. (Order Code) **PQ3198** (Main unit, current sensor is sold separately)

Note: an optional current sensor is necessary to measure current or power parameters. Select from Value Kits for added savings.

#### POWER QUALITY ANALYZER PQ3198 VALUE KITS :

Model No. (Order Code) (Note)

**PQ3198-92** (Kit includes 600 A sensor  $\times$  4 and other options)

Kit contents: Main unit, AC Current sensor CT17136 (600 A)  $\times$  4, Patch Cord L1021-02  $\times$  3, Carrying Case C1009

**PQ3198-94** (Kit includes 6000 A sensor  $\times$  4 and other options)

Kit contents: Main unit, AC Current sensor CT7045 (6000 A)  $\times$  4, Patch Cord L1021-02  $\times$  3, Carrying Case C1009

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement line type	Single-phase 2-wire, Single-phase 3-wire, Three-phase 3-wire or Three-phase 4-wire plus one extra input channel for voltage, current, power measurement (AC or DC measurement)
Voltage ranges	Voltage measurement: 600.00 V rms Transient measurement 6.0000 kV peak
Current ranges	500.00 mA to 5.0000 kA AC (depends on current sensor in use)
Power ranges	300.00 W to 3.0000 MW (determined automatically based on voltage and current range in use)
Basic accuracy	Voltage: $\pm 0.1\%$ of nominal voltage Current: $\pm 0.1\%$ rdg $\pm 0.1\%$ f.s. + current sensor accuracy Active power: $\pm 0.2\%$ rdg $\pm 0.1\%$ f.s. + current sensor accuracy
Measurement items	1. Transient voltage : 2 MHz sampling 2. Frequency cycle : Calculated as one cycle, 40 to 70 Hz 3. Voltage (1/2) RMS: one cycle calculation refreshed every half cycle Current (1/2) RMS: half-cycle calculation 4. Voltage swell, Voltage dips, Voltage interruption 5. Inrush current 6. Voltage waveform comparison 7. Instantaneous flicker value: As per IEC61000-4-15 8. 200 ms frequency: Calculated as 10 or 12 cycles, 40 to 70 Hz 9. 10 sec frequency: Calculated as the whole-cycle time during the specified 10 s period, 40 to 70 Hz 10. Voltage waveform peak, Current waveform peak 11. Voltage, Current, Active power, Apparent power, Reactive power, Active energy, Reactive energy, Power factor, Displacement power factor, Voltage unbalance factor, Current unbalance factor, and efficiency 12. High-order harmonic (supraharmonic) component (voltage/ current): 2 kHz to 80 kHz 13. Harmonic/ Harmonic phase angle (voltage/ current), Harmonic power: 0th to 50th orders 14. Harmonic voltage-current phase angle: 1th to 50th orders 15. Total harmonic distortion factor (voltage/ current) 16. Inter harmonic (voltage/ current): 0.5 th to 49.5 th order 17. K Factor (multiplication factor) 18. IEC Flicker, $\Delta$ V10 Flicker 19. Mains signaling voltage
Record	Repeated ON: 1 year, Maximum recording event: 9999 $\times$ 366 days (up to 9999 events per day) Repeated off: 35 days, maximum recording event: 9999 events
Interfaces	SD/SDHC memory card, LAN (HTTP server function / FTP function), USB2.0 (for communication)
Display	6.5-inch TFT color LCD (640 $\times$ 480 dots)
Power supply	AC adapter Z1002 (100 V to 240 V AC, 50/60 Hz, rated current 1.7 A), Battery Pack Z1003 (Continuous use: 180 minutes, Charging time: Max. 5 hr 30 m with AC adapter)
Dimensions and mass	300 mm (11.81 in.)W $\times$ 211 mm (8.31 in.)H $\times$ 68 mm (2.68 in.)D, 2.6 kg (91.7 oz.) (including Battery Pack Z1003)
Included accessories	Instruction manual $\times$ 1, Measurement guide $\times$ 1, Voltage Cord L1000 $\times$ 1 set (Red/ Yellow/ Blue/ Gray each 1, Black 4, 3m (9.84ft) length, Alligator clip $\times$ 8), Color clip, AC Adapter Z1002 $\times$ 1, Strap $\times$ 1, USB cable (1 m 3.28 ft length) $\times$ 1, Battery pack Z1003 $\times$ 1, SD Memory Card 2GB Z4001 $\times$ 1, Application software (PQ ONE) $\times$ 1

## Quick and Simple Power Quality Testing, Record and Analyze Power Supply Issues with a Single Instrument

### POWER QUALITY ANALYZER PQ3100



Current sensors : Sold separately



- Record data including voltage, current, power, harmonics, and flicker simultaneously along a single time axis
- Measure up to 6000 A AC
- Capture all power anomalies, including instantaneous outages, voltage drops, and frequency fluctuations, while simultaneously recording trend data
- Quick Set: Easy-to-understand on-screen guide for measurement procedures
- Bundled PQ ONE application software makes it easy to create reports
- Record waveforms for up to 1 second before and 10 seconds after an anomaly occurs
- Accurately measure DC currents over extended periods of time (with an AC/DC auto-zero current sensor)
- Directly supply power to connected current sensors
- Send measured values to Hioki data loggers using a Bluetooth® wireless technology compatible adapter (LR8410 Link-compatible products), Ver. 2.0 and later

Model No. (Order Code) **PQ3100** (Main unit, clamp sensor is sold separately)

Note: an optional current sensor is necessary to measure current or power parameters. Select from Value Kits for added savings.

#### POWER QUALITY ANALYZER PQ3100 VALUE KITS :

Model No. (Order Code) (Note)

**PQ3100-91** (Kit includes 600 A sensor  $\times$  2 and other options)

Kit contents: AC Current sensor CT17136 (600 A)  $\times$  2, PQ3100 main unit, SD Memory card 2GB Z4001, Carrying case C1009

**PQ3100-92** (Kit includes 600 A sensor  $\times$  4 and other options)

Kit contents: AC Current sensor CT17136 (600 A)  $\times$  4, PQ3100 main unit, SD Memory card 2GB Z4001, Carrying case C1009

**PQ3100-94** (Kit includes 6000 A sensor  $\times$  4 and other options)

Kit contents: AC Flexible current sensor CT7045 (6000 A)  $\times$  4, PQ3100 main unit, SD Memory card 2GB Z4001, Carrying case C1009



PQ3100-91 Value Kit

#### Basic specifications (Accuracy guaranteed for 1 year)







Measurement line type	Single-phase 2-wire, Single-phase 3-wire, Three-phase 3-wire or Three-phase 4-wire plus one extra input channel CH4 for voltage/current, (all channels AC/DC measurement)
Voltage ranges	Voltage measurement: 1000.0 V rms or DC, Transient measurement 2.200 kV peak
Current ranges	50.000 mA AC to 5.0000 kA AC, 10.000 A DC to 2.0000 kA DC (depends on current sensor in use)
Power ranges	50.000 W to 6.0000 MW (determined automatically based on current range in use)
Basic accuracy	Voltage: $\pm 0.2\%$ of nominal voltage, Current: $\pm 0.1\%$ rdg $\pm 0.1\%$ f.s. + current sensor accuracy, Active power: DC $\pm 0.5\%$ rdg $\pm 0.5\%$ f.s. + current sensor accuracy, AC $\pm 0.2\%$ rdg $\pm 0.1\%$ f.s. + current sensor accuracy
Measurement items	1. Transient over voltage : 200 kHz sampling 2. Frequency cycle : Calculated as one cycle 3. Voltage (1/2) RMS, Current (1/2) RMS: one cycle calculation refreshed every half cycle 4. Voltage swell, Voltage dips, Voltage interruption, RVC (Ver. up) : Voltage (1/2) RMS calculation 5. Inrush current : half-cycle calculation: Calculated as the current RMS value for current waveform data sampled every half-cycle. 6. Frequency 200 ms: Calculated as 10 or 12 cycles 7. 10-sec frequency: Calculated as the whole-cycle time during the specified 10 s period 8. Voltage waveform peak, Current waveform peak 9. Voltage, Current, Active power, Apparent power, Reactive power, Active energy, Apparent energy, Reactive energy, Energy cost, Power factor, Displacement power factor, Voltage unbalance factor, Current unbalance factor 10. Voltage crest factor, Current crest factor 11. Harmonic/ Harmonic phase angle (voltage/ current), Harmonic power: 0 th to 50 th orders 12. Harmonic voltage-current phase angle: 1 th to 50 th orders 13. Total harmonic distortion factor (voltage/ current) 14. Inter harmonic (voltage/ current): 0.5 th to 49.5 th orders 15. K Factor (multiplication factor) 16. IEC Flicker, $\Delta$ V10 Flicker
Record	Maximum recording interval: 1 year, Maximum number of recordable events: 9999 $\times$ 365 days
Interfaces	SD/SDHC memory card, RS-232C (for communication/ LR8410 link), LAN (HTTP server/ FTP / Send e-mail), USB 2.0 (for communication)
Logger connectivity	Sends measured values wirelessly to logger by using a Bluetooth® wireless technology serial conversion adapter. (Supported devices: Hioki LR8410 Link-compatible loggers), Ver. 2.0 and later
Display	6.5-inch TFT color LCD (640 $\times$ 480 dots)
Power supply	AC adapter Z1002 (100 V to 240 V AC, 50/60 Hz, rated current 1.7 A), Battery pack Z1003 (Continuous use: 8 hr, Charging time: Max. 5 hr 30 m with AC adapter)
Dimensions and mass	300 mm (11.81 in.)W $\times$ 211 mm (8.31 in.)H $\times$ 68 mm (2.68 in.)D, 2.5 kg (88.2 oz.) (including battery pack)
Included accessories	Instruction manual $\times$ 1, Measurement guide $\times$ 1, Voltage cord L1000-05 $\times$ 1 set (Red/ Yellow/Blue/Gray/Black, Alligator clip $\times$ 5, Spiral tube $\times$ 5), Color clip (for identifying clamp sensor color) $\times$ 1 set, Spiral tube $\times$ 5, AC adapter Z1002 $\times$ 1, Strap $\times$ 1, USB cable (1 m 3.28 ft length) $\times$ 1, Battery pack Z1003 $\times$ 1, PQ ONE (software, CD) $\times$ 1

# Power Quality Analyzers

## Shared options for the PQ3198 / PQ3100


For power or load current measurement (1 sensor necessary for single-phase measurements, and 2 or 3 sensors required for 3-phase measurements)

Current Input

 <b>AC CURRENT SENSOR CT7126</b> 60 A AC, φ15 mm (0.59 in.), 2.5 m (8.20 ft.) cord length	 <b>AC CURRENT SENSOR CT7131</b> 100 A AC, φ15 mm (0.59 in.), 2.5 m (8.20 ft.) cord length	 <b>AC CURRENT SENSOR CT7136</b> 600 A AC, φ46 mm (1.81 in.), 2.5 m (8.20 ft.) cord length	 <b>AC FLEXIBLE CURRENT SENSOR CT7044</b> 6000 A AC, φ100 mm (3.94 in.), 2.5 m (8.20 ft.) cord length	 <b>AC FLEXIBLE CURRENT SENSOR CT7045</b> 6000 A AC, φ180 mm (7.09 in.), 2.5 m (8.20 ft.) cord length	 <b>AC FLEXIBLE CURRENT SENSOR CT7046</b> 6000 A AC, φ254 mm (10.00 in.), 2.5 m (8.20 ft.) cord length
--	---	---	--	---	---

Leak Current Input

\*For leak current measurement (not capable of power measurement)

 <b>AC LEAKAGE CURRENT SENSOR CT7116</b> 6 A AC, φ40 mm (1.57 in.), 2.5 m (8.20 ft.) cord length
---

AC/DC Current Input

 <b>AC/DC AUTO-ZERO CURRENT SENSOR CT7731</b> 100 A AC/DC, φ33 mm (1.30 in.), 2.5 m (8.20 ft.) cord length	 <b>AC/DC AUTO-ZERO CURRENT SENSOR CT7736</b> 600 A AC/DC, φ33 mm (1.30 in.), 2.5 m (8.20 ft.) cord length	 <b>AC/DC AUTO-ZERO CURRENT SENSOR CT7742</b> 2000 A AC/DC, φ55 mm (2.17 in.), 2.5 m (8.20 ft.) cord length	 <b>EXTENSION CABLE L0220-01</b> 2 m (6.56 ft.) length	 <b>EXTENSION CABLE L0220-02</b> 5 m (16.41 ft.) length	 <b>EXTENSION CABLE L0220-03</b> 10 m (32.81 ft.) length
---	---	--	---	---	---

Storage Media

\*The Z4001 is bundled to PQ3198 only

**SD Card Precaution**  
Use only the SD Card sold by Hioki. Compatibility and performance are not guaranteed for SD cards made by other manufacturers. You may be unable to read from or save data to such cards.

**SD MEMORY CARD**  
2GB Z4001 2 GB capacity  
8GB Z4003 8 GB capacity

PQ3100 Voltage Input

For PQ3100 only \*The L1000-05 is bundled with PQ3100

**VOLTAGE CORD L1000-05**  
Red/ Yellow/ Blue/ Gray/ Black each 1, 3 m (9.84 ft.) length, Alligator clip ×5

For PQ3198 only \*The L1000 is bundled with PQ3198

**VOLTAGE CORD L1000**  
Red/ Yellow/ Blue/ Gray each 1, Black 4, 3m (9.84ft) length, Alligator clip ×8

**WIRING ADAPTER PW9000**  
When three-phase 3-wire (3P3W3M) connection, the voltage cord to be connected can be reduced from 6 to 3

**WIRING ADAPTER PW9001**  
When three-phase 4-wire (3P4W) connection, the voltage cord to be connected can be reduced from 6 to 4

**PATCH CORD L1021-01**  
Banana branch-banana, Red: 1, Cable length: 0.5 m, For branching from the L9438 series or L1000 series, CAT IV 600 V, CAT III 1000 V

**PATCH CORD L1021-02**  
Banana branch-banana, Black: 1, Cable length: 0.5 m, For branching from the L9438 series or L1000 series, CAT IV 600 V, CAT III 1000 V

Voltage Input

Shared options for the PQ3100 / PQ3198

**GRABBER CLIP L9243**  
Attaches to the tip of the banana plug cable, Red/ Black: 1 each, 185 mm (7.28 in.) length, CAT II 1000 V

**MAGNETIC ADAPTER 9804-01**  
Attaches to the tip of cord, red ×1, φ11 mm (0.43 in.)

**MAGNETIC ADAPTER 9804-02**  
Attaches to the tip of cord, black ×1, φ11 mm (0.43 in.)

Power Supply

**AC ADAPTER Z1002**  
For main unit, 100 to 240 V AC

\*The Z1002, Z1003 are bundled

**BATTERY PACK Z1003**  
NiMH, Charges while installed in the main unit

Other Options

**LAN CABLE 9642**  
Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft.) length

**CONVERSION CABLE L9910**  
Used to connect the current sensors with BNC terminal to PL14 terminal (example the PQ3100)

PC Peripherals

Shared options for the PQ3100 / PQ3198

**GENNECT One SF4000**  
Application for Windows

For PQ3100 only

**RS-232C CABLE 9637**  
For the PC, 9 pin - 9 pin, cross, 1.8 m (5.91 ft.) length

Hands-free Options

When using with PQ3100 / PQ3198, suspend the main body on the metal surface using two Z5020 powerful type. Z5004 hang the cords on the metal surface.

**MAGNETIC STRAP Z5020**  
Heavy-duty

**MAGNETIC STRAP Z5004**

Cases

**CARRYING CASE C1002**  
Hard trunk type, includes compartment for options

**CARRYING CASE C1009**  
Bag type, includes compartment for options

**Waterproof Box**  
For outdoor installation; IP65 compliant, contact Hioki for a quotation.

For PQ3198 only

Time Synchronization

**GPS BOX PW9005**  
To synchronize the PQ3198 clock to UTC

Power Quality Analyzers



## Eliminate the Risk of Short-Circuits and Electrical Accidents

### CLAMP ON POWER LOGGER PW3365



True RMS

\* Current sensors : sold separately  
\* Voltage sensors : bundled

- Voltage measurement from the top of the cable, zero risk of short circuit
- Supports single to three-phase, 4-wire circuits
- Measure between 90V to 520V
- Display harmonics up to the 13th order
- Slim, compact design that can be placed anywhere
- Store months of data on SD cards
- The QUICK SET function guides you in making the right connections



\*For Voltage Sensor



\* For PW3365

Model No. (Order Code) **PW3365-20** (English model, main unit only)

Note: Clamp On Power Logger PW3365-20 by itself does not support current and power measurements. Current and power measurements require clamp on sensors, sold separately. Use only Hioki SD cards guaranteed to work for saving measurement data (options, sold separately).

#### SAFETY VOLTAGE SENSOR PW9020 Specifications

Compatible conductor types	Insulated wires*, in door PVC or metal parts *Shielded wires cannot be measured. The product may not be able to accurately measure multi-core cables or cables that have thick insulation.
Compatible conductor diameters	Finished outer diameter $\phi$ 6 mm to $\phi$ 30 mm
Effective measurement range	90 V rms to 520 V rms
Cord length	3 m (9.84 ft.)

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement line & number of circuits	50/60 Hz, Single phase 2 wires (1/2/3 circuits), Single phase 3 wires (1 circuit), Three phases 3 wires (1 circuit), Three phases 4 wires (1 circuit), Current only: 1 to 3 channels
Measurement items	Voltage RMS, current RMS, voltage fundamental wave value, current fundamental wave value, voltage fundamental wave phase angle, current fundamental wave phase angle, frequency (UI), voltage waveform peak (absolute value), current waveform peak (absolute value), active power, reactive power, apparent power, power factor (with lag/lead display) or displacement power factor (with lag/lead display), active energy (consumption, regeneration), reactive energy (lag, lead), energy cost display, active power demand quantity (consumption, regeneration), reactive power demand quantity (lag, lead), active power demand value (consumption, regeneration), reactive power demand value (lag, lead), power factor demand
Harmonic	Harmonic voltage, harmonic current, voltage total harmonic distortion (THD-F or THD-R), current total harmonic distortion (THD-F or THD-R), up to 13th order
Voltage ranges	400 V AC (Effective measurement range: 90.0 V to 520.0 V)
Current ranges	500.00 mA to 5.0000 kA AC (depends on current sensor in use), 50.0000 mA to 5.0000 A AC (Leak clamp on sensor only)
Power ranges	200.00 W to 6.0000 MW (depends on voltage/current combination and measured line type)
Basic accuracy	Voltage : $\pm 1.5\%$ rdg $\pm 0.2\%$ f.s. (combined accuracy with PW3365-20 + PW9020) Current : $\pm 0.3\%$ rdg $\pm 0.1\%$ f.s. + clamp sensor accuracy Active power : $\pm 2.0\%$ rdg $\pm 0.3\%$ f.s. + clamp sensor accuracy (at power factor = 1)
Display update rate	0.5 sec (except when accessing SD card or internal memory, or during LAN/USB communication)
Save destination	SD/SDHC Memory card, or internal memory at real time
Data save interval	1 sec to 30 sec, 1 minute to 60 minutes, 14 selections
Save items	Measurement value save: Average only / Average, Maximum, Minimum value Screen copy: BMP form (saved every 5 min. at minimum interval time) Waveform save: Binary waveform data
Interfaces	SD/SDHC memory card, LAN 100BASE-TX: HTTP server function, remote settings via communication program, data download, USB 2.0: When connected to a PC, the SD Card and internal memory are recognized as removable storage devices, remote settings via communication program, data download
Functions	Connection check, Quick Set navigation guide, clock
Power supply	AC adapter Z1008: (100 to 240 V AC, 50/60 Hz), 45 VA (including AC adapter) Battery pack 9459: (DC 7.2 V, 3 VA, charging time 6 hr 10 m), 3 hours of continuous use (with back light off)
Dimensions and mass	180 mm (7.09 in.)W $\times$ 100 mm (3.94 in.)H $\times$ 48 mm (1.89 in.)D, 540 g (19 oz.) without PW9002 180 mm (7.09 in.)W $\times$ 100 mm (3.94 in.)H $\times$ 68 mm (2.68 in.)D, 820 g (28.9 oz.) with PW9002
Included accessories	Safety Voltage Sensor PW9020 $\times$ 1 set, AC adapter Z1008 $\times$ 1, USB cable $\times$ 1, Instruction manual $\times$ 1, Measurement guide $\times$ 1, Color clip (red, yellow, blue and white each 4), Spiral tubes in black (cord bundling for current sensors and voltage sensors) $\times$ 10

## Identify Your Power Condition to Reveal Energy Saving Ideas

### CLAMP ON POWER LOGGER PW3360



Current sensors : Sold separately

- Supports single to three-phase, 4-wire circuits
- Measure between 90V to 780V
- Simultaneously measure up to three single-phase, 2-wire circuits (in the same power system)
- Slim, compact design that can be placed anywhere
- Store months of data on SD cards
- The QUICK SET function guides you in making the right connections
- Choose PW3360-21 for harmonic measurements up to the 40th order

Model No. (Order Code) **PW3360-20** (English model, main unit only)

**PW3360-21** (English model, with harmonic analysis function)

Note: at least one optional current sensor is necessary to measure current or power parameters. To store measurement data, use only the guaranteed SD cards sold by Hioki.



#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement line & number of circuits	50/60 Hz, Single phase 2 wires (1/2/3 circuits), Single phase 3 wires (1 circuit), Three phases 3 wires (1 circuit), Three phases 4 wires (1 circuit), Current only: 1 to 3 channels
Measurement items	Voltage RMS, current RMS, voltage fundamental wave value, current fundamental wave value, voltage fundamental wave phase angle, current fundamental wave phase angle, frequency (UI), voltage waveform peak (absolute value), current waveform peak (absolute value), active power, reactive power (with lag/lead display), apparent power, power factor (with lag/lead display) or displacement power factor (with lag/lead display), active energy (consumption, regeneration), reactive energy (lag, lead), energy cost display, active power demand quantity (consumption, regeneration), reactive power demand quantity (lag, lead), active power demand value (consumption, regeneration), reactive power demand value (lag, lead), power factor demand, pulse input [PW3360-21 only]: Harmonic voltage level, harmonic current level, harmonic power level, content percentage, phase angle, total harmonic distortion (THD-F or THD-R), up to 40th order
Voltage ranges	600 V AC (Effective measurement range: 90.00 V to 780.00 V)
Current ranges	500.00 mA to 5.0000 kA AC (depends on current sensor in use), 50.0000 mA to 5.0000 A AC (Leak clamp on sensor only)
Power ranges	300.00 W to 9.0000 MW (depends on voltage/current combination and measured line type)
Basic accuracy	Voltage : $\pm 0.3\%$ rdg $\pm 0.1\%$ f.s. Current : $\pm 0.3\%$ rdg $\pm 0.1\%$ f.s. + clamp sensor accuracy Active power : $\pm 0.3\%$ rdg $\pm 0.1\%$ f.s. + clamp sensor accuracy (at power factor = 1)
Display update rate	0.5 sec (except when accessing SD card or internal memory, or during LAN/USB communication)
Save destination	SD Memory card, or internal memory at real time
Data save interval	1 sec to 30 sec, 1 minute to 60 minutes, 14 selections
Save items	Measurement value save: Average only / Average, Max./Min. value, [PW3360-21 only]: Harmonic data save: Average only / average, max./min. value in binary format, Screen copy: BMP form (saved every 5 min. at minimum interval time), Waveform save: Binary waveform data
Interfaces	SD/SDHC memory card, LAN 100BASE-TX: HTTP server function, USB 2.0: When connected to a PC, the SD Card and internal memory are recognized as removable storage devices, remote settings via communication program, data download, Pulse output: proportional to active power consumption when measuring integral power consumption, Isolated open-collector signal
Functions	Connection check, Quick Set navigation guide, clock, pulse input
Power supply	AC adapter Z1006: (100 to 240 V AC, 50/60 Hz), 40 VA (including AC adapter), Battery pack 9459: (DC 7.2 V, 3 VA, charging time 6 hr 10 m), 6 hours of continuous use (with back light off)
Dimensions and mass	180 mm (7.09 in.)W $\times$ 100 mm (3.94 in.)H $\times$ 48 mm (1.89 in.)D, 550 g (19.4 oz.) without PW9002 180 mm (7.09 in.)W $\times$ 100 mm (3.94 in.)H $\times$ 67.2 mm (2.65 in.)D, 830 g (29.3 oz.) with PW9002
Included accessories	Voltage cord L9438-53 $\times$ 1 set, AC adapter Z1006 $\times$ 1, USB cable $\times$ 1, Instruction manual $\times$ 1, Measurement guide $\times$ 1, Color clip $\times$ 1 set: red, yellow, blue, white/two each, for color-coding clamp sensors, Spiral tubes for grouping clamp sensor cords $\times$ 5, Application Software CD (SF4000 GENNECT One) $\times$ 1

# Power Quality Analyzers

## Shared options for PW3360, PW3365

\*L9438-53 is bundled with the PW3360-20/-21

Voltage Input for PW3360

**VOLTAGE CORD L9438-53**  
Black/ Red/ Yellow/ Blue, 3 m (9.84 ft.) length, Alligator clip x4

**MAGNETIC ADAPTER 9804-01**  
Attaches to the tip of cord, red x1,  $\phi$ 11 mm

**MAGNETIC ADAPTER 9804-02**  
Attaches to the tip of cord, black x1,  $\phi$ 11 mm

**PATCH CORD L1021-01**  
Banana branch-banana, Red: 1, Cable length: 0.5 m, For branching from the L9438 series or L1000 series, CAT IV 600 V, CAT III 1000 V

**PATCH CORD L1021-02**  
Banana branch-banana, Black: 1, Cable length: 0.5 m, For branching from the L9438 series or L1000 series, CAT IV 600 V, CAT III 1000 V

Storage Media

**SD MEMORY CARD 2GB Z4001**  
2 GB capacity

**SD MEMORY CARD Z4003**  
8 GB capacity

**SD Card Precaution**  
Use only the SD Card sold by Hioki. Compatibility and performance are not guaranteed for SD cards made by other manufacturers. You may be unable to read from or save data to such cards.

Voltage Input for PW3365

\*PW9020 x4 pieces are bundled, additional single sensors also available  
**SAFETY VOLTAGE SENSOR PW9020**  
For PW3365, 3 m (9.84 ft.) length

Shared Power Supply

The 9459 is a replacement battery pack included with the Battery Set PW9002.

**BATTERY SET PW9002**  
Battery case and Battery Pack 9459 Set

**BATTERY PACK 9459**  
NiMH, Charges while installed in the main unit

Power Supply for PW3360

Z1006 is bundled with the PW3360  
**AC ADAPTER Z1006**  
100 to 240 V AC  
**VOLTAGE LINE POWER ADAPTER PW9003**  
For PW3360s, supplies power from measurement lines, up to 240V AC

Power Supply for PW3365

\*Z1008 is bundled with the PW3365  
**AC ADAPTER Z1008**  
100 to 240 V AC

Shared Case, Other

Z5004 hang the cords on the metal surface. C1005 store Current sensor x2, Voltage sensor x3 pieces  
**CARRYING CASE C1005**  
For PW3360/3365 series, for storing options  
**MAGNETIC STRAP Z5004**

**CARRYING CASE C1008**  
For PW3365 series, for storing Current sensor x3, Voltage sensor x4 pieces

**POWER LOGGER VIEWER SF1001**  
Easy graphical processing of measurement data saved with the PW3360/PW3365 series, 3169 series on a PC

**GENNECT One SF4000**  
Application for Windows  
**LAN CABLE 9642**  
Straight Ethernet cable, supplied with straight to cross conversion adapter, 5 m (16.41 ft.) length

## Shared optional current sensors for PW3360, and PW3365

For power or load current measurement (1 sensor necessary for single-phase measurements, and 2 or 3 sensors required for 3-phase measurements)

**CLAMP ON SENSOR 9694**  
5A AC rated current,  $\phi$  15 mm (0.59 in.) core dia., 3 m (9.84 ft.) length

**CLAMP ON SENSOR 9660**  
100A AC rated current,  $\phi$  15 mm (0.59 in.) core dia., 3 m (9.84 ft.) length

**CLAMP ON SENSOR 9661**  
500A AC rated current,  $\phi$  46 mm (1.81 in.) core dia., 3 m (9.84 ft.) length

**FLEXIBLE CLAMP ON SENSOR CT9667-01/-02/-03**  
5000/500 A AC rated current,  $\phi$  100 mm (3.94 in.) to 254 mm (10.0 in.) core dia., Cable length: Between sensor - box 2 m (6.56 ft.), Output cable 1 m (3.28 ft.)

**CLAMP ON SENSOR 9669**  
1000A AC rated current,  $\phi$  55 mm (2.17 in.) core dia., 3 m (9.84 ft.) length

**CLAMP ON SENSOR 9695-02**  
50A AC rated current,  $\phi$  15 mm (0.59 in.) core dia., Requires the Connection cord 9219

**CLAMP ON SENSOR 9695-03**  
100A AC rated current,  $\phi$  15 mm (0.59 in.) core dia., Requires the Connection cord 9219

**CONNECTION CORD 9219**  
Connect with the 9695-02/-03, Output BNC terminal

### Shared options for PW3360 and PW3365

For leak current measurement (not capable of power measurement)  
\*Up to 5 A when using with power meters

**CLAMP ON LEAK SENSOR 9675**  
10A AC rated current,  $\phi$  30 mm (1.18 in.) core dia., 3 m (9.84 ft.) length

**CLAMP ON LEAK SENSOR 9657-10**  
10A AC rated current,  $\phi$  40 mm (1.57 in.) core dia., 3 m (9.84 ft.) length

**Clamp sensor adapter**  
**CLAMP ON ADAPTER 9290-10**  
CT for 1000A AC, secondary current 1/10 of primary

Power Quality Analyzers

## Capture Inrush, Micro and High-Speed Currents with a Single Probe

### CURRENT PROBE CT6710, CT6711



CT6710

- 3 ranges in a single probe - 30 A, 5 A, 0.5 A. Observe a wide current range from micro currents to 30 A.
- Wide band: [CT6710] DC to 50 MHz (-3 dB), [CT6711] DC to 120 MHz (-3 dB)
- High S/N ratio and 10 times output rate: Observe waveforms at 100 μA/div at oscilloscope maximum voltage sensitivity setting of 1 mV/div
- Directly connect to an oscilloscope's BNC input terminal \*1

\*1: Connecting the probe's metal BNC terminal to a Memory HiCorder's plastic BNC terminal may distort or damage the plastic terminal. To avoid damage, please connect and disconnect the probe cable straight to the BNC terminal of the waveform monitoring equipment.


Model No. (Order Code)	<b>CT6710</b>	(From 200μA, 50MHz bandwidth)
	<b>CT6711</b>	(From 200μA, 120MHz bandwidth)

Note: if power cannot be supplied from the Memory HiCorder, an optional power supply 3269 is required. Please pay attention to offset drift during continuous, long-term measurement.


#### Basic specifications (Accuracy guaranteed for 1 year)

	CT6710	CT6711
Frequency bandwidth	DC to 50 MHz (-3 dB)	DC to 120 MHz (-3 dB)
Rise time	7.0 ns or shorter	2.9 ns or shorter
Delay time (Typical)	30 A range: 12 ns, 5 A range: 12 ns, 0.5 A range: 13 ns (Delay time relative to rising waveform of input signal 1 ns)	
Noise level	75 μA rms max (at 0.5 A range, using 20 MHz band measuring instrument)	
Max. rated current	30 A range: 30 A rms, 5 A range: 5 A rms, 0.5 A range: 0.5 A rms (DC, and sine wave, requires derating at frequency)	
Max. allowable peak current	30 A range: ±50 A peak (within the input limit time 2 s) 5 A range: ± 7.5 A peak, 0.5 A range: ± 0.75 A peak (< 10 MHz), ±0.3 A peak (≥ 10 MHz)	
Amplitude accuracy	30 A range: ±3.0% rdg ±1 mV, (Typical) ±1.0% rdg ±1 mV (≤ 10 Arms, DC, 45 to 66 Hz sine wave, within the maximum peak current of each range) 5 A range: ±3.0% rdg ±1 mV, (Typical) ±1.0% rdg ±1 mV (DC, 45 to 66 Hz sine wave, within the maximum peak current of each range) 0.5 A range: ±3.0% rdg ±10 mV, (Typical) ±1.0% rdg ±10 mV (DC, 45 to 66 Hz sine wave, within the maximum peak current of each range)	
Output rate	30 A range: 0.1 V/A, 5 A range: 1 V/A, 0.5 A range: 10 V/A (The output of this probe is internally terminated)	
Measurable conductors	φ 5 mm (0.20 in.), Insulated conductor	
Power supply	Supplied from Power Supply 3269, Probe Power Unit Z5021	
Cable length	Sensor cable (between relay box and sensor): 1.5 m (4.92 ft.) Power cable: 1.0 m (3.28 ft.) (Power plug: FFA.0S.304.CLAC37Y / LEMO inc.)	
Dimensions and mass	Sensor: 155 mm (6.10 in.)W × 18 mm (0.71 in.)H × 26 mm (1.02 in.)D, Relay box section: 45 mm (1.77 in.)W × 120 mm (4.72 in.)H × 25 mm (0.98 in.)D Terminator section: 29 mm (1.14 in.)W × 83 mm (3.27 in.)H × 40 mm (1.57 in.)D mm, 370 g (13.1 oz.)	
Included accessories	Instruction manual ×1, Carrying case ×1	

#### (Typical characteristics example)



#### (Typical characteristics example)



**POWER SUPPLY 3269**  
Power 2 × CT6710 series or 4 × CT6700, 3270 series, 100 to 240 VAC

**PROBE POWER UNIT Z5021**  
Specified upon order of the MR6000, power max. 4 × CT6710 series, or max. 8 × other probes

## Clearly Observe Even 1 mA Waveforms

### CURRENT PROBE CT6700, CT6701



CT6700

- Wide band: [CT6700] DC to 50 MHz (-3 dB), [CT6701] DC to 120 MHz (-3 dB)
- High S/N characteristic ideal for ultra low 1 mA order current waveforms
- Connect directly to an oscilloscope's BNC input terminal \*1

\*1: Connecting the probe's metal BNC terminal to a Memory HiCorder's plastic BNC terminal may distort or damage the plastic terminal. To avoid damage, please connect and disconnect the probe cable straight to the BNC terminal of the waveform monitoring equipment.


Model No. (Order Code)	<b>CT6700</b>	(From 1mA, 50MHz bandwidth)
	<b>CT6701</b>	(From 1mA, 120MHz bandwidth)

Note: use optional Power Supply 3269 or 3272 to drive the current probe when power from the Memory HiCorder or oscilloscope is not available. Exercise care concerning offset drift when performing continuous measurement over extended periods of time.


#### Basic specifications (Accuracy guaranteed for 1 year)

	CT6700	CT6701
Frequency bandwidth	DC to 50 MHz (-3 dB)	DC to 120 MHz (-3 dB)
Rise time	7.0 ns or shorter	2.9 ns or shorter
Noise level	60 μA rms typical, 75 μA rms max (for 30 MHz band measuring instrument)	
Continuous allowable input	5 A rms (DC, and sine wave, requires derating at frequency)	
Max. allowable peak input	±7.5 A peak (non-continuous)	
Amplitude accuracy	Typ.: ±1% rdg ±1 mV (DC, 45 to 66 Hz sine wave, 0 to 5 A rms) Guaranteed: ±3% rdg ±1 mV (DC, 45 to 66 Hz sine wave, 0 to 5 A rms)	
Output rate	1 V/A (The output of this probe is internally terminated)	
Measurable conductors	Insulated conductor	
Core diameter	φ 5 mm (0.20 in.)	
Power supply	±12 V ±0.5 V, 3.2 VA	
Dimensions and mass	Sensor: 155 mm (6.10 in.)W × 18 mm (0.71 in.)H × 26 mm (1.02 in.)D, Terminator: 29 mm (1.14 in.)W × 83 mm (3.27 in.)H × 40 mm (1.57 in.)D mm, Mass: 250 g (8.8 oz.), Sensor cable BNC terminal: 1.5 m (4.92 ft.), Power cable: 1 m (3.28 ft.), Power plug: FFA.0S.304.CLAC37Y / LEMO inc.	
Included accessories	Instruction manual ×1, Carrying case ×1	

#### (Typical characteristics example)



#### (Typical characteristics example)



**POWER SUPPLY 3269**  
Power 2 × CT6710 series or 4 × CT6700, 3270 series, 100 to 240 VAC

**POWER SUPPLY 3272**  
Power 1 × CT6700, 3270 series, 120/220/240 V AC, specify when ordering



## Wide-Band Current Probe Allows Direct Input to Oscilloscope

### CLAMP ON PROBE 3273-50, 3274, 3275, 3276




- Waveform observation across a wide band from DC to MHz
- Connects directly to oscilloscope or Memory HiCorder BNC input terminal \*1
- High S/N characteristics enable the measurement of 10 mA order current waveforms (3273-50, 3276)

\*1: Connecting the probe's metal BNC terminal to a Memory HiCorder's plastic BNC terminal may distort or damage the plastic terminal. To avoid damage, please connect and disconnect the probe cable straight to the BNC terminal of the waveform monitoring equipment.

Model No. (Order Code)	3273-50	(DC to 50 MHz, 30 Arms)
	3274	(DC to 10 MHz, 150 Arms)
	3275	(DC to 2 MHz, 500 Arms)
	3276	(DC to 100 MHz, 30 Arms)

### Frequency response (Characteristics Example)

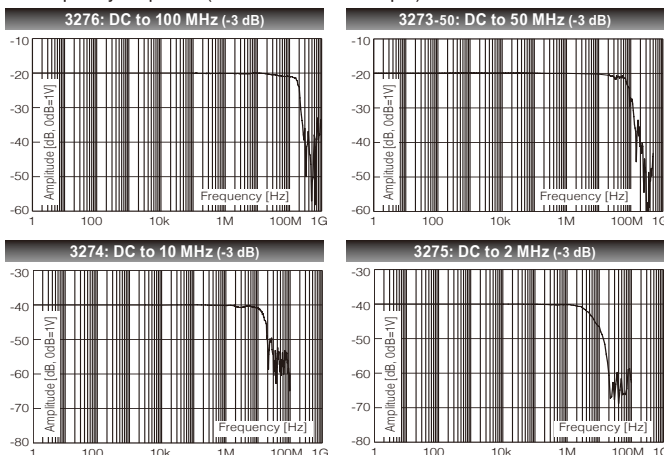

Note: use the Power Supply 3269/3272 for general measurements or when power is not available from the Memory HiCorder. When performing continuous measurements, be aware of offset voltage drift.

**Options**

**POWER SUPPLY 3269**  
Power 2 × CT6710 series or 4 × CT6700, 3270 series, 100 to 240 V AC

**POWER SUPPLY 3272**  
Power 1 × CT6700, 3270 series, 120/ 220/ 240 V AC, specify when ordering

### Connecting Wideband Sensors to Other Devices

Below are the options necessary for connecting wide-bandwidth sensors to measurement devices.

Current sensor model No.	POWER ANALYZER PW6001	MEMORY HiCORDER Oscilloscope
3273-50 3274 3275 3276 CT6700 CT6701	- Direct connection possible - Power by the PW6001	- Dedicated extension cable (synthetic resin BNC or metal BNC conversion cable) is recommended - POWER SUPPLY 3269 or 3272 is required - When using a recorder, the PROBE POWER UNIT Z5021 is also available.
CT6710 CT6711	-	When using a recorder, the Probe Power Unit Z5021 supports the use of up to 4 sensors.



When using the High-speed Analog Unit U8976 (Frequency range: DC to 30MHz)



Z5021  
PROBE POWER UNIT

Connect up to four CT6710/CT6711 probes.

Current Probes

### Basic specifications (Accuracy guaranteed for 1 year)

	3276	3273-50	3274	3275
Frequency bandwidth	DC to 100 MHz (-3 dB)	DC to 50 MHz (-3 dB)	DC to 10 MHz (-3 dB)	DC to 2 MHz (-3 dB)
Rise time	3.5 ns or shorter	7 ns or shorter	35 ns or shorter	175 ns or shorter
Noise level	2.5 mA rms max. (bandwidth limited to 20 MHz)			
Continuous allowable input	30 A rms (requires derating at frequency)		150 A rms (requires derating at frequency)	500 A rms (requires derating at frequency)
Max. allowable peak input	50 A peak (non continuous)		300 A peak (non continuous) 500 A peak (pulse width: 30 μs or shorter)	700 A peak (non continuous)
Amplitude accuracy (30 min. after power-on, after degaussing and zero-adjustment)	±1.0 % rdg ±1 mV f.s. (DC, 45 to 66 Hz, 0 to 30 A rms) ±2 % rdg (DC, 45 to 66 Hz, 30 A rms to 50 A peak)		±1.0 % rdg ±1 mV f.s. (DC, 45 to 66 Hz, 0 to 150 A rms) ±2.0 % rdg (DC, 45 to 66 Hz, 150 A to 300 A peak)	±1.0 % rdg ±5 mV f.s. (DC, 45 to 66 Hz, 0 to 500 A rms) ±2.0 % rdg (DC, 45 to 66 Hz, 500 A to 700 A peak)
Output rate	0.1 V/A (The output of this probe is internally terminated)		0.01 V/A (The output of this probe is internally terminated)	
Measurable conductors	Insulated conductor		Insulated conductor	
Core diameter	φ 5 mm (0.20 in.)		φ 20 mm (0.79 in.)	
Power supply	±12 V ±0.5 V, 5.3 VA max.	±12 V ±0.5 V, 5.6 VA max.	±12 V ±1 V, 5.5 VA max.	±12 V ±0.5 V, 7.2 VA max.
Dimensions and mass	175 mm (6.89 in.)W × 18 mm (0.71 in.)H × 40 mm (1.57 in.)D, 240 g (8.5 oz.)	175 mm (6.89 in.)W × 18 mm (0.71 in.)H × 40 mm (1.57 in.)D, 230 g (8.1 oz.)	176 mm (6.93 in.)W × 69 mm (2.72 in.)H × 27 mm (1.06 in.)D, 500 g (17.6 oz.)	176 mm (6.93 in.)W × 69 mm (2.72 in.)H × 27 mm (1.06 in.)D, 520 g (18.3 oz.)
Included accessories	Instruction manual ×1, Carrying case ×1	Instruction manual ×1, Soft case ×1	Instruction manual ×1, Carrying case ×1	Instruction manual ×1, Carrying case ×1

## Power Supply for Current Probes

### POWER SUPPLY 3269, 3272



- Power supply for the Clamp on probe 3273-50 - 3276, CT6700 series
- Supplies power when connected to a general-purpose instrument such as a recorder.

Model No. (Order Code)	3269	(For the CT6700 series/3270 series, up to 4)
	3272	(For the CT6700 series/3270 series, up to 1 or 2)

Note: these products cannot be used alone. To measure current, a compatible current sensor is required.

### Basic specifications

	3269	3272
Compatible sensors	The CT6710, CT6711: up to 2 units The CT6700, CT6701, 3273-50, 3274, 3275 or 3276: up to 4 units Note: also up to 4 units for the discontinued Model 3273	The CT6700, CT6701: up to 2 units Note: when measuring the maximum peak current, only one unit The 3273-50, 3274, 3275 or 3276: up to 1 unit Note: may be used with up to 2 units of Model 3273 (not -50 type), and up to 2 units of Models 3273-50, 3274, 3275 or 3276 on condition that the measurement current is sufficiently low. Note: the CT6710, CT6711 cannot be used
Number of power supply connectors	4	2
Output	±12 V ±0.5 V, ±2.5 A (sum total of all channels)	±12 V ±0.5 V, 600 mA (sum total of all channels)
Power supply	100 V to 240 V AC (free) 50/60 Hz 170 VA max.	100 V or 120/ 220/ 240 V AC (specify when ordering), 50/60 Hz 20 VA max.
Dimensions and mass	80 mm (3.15 in.)W × 119 mm (4.69 in.)H × 200 mm (7.87 in.)D, 1.1 kg (38.8 oz.)	73 mm (2.87 in.)W × 110 mm (4.33 in.)H × 186 mm (7.32 in.)D, 1.1 kg (38.8 oz.)
Included accessories	Instruction manual ×1, Power cord ×1	Power cord ×1, Instruction manual ×1, Spare fuse ×1

## Best-in-class Measurement Bandwidth with High Accuracy

### AC/DC CURRENT SENSOR CT6904A



CE  
CAT III 1000 V  
3 Year Warranty

Other Options  
Please contact your Hioki distributor or subsidiary for more information.  
• Metal fittings

- Combined accuracy with Hioki power analyzer PW8001 and PW6001 is specified (DC, 45 Hz ≤ f ≤ 65 Hz). For details of combined accuracy, refer to the instruction manual.
- 500 A (rms) or 800A (rms) rated for measurement of large currents
- Wide measurement frequency range: DC to 4 MHz (CT6904A, CT9604A-2)
- ±5 ppm excellent linearity (CT6904A, CT6904A-1)
- 120 dB (100 kHz) high Common-Mode Rejection Ratio (CMRR)

Model No. (Order Code)

<b>CT6904A</b>	(500 A AC/DC, HIOKI ME15A terminal, cable length: 3 m [9.84 ft.])
<b>CT6904A-1</b>	(Build-to-order, 500 A AC/DC, HIOKI ME15A terminal, cable length: 10 m [32.81 ft.])
<b>CT6904A-2</b>	(Build-to-order, 800 A AC/DC, HIOKI ME15A terminal, cable length: 3 m [9.84 ft.])
<b>CT6904A-3</b>	(Build-to-order, 800 A AC/DC, HIOKI ME15A terminal, cable length: 10 m [32.81 ft.])

#### Basic specifications (Accuracy guaranteed for 1 year)

	CT6904A, CT6904A-1	CT6904A-2, CT6904A-3
Rated current	500 A AC/DC	800 A AC/DC
Max. allowable input	±1000 A peak Within the derating range, design value, within 20 ms and 40°C (104°F) or less	±1200 A peak
Frequency characteristics	Amplitude: DC to 4 MHz (CT6904A-1, CT6904A-3: DC to 2MHz) Phase: DC to 1 MHz	
Linearity	±5 ppm Typical (23°C [73°F])	±12.5 ppm Typical (23°C [73°F])
Offset voltage	±10 ppm Typical (23°C (73°F), no input)	
Basic accuracy	DC (Amplitude: ±0.025 % rdg. ±0.007 % f.s., no phase specification) 45 Hz ≤ f ≤ 65 Hz (Amplitude: ±0.02 % rdg. ±0.007 % f.s., Phase: ±0.08°)	DC (Amplitude: ±0.030 % rdg. ±0.009 % f.s., no phase specification) 45 Hz ≤ f ≤ 65 Hz (Amplitude: ±0.025 % rdg. ±0.007 % f.s., Phase: ±0.08°)
Output voltage rate	4 mV / A rated	2 mV / A rated
Max. rated voltage to earth	1000 V CAT III	
Core diameter	φ 32 mm (1.26 in.)	
Operating temperature, humidity	-10°C to 50°C (14°F to 122°F) 80% RH or less (with no condensation)	
Power supply	Power supplied via the Power Analyzer PW8001, PW6001, PW3390, or Sensor Unit CT9555, CT9556, CT9557	
Max. rated power	7 VA Max. (500 A/55 Hz measurement, with a power supply of ±12 V)	
Dimensions and mass	139 mm (5.47 in.)W × 120 mm (4.72 in.)H × 52 mm (2.05 in.)D CT6904A: 1.05 kg (37 oz.), cable length 3 m (9.84 ft.) CT6904A-1: 1.35 kg (47.6 oz.), cable length 10 m (32.81 ft.)	CT6904A-2: 1.15 kg (40.6 oz.), cable length 3 m (9.84 ft.) CT6904A-3: 1.45 kg (51.1 oz.), cable length 10 m (32.81 ft.)
Included accessories	Instruction manual ×1, Carrying case ×1, Color labels (for channel identification) ×1	

## Supports Current Measurement of Inverters with High Current and High Speed

### AC/DC CURRENT SENSOR CT6875A, CT6876A, CT6877A



CE  
CAT III 1000 V  
3 Year Warranty

- Combined accuracy with Hioki power analyzer PW8001, PW6001 and PW3390 is specified (DC, 45 Hz ≤ f ≤ 66 Hz). For details of combined accuracy, refer to the instruction manual.
- Meet a wide range of applications from measuring battery charge/discharge to the secondary side of inverters in photovoltaic power generation and fuel cell evaluation, etc.
- Monitor waveforms when paired with oscilloscopes or Memory HiCorders and Sensor Unit
- Measures high-current up to 2000 A for EV, HEV and other electric vehicles (CT6877A)
- Improved noise resistance performance through a stronger shield lets you accurately measure current buried in noise
- High accuracy measurement realized through flat frequency characteristics and CMRR performance
- More enhanced environmental resistance performance than ever before lets you measure in -40 to 85°C situations
- Superior frequency characteristics  
CT6875A: DC to 2 MHz (amplitude), CT6876A: DC to 1.5 MHz (amplitude), CT6877A: DC to 1 MHz (amplitude)

Model No. (Order Code)	CT6875A	CT6875A-1	CT6876A	CT6876A-1	CT6877A	CT6877A-1
	(500 A AC/DC, ME15W terminal, 3 m (9.84 ft.) cable length)	(500 A AC/DC, ME15W terminal, 10 m (32.81 ft.) cable length)	(1000 A AC/DC, ME15W terminal, 3 m (9.84 ft.) cable length)	(1000 A AC/DC, ME15W terminal, 10 m (32.81 ft.) cable length)	(2000 A AC/DC, ME15W terminal, 3 m (9.84 ft.) cable length)	(2000 A AC/DC, ME15W terminal, 10 m (32.81 ft.) cable length)

Compatible models	CT6875A	CT6876A	CT6877A
PW8001	✓	✓	✓
PW6001	✓	✓	✓
PW3390	✓	✓	✓
U8977	✓	✓	✓

#### Shared options for CT6904A, CT6875A, CT6876A and CT6877A

<b>Options A</b>	<b>SENSOR UNIT CT9555</b> Power supply for current sensors (1ch, with waveform output)	<b>SENSOR UNIT CT9556</b> Power supply for current sensors (1ch, with waveform / RMS output)	<b>SENSOR UNIT CT9557</b> Power supply for current sensors (4ch, with waveform / total waveform / total RMS output)	<b>CONNECTION CORD L9217</b> Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft.) length	<b>CONNECTION CORD 9165</b> Cord has metallic BNC connectors at both ends, use at metallic terminal, 1.5 m (4.92 ft.) length
------------------	---	---	--	---	---

The CT9902 connects up to 2 cables in series

**Options B**

**EXTENSION CABLE CT9902**  
5 m (16.41 ft.) length, HIOKI ME15W (12 pin) - HIOKI ME15W (12 pin) connector

For connecting to the FIV Unit 8940 or Current Unit 8971

**Options D**

**CONVERSION CABLE 9318**  
To connect HIOKI PL23 (10 pin) connector to the 8971/40.51, 38 cm (14.96 in.) length

#### Basic specifications (Accuracy guaranteed for 1 year)

	CT6875A, CT6875A-1	CT6876A, CT6876A-1
Rated current	500 A AC/DC	1000 A AC/DC
Max. allowable input	Within the derating range, up to ±1500 Apeak (design value) allowed at 40°C or less for 20 ms or less	Within the derating range, up to ±1800 Apeak (design value) allowed at 40°C or less for 20 ms or less
Frequency bandwidth	Amplitude: DC to 2 MHz (CT6875A), DC to 1.5 MHz (CT6875A-1) Phase: DC to 1 MHz	Amplitude: DC to 1.5 MHz (CT6876A), DC to 1.2 MHz (CT6876A-1) Phase: DC to 1 MHz
Basic accuracy	(DC, 45 Hz ≤ f ≤ 66 Hz) Amplitude: ±0.04 % rdg ±0.008 % f.s., Phase: ±0.1°	(DC, 45 Hz ≤ f ≤ 66 Hz) Amplitude: ±0.04 % rdg ±0.008 % f.s., Phase: ±0.1°
Output voltage rate	4 mV / A rated	2 mV / A rated
Max. rated voltage to earth	1000 V AC/DC (50/60 Hz, CAT III)	
Core diameter	φ 36 mm (1.42 in.)	
Operating temperature, humidity	-40°C to +85°C (-40°F to 185°F), 80% RH or less (with no condensation)	
Power supply	Power supplied via the Power Analyzer PW8001, PW6001, PW3390, Sensor Unit CT9555, CT9556, CT9557, or 3CH CURRENT UNIT U8977	
Max. rated power	7 VA max. (at 500 A/55 Hz)	7.5 VA max. (at 1000 A/55 Hz)
Dimensions and mass	160 mm (6.30 in.)W × 112 mm (4.41 in.)H × 50 mm (1.97 in.)D, CT6875A: 850 g (30 oz.), cable length 3 m (9.84 ft.), CT6875A-1: 1150 g (40.6 oz.), cable length 10 m (32.81 ft.)	160 mm (6.30 in.)W × 112 mm (4.41 in.)H × 50 mm (1.97 in.)D, CT6876A: 970 g (34.2 oz.), cable length 3 m (9.84 ft.), CT6876A-1: 1300 g (45.9 oz.), cable length 10 m (32.81 ft.)
Included accessories	Instruction manual ×1, Mark bands ×6, Operating precautions ×1	
	<b>CT6877A, CT6877A-1</b>	
Rated current	2000 A AC/DC	
Max. allowable input	Within the derating range, (within the specified range up to ±3200 Apeak)	
Frequency characteristics	Amplitude: DC to 1 MHz, Phase: DC to 700 kHz	
Linearity	±10 ppm Typical (23°C [73°F])	
Offset voltage	±5 ppm Typical (23°C (73°F), no input)	
Basic accuracy	(DC, 45 Hz ≤ f ≤ 66 Hz) Amplitude: ±0.04 % rdg ±0.008 % f.s., Phase: ±0.08°	
Output voltage rate	1 mV / A rated (This device outputs AC+DC voltage via the Sensor Unit)	
Max. rated voltage to earth	1000 V AC/DC (50/60 Hz, CAT III)	
Core diameter	φ 80 mm (3.15 in.)	
Operating temperature, humidity	-40°C to +85°C (-40°F to 185°F), 80% RH or less (with no condensation)	
Power supply	Power supplied via the Power Analyzer PW8001, PW6001, PW3390, Sensor Unit CT9555, CT9556, CT9557, or 3CH CURRENT UNIT U8977	
Max. rated power	9.5 VA max. (at 2000 A/55 Hz, ±12 V power requirement)	
Dimensions and mass	229 mm (9.02 in.)W × 232 mm (9.13 in.)H × 112 mm (4.41 in.)D, CT6877A: 5 kg (176.4 oz.), cable length 3 m (9.84 ft.), CT6877A-1: 5.3 kg (186.9 oz.), cable length 10 m (32.81 ft.)	
Included accessories	Instruction manual ×1, Mark bands ×6, Operating precautions ×1	



## Low-current Model of 50 A or 200A rating, with Wideband and High Accuracy

### AC/DC CURRENT SENSOR CT6872, CT6873



CE  
CAT III 1000 V  
3 Year Warranty

- Combined accuracy with Hioki power analyzer PW8001, PW6001 and PW3390 is specified (DC, 45 Hz ≤ f ≤ 66 Hz). For details of combined accuracy, refer to the instruction manual.
- Wide-bandwidth DC to 10 MHz excellent frequency characteristics
- Applications in the fields of electric and hybrid electric vehicles
- Wide operating temperature range(-40°C to 85°C) fit for automobile applications
- Ideal for evaluation of solar power generation and fuel cells to measure battery charge and discharge and the secondary side of inverters
- For observing waveforms to be used with the oscilloscopes or Memory HiCorders (use with Sensor Unit)

Model No. (Order Code)	<b>CT6872</b>	(50 A AC/DC, ME15W terminal, 3 m (9.84 ft.) cable length)
	<b>CT6872-01</b>	(50 A AC/DC, ME15W terminal, 10 m (32.81 ft.) cable length)
	<b>CT6873</b>	(200 A AC/DC, ME15W terminal, 3 m (9.84 ft.) cable length)
	<b>CT6873-01</b>	(200 A AC/DC, ME15W terminal, 10 m (32.81 ft.) cable length)

Note: these products cannot be used alone. The optional SENSOR UNIT is required in order to supply power and connect the clamp to a Memory HiCorder or other instrument. Products can be directly connected to the compatible Power Meters.

#### Basic specifications (Accuracy guaranteed for 1 year)

	CT6872, CT6872-01	CT6873, CT6873-01
Rated current	50 A AC/DC	200 A AC/DC
Max. allowable input	Up to ±150 A peak	Up to ±420 A peak
Frequency bandwidth	Amplitude: DC to 10 MHz, Phase: DC to 1 MHz	
Linearity	±2 ppm Typical (23°C [73°F])	
Offset voltage	±5 ppm Typical (23°C [73°F], no input)	
Basic accuracy	DC (±0.03% rdg. ±0.002% f.s., no phase specification) 45 Hz ≤ f ≤ 66 Hz (±0.03% rdg. ±0.007% f.s., ±0.05°) Specified up to 1 MHz	
Output voltage rate	40 mV/A rated	10 mV/A rated
	This device outputs AC+DC voltage via the Sensor Unit	
Max. rated voltage to earth	1000 V CAT III	
Core diameter	φ 24 mm (0.94 in.)	
Operating temperature, humidity	-40°C to +85°C (-40°F to 185°F), 80% RH or less (with no condensation)	
Power supply	Power supplied via the Power Analyzer PW8001, PW6001, PW3390, Sensor Unit CT9555, CT9556, CT9557, or 3CH CURRENT UNIT U8977	
Max. rated power	4 VA max. (at 50 A/55 Hz, ±12 V power requirement)	6 VA max. (at 200 A/55 Hz, ±12 V power requirement)
Dimensions and mass	70 mm (2.76 in.)W × 100 mm (3.94 in.)H × 53 mm (2.09 in.)D, CT6872, CT6873: 370 g (13.1 oz.), cable length: 3 m (9.84 ft.), CT6872-01, CT6873-01: 690 g (24.3 oz.), cable length 10 m (32.81 ft.)	
Included accessories	Instruction Manual ×1, Mark bands ×6, Operating Precautions ×1	

Compatible models	CT6872	CT6873
Power Analyzer PW8001	✓	✓
Power Analyzer PW6001	✓	✓
Power Analyzer PW3390	✓	✓
3CH Current Unit U8977	✓	✓

**Options A**

<b>SENSOR UNIT CT9555</b> Power supply for current sensors (1ch, with waveform output)	<b>SENSOR UNIT CT9556</b> Power supply for current sensors (1ch, with waveform / RMS output)	<b>SENSOR UNIT CT9557</b> Power supply for current sensors (4ch, with waveform / total waveform / total RMS output)	<b>CONNECTION CORD L9217</b> Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft.) length	<b>CONNECTION CORD 9165</b> Cord has metallic BNC connectors at both ends, use at metallic terminal, 1.5 m (4.92 ft.) length
---	---	--	---	---

**Options B**

The CT9902 connects up to 2 cables in series

**EXTENSION CABLE CT9902**  
5 m (16.41 ft.) length, HIOKI ME15W (12 pin) - HIOKI ME15W (12 pin) connector

**Options D**

For connecting to the F/V Unit 8940 or Current Unit 8971

**CONVERSION CABLE 9318**  
To connect HIOKI PL23 (10 pin) connector to the 8971/4051, 38 cm (14.96 in.) length

Current Sensors

## Delivering Wide Operating Temperature Range and High-precision Current Measurement

### AC/DC CURRENT SENSOR CT6862, CT6863



CE  
CAT III 1000 V  
3 Year Warranty

- Super high precision
- Wide-bandwidth DC to 1 MHz (CT6862-05) excellent frequency characteristics
- Applications in the fields of electric and hybrid electric vehicles
- Wide operating temperature range(-30 °C to 85 °C) fit for automobile applications
- Ideal for evaluation of solar power generation and fuel cells to measure battery charge and discharge and the secondary side of inverters
- For observing waveforms to be used with the oscilloscopes or Memory HiCorders (use with SENSOR UNIT)

Model No. (Order Code)	<b>CT6862-05</b>	(50 A AC/DC, ME15W terminal)
	<b>CT6863-05</b>	(200 A AC/DC, ME15W terminal)

Note: these products cannot be used alone. The optional SENSOR UNIT is required in order to supply power and connect the clamp to a Memory HiCorder or other instrument. Products can be directly connected to the compatible Power Meters.

#### Basic specifications (Accuracy guaranteed for 1 year)

	CT6862-05	CT6863-05
Rated current	50 A AC/DC	200 A AC/DC
Max. allowable input	100 A rms (requires derating)	400 A rms (requires derating)
Frequency characteristics	Amplitude: DC to 1 MHz Phase: DC to 300 kHz	Amplitude: DC to 500 kHz Phase: DC to 300 kHz
Amplitude and Phase accuracy	DC ±0.05 % rdg ±0.01 % f.s. (Phase: Not defined) 16 Hz ≤ f ≤ 400 Hz ±0.05 % rdg ±0.01 % f.s. (Phase: ±0.2°) Defined to 1 MHz (CT6862-05) Defined to 500 kHz (CT6863-05)	
Output voltage	2 V / rated current value (This device outputs AC+DC voltage via the Sensor Unit.)	
Max. rated voltage to earth	1000 V AC/DC (50/60 Hz, CAT III)	
Core diameter	φ 24 mm (0.94 in.)	
Operating temperature, humidity	-30°C to +85°C (-22°F to 185°F), 80% RH or less (with no condensation)	
Power supply	Power supplied via the Power Analyzer PW8001, PW6001, PW3390, or Sensor Unit CT9555, CT9556, CT9557, or 3CH CURRENT UNIT U8977	
Power consumption	5 VA max. (at 50 A/55 Hz, ±12 V power requirement)	6 VA max. (at 200 A/55 Hz, ±12 V power requirement)
Dimensions and mass	70 mm (2.76 in.)W × 100 mm (3.94 in.)H × 53 mm (2.09 in.)D, 340 g (12.0 oz.), cord length: 3 m (9.84 ft.)	70 mm (2.76 in.)W × 100 mm (3.94 in.)H × 53 mm (2.09 in.)D, 350 g (12.3 oz.), cord length: 3 m (9.84 ft.)
Included accessories	Instruction manual ×1, Mark bands ×6	

Compatible models	(CT6862)	CT6862-05	(CT6863)	CT6863-05
PW8001	▲ (Requires the CT9900)	✓	▲ (Requires the CT9900)	✓
PW6001	▲ (Requires the CT9900)	✓	▲ (Requires the CT9900)	✓
PW3390	▲ (Requires the CT9900)	✓	▲ (Requires the CT9900)	✓
U8977	▲ (Requires the CT9900)	✓	▲ (Requires the CT9900)	✓

**Options A**

<b>SENSOR UNIT CT9555</b> Power supply for current sensors (1ch, with waveform output)	<b>SENSOR UNIT CT9556</b> Power supply for current sensors (1ch, with waveform / RMS output)	<b>SENSOR UNIT CT9557</b> Power supply for current sensors (4ch, with waveform / total waveform / total RMS output)	<b>CONNECTION CORD L9217</b> Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft.) length	<b>CONNECTION CORD 9165</b> Cord has metallic BNC connectors at both ends, use at metallic terminal, 1.5 m (4.92 ft.) length
---	---	--	---	---

**Options C**

The CT9902 connects up to 2 cables in series (Accuracy addition required.)

**EXTENSION CABLE CT9902**  
5 m (16.41 ft.) length, HIOKI ME15W (12 pin) - HIOKI ME15W (12 pin) connector

**Options D**

For connecting to the F/V Unit 8940 or Current Unit 8971

**CONVERSION CABLE 9318**  
To connect HIOKI PL23 (10 pin) connector to the 8971/4051, 38 cm (14.96 in.) length



## High-precision Current Testing (Rated Current 1000 A AC/DC, 500 A AC/DC)

### AC/DC CURRENT PROBE CT6844A, CT6845A, CT6846A



- Combined accuracy with Hioki Power Analyzer PW8001, PW6001 and PW3390 is specified (DC, 45 Hz  $\leq$  f  $\leq$  66 Hz). For details of combined accuracy, refer to the instruction manual.
- Frequency bandwidth: DC to 500 kHz (CT6844A), DC to 200 kHz (CT6845A), DC to 100 kHz (CT6846A)
- Ideal for use in environmental testing with broad -40°C to 85°C temperature range
- Single-handed operation and robust locking mechanism
- Large jaw for clamping thick and paired wires (CT6845A, CT6846A)
- Power supplied via the measurement instrument (when connecting Hioki Power Analyzer or Memory HiCorder)
- Ideal for EV inverter evaluation and PV power generation PCS evaluation

Model No. (Order Code)	CT6844A	(500 A AC/DC, ME15W terminal)
	CT6845A	(500 A AC/DC, ME15W terminal)
	CT6846A	(1000 A AC/DC, ME15W terminal)

#### Basic specifications (Accuracy guaranteed for 1 year)

	CT6844A	CT6845A	CT6846A
Rated current	500 A AC/DC		1000 A AC/DC
Frequency characteristics	DC to 500 kHz	DC to 200 kHz	DC to 100 kHz
Core diameter	$\phi$ 50 mm (1.97 in.)		
Max. allowable input	$\pm$ 800 Apeak (Within 20 ms in an environment of 40°C/104°F or less)	$\pm$ 1500 Apeak (Within 20 ms in an environment of 40°C/104°F or less)	$\pm$ 1900 Apeak (Within 20 ms in an environment of 40°C/104°F or less)
Output voltage	4 mV/A		2 mV/A
Output resistance	50 $\Omega$ $\pm$ 10 $\Omega$		
Accuracy (amplitude)	DC: $\pm$ 0.2 % rdg +0.02 % f.s., DC < f $\leq$ 100 Hz $\pm$ 0.2 % rdg $\pm$ 0.01 % f.s.		
Linearity	$\pm$ 20 ppm Typical		
Common-Mode Voltage Rejection Ratio (CMRR)	DC to 1 kHz: 150 dB or greater 1 kHz to 10 kHz: 135 dB or greater 10 kHz to 100 kHz: 120 dB or greater 100 kHz to 300 kHz: 100 dB or greater (effect on output voltage and common mode voltage)	DC to 1 kHz: 150 dB or greater 1 kHz to 10 kHz: 130 dB or greater 10 kHz to 100 kHz: 100 dB or greater (effect on output voltage and common mode voltage)	DC to 1 kHz: 150 dB or greater 1 kHz to 10 kHz: 130 dB or greater 10 kHz to 50 kHz: 100 dB or greater (effect on output voltage and common mode voltage)
Automatic phase correction	Automatically performs phase correction when connected to PW8001		
Operating temperature, humidity	-40 °C to +85 °C (-40 °F to 185 °F), 80% RH or less (with no condensation)		
Standards	Safety IEC 61010-2-032:2012/EN 61010-2-032:2012 Type D EMC IEC 61326-1:2012/EN 61326-1:2013		
Withstand voltage	AC 4,260 V		
Power supply	Power supplied via the Power Analyzer PW8001, PW6001, PW3390, Sensor Unit CT9555, CT9556, CT9557, or 3CH CURRENT UNIT U8977		
Max. rated power	7 VA max. (at 500 A/55 Hz, $\pm$ 12 V power requirement)		7 VA max. (at 1000 A/55 Hz, $\pm$ 12 V power requirement)
Dimensions and mass	153 mm (6.02 in.)W $\times$ 67 mm (2.64 in.)H $\times$ 25 mm (0.68 in.)D, 400 g (14.1 oz.), cord length: 3 m (9.84 ft.)	238 mm (9.37 in.)W $\times$ 116 mm (4.57 in.)H $\times$ 35 mm (1.38 in.)D, 860 g (30.3 oz.), cord length: 3 m (9.84 ft.)	238 mm (9.37 in.)W $\times$ 116 mm (4.57 in.)H $\times$ 35 mm (1.38 in.)D, 990 g (34.9 oz.), cord length: 3 m (9.84 ft.)
Included accessories	Instruction manual $\times$ 1, Mark bands $\times$ 6, Carrying Case $\times$ 1		

Note: these products cannot be used alone. The optional SENSOR UNIT is required in order to supply power and connect the clamp to a Memory HiCorder or other instrument. Products can be directly connected to the compatible Power Meters.

## High-precision Current Testing (Rated Current 500 A AC/DC, 200 A AC/DC)

### AC/DC CURRENT PROBE CT6833, CT6834



- The slim design ensures easy installation even in tight spaces
- Rated current 200 A AC/DC (CT6833, CT6833-01), 500 A AC/DC (CT6834, CT6834-01)
- Frequency bandwidth: DC to 50 kHz
- Measurement accuracy DC:  $\pm$ 0.07% rdg.  $\pm$ 0.01% f.s.
- Operating temp range: -40°C to 85°C, perfect for vehicle testing
- Ideal for vehicle fuel & energy efficiency testing—compliant with international standard WLTP

Model No. (Order Code)	CT6833	(200 A AC/DC, ME15W terminal, 5 m cable length)
	CT6833-01	(200 A AC/DC, ME15W terminal, 10 m cable length)
	CT6834	(500 A AC/DC, ME15W terminal, 5 m cable length)
	CT6834-01	(500 A AC/DC, ME15W terminal, 10 m cable length)

#### Basic specifications (Accuracy guaranteed for 1 year)

	CT6833, CT6833-01	CT6834, CT6834-01
Rated current	200 A AC/DC	500 A AC/DC
Frequency bandwidth	DC to 50 kHz	
Diameter of measurable conductor	Max. $\phi$ 20 mm (0.79 in.)	
Maximum peak current	Up to $\pm$ 600 A peak are permitted at a temperature of 40°C (104°F) or less and within 1 period of a periodic waveform of 10 ms or more (design value, out of guaranteed accuracy range)	Up to $\pm$ 800 A peak are permitted at a temperature of 40°C (104°F) or less and within 1 period of a periodic waveform of 10 ms or more (design value, out of guaranteed accuracy range)
Output voltage	10 mV/A	4 mV/A
Measurement accuracy	DC : $\pm$ 0.07% rdg. $\pm$ 0.01% f.s.	
Operating temperature and humidity range	Sensor, cable: -40°C to 85°C (-40°F to 185°F), 80% RH or less (non-condensing) Relay box: -25°C to 50°C (-13°F to 122°F), 80% RH or less (non-condensing)	
Temperature coefficient	The following numerical values are added to the measurement accuracy according to the temperature difference with the upper and lower limits of the guaranteed accuracy temperature range (18°C or 28°C [64°F or 82°F]) if operating temperatures are outside the guaranteed accuracy temperature range (23°C $\pm$ 5°C [73°F $\pm$ 9°F]). - Sensor Amplitude accuracy: $\pm$ 4 ppm of reading/°C ( $\pm$ 0.8 ppm of reading/°C Typical) Offset voltage: $\pm$ 3 ppm of full scale/°C ( $\pm$ 0.5 ppm of full scale/°C Typical) - Relay box Amplitude accuracy: $\pm$ 15 ppm of reading/°C ( $\pm$ 5 ppm of reading/°C Typical) Offset voltage: $\pm$ 1 ppm of full scale/°C ( $\pm$ 0.3 ppm of full scale/°C Typical)	
Effects of conductor position	(For a conductor with an outer diameter of 10 mm) DC: $\pm$ 0.03% of reading or less ( $\pm$ 0.01% of reading Typical) 50 Hz/60 Hz: $\pm$ 0.04% of reading or less ( $\pm$ 0.015% of reading Typical) 1 kHz: $\pm$ 0.1% of reading or less ( $\pm$ 0.04% of reading Typical) 10 kHz: $\pm$ 1% of reading or less ( $\pm$ 0.3% of reading Typical)	
Power supply	Use Hioki instruments with an ME15W connector	
Dimensions (excluding protrusions and cable)	Sensor: approx. 149W $\times$ 46H $\times$ 16.5D mm (5.9W $\times$ 1.8H $\times$ 0.6D in.) Relay box: approx. 126W $\times$ 57H $\times$ 20.5D mm (5.0W $\times$ 2.2H $\times$ 0.8D in.)	
Weight	CT6833: approx. 500 g (17.6 oz.) CT6833-01: approx. 710 g (25.0 oz.)	CT6834: approx. 500 g (17.6 oz.) CT6834-01: approx. 710 g (25.0 oz.)
Output cable length (including relay box)	CT6833: approx. 5 m (16.4 ft.) CT6833-01: approx. 10 m (32.8 ft.)	CT6834: approx. 5 m (16.4 ft.) CT6834-01: approx. 10 m (32.8 ft.)
Included accessories	Color labels (for channel identification) $\times$ 1, Carrying Case $\times$ 1, Instruction Manual $\times$ 1, Current Sensor Operating Precautions $\times$ 1	

## High-precision Current Testing (Rated Current 200 A AC/DC, 20 A AC/DC)

### AC/DC CURRENT PROBE CT6841A, CT6843A



- Combined accuracy with Hioki Power Analyzer PW8001, PW6001 and PW3390 is specified (DC, 45 Hz ≤ f ≤ 66 Hz). For details of combined accuracy, refer to the instruction manual.
- Frequency bandwidth: DC to 2 MHz (CT6841A), DC to 700 kHz (CT6843A)
- Ideal for use in environmental testing with broad -40°C to 85°C temperature range
- Single-handed operation and robust locking mechanism
- Power supplied via the measurement instrument (when connecting Hioki Power Analyzer or Memory HiCorder)
- Ideal for EV inverter evaluation and PV power generation PCS evaluation

Model No. (Order Code)	<b>CT6841A</b>	(20 A AC/DC, ME15W terminal)
	<b>CT6843A</b>	(200 A AC/DC, ME15W terminal)

Note: these products cannot be used alone. The optional SENSOR UNIT is required in order to supply power and connect the clamp to a Memory HiCorder or other instrument. Products can be directly connected to the compatible Power Meters.

#### Basic specifications (Accuracy guaranteed for 1 year)

	CT6841A	CT6843A
Rated current	20 A AC/DC	200 A AC/DC
Frequency characteristics	DC to 2 MHz	DC to 700 kHz
Core diameter	φ 20 mm (0.79 in.)	
Max. allowable input	±60 Apeak (Within 20 ms in an environment of 40°C/104°F or less)	
Output voltage	100 mV/A	10 mV/A
Output resistance	50 Ω ± 10 Ω	
Accuracy (amplitude)	DC: ±0.2 % rdg +0.05 % f.s. DC < f ≤ 100 Hz: ±0.2 % rdg ±0.01 % f.s.	DC: ±0.2 % rdg +0.02 % f.s. DC < f ≤ 100 Hz: ±0.2 % rdg ±0.01 % f.s.
Linearity	±20 ppm Typical	
Common-Mode Voltage Rejection Ratio (CMRR)	DC to 1 kHz: 140 dB or greater 1 kHz to 10 kHz: 125 dB or greater 10 kHz to 100 kHz: 100 dB or greater 100 kHz to 1 MHz: 80 dB or greater (effect on output voltage and common mode voltage)	DC to 1 kHz: 150 dB or greater 1 kHz to 10 kHz: 135 dB or greater 10 kHz to 100 kHz: 115 dB or greater 100 kHz to 500 kHz: 95 dB or greater (effect on output voltage and common mode voltage)
Automatic phase correction	Automatically performs phase correction when connected to PW8001	
Operating temperature, humidity	-40 °C to +85 °C (-40 °F to 185 °F), 80% RH or less (with no condensation)	
Standards	Safety IEC 61010-2-032:2012/EN 61010-2-032:2012 Type D EMC IEC 61326-1:2012/EN 61326-1:2013	
Withstand voltage	AC 4,260 V	
Power supply	Power supplied via the Power Analyzer PW8001, PW6001, PW3390, Sensor Unit CT9555, CT9556, CT9557, or 3CH CURRENT UNIT U8977	
Max. rated power	5 VA max. (at 20 A/55 Hz, ±12 V power requirement)	6 VA max. (at 200 A/55 Hz, ±12 V power requirement)
Dimensions and mass	153 mm (6.02 in.)W × 67 mm (2.64 in.)H × 25 mm (0.98 in.)D, cord length: 3 m (9.84 ft.) CT6841A: 370 g (13.05 oz.), CT6843A: 380 g (13.4 oz.)	
Included accessories	Instruction manual ×1, Mark bands ×6, Carrying Case ×1	

## One of the Industry's Smallest Current Sensors (Rated Current 20 A AC/DC, 2 A AC/DC)

### AC/DC CURRENT PROBE CT6830, CT6831



- Exceptional performance in a compact package
- Easy to install in confined locations with complex wiring
- High accuracy: ±0.3% rdg, ±0.1% f.s.
- Decreased offset drift that comes from temperature changes

Model No. (Order Code)	<b>CT6830</b>	(2 A AC/DC, ME15W terminal)
	<b>CT6831</b>	(20 A AC/DC, ME15W terminal)

Note: these products can be used with PW8001, PW6001, PW3390, CT9555, CT9556, CT9557, and U8977.

#### Basic specifications (Accuracy guaranteed for 1 year)

	CT6830	CT6831
Rated measurement current	2 A AC/DC	20 A AC/DC
Max. allowable input	3 A rms continuous (±4.3 Ap)	30 A rms continuous (±43 Ap)
Bandwidth	DC to 100 kHz	
Core diameter	φ 5 mm or less	
Output connectors	HIOKI ME 15W	
Operating temperature range	Sensor: -40°C to 85°C, 80% RH or less (non-condensing) Multiplexer: -25°C to 50°C, 80% RH or less (non-condensing)	
Dimensions	Sensor: 76.5W × 23.4H × 14.2D mm (excluding protrusions and the cable) Multiplexer: 80W × 20H × 26.5D mm (excluding protrusions and the cable)	
Weight	140 g	
Output cable length	4 m (between sensor and multiplexer) 0.2 m (between multiplexer and output connector)	
Included accessories	Colored labels (for channel identification), Carrying case, Instruction Manual, Operating Precautions	

### Shared options for CT6844A, CT6845A, CT6846A, CT6833, CT6834, CT6841A, CT6843A, CT6830 and CT6831

**Options A**

**SENSOR UNIT CT9555**  
Power supply for current sensors (1ch, with waveform output)

**SENSOR UNIT CT9556**  
Power supply for current sensors (1ch, with waveform / RMS output)

**SENSOR UNIT CT9557**  
Power supply for current sensors (4ch, with waveform / total waveform / total RMS output)

**CONNECTION CORD L9217**  
Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft.) length

**CONNECTION CORD 9165**  
Cord has metallic BNC connectors at both ends, use at metallic terminal, 1.5 m (4.92 ft.) length

**Options C**

The CT9902 connects up to 2 cables in series (Accuracy addition required.)

**EXTENSION CABLE CT9902**  
5 m (16.4 ft.) length, HIOKI ME15W (12 pin)-HIOKI ME15W (12 pin) connector

**Options D**

For connecting to the F/V Unit 8940 or Current Unit 8971

**CONVERSION CABLE 9318**  
To connect HIOKI PL23 (10 pin) connector to the 8971/40/51, 38 cm (14.96 in.) length

Compatible models	CT6844A	CT6845A	CT6846A	CT6833	CT6834	CT6841A	CT6843A	CT6830	CT6831
PW8001	✓	✓	✓	✓	✓	✓	✓	✓	✓
PW6001	✓	✓	✓	✓	✓	✓	✓	✓	✓
PW3390	✓	✓	✓	✓	✓	✓	✓	✓	✓
U8977	✓	✓	✓	✓	✓	✓	✓	✓	✓

## Power Supply for 4ch High-Precision Current Sensors Capable of Adding Current Waveforms

### SENSOR UNIT CT9557



- Power supply for high-precision current sensors with waveform output functionality
- Channel-specific waveform output, total waveform output, total RMS output
- Ideal for measuring multi-cable circuits

Model No. (Order Code) **CT9557** (For the CT6841A, etc., ME15W terminal)

#### Basic specifications (Accuracy guaranteed for 1 year)

Connectable current sensors	Current sensors with a Hioki ME15W (male) output connector (CT6872, CT6841A, etc.) *The separately available Conversion Cable CT9900 is required in order to use a current sensor equipped with a PL23 (10-pin) terminal
Output Terminal	BNC Terminal
Output voltage	Waveform output/ Total waveform output: 2 V f.s. Total RMS output: 2 V DC f.s. Waveform output (4CH), total waveform output and total RMS output can be used simultaneously
Output resistance	50 Ω
Operating temperature range	-10 °C to 50 °C (14 °F to 122 °F)
Power supply	AC Adapter Z1002 (100 to 240 V AC, 50/60 Hz, maximum rated power when used with sensors: 155 VA) External power supply (10 to 30 V DC; maximum rated power: 60 VA)
Dimensions and mass	116 mm (4.57 in.)W × 67 mm (2.64 in.)H × 132 mm (5.20 in.)D (excluding protruding parts), 420 g (14.8 oz.)
Included accessories	AC Adapter Z1002 ×1, Power cord ×1, Instruction manual ×1

## Power Supplies for High-Precision Current Sensors

### SENSOR UNIT CT9555, CT9556



- Power supply for high-precision current sensors with waveform output functionality (CT9555)
- Power supply for high-precision current sensors with waveform output/RMS output functionality (CT9556)

Model No. (Order Code) **CT9555** (For the CT6841A, etc., ME15W connector)  
**CT9556** (For the CT6841A, etc., ME15W connector)

#### Basic specifications (Accuracy guaranteed for 1 year)

	CT9555	CT9556
Connectable current sensors	Current sensors with a Hioki ME15W (male) output connector (CT6872, CT6841A, etc.) *The separately available Conversion Cable CT9900 is required in order to use a current sensor equipped with a PL23 (10-pin) terminal	
Output Terminal	BNC Terminal	
Output voltage	Waveform output: 2 V f.s.	Waveform output: 2 V f.s. RMS output: 2 V DC f.s. Waveform output and RMS output can be used simultaneously
Output resistance	50 Ω	
Operating temperature range	-10 °C to 50 °C (14 °F to 122 °F)	
Power supply	AC Adapter Z1008 (100 to 240 V AC, 50/60 Hz, maximum rated power when used with sensors: 45 VA) External power supply (10 to 30 V DC; maximum rated power: 15 VA)	
Dimensions and mass	33 mm (1.30 in.)W × 67 mm (2.64 in.)H × 132 mm (5.20 in.)D (excluding protruding parts), 200 g (7.1 oz.)	
Included accessories	AC Adapter Z1008 ×1, Power cord ×1, Instruction manual ×1	

#### Shared options for CT9555, CT9556 and CT9557

Options		CONNECTION CABLE CT9904 ME15W (12 pin) terminal to ME15W (12 pin) terminal, 1 m (3.28 ft.) length (for connecting CT9557 total output to PW8001, PW6001 or PW3390 only)
		CONNECTION CORD L9217 Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft.) length
		CONNECTION CORD 9165 Cord has metallic BNC connectors at both ends, use at metallic terminal, 1.5 m (4.92 ft.) length
		CONVERSION CABLE CT9900 PL23 (10 pin) to ME15W (12 pin) connector

## Ideal for Measuring AC Current with Low Frequencies such as Inverter Control Devices

### CLAMP ON SENSOR 9272



HIOKI ME15W (12-pin terminal)



CAT III 600 V

- Superior low frequency and phase characteristics suitable for testing the current and power of inverter control devices
- Wide 1 Hz to 100 kHz frequency bandwidth perfect for harmonic analysis, FFT analysis and waveform monitoring (AC only)

Model No. (Order Code) **9272-05** (20/200 A AC, ME15W terminal)

*Note: this product cannot be used alone. The optional Sensor Unit is required in order to supply power and connect the clamp to a Memory HiCorder or other instrument. The clamp can be directly connected to a compatible Power Meters.*



#### Basic specifications (Accuracy guaranteed for 1 year)

Rated current	20 A AC, or 200 A AC (selectable)
Max. allowable input	50 A rms (at 20 A range), 300 A rms (at 200 A range)
Frequency characteristics	1 Hz (±2 % rdg ±0.1 % f.s.) to 100 kHz (±30 % rdg ±0.1 % f.s.)
Amplitude and Phase accuracy	Amplitude: ±0.3 % rdg ±0.01 % f.s. Phase: ±0.2 ° (45 to 66 Hz)
Output voltage	2 V/20 A rated current range, or 2 V/200 A rated current range (This device outputs AC+DC voltage via the Sensor Unit.)
Max. rated voltage to earth	600 V rms (CAT III)
Core diameter	φ 46 mm (1.81 in.)
Power supply	Power supplied via the Power Analyzer PW8001, PW6001, PW3390, Sensor Unit CT9555, CT9556, CT9557, or 3CH CURRENT UNIT U8977
Power consumption	5 VA Max. (when measuring 200 A)
Dimensions and mass	78 mm (3.07 in.)W × 188 mm (7.40 in.)H × 35 mm (1.38 in.)D, 430 g (15.2 oz.), cord length: 3 m (9.84 ft.)
Included accessories	Carrying case 9355 ×1, Instruction manual ×1, Mark bands ×6

	Compatible models (9272-10)	9272-05
Power Analyzer PW8001	▲ (Requires CT9900)	✓
Power Analyzer PW3390	▲ (Requires CT9900)	✓
3CH Current Unit U8977	▲ (Requires CT9900)	✓

Options A		SENSOR UNIT CT9555 Power supply for current sensors (1ch, with waveform output)
		SENSOR UNIT CT9556 Power supply for current sensors (1ch, with waveform/RMS output)
		SENSOR UNIT CT9557 Power supply for current sensors (4ch, with waveform/total waveform/total RMS output)
		CONNECTION CORD L9217 Cord has insulated BNC connectors at both ends, 1.6 m (5.25 ft.) length
		CONNECTION CORD 9165 Cord has metallic BNC connectors at both ends, use at metallic terminal, 1.5 m (4.92 ft.) length

Options C		The CT9902 connects up to 2 cables in series (Accuracy addition required.) EXTENSION CABLE CT9902 3 m (16.4 ft.) length, HIOKI ME15W (12 pin)-HIOKI ME15W (12 pin) connector
		For connecting to the F/V Unit 8940 or Current Unit 8971 CONVERSION CABLE 9318 To connect HIOKI PL23 (10 pin) connector to the 8971/40/51, 38 cm (14.96 in.) length



## Accurate, Long-term Recording and Easy Output Settings

### AC/DC AUTO-ZERO CURRENT SENSOR CT7700 series



- Accurately measure and record even when the temperature changes
- Ideal for site inspections by using detachable Display Unit
- Four output formats to output data to loggers or other devices (via Display Unit) WAVE, RMS, PEAK, Hz

Model No. (Order Code)	<b>CT7742</b> (2000 A AC/DC, $\phi$ 55 mm (2.17 in.))
	<b>CT7736</b> (600 A AC/DC, $\phi$ 33 mm (1.30 in.))
	<b>CT7731</b> (100 A AC/DC, $\phi$ 33 mm (1.30 in.))

Note: CT7700 series cannot be used alone. Use with the Display Unit CM7290 to connect with Data Loggers and Memory HiCorders. When used in combination with CM7290, the frequency band of current display and waveform output becomes narrow.

#### ■ Basic specifications (Accuracy guaranteed for 3 years)

	CT7742	CT7736	CT7731
Rated measurement current	2000 A AC/DC	600 A AC/DC	100 A AC/DC
Max. measurement current	2000 A (requires derating at frequency)	600 A (requires derating at frequency)	100 A (requires derating at frequency)
Max. allowable peak input	2840 A peak	900 A peak	150 A peak
Bandwidth	DC to 5 kHz (-3dB) (When used in combination with CM7290: DC 3 Hz to 1 kHz)		
Typical accuracy	$\pm 2.3$ deg. (DC < f $\leq$ 66 Hz)	$\pm 1.8$ deg. (DC < f $\leq$ 66 Hz)	$\pm 1.8$ deg. (DC < f $\leq$ 66 Hz)
Output rate	0.1 mV/A	1 mV/A	1 mV/A
Max. rated voltage to earth	600 V AC/DC (CAT IV) 1000 V AC/DC (CAT III)	600 V AC/DC (CAT IV) 1000 V AC/DC (CAT III)	600 V AC/DC (CAT IV)
Core diameter	$\phi$ 55 mm (2.17 in.) or less	$\phi$ 33 mm (1.30 in.) or less	$\phi$ 33 mm (1.30 in.) or less
Output connectors	HIOKI PL 14		
Operating temperature range	-25 °C to 65 °C (-13 °F to 149 °F)		
Dust and water resistance *	Jaws and barriers: IP50 (when jaw closes)/Grip: IP54 (when measuring insulated conductors only. Do not use when wet.)		IP40 (when jaw closes)
Dimensions and mass	64 mm (2.52 in.)W $\times$ 195 mm (7.68 in.)H $\times$ 34 mm (1.34 in.)D, 510 g (18.0 oz.), Cable length 2.5 m (8.20 ft.)	64 mm (2.52 in.)W $\times$ 160 mm (6.30 in.)H $\times$ 34 mm (1.34 in.)D, 320 g (11.3 oz.), Cable length 2.5 m (8.20 ft.)	58 mm (2.28 in.)W $\times$ 132 mm (5.20 in.)H $\times$ 18mm (0.71 in.)D, 250 g (8.8 oz.), Cable length 2.5 m (8.20 ft.)
Included accessory	None		

\* Waterproof characteristics intended to maintain measurement function; measuring energized parts while instrument is wet will increase risk of electric shock.

## Accurate, Instantaneous Waveforms Recording and Easy Output Settings

### AC/DC CURRENT SENSOR CT600 series



- Ideal for observing instantaneous waveforms in laboratories and other temperature-controlled environments
- Ideal for site inspections by using detachable Display Unit
- Four output formats to output data to loggers or other devices (via Display Unit) WAVE, RMS, PEAK, Hz

Model No. (Order Code)	<b>CT7642</b> (2000 A AC/DC, $\phi$ 55 mm (2.17 in.))
	<b>CT7636</b> (600 A AC/DC, $\phi$ 33 mm (1.30 in.))
	<b>CT7631</b> (100 A AC/DC, $\phi$ 33 mm (1.30 in.))

Note: CT600 series cannot be used alone. Use with the Display Unit CM7290 to connect with Data Loggers and Memory HiCorders. When used in combination with CM7290, the frequency band of current display and waveform output becomes narrow.

#### ■ Basic specifications (Accuracy guaranteed for 3 years)

	CT7642	CT7636	CT7631
Rated measurement current	2000 A AC/DC	600 A AC/DC	100 A AC/DC
Max. measurement current	2000 A (requires derating at frequency)	600 A (requires derating at frequency)	100 A (requires derating at frequency)
Max. allowable peak input	2840 A peak	900 A peak	150 A peak
Bandwidth	DC to 10 kHz (-3dB) (When used in combination with CM7290: DC 3 Hz to 1 kHz)		
Typical accuracy	$\pm 2.3$ deg. (DC < f $\leq$ 66 Hz)	$\pm 1.8$ deg. (DC < f $\leq$ 66 Hz)	$\pm 1.8$ deg. (DC < f $\leq$ 66 Hz)
Output rate	0.1 mV/A	1 mV/A	1 mV/A
Max. rated voltage to earth	600 V AC/DC (CAT IV) 1000 V AC/DC (CAT III)	600 V AC/DC (CAT IV) 1000 V AC/DC (CAT III)	600 V AC/DC (CAT IV)
Core diameter	$\phi$ 55 mm (2.17 in.) or less	$\phi$ 33 mm (1.30 in.) or less	$\phi$ 33 mm (1.30 in.) or less
Output connectors	HIOKI PL 14		
Operating temperature range	-25 °C to 65 °C (-13 °F to 149 °F)		
Dust and water resistance *	Jaws and barriers: IP50 (when jaw closes)/Grip: IP54 (when measuring insulated conductors only. Do not use when wet.)		IP40 (when jaw closes)
Dimensions and mass	64 mm (2.52 in.)W $\times$ 195 mm (7.68 in.)H $\times$ 34 mm (1.34 in.)D, 510 g (18.0 oz.), Cable length 2.5 m (8.20 ft.)	64 mm (2.52 in.)W $\times$ 160 mm (6.30 in.)H $\times$ 34 mm (1.34 in.)D, 320 g (11.3 oz.), Cable length 2.5 m (8.20 ft.)	58 mm (2.28 in.)W $\times$ 132 mm (5.20 in.)H $\times$ 18mm (0.71 in.)D, 250 g (8.8 oz.), Cable length 2.5 m (8.20 ft.)
Included accessory	None		

\* Waterproof characteristics intended to maintain measurement function; measuring energized parts while instrument is wet will increase risk of electric shock.

## One of the Industry's Smallest Current Sensors

### AC/DC CURRENT SENSOR CT7812, CT7822



- Exceptional performance in a compact package
- Easy to install in confined locations with complex wiring
- High accuracy:  $\pm 0.3\%$  rdg.  $\pm 0.1\%$  f.s.
- Decreased offset drift that comes from temperature changes

Model No. (Order Code)	<b>CT7812</b> (2 A AC/DC)
	<b>CT7822</b> (20 A AC/DC)

Note: these products can be used with U8556 and LR8536 and cannot be used with PQ3198, PQ3100, CM7290.

#### ■ Basic specifications (Accuracy guaranteed for 1 year)

	CT7812	CT7822
Rated measurement current	2 A AC/DC	20 A AC/DC
Max. allowable input	3 A rms continuous ( $\pm 4.3$ Ap)	30 A rms continuous ( $\pm 43$ Ap)
Bandwidth	DC to 100 kHz	
Core diameter	$\phi$ 5 mm or less	
Output connectors	HIOKI PL 14	
Operating temperature range	Sensor: -40°C to 85°C, 80% RH or less (non-condensing) Multiplexer: -25°C to 50°C, 80% RH or less (non-condensing)	
Dimensions	Sensor: 76.5W $\times$ 23.4H $\times$ 14.2D mm (excluding protrusions and the cable) Multiplexer: 80W $\times$ 20H $\times$ 26.5D mm (excluding protrusions and the cable)	
Weight	140 g	
Output cable length	4 m (between sensor and multiplexer) 0.2 m (between multiplexer and output connector)	
Included accessories	Colored labels (for channel identification), Carrying case, Instruction Manual, Operating Precautions	

## Multi-functional Display Unit to Use Right on the Field or Output to Advanced Recorder or Logger

### DISPLAY UNIT CM7290



- Power supply and signal output for Current Sensor CT7000 series
- Simultaneous dual display of the measured values, frequency, and output rate
- Four output formats to output data to loggers or other devices (via Display Unit)
- Supports AC adapter, AA alkaline batteries, and external power supply

Model No. (Order Code) **CM7290** (For the CT7000 series)

Note: CM7290 cannot be used alone. Use with CT7000 series. When used in combination with the CT7000 sensor series, the frequency band for current display and waveform output is narrower than the sensor band.

#### Basic specifications (Accuracy guaranteed for 3 years)

Sensor	CT7642, 7742	CT7636, 7736	CT7631, 7731
Measurement parameters	DC, AC, DC+AC, Hz		
Crest factor	3 at 5000 count or 2.5 at 6000 count for AC and DC+AC		
Output method	WAVE, RMS, PEAK, FREQ		
Input connectors	HIOKI PL 14		
Output update time	PEAK--- FAST: 0.02 s / NORMAL: 0.2 s / SLOW: 1 s FREQ--- FAST: FAST: 0.2 s / NORMAL: 0.2 s / SLOW: 3.0 s (WAVE, RMS: analog output)		
PEAK sensing duration	2 ms or greater (during PEAK MAX/PEAK MIN and PEAK output)		
Other functions	Auto range, Zero adjustment at power-up, Analysis display, Filter, Output amplification, Display value hold, Backlight, Auto-power save, Save settings, Keypad lock		
Typical accuracy (WAVE output DC)	±2.0% rdg ±10.8 mV (60.00 A range)	±2.5% rdg ±30.8 mV (60.00 A range)	±1.5% rdg ±5.8 mV (60.00 A range)
Typical accuracy (RMS output AC)	±2.3% rdg ±10.8 mV (60.00 A range)	±2.8% rdg ±30.8 mV (60.00 A range)	±1.8% rdg ±5.8 mV (60.00 A range)
Power supply	LR6 alkaline batteries (AA) ×2, Continuous use: 16 h (backlight OFF and WAVE or RMS output, when used with CT7600 series), Rated power 2.5 VA or AC adapter 9445-02/03 (100 to 240V AC), or 5 to 15 V DC external power supply, Rated power 2.5 VA		
Dust and water resistance *	IP54 (with sensor connected and caps fitted to AC adapter and power connector)		
Dimensions and mass	52 mm (2.05 in.)W × 163 mm (6.42 in.)H × 37 mm (1.46 in.)D, 220 g (7.8 oz.) (including protector and battery)		
Included accessories	LR6 alkaline batteries ×2, Protector (attached to unit) ×1, Instruction manual ×1		

\* Waterproof characteristics intended to maintain measurement function; measuring energized parts while instrument is wet will increase risk of electric shock.


Connectable sensor 1	AC/DC AUTO-ZERO CURRENT SENSOR CT7742 2000 A AC/DC, φ 55 mm (2.17 in.), 2.5 m (8.20 ft.) cord length	AC/DC AUTO-ZERO CURRENT SENSOR CT7736 600 A AC/DC, φ 33 mm (1.30 in.), 2.5 m (8.20 ft.) cord length	AC/DC AUTO-ZERO CURRENT SENSOR CT7731 100 A AC/DC, φ 33 mm (1.30 in.), 2.5 m (8.20 ft.) cord length	AC/DC CURRENT SENSOR CT7642 2000 A AC/DC, φ 55 mm (2.17 in.), 2.5 m (8.20 ft.) cord length	AC/DC CURRENT SENSOR CT7636 600 A AC/DC, φ 33 mm (1.30 in.), 2.5 m (8.20 ft.) cord length	AC/DC CURRENT SENSOR CT7631 100 A AC/DC, φ 33 mm (1.30 in.), 2.5 m (8.20 ft.) cord length	AC FLEXIBLE CURRENT SENSOR CT7046 600/6000 A AC, φ 254 mm (10.00 in.)	AC FLEXIBLE CURRENT SENSOR CT7045 600/6000 A AC, φ 180 mm (7.09 in.)	AC FLEXIBLE CURRENT SENSOR CT7044 600/6000 A AC, φ 100 mm (3.94 in.)
	Connectable sensor 2	AC LEAKAGE CURRENT SENSOR CT7116 6 A AC, φ 40 mm (1.57 in.), 2.5 m (8.20 ft.) cord length	AC CURRENT SENSOR CT7126 60 A AC, φ 15 mm (0.59 in.), 2.5 m (8.20 ft.) cord length	AC CURRENT SENSOR CT7131 100 A AC, φ 15 mm (0.59 in.), 2.5 m (8.20 ft.) cord length	AC CURRENT SENSOR CT7136 600 A AC, φ 46 mm (1.81 in.), 2.5 m (8.20 ft.) cord length	OUTPUT CORD L9094 Connect to Banana terminal, 1.5 m (4.92 ft.) length	OUTPUT CORD L9095 Connect to BNC terminal, 1.5 m (4.92 ft.) length	OUTPUT CORD L9096 Connect to terminal block, 1.5 m (4.92 ft.) length	AC ADAPTER 9445-02 100 to 240 V AC

#### Shared options for CT7000 series

DISPLAY UNIT CM7290 Power supply for the CT7000 series single drive, Measure, Display, Signal output function	EXTENSION CABLE L0220-01 2 m (6.56 ft.) length	EXTENSION CABLE L0220-02 5 m (16.41 ft.) length	EXTENSION CABLE L0220-03 10 m (32.81 ft.) length	EXTENSION CABLE L0220-04 20 m (65.62 ft.) length	EXTENSION CABLE L0220-05 30 m (98.43 ft.) length	EXTENSION CABLE L0220-06 50 m (164.06 ft.) length	EXTENSION CABLE L0220-07 100 m (328.11 ft.) length	CARRYING CASE C0220 For storing sensor ×1, CM7290 ×1, AC adapter ×1, and output cord	CARRYING CASE C0221 For storing sensor ×3, CM7290 ×1, AC adapter ×1, output cord, and 30 m extension cable
--	---	--	---	---	---	--	---	---	---

## Easy to Loop Around, Even in Confined Spaces

### AC FLEXIBLE CURRENT SENSOR CT7040 series

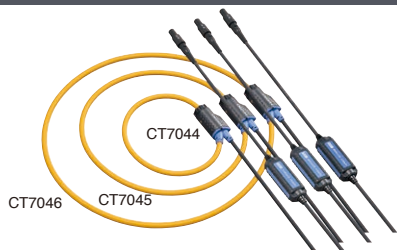

- Thinner cables are easier to use in confined spaces and with complicated wiring
- Supports large current measurements up to 6000 A
- Wide 10 Hz to 50 kHz band with excellent frequency characteristics
- Choose from three conductor diameter sizes
- Ideal for site inspections by using detachable Display Unit
- Four output formats to output data to loggers or other devices (via Display Unit) WAVE, RMS, PEAK, Hz

Model No. (Order Code) **CT7046** (6000 A, φ254 mm (10.00 in.))  
**CT7045** (6000 A, φ180 mm (7.09 in.))  
**CT7044** (6000 A, φ100 mm (3.94 in.))

Note: CT7040 series cannot be used alone. Use with the Display Unit CM7290 to connect with Data Loggers and Memory HiCorders. When used in combination with CM7290, the frequency band of current display and waveform output becomes narrow. CT7046, CT7045, and CT7044 are a flexible current sensor for measuring large currents. It is not suitable for measuring minute current such as leakage current.

#### Basic specifications (Accuracy guaranteed for 1 year)

	CT7046	CT7045	CT7044
Rated measurement current	6000 A AC		
Internal Measurement range	600A AC/ 6000A AC (Range is controlled by main device)		
Max. allowable input	10000 A continuous (at 6000 A range, 45 to 66 Hz, requires derating)		
Bandwidth	10 Hz to 50 kHz (±3dB) (When used in combination with CM7290: 10 Hz to 1 kHz)		
Amplitude and phase accuracy	±1.5 % rdg ±0.25 % f.s. (f.s. is internal range, 45 to 66 Hz), ±1 deg		
Output rate	1 mV/A (600 A*), 0.1 mV/A (6000 A) *Selectable only when used with CM7290, PQ3100		
Max. rated voltage to earth	600 V AC (CAT IV), 1000 V AC (CAT III)		
Loop diameter	φ 254 mm (10.00 in.) or less	φ 180 mm (7.09 in.) or less	φ 100 mm (3.94 in.) or less
Dustproof, waterproof	IP54* (When sensor is connected to a compatible instrument.) * Do not use when met.		
Output connectors	HIOKI PL 14		
Operating temperature range	-25 °C to 65 °C (-13 °F to 149 °F)		
Dust and water resistance *	IP54 (when connected to a supported instrument, Do not make measurements when wet.)		
Dimensions	Flexible loop cable diameter: φ7.4 mm (0.29 in.), Cable length: Between flexible loop and battery box: 2.3 m (7.55 ft.), Output cable: 20 cm (0.66 ft.), Battery box 25 mm (0.98 in.)W × 72 mm (2.83 in.)H × 20 mm (0.79 in.)D		
Mass	186 g (6.6 oz.)	174 g (6.1 oz.)	160 g (5.6 oz.)
Included accessory	Instruction manual ×1		


\* Waterproof characteristics intended to maintain measurement function; measuring energized parts while instrument is wet will increase risk of electric shock.



DISPLAY UNIT CM7290  
Display of current sensor, signal output

## Easy to Loop Around, Even in Confined Spaces

### AC FLEXIBLE CURRENT SENSOR CT9667 series

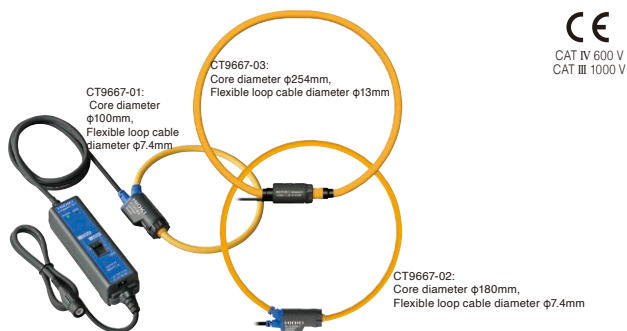

CE  
CAT IV 600 V  
CAT III 1000 V

CT9667-01:  
Core diameter  
φ100mm,  
Flexible loop cable  
diameter φ7.4mm

CT9667-03:  
Core diameter φ254mm,  
Flexible loop cable diameter φ13mm

CT9667-02:  
Core diameter φ180mm,  
Flexible loop cable diameter φ7.4mm

- Thinner cables are easy to use in confined spaces and with complicated wiring (-01, -02)
- Shaped so that it's easy to route through complex wiring
- Easily supports large current measurements up to 5000 A
- Wide 10 Hz to 20 kHz band with excellent frequency characteristics
- Choose from three conductor diameter sizes
- Combine with Hioki Power Meters or Memory HiCorders (with BNC input terminals)

Model No. (Order Code) **CT9667-01** (φ100 mm (0.30 in.))  
**CT9667-02** (φ180 mm (7.09 in.))  
**CT9667-03** (φ254 mm (10.00 in.))

Note: these current sensors may also be used with Hioki power quality analyzers, power meters or Memory HiCorders. CT9667 is a flexible current sensor for measuring large currents. It is not suitable for measuring minute current such as leakage current.

#### Basic specifications (Accuracy guaranteed for 1 year)

	CT9667-01	CT9667-02	CT9667-03
Rated input current	5000 A AC/ 500 A AC		
Max. allowable input	10000 A continuous (45 to 66 Hz, requires derating at frequency)		
Bandwidth	10 Hz to 20 kHz (±3dB)		
Amplitude and phase accuracy	±2 % rdg ±0.3 % f.s. (45 to 66 Hz, at center of flexible loop) Phase: ±1 deg (45 to 66 Hz)		
Output voltage	500 mV AC/f.s. (0.1 mV AC/A) at 5000 A range 500 mV AC/f.s. (1 mV AC/A) at 500 A range		
Max. rated voltage to earth	1000 V AC (CAT III), 600 V AC (CAT IV)		
Core diameter	φ 100 mm (3.94 in.)	φ 180 mm (7.09 in.)	φ 254 mm (10.00 in.)
Output terminal	BNC		
Operating temperature	-25 °C to +65 °C (-13 °F to 149 °F)	-25 °C to +65 °C (-13 °F to 149 °F)	-10 °C to +50 °C (14 °F to 122 °F)
Power supply	LR6 (AA) alkaline batteries ×2, Continuous use : 7 days (rated power 35 mVA), or AC adapter 9445-02/03 (rated power 0.2 VA), or External power supply 5 to 15 V DC (rated power 0.2 VA)		
Dust and water resistance	Flexible loop only: IP54		N/A
Dimensions and mass	Flexible loop cable diameter: φ7.4 mm (0.29 in.), Cable length: Between flexible loop and battery box: 2 m (6.56 ft.), Output cable: 1 m (3.28 ft.), Battery box: 35 mm (1.38 in.)W × 120.5 mm (4.74 in.)H × 34 mm (1.34 in.)D, 280 g (9.9 oz.)		Flexible loop cable diameter: φ13 mm (0.51 in.), Cable length: Between flexible loop and battery box: 2 m (6.56 ft.), Output cable: 1 m (3.28 ft.) Battery box: 35 mm (1.38 in.)W × 120.5 mm (4.74 in.)H × 34 mm (1.34 in.)D, 470 g (16.6 oz.)
Included accessories	LR6 (AA) alkaline batteries ×2, Instruction manual ×1		



## Simply Connect to a Tester or Recorder to Easily Measure Large Currents

### CLAMP ON PROBE 9132-50, 9010-50



CE  
CAT III 600 V

9132-50

9010-50

- Economical clamp sensors for waveform recording with Memory HiCorders
- Choose from up to six general-purpose ranges

Order Code **9132-50** (BNC output terminal)  
**9010-50** (BNC output terminal)

Note: for commercial power lines, 50/60 Hz (separate power supply not required).

#### Basic specifications (Accuracy guaranteed for 1 year)

	9132-50	9010-50
Rated current	20 A to 1000 A AC, 6 ranges	10 A to 500 A AC, 6 ranges
Accuracy	±3 % rdg ±0.2 % f.s. (45 to 66 Hz)	±2 % rdg ±1 % f.s. (45 to 66 Hz)
Frequency characteristics	Add to amplitude accuracy for frequencies from 40 to 1 kHz: ±1 % rdg	Add to amplitude accuracy for frequencies from 40 to 1 kHz: ±6 % rdg (at 10 A and 20 A range) ±3 % rdg (for 50 A range and above)
Output rate	0.2 V AC f.s. (f.s. = setting range) (Connect to a voltage input device providing a high input impedance of 1 MΩ)	
Max. allowable input	1000 A rms continuous (all ranges) (For 40 Hz to 500 Hz: 100 %, and for 500 Hz to 1 kHz: within 90 % of derating)	150 A rms continuous (10/20/50 A ranges) 400 A rms continuous (100/200 A ranges) 650 A rms continuous (500 A range) (For 40 Hz to 100 Hz: 100 %, and for 100 Hz to 1 kHz: within 50 % of derating)
Max. rated voltage to earth	600 Vrms (50/60 Hz, CAT III)	
Core diameter	φ55 mm (2.17 in.), or 20 mm (0.79 in.) × 80 mm (3.15 in.) busbar	φ46 mm (1.81 in.)
Dimensions and mass	100 mm (3.94 in.)W × 224 mm (8.82 in.)H × 35 mm (1.38 in.)D, 600 g (21.2 oz.), cord length: 3 m (9.84 ft.)	78 mm (3.07 in.)W × 188 mm (7.40 in.)H × 35 mm (1.38 in.)D, 420 g (14.8 oz.), cord length: 3 m (9.84 ft.)
Included accessory	Instruction manual ×1	



## Superior Phase Characteristics Let You Record Waveforms Accurately

### CLAMP ON PROBE 9018-50



CE  
CAT III 600 V

- Choose from up to six general-purpose ranges
- Accurately record and analyze waveforms and harmonic signals

Order Code **9018-50** (BNC output terminal)

Note: for commercial power lines, 50/60 Hz (separate power supply not required).

#### Basic specifications (Accuracy guaranteed for 1 year)

Rated current	10 A to 500 A AC, 6 ranges
Accuracy	±1.5 % rdg ±0.1 % f.s. (45 to 66 Hz)
Frequency characteristics	Add to amplitude accuracy : ±1 % rdg Add to phase accuracy : ±2.5 ° for frequencies from 40 Hz to 3 kHz
Output rate	0.2 V AC f.s. (f.s. = setting range) (Connect to a voltage input device providing a high input impedance of 1 MΩ)
Max. allowable input	150 A rms continuous (10/20/50 A ranges) 400 A rms continuous (100/200 A ranges) 650 A rms continuous (500 A range) (For 40 Hz to 100 Hz: 100 %, and for 100 Hz to 1 kHz: within 50 % of derating)
Max. rated voltage to earth	600 Vrms (50/60 Hz, CAT III)
Core diameter	φ46 mm (1.81 in.)
Dimensions and mass	78 mm (3.07 in.)W × 188 mm (7.40 in.)H × 35 mm (1.38 in.)D, 420 g (14.8 oz.), cord length: 3 m (9.84 ft.)
Included accessory	Instruction manual ×1








## Sensors for Master to Branch Circuits

f.s. is the sensor's rated measurement current value.





**For load currents:** for the PQ3100/PQ3198, CM7290 and similar products (PL14 terminal)

■ **Basic specifications** (Accuracy guaranteed for 1 year)

Model No. (Order Code)	CT7126	CT7131	CT7136
			
Rated measurement current	60 A AC	100 A AC	600 A AC
Max. measurement current	Continuous 60 A (45 to 66 Hz)	Continuous 130 A (45 to 66 Hz)	Continuous 600 A (45 to 66 Hz)
Output rate	10 mV/A	1 mV/A	1 mV/A
Amplitude accuracy (45 to 66 Hz)	±0.3% rdg ±0.01% f.s.	±0.3% rdg ±0.02% f.s.	±0.3% rdg ±0.01% f.s.
Phase accuracy	±2° (45 Hz to 5 kHz)	±1° (45 Hz to 5 kHz)	±0.5° (45 Hz to 5 kHz)
Amplitude frequency characteristics	Within ±2.04% at 40 Hz - 20 kHz	Within ±2.05% at 40 Hz - 20 kHz	Within ±2.54% at 40 Hz - 20 kHz
Max. rated voltage to earth	300 V AC rms or less		1000 V AC rms or less
Measurable conductor diameter	φ 15 mm (0.59 in.) or less		φ 46 mm (1.81 in.) or less
Operating temperature and humidity	-10°C to 50°C (14°F to 122°F), 80% RH or less (no condensation)		
Dustproofness and waterproofness	IP40 (EN60529) (with sensor connected and jaw closed)		
Dimensions and mass	46 mm (1.81 in.)W × 135 mm (5.31 in.)H × 21 mm (0.83 in.)D, 190 g (6.7 oz.) Cable length 2.5 m (8.20 ft.) (there is an optional extension cable), Output terminal: PL14		78 mm (3.07 in.)W × 152 mm (5.98 in.)H × 42 mm (1.65 in.)D, 350 g (12.3 oz.)




**For load currents:** for the PW3360 series, PW3198, MR8800 series and similar products (BNC terminal)

■ **Basic specifications** (Accuracy guaranteed for 1 year)

Model No. (Order Code)	9694	9660	9661	9669
				
Rated measurement current	5 A AC	100 A AC	500 A AC	1000 A AC
Max. measurement current	Continuous 50 A (45 to 66 Hz)	Continuous 130 A (45 to 66 Hz)	Continuous 550 A (45 to 66 Hz)	Continuous 1000 A (45 to 66 Hz)
Output rate	10 mV AC/A	1 mV AC/A	1 mV AC/A	0.5 mV AC/A
Amplitude accuracy (45 to 66 Hz)	±0.3% rdg ±0.02% f.s.		±0.3% rdg ±0.01% f.s.	±1.0% rdg ±0.01% f.s.
Phase accuracy	±2° (45 Hz to 5 kHz)	±1° (45 Hz to 5 kHz)	±0.5° (45 Hz to 5 kHz)	±1° (45 Hz to 5 kHz)
Amplitude frequency characteristics	Within ±1% at 40 Hz - 5 kHz (deviation from amplitude accuracy)			Within ±2% at 40 Hz - 5 kHz (deviation from accuracy)
Max. rated voltage to earth	300 V AC rms or less		600 V AC rms or less	
Measurable conductor diameter	φ 15 mm (0.59 in.) or less		φ 46 mm (1.81 in.) or less	φ 55 mm (2.17 in.) or less 80 × 20 mm, Bus bars
Operating temperature and humidity	0°C to 50°C (32°F to 122°F) 80% RH or less (no condensation)		0°C to 50°C (32°F to 122°F) 80% RH or less (no condensation)	
Dustproofness and waterproofness	N/A		N/A	
Dimensions and mass	46 mm (1.81 in.)W × 135 mm (5.31 in.)H × 21 mm (0.83 in.)D, 230 g (8.1 oz.)		78 mm (3.07 in.)W × 152 mm (5.98 in.)H × 42 mm (1.65 in.)D, 380 g (13.4 oz.) 99.5 mm (3.92 in.)W × 188 mm (7.40 in.)H × 42 mm (1.65 in.)D, 590 g (20.8 oz.) Cord length 3 m (9.84 ft.), Output terminal: BNC	



**For leak currents:** for the PQ3100 (PL14 terminal) and similar products (BNC terminal)

■ **Basic specifications** (Accuracy guaranteed for 1 year)

Model No. (Order Code)	CT7116	9675	9657-10
			
Rated measurement current	6 A AC	10 A AC (for leak current measurement, 50/60 Hz)	
Max. measurement current (45 to 66 Hz)	Continuous 10 A	Continuous 10 A	Continuous 30 A
Output rate	100 mV AC/A	100 mV AC/A	100 mV AC/A
Amplitude accuracy (45 to 66 Hz)	±1.0% rdg ±0.05% f.s.	±1.0% rdg ±0.05% f.s.	±1.0% rdg ±0.05% f.s.
Phase accuracy (50 Hz or 60 Hz)	±3° or less	±5° or less	±3° or less
Amplitude frequency characteristics	40 Hz to 5 kHz	40 Hz to 5 kHz: ±5%	40 Hz to 5 kHz: ±3°
Residual current characteristics	Max. 5 mA (in 100 A go and return electric wire)	Max. 1 mA (in 10 A go and return electric wire)	Max. 5 mA (in 100 A go and return electric wire)
Effect of external magnetic field (400 A/m, 50 Hz / 60 Hz)	Corresponding to 5 mA / 7.5 mA max.	7.5 mA max.	Corresponding to 5 mA / 7.5 mA max.
Measurable conductor diameter	φ 40 mm (1.57 in.) or less (Insulated conductor)	φ 30 mm (1.18 in.) or less	φ 40 mm (1.57 in.) or less
Operating temperature and humidity	-25 °C to 65 °C (-13 °F to 149 °F), 80% RH or less (no condensation)	0 °C to 50 °C (32 °F to 122 °F), 80% RH or less (no condensation)	
Dustproof, waterproof	IP40 (with sensor connected and jaw closed)	No regulation	
Dimensions and mass	74 mm (2.91 in.)W × 145 mm (5.71 in.)H × 42 mm (1.65 in.)D, 340 g (12.0 oz.) Cord length: 2.5 m (8.20 ft.) Output terminal: PL14	60 mm (2.36 in.)W × 112.5 mm (4.43 in.)H × 23.6 mm (0.93 in.)D, 160 g (5.6 oz.) Cord length: 3 m (9.84 ft.) Output terminal: BNC	74 mm (2.91 in.)W × 145 mm (5.71 in.)H × 42 mm (1.65 in.)D, 380 g (13.4 oz.) Cord length: 3 m (9.84 ft.) Output terminal: BNC

**For load currents:** for the PW3360 and PW3365 (requires the 9219)

■ **Basic specifications** (Accuracy guaranteed for 1 year)

Model No. (Order Code)	9695-02	9695-03
		
Rated measurement current	50 A AC	100 A AC
Max. measurement current (45 to 66 Hz)	Continuous 60 A (45 to 66 Hz)	Continuous 130 A (45 to 66 Hz)
Output rate	10 mV AC/A	1 mV AC/A
Amplitude accuracy (45 to 66 Hz)	±0.3% rdg ±0.02% f.s.	
Phase accuracy	±2° (45 Hz to 5 kHz)	±1° (45 Hz to 5 kHz)
Amplitude frequency characteristics	Within ±1% at 40 Hz - 5 kHz (deviation from amplitude accuracy)	
Max. rated voltage to earth	300 V AC rms or less (Insulated conductor)	
Measurable conductor diameter	φ 15 mm (0.59 in.) or less	
Operating temperature and humidity	0 °C to 50 °C (32 °F to 122 °F), 80% RH or less (no condensation)	
Dimensions and mass	50.5 mm (1.99 in.)W × 58 mm (2.28 in.)H × 18.7 mm (0.74 in.)D, 50 g (1.8 oz.) Output terminal : M3 terminal (outside 3 mm, 0.12 inch diameter) Option: Connection cable 9219 (3 m, 9.84 ft length)	

f.s. is the sensor's rated measurement current value.


● **9695 OPTION CONNECTION CABLE 9219**

Connect with the 9695-02/-03, Output BNC terminal, 3 m (9.84 ft.) length



## Clamp-type CT that enables measurement in excess of 1000 A (clamp ammeter option/AC use only)

### CLAMP ON ADAPTER 9290-10



- Outputs large currents of 1000 A AC continuously (1500 A for 5 minutes) at a CT ratio of 10:1
- Expands the measurement range of normal clamp ammeters
- Excellent phase characteristics; also used to expand power meter measurement ranges

■ **Basic specifications** (Accuracy guaranteed for 1 year)

Rated primary current	AC 1000 A continued (Maximum 1500 A for 5 minutes or shorter)
Rated secondary current	AC 100 A (10 : 1 CT ratio)
Amplitude accuracy	±1.5% rdg
Phase accuracy	±1.0° or less
Frequency characteristics	Amplitude: 20 Hz to 5 kHz: ±2.0% rdg (deviation from accuracy) Phase: 20 Hz to 5 kHz: ±1.0° or less (deviation from accuracy)
Max. rated voltage to earth	600 V AC rms (insulated wire)
Core jaw dia.	φ55 mm (2.17 in.) or 80 mm (3.15 in.) × 20 mm (0.79 in.) bus-bar
Dimensions and mass	99.5 mm (3.92 in.)W × 188 mm (7.40 in.)H × 42 mm (1.65 in.)D, 580 g (20.5 oz.), cord length 3 m (9.84 ft.)
Included accessories	Instruction manual ×1, Mark band ×6

## A LAN Cable Tester Capable of Identifying the Location of Wire Breaks

### LAN CABLE HiTESTER 3665



#### Bundled Accessories



#### ■ Basic specifications (Accuracy guaranteed for 1 year)

Measurable cable	Twisted-pair cable, characteristic impedance: 100 Ω, shielded and unshielded, CAT 3, 4, 5, 5e, 6 and 6A
Compatible connectors	RJ-45 plugs
Wire Map test	Detectable errors: open, short, reversed, transposed, split pairs and other incorrect wiring (Wiring condition and shielding can be confirmed using the Terminator 9690)
Cable length measurement	Measurable lengths: 2 m to 300 m (6.6 ft to 984 ft) Measurement accuracy: $\pm 4\%$ rdg $\pm 1$ m (3.3 ft) (condition of regulation: single wire) Display resolution: 0.1 m (0.3 ft)
Direction measurement	Up to 21 cables can be identified using the supplied Terminator 9690 and optional Models 9690-01 to 9690-04
Power supply	LR6 (AA) alkaline battery $\times 2$ , 1.4 VA max., Continuous use : 50 hr (at measurement interval of 1 minute)
Dimensions and mass	85 mm (3.35 in.)W $\times$ 130 mm (5.12 in.)H $\times$ 33 mm (1.30 in.)D, 160 g (5.6 oz.) (without batteries)
Included accessories	Terminator 9690 $\times 1$ , Carrying case $\times 1$ , LR6 (AA) alkaline battery $\times 2$ , Instruction manual $\times 1$

- Wire map check : Detect split pairs with wiring check
- Cable length : Get NVP-Enhanced measurement accuracy
- Direction check : Identify up to 21 cable destinations

Model No. (Order Code) **3665-20** (English model)

*Note: for direction checks enabling individual wires to be identified, please purchase optional Terminators 9690-01 to -04.*

Options

**TERMINATOR 9690-01**  
IDs 1 to 5, 5 piece set

**TERMINATOR 9690-02**  
IDs 6 to 10, 5 piece set

**TERMINATOR 9690-03**  
IDs 11 to 15, 5 piece set

**TERMINATOR 9690-04**  
IDs 16 to 20, 5 piece set

**CARRYING CASE 9249**  
Stores the main unit and options together

## Inspect Solar Panel Bypass Diodes for Opens and Shorts in Broad Daylight Without Covering Panels

### BYPASS DIODE TESTER FT4310



#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement items	Open-circuit voltage, Short-circuit current, Bypass route resistor
<b>[BPD TEST mode]</b>	
Measurement items	Bypass diode comparator judgment, Bypass route resistor, Open-circuit voltage, Short-circuit current, Measurement (applied) current
Measurement object	Crystal system string Open-circuit voltage: 1000 V DC or less, Rated current: 2 A to 12 A DC
Measurement method	Short-circuit and pulse voltage application
Measurement accuracy	Open-circuit voltage: $\pm 0.2\%$ rdg $\pm 3$ dgt (at 0 to $\pm 1000$ V) Short-circuit current: $\pm 3\%$ rdg $\pm 3$ dgt (at 0.0 to 15.0 A) Bypass route resistance: $\pm 5\%$ rdg $\pm 5$ dgt (at 0.0 to 15.0 $\Omega$ , During pure resistance measurement)
Measurement time	2 s or less (3 seconds or less when measurement voltage is 10 V or less)
Possible number of measurements	3000 times (Comparator, backlight, Bluetooth* OFF) LR6 Alkaline battery $\times 6$
<b>[Voc mode]</b>	
Measurement items	Open-circuit voltage
Measurement range	0 V to 1000 V DC (Displayed up to 1200 V DC), Accuracy: $\pm 0.2\%$ rdg $\pm 3$ dgt
Response time	Within 1 sec.
<b>[General]</b>	
Dustproof and waterproof	IP40 (EN60529)
Functions	Displays the number of bypass diode measurements, Automatic polarity judgment, function, Comparison display, Auto hold, Live circuit indicator, Buzzer sounds, Backlight, Comparator, Battery indicator, Auto power off, Bluetooth* wireless technology
Interface	Bluetooth* 4.0LE, Display of measured values on an iOS or Android handset
Power supply	LR6 (AA) alkaline battery $\times 6$ , Maximum rated power 18 VA Continuous operating time: 45 hours (Comparator, backlight, Bluetooth* OFF)
Dimensions and mass	152W $\times$ 92H $\times$ 69D mm (5.98 W $\times$ 3.62 H $\times$ 2.72 D in.) 650 g (22.9 oz.) (including batteries, excluding test leads)

- Test for open or short-circuit bypass diodes even during the day\*1
- Easily test using the strings in the junction boxes\*2
- Save time - simultaneously measure all electrical parameters\*3
- Automatically transfer data wirelessly (Available for Android and iOS devices\*4)

\*1 Testing can also be performed at night. Testing for short-circuit faults can only be performed during the day.  
\*2 There is no need to climb onto the roof and dramatically improving work efficiency.  
\*3 Measure open-circuit voltage, short-circuit current, and bypass route resistance and display all three values at once.  
\*4 Automatically transfer data with Bluetooth\* wireless technology


Model No. (Order Code) **FT4310** (Built-in Bluetooth\* wireless technology)

Note: the FT4310 cannot measure strings installed in parallel. Please contact Hioki for more information.

■ Data can be downloaded to tablets and smartphones using Hioki's dedicated apps available from the Google Play or App Store. Search for "HIOKI" and download the "GENNECT Cross" app.




\*Android, Google Play and the Google Play logo are trademarks of Google Inc.  
\*iOS is a registered trademark of Cisco Technology, Inc. and/or its affiliates in the United States and certain other countries.  
\*iPhone, iPad, iPad mini, iPad Pro and iPod touch are trademarks of Apple Inc.  
\*Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.  
\*Microsoft, Windows, Windows Vista, and Excel are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.  
\*Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.  
\*The Bluetooth\* word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license.  
\*For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website.

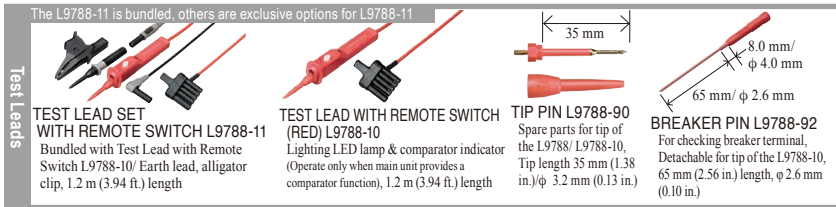

### Easily inspect bypass diodes for open and short-circuit faults even in broad daylight


#### Reference Issues caused by faulty bypass diodes

**Normal reading:** Current is routed around panels that are covered by shadows

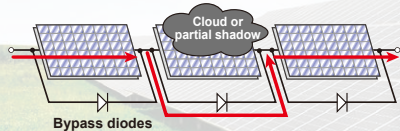


When a solar panel is obscured by a partial shadow (or when it fails), the current bypasses the panel in order prevent any drop-off in generating efficiency.

**Short-circuit fault:** Generating capacity falls

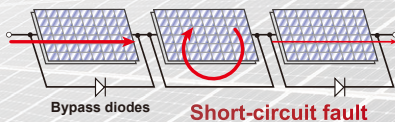

When a short-circuit fault occurs, the generated current flows in a loop, making it impossible to capture the generated power, resulting in lowered efficiency.

**Open fault:** Potential fire

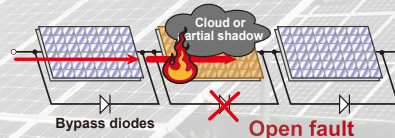

When an open fault occurs, current is forced to flow to the defective cell when it's covered by a shadow, causing the panel to heat up and posing the risk of fire.



## Non-Contact Infrared Thermometer Featuring Simple, One-Touch Measurement

### INFRARED THERMOMETER FT3700, FT3701



- Pistol design with easy-to-see display
- A full menu of basic measuring functions
- Easily test in difficult locations, moving objects or where there is danger of electric shock

Model No. (Order Code) **FT3700-20** (Long-focus type)  
**FT3701-20** (Long focus, precise-field type)


**Note: Laser Product Caution Notice**

A caution label is attached to the thermometer. Be sure to observe the operating precautions on the label.




■ Basic specifications (Accuracy guaranteed for 1 year)

	FT3700-20	FT3701-20
Measurement temperature range	-60.0 to 550.0 °C (-76 to 1022 °F), 0.1 °C resolution	-60.0 to 760.0 °C (-76 to 1400 °F), 0.1 °C resolution
Accuracy	-35.0 to -0.1 °C (-31.0 to 31.9 °F) : ±10 %rdg ±2 °C 0.0 to 100.0 °C (-32.0 to 212.0 °F) : ±2 °C 100.1 to 500.0 °C (212.1 to 932.0 °F) : ±2% rdg <i>Note) -60.0 to -33.1 °C (-76.0 to -31.1 °F), and over 500.1 °C (932.0 °F) : Accuracy not specified</i>	
Response time	1 sec (90%)	
Measurement wavelength	8 to 14 μm	
Thermal emissivity compensation	ε=0.10 to 1.00 (0.01 step)	
Measurement field diameter	φ 83 mm at 1000 mm (3.27 in at 3.28 ft.) (Distance : Spot = 12 : 1)	φ 100 mm at 3000 mm (3.94 in at 9.84 ft.) (Distance : Spot = 30 : 1)
Sighting	Two-beam laser marker Max 1 mW (class 2), Red	
Functions	Continuous measurement mode, MAX/ MIN/ DIF (MAX - MIN)/ AVG measurement, Alarm, Backlight, Auto power-off	
Power supply	LR03 (AAA) alkaline battery ×2, 150 mVA, Continuous use of 140 hours (With laser marker, backlight and buzzer are OFF)	
Dimensions and mass	48 mm (1.89 in.)W × 172 mm (6.77 in.)H × 119 mm (4.69 in.)D, 256 g (9.0 oz.), (including batteries)	
Included accessories	Instruction manual ×1, LR03 alkaline battery ×2, Carrying case ×1	

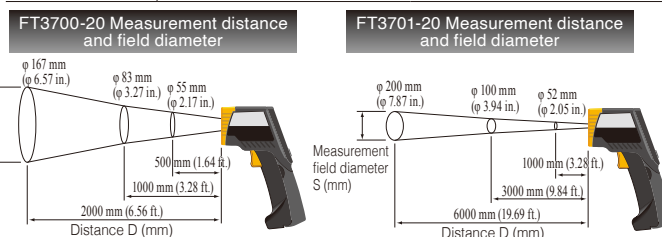

## Robust Support for 3-Axis Magnetic Flux Density Measurement

### MAGNETIC FIELD HITESTER FT3470

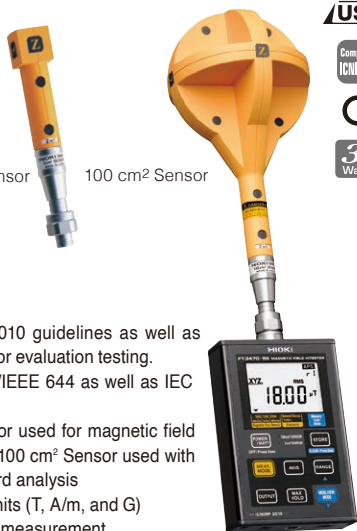

3 cm<sup>2</sup> Sensor      100 cm<sup>2</sup> Sensor

- Complies with ICNIRP 2010 guidelines as well as other relevant standards for evaluation testing.
- Complies with IEC 62110/IEE 644 as well as IEC 62233.
- Bundled with 3 cm<sup>2</sup> Sensor used for magnetic field distribution analysis, and 100 cm<sup>2</sup> Sensor used with the IEC/EN 62233 standard analysis
- User-selectable display units (T, A/m, and G)
- Simple operation for easy measurement
- Bundled with PC application software
- Level output for RMS value, or 3-axis waveform output for magnetic fields



100 cm<sup>2</sup> Sensor  
 (FT3470-51 and FT3470-52 bundled)  
 Cross-sectional area: 100 cm<sup>2</sup>, Standard sensor for use with the IEC/EN 62233 standard.



3 cm<sup>2</sup> Sensor  
 (FT3470-52 only bundled)  
 Cross-sectional area: 3 cm<sup>2</sup>, Enables detailed analysis of magnetic field distribution for measurement targets.

Model No. (Order Code) **FT3470-51** (100 cm<sup>2</sup> Sensor bundled)  
**FT3470-52** (100 cm<sup>2</sup> Sensor, 3 cm<sup>2</sup> Sensor bundled)

■ Basic specifications (Accuracy guaranteed for 1 year)

Magnetic flux density (Bandwidth)	10 Hz to 400 kHz/ 10 Hz to 2 kHz/ 2 kHz to 400 kHz
Exposure level	General Public/ Occupational
Display	Single axes X, Y, Z (2000 counts), Composite RMS value R (3464 counts), Magnetic flux density (unit: T, G, A/m), Exposure level (unit: %)
Magnetic flux density/ Ranges, Accuracy	[X, Y, Z axes] Effective measuring ranges: 2.000 μT to 2.000 mT, 4 ranges, Accuracy: ±3.5% rdg ±0.5% f.s. [R axis] Effective measuring ranges: 3.464 μT to 3.464 mT, 4 ranges, Accuracy: ±3.5% rdg ±0.5% f.s. [Valid measurement frequency range] at 10 Hz-400 kHz mode: 50 Hz to 100 kHz, at 10 Hz-2 kHz mode: 50 Hz to 1 kHz, at 2 kHz-400 kHz mode: 5 kHz to 100 kHz
Exposure level/ Ranges, Accuracy	[X, Y, Z axes] Effective measuring ranges: 20.00 % to 200.0 %, 2 ranges [R axis] Effective measuring ranges: 34.64 % to 346.4 %, 2 ranges, Accuracy: Smoothed edges 50 Hz to 1 kHz ±3.5% rdg ±0.5% f.s. Accuracy: Smoothed edges 1 kHz to 100 kHz ±5.0% rdg ±0.5% f.s.
Interfaces	[Supporting output] Resultant RMS level output, Exposure level output, Waveform output of magnetic flux density X/ Y/ Z each axis, Output rate: 0.1 mV/display value count [USB 1.1] Data saving with the PC application
Other functions	Memory function: Up to 99 measured value data, Slow function, Holds the maximum value, Auto power off, Buzzer sound on/off
Power supply	LR6 (AA) alkaline battery ×4, 0.8 VA (at battery operation), Continuous use of 10 hr, or AC adapter 9445-02 (1.0 VA max. consumption)
Dimensions and mass	Main unit: 100 mm (3.94 in.)W × 150 mm (5.91 in.)H × 42 mm (1.65 in.)D, 830 g (29.3 oz.), (including batteries) 100 cm <sup>2</sup> Sensor: φ122 mm (4.80 in.) × 295 mm (11.61 in.)L, 220 g (7.8 oz.) 3 cm <sup>2</sup> Sensor: □ 27 mm (1.06 in.) × 165 mm (6.50 in.)L, 95g (3.4 oz.)
Included accessories for the FT3470-51	100 cm <sup>2</sup> Sensor ×1, Instruction manual ×1, CD-R (PC application software Data Viewer for FT3470) ×1, USB cable ×1, LR6 (AA) alkaline battery ×4, AC adapter 9445-02 ×1, Carrying case ×1
Included accessories for the FT3470-52	100 cm <sup>2</sup> Sensor ×1, 3 cm <sup>2</sup> Sensor ×1, Instruction manual ×1, CD-R (PC application software Data Viewer for FT3470) ×1, USB cable ×1, LR6 (AA) alkaline battery ×4, AC adapter 9445-02 ×1, Extension cable 9758 ×1, Output cable 9759 ×1, Carrying case ×1

■ Bundled PC application software (DATA VIEWER for the FT3470)

Operating environment	Computer running under Windows 7 (32/64-bit), Vista (32/64-bit), XP
Functions	RMS value data logging/ Save to a PC in a batch, CSV file format

**Options**

- EXTENSION CABLE 9758**  
1.5 m (4.92 ft.) length, to extend the length of the sensor to the instrument
- OUTPUT CABLE 9759**  
1.5 m (4.92 ft.) length, with 3-BNC connectors on the output end
- AC ADAPTER 9445-02**  
100 to 240 V AC

The 9445-02 is bundled

# Environmental Measuring

## High Reliability LUX METER Series, Complies with DIN Class B and JIS Class AA, Compatible with LED/OLED Lighting

### LUX METER FT3424, FT3425



FT3424



Bluetooth  
FT3425



Sensor unit and main display can be separated. Sold separately

USB 2.0

CE

3 Year Warranty

- Measured illuminance data is automatically sent to smartphone or tablet with Bluetooth® wireless technology (FT3425)
- Compatible with LED/OLED lighting
- Complies with DIN 5032-7:1985 class B and JIS C 1609-1:2006 general AA class
- Timer hold function lets you make measurements in remote locations while avoiding the effects of shadows and reflections
- Save up to 99 measured values in the instrument's internal memory and transfer them to a computer later for improved work efficiency

Model No. (Order Code) **FT3424**  
**FT3425** (Built in Bluetooth(R) wireless technology)

#### Basic specifications (Accuracy guaranteed for 2 years)

Standards	DIN 5032-7: 1985 class B, JIS C 1609-1: 2006 general AA class
Light receiving element	Silicon photo diode
Range selection	Auto/ Manual
Linearity	±2% rdg (Multiply by 1.5 for display values in excess of 3000 lx.)
Accuracy guarantee for temperature and humidity	21 °C to 27 °C (69.8 °F to 80.6 °F), 75% rh or less (non-condensing)
Response time	Auto range: within 5 seconds, Manual range: within 2 seconds
D/A output	Output level: 2 V/range f.s. (2.5 V is output when the range f.s. is exceeded.) Output accuracy: ±1% rdg ±5 mV (at display count)
Functions	Timer hold function, Memory function (Up to 99 measured data can be saved), Hold, Auto power off, Buzzer sound, Backlight, Zero adjustment
Interfaces	USB 2.0 (FT3424/FT3425), Bluetooth® 4.0LE (FT3425 only)
Power supply	LR6 Alkaline battery ×2, Max. rated power 500 mVA, or R6 Manganese battery ×2, or USB bus power (5 VDC)
Continuous battery operation time	300 hours (when using LR6 batteries, with Bluetooth® OFF), 80 hours (when using LR6 batteries, with Bluetooth® ON)
Dimensions and mass (including the batteries)	78 mm (3.07 in.)W × 170 mm (6.69 in.)H × 39 mm (1.54 in.)D, 310 g (10.9 oz, FT3424) / 320 g (11.3 oz, FT3425)
Included accessories	Instruction Manual ×1, AA/LR6 Alkaline battery ×2, Sensor cap (with strap) ×1, Carrying case (soft) ×1, Strap (for instrument) ×1, USB cable (0.9 m/2.95 ft.) ×1, CD (USB driver, dedicated computer application software, and communications specifications) ×1, Precautions Concerning Use of Equipment that Emits Radio Waves ×1 (only FT3425)

Only FT3425 is equipped with Bluetooth® wireless technology, others are shared specifications

#### Measurement ranges

Range	Measurement range	Display steps
20 lx	0.00 lx to 20.00 lx	1 count step
200 lx	0.0 lx to 200.0 lx	1 count step
2000 lx	0 lx to 2000 lx	1 count step
20000 lx	00 lx to 20000 lx	10 count step
200000 lx	000 lx to 200000 lx	100 count step

- Data can be downloaded to tablets and smartphones using Hioki's dedicated apps available from the Google Play or App Store. (FT3425 only)
- Search for "HIOKI" and download the "GENNECT Cross" app.




Options

Extendible length:  
0.5 m (1.64 ft.) to  
1.6 m (5.25 ft.)



Mounting method of instrument  
**EXTENSION CART  
Z5023**  
This cart with castor wheels  
can be easily moved between  
measurement locations.



**CONNECTION CABLE  
L9820**

Use when positioning the sensor  
unit and display unit separately  
during use. 2 m (6.56 ft.) length



**OUTPUT CORD L9094**  
3.5 mm (0.14 in.) dia. mini plug  
to banana, 1.5 m (4.92 ft.) length



**OUTPUT CORD L9095**  
Connect to BNC terminal,  
1.5 m (4.92 ft.) length



**OUTPUT CORD L9096**  
Connect to terminal block,  
1.5 m (4.92 ft.) length



**CARRYING CASE  
C0202**  
Soft case



**CARRYING CASE  
C0201**  
Semi-hard case

C0202: For storing the instrument with the Connection Cable, Output Cord, and USB Cable  
C0201: For storing the instrument with Output Cord and USB Cable

# Digital Multimeters/Testers

World's Premier Digital Multimeter! Superior Accuracy and High Response, Topped with Safety Terminal Shutters

## DIGITAL MULTIMETER DT4281, DT4282



Not CE Marked

CAT IV 600 V  
CAT III 1000 V



True RMS

USB 2.0  
Option



DT4281

DT4282

- 60000 count, 5-digit display, high-resolution measurements
- $\pm 0.025\%$  DC V basic accuracy, wide 20 Hz to 100 kHz AC V frequency characteristics
- Low-pass filter cuts high harmonics (when measuring inverter fundamental waveforms)
- Includes multiple measurement functions such as DC+ACV, temperature, capacitance, and frequency
- Terminal shutter mechanism (prevents erroneous test lead insertion)
- Measures large currents with optional clamp probe (only for DT4281, which has no 10 A terminal for accident prevention)
- Measure up to 10A with direct input (DT4282 only)
- Dual display lets you check voltage and frequency simultaneously
- Magnetic strap (Optional)
- Rear kickstand
- Store probes at the back of the tester
- Identify excessively high input with a red screen backlight
- Robust design capable of withstanding a drop from a height of 1 m
- USB communications function supports PC measurements (optional)
- Broad -15 (5°F) to 55°C (131°F) operating temperature range

Model No. (Order Code) **DT4281** (Direct and current clamp input terminals)  
**DT4282** (10 A direct input)

Regarding DMM Accuracy Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalogs for detailed accuracy information.

### Basic specifications (Accuracy guaranteed for 1 year)

	DT4281	DT4282
DC Voltage range	60.000 mV to 1000.0 V, 6 ranges, Basic accuracy: $\pm 0.025\%$ rdg $\pm 2$ dgt	
AC Voltage* range	60.000 mV to 1000.0 V, 6 ranges, Frequency characteristics: 20 Hz - 100 kHz Basic accuracy 45 - 65 Hz: $\pm 0.2\%$ rdg $\pm 25$ dgt (True RMS, crest factor 3)	
DC + AC Voltage* range	6.0000 V to 1000.0 V, 4 ranges, Frequency characteristics: 20 Hz - 100 kHz Basic accuracy 45 - 65 Hz: $\pm 0.3\%$ rdg $\pm 30$ dgt (True RMS, crest factor 3)	
Resistance range	60.000 $\Omega$ to 600.0 M $\Omega$ , 8 ranges, (Conductance: 600.00 nS, DT4282 only) Basic accuracy: $\pm 0.03\%$ rdg $\pm 2$ dgt	
DC Current range	600.00 $\mu$ A to 600.00 mA, 4 ranges	600.00 $\mu$ A to 10.000 A, 6 ranges
	Basic accuracy: $\pm 0.05\%$ rdg $\pm 5$ dgt	
AC Current* range	600.00 $\mu$ A to 600.00 mA, 4 ranges	600.00 $\mu$ A to 10.000 A, 6 ranges
	Basic accuracy 45 - 65 Hz: $\pm 0.6\%$ rdg $\pm 5$ dgt (True RMS, crest factor 3) Frequency characteristics: 20 Hz - 20 kHz (at 600 $\mu$ A to 600 mA range)	
AC Current* range (use with Clamp on probes)	10.00 A to 1000 A, 7 ranges Add the Clamp on probe accuracy to Basic accuracy 40 - 65 Hz: $\pm 0.6\%$ rdg $\pm 2$ dgt (True RMS, crest factor 3)	N/A
Peak	DC V measurement: Signal width 4 msec or more (single), 1 msec or more (repeated) AC V, DC/AC A measurement: Signal width 1 msec or more (single), 250 $\mu$ sec or more (repeated)	
Capacitance range	1.000 nF to 100.0 mF, 9 ranges, Basic accuracy: $\pm 1.0\%$ rdg $\pm 5$ dgt	
Continuity check	Continuity threshold: 20/50/100/500 $\Omega$ , Response time: 10 ms or more	
Diode test	Open terminal voltage: 4.5 V or less, Testing current 1.2 mA or less, Threshold of forward voltage: 0.15 V to 3 V, seven stages	
Frequency range	AC V, DC/AC A measurement, at pulse width 1 $\mu$ s or more (50 % duty ratio) 99.999 Hz (0.5 Hz or more) to 500.00 kHz, 5 ranges, $\pm 0.005\%$ rdg $\pm 3$ dgt	
dB conversion	Standard impedance setting (dBm), 4 $\Omega$ to 1200 $\Omega$ , 20 stages Display dB conversion value of AC voltage (dBV)	
Temperature (thermocouples)	K: -40.0 $^{\circ}$ C to 800.0 $^{\circ}$ C (-40.0 $^{\circ}$ F to 1472.0 $^{\circ}$ F) Add accuracy of the Thermocouple probe to main unit accuracy: $\pm 0.5\%$ rdg $\pm 3$ $^{\circ}$ C	
Other functions	Filter function (Remove harmonic noise, use only at 600 VAC, 1000 VAC ranges), Display value hold, Auto hold, Max/Min value display, Sampling select, Relative display, Measurement memory (400 data), Auto-power save, USB communication (option), 4-20 mA % conversion	
Display	Main and Sub displays: 5-digits LCD, max. 60000 digits	
Display refresh rates	5 times/s (Capacitance measurement: 0.05 to 2 times/s, depending on measured value, Temperature: 1 time/s)	
Power supply	LR6 (AA) alkaline batteries $\times 4$ , Continuous use: 100 hours	
Dimensions and mass	93 mm (3.66 in.) $\times$ 197 mm (7.76 in.) $\times$ 53 mm (2.09 in.)D, 650 g (22.9 oz.) (including test leads holder and batteries)	
Included accessories	Test lead L9207-10 $\times 1$ (replaced by the probe L9300 starting with batches manufactured in March, 2025), Instruction manual $\times 1$ , LR6 alkaline battery $\times 4$	

\* Zero-suppression: For small inputs below the guarantee range, zero is effectively displayed

### Shared options for the DT4280 series, DT4261, DT4250 series

\*: accepts only rated currents under 10A.

DT4280 series, DT4250 series: L9207-10 is bundled (replaced by the probe L9300 starting with batches manufactured in March, 2025). DT4261: L9300 is bundled.

**Discontinuation scheduled**

**TEST LEAD L9207-10**  
90 cm (2.95 ft.) length

**TEST LEAD L9300**  
95 cm (37.4 in.), Integrated cap and protective finger guard

Attach L9207-10 with the cap removed. Slide the guard of L9300 and attach as measurement category II.

**CONTACT PIN SET L4933\***  
Attaches to the tip of the Test Lead L9207-10/ L9300/ DT4911/ L9206, 60V DC/ 30V AC

**SMALL ALLIGATOR CLIP SET L4934\***  
Attaches to the tip of the L4932/ L9207-10/ L9300/ DT4911/ L9206, CAT III 300V, CAT II 600V

For DT4281/DT4253/DT4255/DT4256 (Note: use with the Conversion Adapter 9704)

**CLAMP ON PROBE 9010-50**  
10 to 500 AAC,  $\phi 46$  mm ( $\phi 1.81$  in.), 3 m (9.84 ft.) length

**CLAMP ON PROBE 9018-50**  
Wide-band type, 10 to 500 AAC,  $\phi 46$  mm ( $\phi 1.81$  in.), 3 m (9.84 ft.) length

**CLAMP ON PROBE 9132-50**  
20 to 1000 AAC,  $\phi 55$  mm ( $\phi 2.17$  in.) or 80-20 mm (3.15 $\times$ 0.79 in.), 3 m (9.84 ft.) length

**CONVERSION ADAPTER 9704**  
Receiving end: Female BNC; Output end: Male banana-plug  
Not compatible with older generation Memory HiCorders with banana input terminals

Options for Test Leads

**CONNECTION CABLE SET L4930**  
1.2 m (3.94 ft.) length, CAT IV 600V, CAT III 1000V

**EXTENSION CABLE SET L4931**  
Expands the length of the L4930/L4940, 1.5 m (4.92 ft.) length

Options for the L4930, Test Pin Set L4932 is required when using the Small Alligator Clip Set L4934

**TEST PIN SET L4932**  
Attaches to the tip of the L4930/L4940, CAT IV 600V, CAT III 1000V

**SMALL ALLIGATOR CLIP SET L4934\***  
Attaches to the tip of the L4932, L9207-10/DT4911, L9206, CAT III 300V, CAT II 600V

**ALLIGATOR CLIP SET L4935**  
Attaches to the tip of the L4930/L4940, CAT IV 600V, CAT III 1000V

**BUS BAR CLIP SET L4936\***  
Attaches to the tip of the L4930/L4940, CAT III 600V

**MAGNETIC ADAPTER SET L4937\***  
Attaches to the tip of the L4930/L4940, CAT III 1000V

**TEST PIN SET L4938**  
Attaches to the tip of the L4930/L4940, CAT III 600V

**BREAKER PIN SET L4939**  
Attaches to the tip of the L4930/L4940, CAT III 600V

**GRABBER CLIP L9243\***  
Attaches to the tip of the L4930/L4940, CAT III 1000 V, 185 mm (7.28 in.) length

Temperature Measurement

**THERMOCOUPLES(K) DT4910**  
K type, tip exposed, 0.5 mm (0.02 in.) diameter, 80 cm (2.62 ft.) length, -40 to 260  $^{\circ}$ C (-40 to 500  $^{\circ}$ F)

Other Options

**COMMUNICATION PACKAGE(USB) DT4900-01**  
Compatible to Windows 11, 10

**MAGNETIC STRAP Z5020**  
Extra strength

**CARRYING CASE C0202**

**CARRYING CASE C0207**  
Bag type

Not compatible with DT4281, DT4282 and DT4261

For DT4250 Series


**CARRYING CASE C0201**

### Ideal for checking ripple voltage in DC supply systems


### Optimized for inverter system measurements

Refer to the detailed catalog

DC + ACV




Peak measurement function & DC+AC voltage measurement  
Capture ripple voltage component on direct current signals.

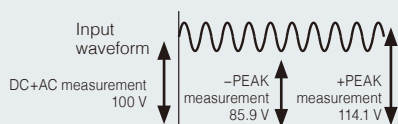


LPF 1kHz

Low-pass filter cuts harmonic waveform components

The (1 kHz cutoff) low-pass filter function cuts high harmonic components when measuring the secondary output voltage of an inverter.



Typical waveform + harmonic components



Typical waveform component



## Analyzing Issues in the Field and Dramatically Improving Work Efficiency

### DIGITAL MULTIMETER DT4261



DT4261

USB 2.0  
Option

CE  
CAT IV 600 V  
CAT III 1000 V

Drop-  
proof

True RMS

3 Year  
Warranty

Bluetooth

When Z3210 is  
installed

- Capable of measuring up to cat III 2000 V with DC High Voltage Probe P2010\* Dramatically improves the safety of maintenance of large-scale solar power generation facilities
- \*1: 2000 V is supported only when the optional DC High Voltage Probe P2010 is used.
- Helping personnel analyze issues in the field
- Stop worrying about losing test lead caps
- Boost work efficiency with digitalization (Excel® Direct Input Function)
- Excellent dust and water resistance (compliant with the IP54 international standard)
- Ensuring safety by preventing erroneous test lead insertion (terminal shutters)

Model No. (Order Code) **DT4261** (Wireless Adapter Z3210 not included)  
**DT4261-90** (Bundled with the Wireless Adapter Z3210)

Data can be downloaded to tablets and smartphones using HioKI's dedicated apps available from the Google Play or App Store. Search for "HIOKI" and download the "GENNECT Cross" app.



\*Android, Google Play and the Google Play logo are trademarks of Google Inc.  
\*iOS is a registered trademark of Cisco Technology, Inc. and/or its affiliates in the United States and certain other countries.  
\*iPhone, iPad, iPad mini, iPad Pro and iPod touch are trademarks of Apple Inc.  
\*Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.  
\*Microsoft, Windows, Windows Vista, and Excel are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.  
\*Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.  
\*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license.  
\*For the latest information about countries and regions where wireless operation is currently supported, please visit the HioKI website.

Regarding DMM Accuracy Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalogs for detailed accuracy information.

#### Basic specifications (Accuracy guaranteed for 1 year)

DC Voltage range	600.0 mV to 1000 V (When using P2010: 600.0 V to 2000 V), 5 ranges, Basic accuracy: ±0.15% rdg. ±2 dgt.
AC Voltage range	6.000 V to 1000 V, 4 ranges, Frequency characteristics: 40 Hz to 1 kHz Basic accuracy 40 Hz - 500 Hz: ±0.9% rdg. ±3 dgt. (True RMS, crest factor 3 or less)
DC + AC Voltage range	6.000 V to 1000 V, 4 ranges, Frequency characteristics: DC, 40 Hz to 1 kHz Basic accuracy DC, 40 Hz - 500 Hz: ±1.0% rdg. ±13 dgt. (True RMS, crest factor 3 or less)
LoZ V	600.0 V, 1 range, Frequency characteristics: DC, 40 Hz to 1 kHz Basic accuracy DC, 40 Hz - 500 Hz: ±1.0% rdg. ±13 dgt. (True RMS, crest factor 3 or less)
Resistance range	600.0 Ω to 60.00 MΩ, 6 ranges, Basic accuracy: ±0.7% rdg. ±3 dgt.
DC Current range	600.0 mA to 10.00 A, 3 ranges Basic accuracy: ±0.5% rdg. ±3 dgt.
AC Current range	600.0 mA to 10.00 A, 3 ranges Basic accuracy 40 Hz - 500 Hz: ±1.4% rdg. ±3 dgt. (True RMS, crest factor 3 or less) Frequency characteristics: 40 Hz to 1 kHz
AC Current range (use with Clamp on probes)	10.00 A to 1000 A, 7 ranges Basic accuracy 40 Hz - 500 Hz: Add the Clamp on probe accuracy to ±0.9% rdg. ±3 dgt. (True RMS, crest factor 3 or less)
Capacitance range	1.000 μF to 10.00 mF, 5 ranges, Basic accuracy: ±1.9% rdg. ±5 dgt.
Continuity Check	Continuity threshold ON : 25 Ω, Continuity threshold OFF : 245 Ω, Response time: 0.5 ms or more
Diode test	Open terminal voltage: 2.0 V or less, Testing current: 0.2 mA or less, Threshold of forward voltage: 0.15 V to 1.8V
Voltage frequency range	99.99 Hz to 99.99 kHz, 4 ranges (Limited by minimum sensitivity voltage) Basic accuracy: ±0.1% rdg. ±1 dgt.
Current frequency range	99.99 Hz to 9.999 kHz, 3 ranges (Limited by minimum sensitivity current) Basic accuracy: ±0.1% rdg. ±1 dgt.
Other functions	Mis-insertion prevention shutters, fuse check function, user setting retention function, filter function, zero-adjustment, display value hold, auto hold, MAX/MIN value display, PEAK value display, auto-power save, USB communication (when optional Communication Package DT4900-01 is installed), wireless communication (when optional Wireless Adapter Z3210 is installed)
Display	Main and sub displays: 4-digits LCD, max. 6000 digits (excluding frequency measurement), bar-graph
Display refresh rates	5 times/s (Capacitance measurement: 0.05 to 5 times/s, depending on measured value, Frequency: 1 to 2 times/s)
Power supply	LR6 (AA) alkaline batteries × 3, Continuous operating time: 130 hr. (without Z3210 installed), 70 hr. (with Z3210 installed and using wireless communications)
Dimensions and mass	87 mm (3.43 in.) W × 185 mm (7.28 in.) H × 47 mm (1.85 in.) D, 480 g (16.9 oz.) (with test leads holder and batteries)
Included accessories	Test Lead L9300 × 1, Instruction Manual × 1, LR6 (AA) alkaline battery × 3, Operating Precautions × 1


#### Option for DT4261

Options	<p><b>DC HIGH VOLTAGE PROBE P2010</b> CAT III 2000 V, light-weight and improved handling</p>	When Z3210 is installed	<p><b>GENNECT Cross</b> SF4071, SF4072 Mobile app for iOS, Android</p>
---------	--	-------------------------	--

#### Bluetooth® communication with Z3210 attached to DT4261

Refer to the detailed catalog

Install the Wireless Adapter Z3210 to the DT4261 to enable Bluetooth® communications. With the Z3210, you can transfer data directly to an Excel® file or pair the instrument with GENNECT Cross.



Z3210  
For more details



Attach to enable Bluetooth® wireless technology

Transport to the Excel® file

Transport to GENNECT Cross

## General Purpose Testers with Rich Measurement Functions

### DIGITAL MULTIMETER DT4252, DT4256



DT4252

DT4256



- $\pm 0.3\%$  DC V basic accuracy, wide 40 Hz to 1 kHz AC V frequency characteristics
- Measure up to 10 A with direct input
- Dual display lets you check voltage and frequency simultaneously
- Low-pass filter cuts high harmonics (when measuring inverter fundamental waveforms)
- USB communications function supports PC measurements (optional)
- Broad  $-25^{\circ}\text{C}$  ( $-13^{\circ}\text{F}$ ) to  $65^{\circ}\text{C}$  ( $149^{\circ}\text{F}$ ) operating temperature range (DT4256)

Model No. (Order Code)	<b>DT4252</b>	(10 A direct input)
	<b>DT4256</b>	(Multi-functional model, with 10 A direct input)

Regarding DMM Accuracy Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalogs for detailed accuracy information.

#### Basic specifications (Accuracy guaranteed for 1 year)

	DT4252	DT4256
DC Voltage range	600.0 mV to 1000 V, 5 ranges	
	Basic accuracy: $\pm 0.3\%$ rdg $\pm 5$ dgt	Basic accuracy: $\pm 0.3\%$ rdg $\pm 3$ dgt
AC Voltage range	6.000 V to 1000 V, 4 ranges, Frequency characteristics: 40 Hz to 1 kHz	
	Basic accuracy 40 - 500 Hz: $\pm 0.9\%$ rdg $\pm 3$ dgt (True RMS, crest factor 3)	
AUTO AC/DCV	N/A	Yes
Resistance range	600.0 $\Omega$ to 60.00 M $\Omega$ , 6 ranges, Basic accuracy: $\pm 0.7\%$ rdg $\pm 5$ dgt	600.0 $\Omega$ to 60.00 M $\Omega$ , 6 ranges, Basic accuracy: $\pm 0.7\%$ rdg $\pm 3$ dgt
DC Current range	6.000 A / 10.00 A, 2 ranges, Basic accuracy: $\pm 0.9\%$ rdg $\pm 5$ dgt	60.00 mA to 10.00 A, 4 ranges, Basic accuracy: $\pm 0.9\%$ rdg $\pm 3$ dgt
AC Current range	6.000 A / 10.00 A, 2 ranges, Basic accuracy 40 - 500 Hz: $\pm 1.4\%$ rdg $\pm 3$ dgt (True RMS, crest factor 3, 40 Hz to 1 kHz)	600.0 mA to 10.00 A, 3 ranges, Basic accuracy 40 - 500 Hz: $\pm 1.4\%$ rdg $\pm 3$ dgt (True RMS, crest factor 3, 40 Hz to 1 kHz)
AC Current range (use with Clamp on probes)	N/A	10.00 A to 1000 A, 7 ranges, Add the Clamp on probe accuracy to basic accuracy 40 - 1 kHz: $\pm 0.9\%$ rdg $\pm 3$ dgt (True RMS, crest factor 3)
Voltage detection (50/60 Hz)	N/A	Hi: AC40 V to 600 V, Lo: AC80 V to 600 V
Capacitance range	1.000 $\mu\text{F}$ to 10.00 mF, 5 ranges, Basic accuracy: $\pm 1.9\%$ rdg $\pm 5$ dgt	
Frequency range	99.99 Hz (5 Hz or more) to 99.99 kHz, 4 ranges (limited by the minimum detectable voltage and current), Basic accuracy: $\pm 0.1\%$ rdg $\pm 1$ dgt	
Continuity check	Continuity threshold [ON]: 25 $\Omega$ or less (Indicate buzzer sound, red LED), [OFF]: 245 $\Omega$ or more, Response time: 0.5 ms or more	
Diode test	Open terminal voltage: 5.0 V or less, Testing current 0.5 mA or less, Threshold of forward voltage: 0.15 V to 1.5 V	
Other functions	Filter function, Display value hold, Auto hold, Max/Min/Average value display, Relative display, Auto-power save, USB communication (option)	
Display	Main and Sub displays: 4-digits LCD, max. 6000 digits, bar graph	
Display refresh rates	5 times/s (Capacitance measurement: 0.05 to 5 times/s, depending on measured value, Frequency: 1 to 2 time/s, Temperature: 1 time/s)	
Power supply	LR03 alkaline batteries $\times 4$ , Continuous use: 130 hours (backlight OFF)	
Dimensions and mass	84 mm (3.31 in.)W $\times$ 174 mm (6.85 in.)H $\times$ 52 mm (2.05 in.)D, 390 g (13.8 oz.) (including batteries and holster)	
Included accessories	Test lead L9207-10 $\times 1$ (replaced by the probe L9300 starting with batches manufactured in March, 2025), Holster $\times 1$ , Instruction manual $\times 1$ , LR03 alkaline battery $\times 4$	

## Application-Specific Testers to Meet Your Needs

### DIGITAL MULTIMETER DT4253, DT4255



DT4253

DT4255



- Ideal for measuring currents ranging from instrumentation signals (4 to 20 mA) to flame currents ( $\mu\text{A}$ ) with built in high-sensitivity current ranges (DT4253)
- Prevents short-circuit accidents with a fast-blow fuse and current-limiting resistor (DT4255)
- Prevents accidents with clamp-on sensor-based current measurement (DT4255)
- Voltage detection function (DT4255)
- Low-pass filter cuts high harmonics (when measuring inverter fundamental waveforms)
- Broad  $-25^{\circ}\text{C}$  ( $-13^{\circ}\text{F}$ ) to  $65^{\circ}\text{C}$  ( $149^{\circ}\text{F}$ ) operating temperature range (DT4255)
- Dual display lets you check voltage and frequency simultaneously

\*1 Your instrument can be used to measure voltages in excess of 1000 V DC if and only if both of the following conditions are satisfied: 1. The circuit under measurement is isolated from the commercial power grid. 2. The circuit under measurement is isolated from ground.

Model No. (Order Code)	<b>DT4253</b>	(With mA DC, temperature)
	<b>DT4255</b>	(With fused measurement terminals)

Regarding DMM Accuracy Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalogs for detailed accuracy information.

#### Basic specifications (Accuracy guaranteed for 1 year)


	DT4253	DT4255
DC Voltage range	600.0 mV to 1000 V	
	5 ranges, Basic accuracy: $\pm 0.3\%$ rdg $\pm 5$ dgt	5 ranges, Basic accuracy: $\pm 0.3\%$ rdg $\pm 3$ dgt
AC Voltage range	6.000 V to 1000 V, 4 ranges, Frequency characteristics: 40 Hz to 1 kHz	
	Basic accuracy 40 - 500 Hz: $\pm 0.9\%$ rdg $\pm 3$ dgt (True RMS, crest factor 3)	
AUTO AC/DCV	Yes	
Resistance range	600.0 $\Omega$ to 60.00 M $\Omega$ , 6 ranges, Basic accuracy: $\pm 0.7\%$ rdg $\pm 5$ dgt	600.0 $\Omega$ to 60.00 M $\Omega$ , 6 ranges, Basic accuracy: $\pm 0.7\%$ rdg $\pm 3$ dgt
DC Current range	60.00 $\mu\text{A}$ to 60.00 mA, 4 ranges, Basic accuracy: $\pm 0.8\%$ rdg $\pm 5$ dgt	N/A
From 4 to 20 mA Percentage conversion display	Yes	N/A
AC Current range (use with Clamp on probes)	10.00 A to 1000 A, 7 ranges, Add the Clamp on probe accuracy to basic accuracy 40 - 1 kHz: $\pm 0.9\%$ rdg $\pm 3$ dgt (True RMS, crest factor 3)	
Temperature (thermocouples)	K: $-40.0$ to $400.0^{\circ}\text{C}$ , Add the Temperature probe accuracy to basic accuracy: $\pm 0.5\%$ rdg $\pm 2^{\circ}\text{C}$	N/A
Voltage detection	N/A	
Capacitance range	1.000 $\mu\text{F}$ to 10.00 mF, 5 ranges, Basic accuracy: $\pm 1.9\%$ rdg $\pm 5$ dgt	
Frequency range	99.99 Hz to 99.99 kHz, 4 ranges (limited by the minimum detectable voltage), Basic accuracy: $\pm 0.1\%$ rdg $\pm 1$ dgt	
Continuity check	Continuity threshold [ON]: 25 $\Omega$ or less, [OFF]: 245 $\Omega$ or more, Response time: 0.5 ms or more	
Diode test	Open terminal voltage: 5.0 V or less, Testing current 0.5 mA or less, Threshold of forward voltage: 0.15 V to 1.5 V	
Other functions	Filter function, Display value hold, Auto hold, Max/Min/Average value display, Relative display, Auto-power save, USB communication (option)	
Display	Main and Sub displays: 4-digits LCD, max. 6000 digits, bar graph	
Display refresh rates	5 times/s (Capacitance measurement: 0.05 to 5 times/s, depending on measured value, Frequency: 1 to 2 time/s)	
Power supply	LR03 alkaline batteries $\times 4$ , Continuous use: 130 hours (backlight OFF)	
Dimensions and mass	84 mm (3.31 in.)W $\times$ 174 mm (6.85 in.)H $\times$ 52 mm (2.05 in.)D, 390 g (13.8 oz.) (including batteries and holster)	
Included accessories	Test lead L9207-10 $\times 1$ (replaced by the probe L9300 starting with batches manufactured in March, 2025), Holster $\times 1$ , Instruction manual $\times 1$ , LR03 alkaline battery $\times 4$	

DMM Testers

#### Key Point

#### Absolute prevention of short-circuit accidents (DT4255)

In the event of erroneous operation, a protective circuit functions to prevent a short-circuit. A current-limiting resistor limits the short-circuit current if damage to the tester's circuitry results in a short-circuit condition, and a fast-blow fuse quickly disconnects the circuit to ensure safety.



## Proprietary Protection Function Against Accidental Voltage Input Prevents Power Failure and Fires

### DIGITAL MULTIMETER DT4223, DT4224



DT4223

DT4224



- Achieving a high level of safety in a compact body and lightweight design
- Circuit breaker false trip prevention function helps avoid accidents resulting from breakers that mistakenly trip due to incorrect input
- Resistance measurement and voltage detection function (DT4223)
- More convenient function: Resistance, Capacitance measurement and diode testing (DT4224)
- Robust design capable of withstanding a drop from a height of 1 m
- Test leads conveniently wrap around the back
- $\pm 0.5\%$  DC V basic accuracy, wide 40 Hz to 1 kHz AC V frequency characteristics
- Low-pass filter cuts high harmonics (when measuring inverter fundamental waveforms)
- Broad  $-10$  ( $14^{\circ}\text{F}$ ) to  $65^{\circ}\text{C}$  ( $149^{\circ}\text{F}$ ) operating temperature range
- Display backlight

Model No. (Order Code) **DT4223** (With resistance measurement, for electrical work)  
**DT4224** (With C/R measurement, for general use)

**Regarding DMM Accuracy** Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalogs for detailed accuracy information.

#### Basic specifications (Accuracy guaranteed for 1 year)

	DT4223	DT4224
DC Voltage range	600.0 mV to 600.0 V, 4 ranges, Basic accuracy: $\pm 0.5\%$ rdg $\pm 5$ dgt	
AC Voltage range	6.000 V to 600.0 V, 3 ranges, Frequency characteristics: 40 Hz - 1 kHz Basic accuracy 40 - 500 Hz: $\pm 1.0\%$ rdg $\pm 3$ dgt (True RMS, crest factor 3)	
Resistance range	600.0 $\Omega$ to 60.00 M $\Omega$ , 6 ranges Basic accuracy: $\pm 0.9\%$ rdg $\pm 5$ dgt	
Capacitance range	N/A	1.000 $\mu\text{F}$ to 10.00 mF, 5 ranges, Basic accuracy: $\pm 1.9\%$ rdg $\pm 5$ dgt
Frequency range	AC V measurement: 99.99 Hz (5 Hz or more) to 9.999 kHz, 3 ranges Basic accuracy: $\pm 0.1\%$ rdg $\pm 2$ dgt	
Continuity check	Continuity threshold [ON]: 25 $\Omega$ or less (buzzer sound), [OFF]: 245 $\Omega$ or more Response time: 0.5 ms or more	
Diode test	N/A	Open terminal voltage: 2.5 V or less, Testing current 0.5 mA or less, Threshold of forward voltage: 0.15 V to 1.5 V
Voltage detection	80 V to 600 V AC	N/A
Other functions	Circuit breaker false trip prevention function, Filter function, Display value hold, Relative display, Auto-power save	
Display	Main and Sub displays: 4-digits LCD, max. 6000 digits, bar graph	
Display refresh rates	5 times/s (Capacitance measurement: 0.05 to 5 times/s, depending on measured value, Frequency: 1 to 2 times/s)	
Power supply	LR03 alkaline batteries $\times 1$ , Continuous use: 35 hours (backlight OFF)	
Dimensions and mass	72 mm (2.83 in.)W $\times$ 149 mm (5.87 in.)H $\times$ 38 mm (1.50 in.)D, 190 g (6.7 oz.) (including batteries and holster)	
Included accessories	Test lead DT4911 $\times 1$ , Holster $\times 1$ , Instruction manual $\times 1$ , LR03 alkaline battery $\times 1$	

#### Shared options for the DT4220 series

Test leads	<p>DT4911 is bundled</p> <p><b>TEST LEAD DT4911</b> CAT IV 300V, CAT III 600V, 54cm (1.77ft) length</p>	<p>Attach DT4911 with the cap removed.</p> <p><b>CONTACT PIN SET L4933</b> Attaches to the tip of the Test Lead L9207-10/ L9300/DT4911/L9206, 60V DC/30V AC</p>	<p><b>SMALL ALLIGATOR CLIP SET L4934</b> Attaches to the tip of the L4932/L9207-10/L9300/ DT4911/L9206, CAT III 300V, CAT II 600V</p>
------------	---	---	---

Other options	<p><b>MAGNETIC STRAP Z5020</b> Extra strength</p>	<p><b>MAGNETIC STRAP Z5004</b></p>	<p><b>CARRYING CASE C0200</b></p>
---------------	---	------------------------------------	-----------------------------------



## Pencil-type DMM with LED Light

### PENCIL HiTESTER 3246-60



Not CE Marked  
CAT IV 300 V  
CAT III 600 V



Removable test pin sleeves prevent short-circuits

- Test lead and main unit in a single body
- Overload protection to 600 V at resistance or continuity functions
- LED light brightly illuminates test points

Model No. (Order Code) **3246-60**

**Regarding DMM Accuracy** Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalogs for detailed accuracy information.

#### Basic specifications (Accuracy guaranteed for 1 year)

DC Voltage range	419.9 mV to 600 V, 5 ranges, Basic accuracy: $\pm 1.3\%$ rdg $\pm 4$ dgt
AC Voltage range	4.199 V to 600 V, 4 ranges, Basic accuracy 50 - 500 Hz : $\pm 2.3\%$ rdg $\pm 8$ dgt (Average rectified)
Resistance range	419.9 $\Omega$ to 41.99 M $\Omega$ , 6 ranges, Basic accuracy: $\pm 2.0\%$ rdg $\pm 4$ dgt
Continuity buzzer	Detection level 50 $\Omega$ $\pm 40$ $\Omega$
Diode check	Judges the right direction only, Open terminal voltage: 3.4 V or less, Testing current: 800 $\mu$ A or less
Auto power save	Available (cancel selectable)
Display	Digital LCD, max. 4199 digits
Sampling rate	2.5 times/sec
Power supply	Coin type lithium battery (CR2032) $\times 1$ , Continuous use: 150 hours (at DC V function), 30 hours (with light turned on for 10 seconds and off for 20 seconds per cycle and in DC V function)
Dimensions and mass	30 mm (1.18 in.)W $\times$ 82 mm (3.23 in.)H $\times$ 26.5 mm (1.04 in.)D, 80 g (2.8 oz.)
Included accessories	Instruction manual $\times 1$ , Coin type lithium battery (CR2032) $\times 1$ (for trial purposes only), Sleeves (Red/ Black each 1)

## Compact ! Palm Size Body, Less Than 1cm Thin!

### CARD HiTESTER 3244-60



Not CE Marked  
CAT III 300 V  
CAT II 600 V



Removable test pin sleeves prevent short-circuits

Rugged external case C0204 protects the DMM. Standard accessory.


- Better contact test leads with 15 mm gold-plated tip pin
- Only 9.5 mm (0.37 in.) thick and 60 g (2.1 oz.) in weight
- Full auto-ranging function and automatic power saving function
- Overload protection to 500 V at resistance or continuity functions

Model No. (Order Code) **3244-60**

**Regarding DMM Accuracy** Due to the many ranges and functions available in a DMM, only the basic accuracy is indicated for reference. Please refer to the individual catalogs for detailed accuracy information.

#### Basic specifications (Accuracy guaranteed for 1 year)

DC Voltage range	419.9 mV to 500 V, 5 ranges, Basic accuracy: $\pm 0.7\%$ rdg $\pm 4$ dgt
AC Voltage range	4.199 V to 500 V, 4 ranges, Basic accuracy 50 - 500 Hz : $\pm 2.3\%$ rdg $\pm 8$ dgt (Average rectified)
Resistance range	419.9 $\Omega$ to 41.99 M $\Omega$ , 6 ranges, Basic accuracy: $\pm 2.0\%$ rdg $\pm 4$ dgt
Continuity buzzer	Detection level 50 $\Omega$ $\pm 40$ $\Omega$ , Diode check: Not available
Auto power save	Available (cancel selectable)
Display	Digital LCD, max. 4199 digits
Sampling rate	2.5 times/sec
Power supply	Coin type lithium battery (CR2032) $\times 1$ , Continuous use: 150 hours
Dimensions and mass	55 mm (2.17 in.)W $\times$ 109 mm (4.29 in.)H $\times$ 9.5 mm (0.37 in.)D, 60 g (2.1 oz.)
Included accessories	Instruction manual $\times 1$ , Carrying case $\times 1$ , Coin type lithium battery (CR2032) $\times 1$ (for trial purposes only), Sleeves (Red/ Black each 1)



\*When used in CAT III environments, test pin sleeves are required.




## Basic Analog Tester (20 kiloohm/V)

### HiTESTER 3030-10



Not CE Marked  
CAT III 600 V



- Drop proof design withstands drop onto a concrete floor from a height of 1 meter
- LED check, Battery check support

Model No. (Order Code) **3030-10**

#### Basic specifications (Accuracy guaranteed for 1 year)

DC Voltage range	0.3 V (16.7 k $\Omega$ /V), 3/12/30/120/300/600 V (20 k $\Omega$ /V) Accuracy: $\pm 2.5\%$ f.s. Max. rated voltage: 600 V
AC Voltage range	12 V (9 k $\Omega$ /V) Accuracy: $\pm 4\%$ f.s. 30/120/300/600 V (9 k $\Omega$ /V) Accuracy: $\pm 2.5\%$ f.s. Average rectifier effective value, Max. rated voltage: 600 V
DC Current range	60 $\mu$ A/30 m/300 mA (300 mV internal voltage drop) Accuracy: $\pm 3\%$ f.s.
Resistance range	0 to 3 k $\Omega$ (center scale 30 $\Omega$ ), R $\times 1$ , R $\times 10$ , R $\times 100$ , R $\times 1$ k Accuracy: $\pm 3\%$ of scale length
Battery check	0.9 to 1.8 V, load resistance 10 $\Omega$ , Accuracy: $\pm 6\%$ f.s.
Temperature scale	Note: the 3030-10 includes a temperature measurement scale, but because the optional Thermister Temperature Probe 9021-01 has been discontinued, the scale is not available for new customers.
Power supply	For resistance measurement range, R6P (AA) $\times 2$ batteries
Dimensions and mass	95 mm (3.74 in.)W $\times$ 141 mm (5.55 in.)H $\times$ 39 mm (1.54 in.)D, 280 g (9.9 oz.)
Included accessories	Test lead L9207-30 $\times 1$ , Spare fuse $\times 1$ , R6P (AA) manganese batteries $\times 2$ , Instruction manual $\times 1$ , Carrying case 9390 $\times 1$



DMM Testers

# Insulation Testers/Megaohm Testers

## Quick Response Comparator Offering Reading Stability in High-speed Digital Format

### INSULATION TESTER IR4057-50, IR4059



CAT III 600 V



IR4057 only



When Z3210 is installed

- Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel® file. (Wireless Adapter Z3210 is necessary)
- 5-range testing voltage of 50 V/100 MΩ to 1000 V/4000 MΩ
- Digital bar graph
- Stable & high-speed digital readings, 0.3 second response time for PASS/ FAIL decisions
- Drop proof onto concrete from 1m (3.28 feet)
- Bright LED, luminous LCD, test lead with bright LED lamp to illuminate near hand (Option L9788-11 or L9788-10)
- Continuity check via 200 mA testing
- Built in AC/DC voltage meter, useful for testing solar power generation systems and electric vehicles

Model No. (Order Code)	<b>IR4057-50</b>	(Wireless Adapter Z3210 not included)
	<b>IR4057-90</b>	(Bundled with the Wireless Adapter Z3210)
	<b>IR4059</b>	(Wireless Adapter Z3210 not included)

■ Data can be downloaded to tablets and smartphones using Hioki's dedicated apps available from the Google Play or App Store. Search for "HIOKI" and download the "GENNECT Cross" app.



\*Android, Google Play and the Google Play logo are trademarks of Google Inc.  
 \*iOS is a registered trademark of Cisco Technology, Inc. and/or its affiliates in the United States and certain other countries.  
 \*Phone, iPad, iPad mini, iPod Pro and iPod touch are trademarks of Apple Inc.  
 \*Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.  
 \*Microsoft, Windows, Windows Vista, and Excel are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.  
 \*Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.  
 \*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license.  
 \*For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website.

#### Basic specifications (Accuracy guaranteed for 1 year)

Rated output voltage	50 V DC	125 V DC	250 V DC	500 V DC	1000 V DC
Effective maximum indicated value	100 MΩ	250 MΩ	500 MΩ	2000 MΩ	4000 MΩ
Accuracy	±2 % rdg ±2 dgt	±2 % rdg ±2 dgt	±2 % rdg ±2 dgt	±2 % rdg ±2 dgt	±2 % rdg ±2 dgt
1st effective measuring range MΩ	0.200 - 10.00	0.200 - 25.0	0.200 - 50.0	0.200 - 500	0.200 - 1000
Lower limit resistance	0.05 MΩ	0.125 MΩ	0.25 MΩ	0.5 MΩ	1 MΩ
Overload protection	600 V AC (10s)				660 V AC (10s)
DC voltage range	4.2 V (0.001 V resolution) to 600 V (1 V resolution), 4 ranges, Accuracy: ±1.3% rdg ±4 dgt, Input resistance: 100 kΩ or higher				
AC voltage range	420 V (0.1 V resolution) / 600 V (1 V resolution), 2 ranges, 50/60 Hz, Accuracy: ±2.3% rdg ±8 dgt, Input resistance: 100 kΩ or higher, Average rectifier				
Low resistance range	For checking the continuity of ground wiring, 10 Ω (0.01 Ω resolution) to 1000 Ω (1 Ω resolution), 3 ranges, Basic accuracy: ±3 % rdg ±2 dgt, testing current 200 mA or more (at 6 Ω or less)				
Display	Semi-transmissive FSTN LCD with back lighting, bar-graph indicator				
Response time	Approx. 0.3 second for PASS/FAIL decision (based on in-house testing)				
Other functions	Indicate MΩ measurement value after a lapse of one minute, Live circuit indicator, Automatic electric discharge, Automatic DC/AC detection, Comparator, Drop proof, Auto power save				
Power supply	LR6 (AA) alkaline batteries × 4. Continuous use: 20 hours (based on in-house testing) Number of measurements: 1000 times (at 5 s ON, 25 s OFF cycle, insulation measurement of lower limit resistance value to maintain nominal output voltage)				
Dimensions and mass	IR4057-50, IR4057-90: 159 mm (6.26 in.) W × 177 mm (6.97 in.) H × 53 mm (2.09 in.) D, 640 g (22.6 oz.) (including batteries, excluding test leads) IR4059: 160 mm (6.30 in.) W × 98 mm (3.86 in.) H × 46 mm (1.81 in.) D, 536 g (18.9 oz.) (including batteries and protector, excluding test leads)				
Included accessories	Connection cable L4930 ×1, Alligator clip set L4935 ×1, Test pin set L4938 ×1, Neck strap ×1, Instruction manual ×1, LR6 (AA) alkaline batteries ×4, Test lead with remote switch (red) L9788-10 ×1 (included with IR4059 only), Protector Z5042 ×1 (included with IR4059 only)				

**Bundled Accessories**

<b>CONNECTION CABLE SET L4930</b> 1.2 m (3.94 ft) length, CAT IV 600V, CAT III 1000V	<b>ALLIGATOR CLIP SET L4935</b> Attaches to the tip of the L4930, CAT IV 600V, CAT III 1000V	<b>TEST PIN SET L4938</b> Attaches to the tip of the L4930, CAT III 600V

**Exclusively for the L9787**

**L9787 options**

<b>TEST LEAD L9787</b> Bundled with Line/ Earth lead, alligator clip, 1.2 m (3.94 ft) length	<b>BREAKER PIN L9787-91</b> For checking breaker terminal, Detachable for tip of the L9787, 48 mm (1.89 in.) length, φ 2.6 mm (0.10 in.)

**Exclusively for the L9788-10/ L9788-11**

**L9788 options**

<b>TEST LEAD SET WITH REMOTE SWITCH L9788-11</b> Bundled with Test Lead with Remote Switch L9788-10/ Earth lead, alligator clip, 1.2 m (3.94 ft) length	<b>TEST LEAD WITH REMOTE SWITCH (RED) L9788-10</b> Lighting LED lamp & comparator indicator (Operate only when main unit provides a comparator function), 1.2 m (3.94 ft) length	<b>TIP PIN L9788-90</b> Spare parts for tip of the L9788/ L9788-10, Tip length 35 mm (1.38 in.)	<b>BREAKER PIN L9788-92</b> For checking breaker terminal, Detachable for tip of the L9788-10, 65 mm (2.56 in.) length, φ 2.6 mm (0.10 in.)

**Exclusively for the IR4059**

**Case**

<b>CARRYING CASE C0213</b> Bag type, for the IR4059, EV maintenance manual included (EV maintenance manual can be downloaded from the Hioki website)	<b>PROTECTOR Z5042</b> Bundled with IR4059, not compatible with IR4057

**Option**

<b>WIRELESS ADAPTER Z3210</b> (included with IR4057-90) Simply plug in the Z3210 wireless adapter and your compatible Hioki device is Bluetooth® ready	<b>MAGNETIC ADAPTER 9804-01</b> Attaches to the tip of cord, red ×1, φ11 mm (0.43 in.)	<b>MAGNETIC ADAPTER 9804-02</b> Attaches to the tip of cord, black ×1, φ11 mm (0.43 in.)

**When Z3210 is installed**

**Software**

<b>GENNECT Cross SF4071, SF4072</b> Mobile app for iOS, Android

# Insulation Testers/Megaohm Testers

## Our Most Popular Model Offering Reading Stability in Medium-speed Digital Format

### INSULATION TESTER IR4056



IR4056-20



IR4056-21



Comparator function  
Fail alert with Red LCD illuminator



Test lead L9788-10  
Bright LED lamp & comparator indicator (green lamp)



- 5-range testing voltage of 50 V/100 MΩ to 1000 V/4000 MΩ
- Stable & medium-speed digital readings, 0.8 second response time of PASS/ FAIL decisions
- Drop proof onto concrete from 1m (3.28 feet)
- Bright LED, luminous LCD, test lead with bright LED lamp to illuminate near hand (Also available in the IR4056-21)
- Continuity check via 200 mA testing
- Built in AC/DC voltage meter, useful for testing solar power generation systems and electric vehicles

Model No. (Order Code) **IR4056-20** (Economic model)  
**IR4056-21** (Economic model, Not CE marked)

#### Basic specifications (Accuracy guaranteed for 1 year)

Rated output voltage	50 V DC	125 V DC	250 V DC	500 V DC	1000 V DC
Effective maximum indicated value	100 MΩ	250 MΩ	500 MΩ	2000 MΩ	4000 MΩ
Accuracy 1st effective measuring range MΩ	±2% rdg ±2 dgt 0.200 - 10.00	±2% rdg ±2 dgt 0.200 - 25.0	±2% rdg ±2 dgt 0.200 - 50.0	±2% rdg ±2 dgt 0.200 - 500	±2% rdg ±2 dgt 0.200 - 1000
Lower limit resistance	0.05 MΩ	0.125 MΩ	0.25 MΩ	0.5 MΩ	1 MΩ
Overload protection	600 V AC (10s)				660 V AC (10s)
DC voltage range	4.2 V (0.001 V resolution) to 600 V (1 V resolution), 4 ranges, Accuracy: ±1.3% rdg ±4 dgt, Input resistance: 100 kΩ or higher				
AC voltage range	420 V (0.1 V resolution) / 600 V (1 V resolution), 2 ranges, 50/60 Hz, Accuracy: ±2.3% rdg ±8 dgt, Input resistance: 100 kΩ or higher, Average rectifier				
Low resistance range	For checking the continuity of ground wiring, 10 Ω (0.01 Ω resolution) to 1000 Ω (1 Ω resolution), 3 ranges, Basic accuracy: ±3% rdg ±2 dgt, testing current 200 mA or more (at 6 Ω or less)				
Display	Semi-transmissive FSTN LCD with back lighting				
Response time	Approx. 0.8 second for PASS/FAIL decision (based on in-house testing)				
Other functions	Live circuit indicator, Automatic electric discharge, Automatic DC/AC detection, Comparator, Drop proof, Auto power save				
Power supply	LR6 (AA) alkaline batteries ×4, Continuous use: 20 hours (Comparator off, back-light off, 500 V range, no load) Number of measurements: 1000 times (at 5 s ON, 25 s OFF cycle, insulation measurement of lower limit resistance value to maintain nominal output voltage)				
Dimensions and mass	159 mm (6.26 in.)W × 177 mm (6.97 in.)H × 53 mm (2.09 in.)D, 600 g (21.2 oz.) (including batteries, excluding test leads)				
Included accessories	[IR4056-20] Test lead L9787 ×1, Neck strap ×1, Instruction manual ×1, LR6 (AA) alkaline batteries ×4 [IR4056-21] Test lead set with remote switch L9788-11 ×1, Neck strap ×1, Instruction manual ×1, LR6 (AA) alkaline batteries ×4				

## Measure PV Insulation Resistance Safely, Accurately and Quickly

### INSULATION TESTER IR4053



#### option



TEST LEAD SET WITH REMOTE SWITCH L9788-11  
Bundled with Remote switch type test lead L9788-10/ Earth lead, alligator clip, 1.2 m (3.94 ft) length



- Safely and accurately measure PV insulation resistance even while generating solar power
- Built-in PV dedicated function, display measurements in 4 seconds
- Five ranges (50/125/250/500/1000V) built in for normal insulation resistance measurement
- Built-in 1000 VDC voltage measurement for open voltage tests of PV systems that support 1000 V
- Built-in comparator function
- Drop proof design withstands drop onto concrete from a height of 1 meter

Model No. (Order Code) **IR4053-10** (Bundled with standard Test Lead L9787)

#### Basic specifications (Accuracy guaranteed for 1 year)

PVΩ measurement					
Rated output voltage	500 V DC			1000 V DC	
Effective maximum indicated value	2000 MΩ			4000 MΩ	
Measuring range/Accuracy	0.200 to 500 MΩ / ±4% rdg 501 to 2000 MΩ / ±8% rdg		0.200 to 1000 MΩ / ±4% rdg 1010 to 4000 MΩ / ±8% rdg		
Other measuring range / Accuracy	0 to 0.199 MΩ / ±2% rdg ±6 dgt				
Insulation resistance measurement					
Rated output voltage	50 V DC	125 V DC	250 V DC	500 V DC	1000 V DC
Effective maximum indicated value	100 MΩ	250 MΩ	500 MΩ	2000 MΩ	4000 MΩ
Accuracy 1st effective measuring range MΩ	±4% rdg 0.200 to 10.00	±4% rdg 0.200 to 25.0	±4% rdg 0.200 to 50.0	±4% rdg 0.200 to 500	±4% rdg 0.200 to 1000
Lower limit resistance	0.05 MΩ	0.125 MΩ	0.25 MΩ	0.5 MΩ	1 MΩ
Overload protection	600 V AC (10 s)				1200 V DC (10 s)
DC voltage range	4.2 V (0.001 V resolution) to 1000 V (1 V resolution), 4 ranges, Accuracy: ±1.3% rdg ±4 dgt, (Ranges in excess of 1000 V are not guaranteed for accuracy)				
AC voltage range	420 V (0.1 V resolution)/600 V (1 V resolution), 2 ranges, 50/60 Hz, Accuracy: ±2.3% rdg ±8 dgt, (Ranges in excess of 600 V are not guaranteed for accuracy)				
Display	Semi-transmissive FSTN LCD with back lighting				
Response time	Insulation resistance range: 1 second, PVΩ function: 4 seconds (based on in-house tests)				
Other functions	Live circuit indicator, automatic electric discharge, automatic DC/AC detection, comparator, drop proof, auto power save				
Power supply	AA alkaline batteries (LR6) ×4, Continuous operating time: Approx. 20 hours (based on in-house tests)				
Dimensions and mass	159 mm (6.26 in.) W × 177 mm H (6.97 in.) H × 53 mm (2.09 in.) D, Approx. 600 g (21.2 oz.) (including batteries, excluding test lead)				
Included accessories	Test Lead L9787 ×1, Neck strap ×1, Instruction manual ×1, AA alkaline batteries (LR6) ×4				

### Shared options for the Insulation Tester IR4058, IR4056, and IR4053

Exclusively for the L9787 \*The L9787 is bundled (IR4058-20, IR4057-20, IR4056-20, IR4053-10)

**L9787 Options**

**TEST LEAD L9787**  
Bundled with Line/ Earth lead, alligator clip, 1.2 m (3.94 ft) length

**BREAKER PIN L9787-91**  
For checking breaker terminal, detachable for tip of the L9787, 48 mm (1.89 in.) length, φ 2.6 mm (0.10 in.)

Exclusively for the L9788-10/ L9788-11 \*The L9788-11 is bundled (IR4056-21)

**L9788 Options**

**TEST LEAD SET WITH REMOTE SWITCH L9788-11**  
Bundled with Test Lead with Remote Switch L9788-10/ Earth lead, alligator clip, 1.2 m (3.94 ft) length

**TEST LEAD WITH REMOTE SWITCH (RED) L9788-10**  
Lighting LED lamp & comparator indicator (Operate only when main unit provides a comparator function), 1.2 m (3.94 ft) length

**TIP PIN L9788-90**  
Spare parts for tip of the L9788/ L9788-10, tip length 35 mm (1.38 in.)

**BREAKER PIN L9788-92**  
For checking breaker terminal, detachable for tip of the L9788-10, 65 mm (2.56 in.) length, φ 2.6 mm (0.10 in.)

**L4930 Options**

**CONNECTION CABLE SET L4930**  
1.2 m (3.94 ft) length

**ALLIGATOR CLIP SET L4935**  
Attaches to the tip of the L4930

**Shared Option**

**MAGNETIC ADAPTER 9804-01**  
Attaches to the tip of cord, red ×1, φ11 mm (0.43 in.)

**MAGNETIC ADAPTER 9804-02**  
Attaches to the tip of cord, black ×1, φ11 mm (0.43 in.)

Field Measuring Instruments



## Reliable and Efficient Insulation Testing in the Field

### ANALOG MΩ HiTESTER IR4018



- Single range testing voltage of 1000 V
- Test insulation resistance up to 2000 MΩ
- Built tough to withstand a 1-meter drop onto a concrete floor
- Bright LED luminous scale
- Check for live circuits and battery status
- Integrated hard case for quick and easy storage without disconnecting the leads

Model No. (Order Code) **IR4018-20**

#### Basic specifications (Accuracy guaranteed for 1 year)

Rated output voltage	1000 V DC
Effective maximum indicated value	2000 MΩ
Accuracy 1st effective measuring range	±2 % of scale length, 2 M to 1000 MΩ
Lower limit resistance	1 MΩ (measurement resistance value to maintain testing voltage)
Overload protection	660 V AC (10 sec.)
AC voltage range	0 to 600 V (50/60 Hz), ±5 % of maximum scale value accuracy, 500 kΩ or more input resistance
Other functions	Bright LED luminous scale, Drop proof (on concrete, 1 m/1 time), Battery check, Live circuit check, Auto discharge
Power supply	LR6 (AA) alkaline batteries ×4, Continuous use: 15 hours (no load)
Dimensions and mass	159 mm (6.26 in.)W × 177 mm (6.97 in.)H × 53 mm (2.09 in.)D, 610 g (21.5 oz.), (including battery, excluding test lead)
Included accessories	Test lead L9787 ×1, LR6 (AA) alkaline batteries ×4, Instruction manual ×1, Shoulder strap ×1

## Reliable and Efficient Insulation Testing in the Field

### ANALOG MΩ HiTESTER IR4017



- Single range testing voltage of 500 V
- Test insulation resistance up to 1000 MΩ
- Built tough to withstand a 1-meter drop onto a concrete floor
- Bright LED luminous scale
- Check for live circuits and battery status
- Integrated hard case for quick and easy storage without disconnecting the leads

Model No. (Order Code) **IR4017-20**

#### Basic specifications (Accuracy guaranteed for 1 year)

Rated output voltage	500 V DC
Effective maximum indicated value	1000 MΩ
Accuracy 1st effective measuring range	±2 % of scale length, 1 M to 500 MΩ
Lower limit resistance	0.5 MΩ (measurement resistance value to maintain testing voltage)
Overload protection	600 V AC (10 sec.)
AC voltage range	0 to 600 V (50/60 Hz), ±5 % of maximum scale value accuracy, 500 kΩ or more input resistance
Other functions	Bright LED luminous scale, Drop proof (on concrete, 1 m/1 time), Battery check, Live circuit check, Auto discharge
Power supply	LR6 (AA) alkaline batteries ×4, Continuous use: 20 hours (no load)
Dimensions and mass	159 mm (6.26 in.)W × 177 mm (6.97 in.)H × 53 mm (2.09 in.)D, 610 g (21.5 oz.), (including battery, excluding test lead)
Included accessories	Test lead L9787 ×1, LR6 (AA) alkaline batteries ×4, Instruction manual ×1, Shoulder strap ×1

## Reliable and Efficient Insulation Testing in the Field

### ANALOG MΩ HiTESTER IR4016



- Single range testing voltage of 500 V
- Test insulation resistance up to 100 MΩ
- Built tough to withstand a 1-meter drop onto a concrete floor
- Bright LED luminous scale
- Check for live circuits and battery status
- Integrated hard case for quick and easy storage without disconnecting the leads

Model No. (Order Code) **IR4016-20**

#### Basic specifications (Accuracy guaranteed for 1 year)

Rated output voltage	500 V DC
Effective maximum indicated value	100 MΩ
Accuracy 1st effective measuring range	±2 % of scale length, 0.1 M to 50 MΩ
Lower limit resistance	0.5 MΩ (measurement resistance value to maintain testing voltage)
Overload protection	600 V AC (10 sec.)
AC voltage range	0 to 600 V (50/60 Hz), ±5 % of maximum scale value accuracy, 500 kΩ or more input resistance
Other functions	Bright LED luminous scale, Drop proof (on concrete, 1 m/1 time), Battery check, Live circuit check, Auto discharge
Power supply	LR6 (AA) alkaline batteries ×4, Continuous use: 20 hours (no load)
Dimensions and mass	159 mm (6.26 in.)W × 177 mm (6.97 in.)H × 53 mm (2.09 in.)D, 610 g (21.5 oz.), (including battery, excluding test lead)
Included accessories	Test lead L9787 ×1, LR6 (AA) alkaline batteries ×4, Instruction manual ×1, Shoulder strap ×1

### Shared options for the Analog Megaohm HiTester series IR4018 to IR4016, 3490

Exclusively for the L9787 \*The L9787 is bundled

L9787 options



**TEST LEAD L9787**  
Bundled with Line/Earth lead, alligator clip, 1.2 m (3.94 ft.) length

**BREAKER PIN L9787-91**  
For checking breaker terminal, Detachable for tip of the L9787, 48 mm (1.89 in.) length, φ 2.6 mm (0.10 in.)

Exclusively for the L9788-10/ L9788-11

L9788 options



**TEST LEAD SET WITH REMOTE SWITCH L9788-11**  
Bundled with Test Lead with Remote Switch L9788-10/ Earth lead, alligator clip, 1.2 m (3.94 ft.) length

**TEST LEAD WITH REMOTE SWITCH (RED) L9788-10**  
Lighting LED lamp & comparator indicator (Operate only when main unit provides a comparator function), 1.2 m (3.94 ft.) length

**TIP PIN L9788-90**  
Spare parts for tip of the L9788/ L9788-10, Tip length 35 mm (1.38 in.) φ 3.2 mm (0.13 in.)

**BREAKER PIN L9788-92**  
For checking breaker terminal, Detachable for tip of the L9788-10, 65 mm (2.56 in.) length, φ 2.6 mm (0.10 in.)

Attached to the Earth side lead tip

Shared option



**MAGNETIC ADAPTER 9804-02**  
Attaches to the tip of cord, black ×1, φ11 mm (0.43 in.)

# Insulation Testers/Megaohm Testers

## Insulation Testing in 3 Easy Steps: Flip the Cover, Select Range & Test

### ANALOG MΩ HiTESTER 3490



- 3-range testing voltage of 250/500 V (insulation resistance testing up to 100 MΩ), and 1000 V (insulation testing up to 4000 MΩ)
- Continuity check at 3 Ω range via 200 mA testing
- Bright LED luminous scale
- Check for live circuits and battery status

Model No. (Order Code) **3490** (Bundled with standard Test Lead L9787)

#### Basic specifications (Accuracy guaranteed for 1 year)

Rated output voltage	250 V DC	500 V DC	1000 V DC
Effective maximum indicated value	100 MΩ	100 MΩ	4000 MΩ
Accuracy 1st effective measuring range	±2 % of scale length 0.05 to 50 MΩ	±2 % of scale length 0.05 to 50 MΩ	±2 % of scale length 2 to 1000 MΩ
Lower limit resistance	0.25 MΩ	0.5 MΩ	1 MΩ
Overload protection	(Measurement resistance value to maintain testing voltage)		
	660 V AC (10 sec.)		
Low resistance range	3 Ω (at 200 mA testing current), ±0.09 Ω accuracy, 30 Ω (at 20 mA testing current), ±0.9 Ω accuracy, Open-circuit voltage: 4.1 to 6.9 V		
AC voltage range	0 to 600 V (50/60 Hz), ±5 % of maximum scale value accuracy, 100 kΩ or more input resistance		
Other functions	Bright LED luminous scale, Drop proof (on concrete, 1 m/1 time), Battery check, Live circuit check, Auto discharge		
Power supply	LR6 (AA) alkaline batteries ×4, Continuous use: 20 hours (at 500 V range, no load)		
Dimensions and mass	159 mm (6.26 in.)W × 177 mm (6.97 in.)H × 53 mm (2.09 in.)D, 610 g (21.5 oz.), (including battery, excluding test lead)		
Included accessories	Test lead L9787 ×1, Instruction manual ×1, Shoulder strap ×1, LR6 (AA) alkaline batteries ×4		

## Maximum 5kV Test Voltage - Up to 10 TΩ of Insulation Resistance Testing

### HIGH VOLTAGE INSULATION TESTER IR5050, IR5051



IR5050

IR5051



When Z3210 is installed

- Measure insulation of high-voltage equipment (such as transformers, cables, and motors)
- Wide testing voltage range, up to 5000 V from 250 V DC
- Wide measurement insulation range, up to 10 TΩ
- Automatically calculated and displayed insulation diagnostics (PI, DAR, and DD)
- Data memory functions increase your work efficiency by eliminating human errors from manual reporting
- Selectable interface compatibility: offers both wireless and USB connectivity options
- Compact and lightweight, equipped with an IP65-rated carrying case
- Measure solar PV system insulation resistance safely and accurately while generating (IR5051 only)

Model No. (Order Code) **IR5050**  
**IR5051** (For solar PV system)  
**IR5051-90** (For solar PV system, bundled with Z3210)

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement parameters	Insulation resistance, leakage current, voltage, capacitance, PV insulation resistance (IR5051 only)				
Max. rated voltage	Max. rated voltage to terminals: 1000 V AC, 2000 V DC Max. rated voltage to ground: 1000 V (CAT IV), 2000 V (CAT III)				
Dustproof/waterproof	IP40 (with protector attached, excluding terminals) IP65 (CARRYING CASE C0212)				
Standards	EN61010 (safety), EN61326 (EMC), IEC 61557-1, IEC 61557-2 (Insulation resistance tester)				
<b>Insulation resistance measurement</b>					
Test voltage preset	250 V	500 V	1000 V	2500 V	5000 V
Guaranteed accuracy range	0.00 MΩ to 2.50 GΩ ±5% rdg ±5 dgt	0.00 MΩ to 5.00 GΩ ±5% rdg ±5 dgt	0.00 MΩ to 10.0 GΩ ±5% rdg ±5 dgt	0.00 MΩ to 25.0 GΩ ±5% rdg ±5 dgt	0.00 MΩ to 50.0 GΩ ±5% rdg ±5 dgt
Rated current	1 mA to 1.2 mA (short-circuit current: 2 mA or less)				
<b>PV insulation resistance measurement (IR5051 only)</b>					
Test voltage preset	500 V		1000 V		1500 V
Guaranteed accuracy range	0.00 MΩ to 5.00 GΩ ±5% rdg ±5 dgt		0.00 MΩ to 10.0 GΩ ±5% rdg ±5 dgt		0.00 MΩ to 20.0 GΩ ±5% rdg ±5 dgt
Rated current	[Test voltage] / [20 MΩ], (short-circuit current: 2 mA or less)				
Leakage current measurement	10 nA to 1 mA, 6 ranges Accuracy ±3% rdg ±3 dgt (guaranteed accuracy range: 1.00 nA to 3 mA) <sup>1</sup>				
Voltage measurement	30 V to 1,000 V AC (45 Hz to 65 Hz), ±10 V to ±2,000 V DC Accuracy: ±3 % rdg ±3 dgt, Input resistance: 500 kΩ or more (DC, 45 Hz to 65 Hz)				
Capacitance measurement	100 nF, 1000 nF, 10 μF (3 ranges) Accuracy: ±10% rdg. ±5 nF (guaranteed accuracy range: 10.0 nF to 25.0 μF) <sup>1</sup>				
Other functions	Insulation diagnosis (PI, DAR, DD, SV, Ramp, Timer <sup>2</sup> ), battery charge indicator, live circuit indicator, automatic power save, automatic discharge, backlight, buzzer, manual recording, logging recording, temperature and humidity input, elapsed time display, clock, filter, hardware filter, data-hold, system reset, USB communication (only when DT4900-01 is installed), wireless communication (only when Z3210 is installed), comparator, resistance gauge display, switching of insulation diagnosis function, breakdown cut-off, negative voltage notification (IR5051 only)				
Display	Digital LCD, max. 999 dgt with backlight, Bar graph display				
Power supply	• LR6 (AA) alkaline battery × 8 • HR6 (AA) nickel-metal hydride (NiMH) rechargeable battery × 8				
Dimensions and mass	195 mm (7.68 in.) W × 254 mm (10 in.) H × 89 mm (3.50 in.) D, 1.7 kg (59.97 oz.) (including batteries)				
Included accessories	Test lead L9850-01 ×1, Test lead L9850-02 ×1, Test lead L9850-03 ×1, Alligator clip L9851-01 ×1, Alligator clip L9851-02 ×1, Alligator clip L9851-03 ×1, Carrying Case C0212 ×1, LR6 Alkaline battery ×8, Instruction manual ×1, Operating precautions ×1, Wireless adapter Z3210 (IR5051-90 only)				

1: refer to complete catalog for other ranges  
 2: only for the PV insulation resistance function

**TEST LEAD**

L9850-01 Red ×1, 3 m (9.84 ft.) length

L9850-02 Black ×1, 3 m (9.84 ft.) length, shielded cable

L9850-03 Blue ×1, 3 m (9.84 ft.) length

L9850-11 Red ×1, 10 m (32.81 ft.) length

L9850-12 Black ×1, 10 m (32.81 ft.) length, shielded cable

L9850-13 Blue ×1, 10 m (32.81 ft.) length

**ALLIGATOR CLIP**

L9851-01 Red ×1, for L9850

L9851-02 Black ×1, for L9850

L9851-03 Blue ×1, for L9850

**TEST PIN SET L9852**

Red and black, for L9850

Case

**CARRYING CASE C0212**  
IP65

Communications

**COMMUNICATION PACKAGE (USB) DT4900-01**  
Compatible to Windows 11, 10

**WIRELESS ADAPTER Z3210**  
(included with IR5051-90)  
Simply plug in the Z3210 wireless adapter and your compatible Hioki device is Bluetooth<sup>®</sup> ready

Field Measuring Instruments

# Clamp Meters

## Innovative Current Sensor Design, Easily Get Into Tight Spaces

### AC/DC CLAMP METER CM4375-50



CAT IV 600 V  
CAT III 1000 V

When using P2010:  
CAT IV 1000 V  
CAT III 2000 V



When Z3210  
is installed



- Easily get into tight spaces between cables thanks to thin sensor structure
- Automatic AC/DC function helps boost work efficiency, Measure up to 1000 A
- Measure DC voltages of up to 2000 V<sup>(\*)</sup> for open voltage inspections of solar panels
- Simultaneously measure inrush current in RMS and crest values
- Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel® file.<sup>(2)</sup>
- Harmonic analysis from 1st to 30th order with GENNECT Cross<sup>(2)</sup>

<sup>\*</sup> When using the optional DC High Voltage Probe P2010. The clamp meter itself is capable of measuring up to 1000 V DC.

<sup>2</sup> Wireless Adapter Z3210 is necessary.

Model No. (Order Code) **CM4375-50** (Wireless Adapter Z3210 not included)  
**CM4375-90** (Bundled with the Wireless Adapter Z3210)  
**CM4375-93** (Bundled with DC High Voltage Probe P2010 and Wireless Adapter Z3210)

#### ■ Basic specifications (Accuracy guaranteed for 1 year)

DC Current range	1000 A, (Max. display 999.9 A), Basic accuracy: $\pm 1.3\%$ rdg. $\pm 0.3$ A (at 30.1 A - 999.9 A)
AC Current range	1000 A (Max. display 999.9 A, 10 Hz to 1 kHz, True RMS), Basic accuracy 45-66 Hz: $\pm 1.8\%$ rdg. $\pm 0.3$ A (at 30.1 A - 900.0 A)
Crest factor	1000 A range: 1.5
DC+AC Current range	1000 A (DC, 10 Hz to 1 kHz, True RMS), Basic accuracy DC, 45-66 Hz: $\pm 1.3\%$ rdg. $\pm 1.3$ A (at 30.1 A - 900.0 A)
DC Power range	0.000 kVA to 1000 kVA (When using P2010: 0 kVA to 2000 kVA) (Automatically switched based on voltage range), Basic accuracy: $\pm 2.0\%$ rdg. $\pm 20$ dgt.
DC Voltage range	600.0 mV to 1000 V (When using P2010: 600.0 V to 2000 V)
AC Voltage range	6.000 V to 1000 V, 4 ranges (15 Hz to 1 kHz, True RMS), Basic accuracy 45 - 66 Hz: $\pm 0.9\%$ rdg. $\pm 0.003$ V (at 6 V)
DC+AC Voltage range	6.000 V to 1000 V, 4 ranges, Basic accuracy DC, 45-66 Hz: $\pm 1.0\%$ rdg. $\pm 0.013$ V (at 6 V)
Resistance range	600.0 $\Omega$ to 6.000 M $\Omega$ , 5 ranges, Basic accuracy: $\pm 0.7\%$ rdg. $\pm 0.5$ $\Omega$ (at 600 $\Omega$ )
Capacitance range	1.000 $\mu$ F to 1000 $\mu$ F, 4 ranges, Basic accuracy: $\pm 1.9\%$ rdg. $\pm 0.005$ $\mu$ F (at 1 $\mu$ F)
Frequency range	9.999 Hz to 999.9 Hz, 3 ranges, Basic accuracy: $\pm 0.1\%$ rdg. $\pm 0.003$ Hz (at 9.999 Hz)
Temperature (K)	-40.0 to 400.0 °C, add temperature probe accuracy to basic accuracy of $\pm 0.5\%$ rdg. $\pm 3.0$ °C
Other functions	Continuity check, Diode check, Automatic AC/DC detection, DC current and DC voltage polarity detection function, MAX/MIN/AVG/ PEAK MAX/PEAK MIN value display, Low-pass filter function, Display value hold, Auto hold, Backlight, Auto power save, Buzzer sound, Zero-adjustment
Dustproof, waterproof	IP20 (Voltage measurement in a completely dry condition. When jaw closes) IP54 (While in storage)
Power supply	LR03 Alkaline battery $\times 2$ Continuous use: approx. 40 hr (without Z3210 installed), approx. 20 hr. (with Z3210 installed and using wireless communications) Other conditions: 100 A AC measurement, backlight off, 23°C reference value
Core jaw diameter	$\phi 34$ mm (1.34 in.)
Smallest dimension of jaw cross-section	9.5 mm (0.37 in.) (Range value of 44 mm (1.73 in.) from the tip of the jaw)
Dimensions and mass	65 mm (2.56 in.) W $\times$ 242 mm (9.53 in.) H $\times$ 35 mm (1.38 in.) D mm, 350 g (12.3 oz.)
Included accessories	Test Lead L9300, Carrying Case C0203, LR03 Alkaline battery $\times 2$ , Instruction Manual $\times 2$ , Operating Precautions $\times 1$

#### Shared options for CM4141-50, CM4371-50, CM4373-50 and CM4375-50

## True RMS 2000A AC/DC Clamp Meter for the Toughest Situations With DMM Functions that Deliver Top Safety

### AC/DC CLAMP METER CM4373-50



CAT IV 600 V  
CAT III 1000 V

When using P2010:  
CAT IV 1000 V  
CAT III 2000 V



When Z3210  
is installed



- Automatic AC/DC function helps boost work efficiency
- Measure DC voltages of up to 2000 V<sup>(\*)</sup> for open voltage inspections of solar panels
- Simultaneously measure inrush current in RMS and crest values
- Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel® file.<sup>(2)</sup>
- Harmonic analysis from 1st to 30th order with GENNECT Cross<sup>(2)</sup>

<sup>\*</sup> When using the optional DC High Voltage Probe P2010. The clamp meter itself is capable of measuring up to 1000 V DC.

<sup>2</sup> Wireless Adapter Z3210 is necessary.

Model No. (Order Code) **CM4373-50** (Wireless Adapter Z3210 not included)  
**CM4373-90** (Bundled with the Wireless Adapter Z3210)  
**CM4373-93** (Bundled with DC High Voltage Probe P2010 and Wireless Adapter Z3210)

#### ■ Basic specifications (Accuracy guaranteed for 1 year)

DC Current range	600.0 A/2000 A, Basic accuracy: $\pm 1.3\%$ rdg. $\pm 0.3$ A (600 A range)
AC Current range	600.0 A/2000 A (10 Hz to 1 kHz, True RMS), Basic accuracy 45 - 66 Hz: $\pm 1.3\%$ rdg. $\pm 0.3$ A (at 600 A)
Crest factor	600.0 A range: 3 or less, 2000 A range: 2.84 or less
DC+AC Current range	600.0 A/2000 A (10 Hz to 1 kHz, True RMS), Basic accuracy DC, 45-66 Hz: $\pm 1.3\%$ rdg. $\pm 1.3$ A (at 600 A)
DC Voltage range	600.0 mV to 1000 V (When using P2010: 600.0 V to 2000 V)
AC Voltage range	6.000 V to 1000 V, 4 ranges (15 Hz to 1 kHz, True RMS), Basic accuracy 45 - 66 Hz: $\pm 0.9\%$ rdg. $\pm 0.003$ V (at 6 V)
DC+AC Voltage range	6.000 V to 1000 V, 4 ranges, Basic accuracy DC, 45 - 66 Hz: $\pm 1.0\%$ rdg. $\pm 0.013$ V (at 6 V)
Resistance range	600.0 $\Omega$ to 6.000 M $\Omega$ , 5 ranges, Basic accuracy: $\pm 0.7\%$ rdg. $\pm 0.5$ $\Omega$ (at 600 $\Omega$ )
Capacitance range	1.000 $\mu$ F to 1000 $\mu$ F, 4 ranges, Basic accuracy: $\pm 1.9\%$ rdg. $\pm 0.005$ $\mu$ F (at 1 $\mu$ F)
Frequency range	9.999 Hz to 999.9 Hz, 3 ranges, Basic accuracy: $\pm 0.1\%$ rdg. $\pm 0.003$ Hz (at 9.999 Hz)
Temperature (K)	-40.0 to 400.0 °C, add temperature probe accuracy to basic accuracy of $\pm 0.5\%$ rdg. $\pm 3.0$ °C
Voltage detection	Hi: 40 V to 600 V AC, Lo: 80 V to 600 V AC, 50/60 Hz
Other functions	DC power, Continuity check, Diode check, Automatic AC/DC detection, Pass/fail judgement function of DC A and DC V, Max/Min/Average/PEAK MAX/PEAK MIN value display, Low-pass filter function, Display value hold, Auto hold, Back light, Auto-power save, Buzzer sounds, Zero-adjustment, etc.
Dustproof, waterproof	IP20 (Voltage measurement in a completely dry condition. When jaw closes) IP54 (While in storage)
Power supply	LR03 Alkaline battery $\times 2$ Continuous use: 40 hr (without Z3210 installed), 24 hr. (with Z3210 installed and using wireless communications) Other conditions: 100 A AC measurement, backlight off, 23°C reference value
Core jaw diameter	$\phi 55$ mm (2.17 in.), Jaw dimension: 92 mm (3.62 in.) W $\times$ 18 mm (0.71 in.) D
Dimensions and mass	65 mm (2.56 in.) W $\times$ 250 mm (9.84 in.) H $\times$ 35 mm (1.38 in.) D mm, 530 g (18.7 oz.)
Included accessories	Test Lead L9300, Carrying Case C0203, LR03 Alkaline battery $\times 2$ , Instruction Manual $\times 2$ , Operating Precautions $\times 1$

#### Shared options for CM4141-50, CM4371-50, CM4373-50 and CM4375-50



# Clamp Meters

## True RMS 600 A AC/DC Clamp Meter for the Toughest Situations With DMM Functions that Deliver Top Safety

### AC/DC CLAMP METER CM4371-50



CAT IV 600 V  
CAT III 1000 V  
When using P2010:  
CAT IV 1000 V  
CAT III 2000 V



True RMS



When Z3210 is installed



- Automatic AC/DC function helps boost work efficiency
- Measure DC voltages of up to 2000 V (\*) for open voltage inspections of solar panels
- Simultaneously measure inrush current in RMS and crest values
- Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel® file (\*\*)
- Harmonic analysis from 1st to 30th order with GENNECT Cross (\*\*)

\*1 When using the optional DC High Voltage Probe P2010. The clamp meter itself is capable of measuring up to 1000 V DC.

\*\*2 Wireless Adapter Z3210 is necessary.

Model No. (Order Code) **CM4371-50** (Wireless Adapter Z3210 not included)  
**CM4371-90** (Bundled with the Wireless Adapter Z3210)

#### Basic specifications (Accuracy guaranteed for 1 year)

DC Current range	20.00 A/600.0 A, Basic accuracy: $\pm 1.3\%$ rdg $\pm 0.08$ A (20 A range)
AC Current range	20.00 A/600.0 A (10 Hz to 1 kHz, True RMS), Basic accuracy: $\pm 1.3\%$ rdg $\pm 0.08$ A (at 20 A)
Crest factor	20.00 A range: 7.5, 600.0 A range: 3 or less
DC+AC Current range	20.00 A/600.0 A (10 Hz to 1 kHz, True RMS), Basic accuracy DC, 45-66 Hz: $\pm 1.3\%$ rdg $\pm 0.13$ A (at 20 A)
DC Voltage range	600.0 mV to 1000 V (When using P2010: 600.0 V to 2000 V)
AC Voltage range	6.000 V to 1000 V, 4 ranges (15 Hz to 1 kHz, True RMS), Basic accuracy 45 - 66 Hz: $\pm 0.9\%$ rdg $\pm 0.003$ V (at 6 V)
DC+AC Voltage range	6.000 V to 1000 V, 4 ranges, Basic accuracy DC, 45 - 66 Hz: $\pm 1.0\%$ rdg $\pm 0.013$ V (at 6 V)
Resistance range	600.0 $\Omega$ to 6.000 M $\Omega$ , 5 ranges, Basic accuracy: $\pm 0.7\%$ rdg $\pm 0.5$ $\Omega$ (at 600 $\Omega$ )
Capacitance range	1.000 $\mu$ F to 1000 $\mu$ F, 4 ranges, Basic accuracy: $\pm 1.9\%$ rdg $\pm 0.005$ $\mu$ F (at 1 $\mu$ F)
Frequency range	9.999 Hz to 999.9 Hz, 3 ranges, Basic accuracy: $\pm 0.1\%$ rdg $\pm 0.003$ Hz (at 9.999 Hz)
Temperature (K)	-40.0 to 400.0 $^{\circ}$ C, add temperature probe accuracy to basic accuracy of $\pm 0.5\%$ rdg $\pm 3.0$ $^{\circ}$ C
Voltage detection	Hi: 40 V to 600 V AC, Lo: 80 V to 600 V AC, 50/60 Hz
Other functions	DC power, Continuity check, Diode check, Automatic AC/DC detection, Pass/fail judgement function of DC A and DC V, Max/Min/Average/PEAK MAX/PEAK MIN value display, Low-pass filter function, Display value hold, Auto hold, Back light, Auto-power save, Buzzer sounds, Zero-adjustment
Dustproof, waterproof	IP20 (Voltage measurement in a completely dry condition. When jaw closes) IP54 (While in storage)
Power supply	LR03 Alkaline battery $\times 2$ Continuous use: 40 hr (without Z3210 installed), 20 hr. (with Z3210 installed and using wireless communications) Other conditions: 10 A AC measurement, backlight off, 23 $^{\circ}$ C reference value
Core jaw diameter	$\phi 33$ mm (1.30 in.), Jaw dimension: 69 mm (2.72 in.) W $\times$ 14 mm (0.55 in.) D
Dimensions and mass	65 mm (2.56 in.) W $\times$ 215 mm (8.46 in.) H $\times$ 35 mm (1.38 in.) D mm, 340 g (12.0 oz.)
Included accessories	Test Lead L9300, Carrying Case C0203, LR03 Alkaline battery $\times 2$ , Instruction Manual $\times 2$ , Operating Precautions $\times 1$

### Shared options for CM4141-50, CM4371-50, CM4373-50 and CM4375-50

\*: accepts only rated currents under 10 A.

Test Leads	L9300 is bundled <b>TEST LEAD L9207-10</b> 90 cm (2.95 ft.) length <i>Discontinuation scheduled</i>	<b>TEST LEAD L9300</b> 95 cm (37.4 in.), Integrated cap and protective finger guard	<b>CONTACT PIN SET L4933*</b> Attaches to the tip of the Test Lead L9207-10/ L9300/ DT4911/ L9206, 60V DC/ 30V AC	<b>SMALL ALLIGATOR CLIP SET L4934*</b> Attaches to the tip of the L4932/ L9207-10/ L9300/ DT4911/ L9206, CAT III 300V, CAT II 600V	<b>High Voltage Probe</b> <b>DC HIGH VOLTAGE PROBE P2010</b> CAT III 2000 V, lightweight and improved handling	<b>Temperature Measurement</b> <b>THERMOCOUPLES(K) DT4910</b> K type, tip exposed, 0.5 mm (0.02 in.) diameter, 80 cm (2.62 ft.) length, -40 to 260 $^{\circ}$ C (-40 to 500 $^{\circ}$ F)	<b>Other Options</b> Bundled accessory <b>CARRYING CASE C0203</b>				
	Options for the L4930. Test Pin Set L4932 is required when using the Small Alligator Clip Set L4934										
Options for Test Leads	<b>CONNECTION CABLE SET L4930</b> 1.2 m (3.94 ft.) length, CAT IV 600V, CAT III 1000V	<b>EXTENSION CABLE SET L4931</b> Expands the length of the L4930/ L4940, 1.5 m (4.92 ft.) length	<b>TEST PIN SET L4932</b> Attaches to the tip of the L4930/ L4940, CAT IV 600V, CAT III 1000V	<b>SMALL ALLIGATOR CLIP SET L4934*</b> Attaches to the tip of the L4932, L9207-10/ DT4911, L9206, CAT III 300V, CAT II 600V	<b>ALLIGATOR CLIP SET L4935</b> Attaches to the tip of the L4930/ L4940, CAT IV 600V, CAT III 1000V	<b>BUS BAR CLIP SET L4936*</b> Attaches to the tip of the L4930/ L4940, CAT III 600V	<b>MAGNETIC ADAPTER SET L4937*</b> Attaches to the tip of the L4930/ L4940, CAT III 1000V	<b>MAGNETIC ADAPTER 9804*</b> Attaches to the tip of voltage cord, $\phi 11$ mm (0.43 in.), compatible M6 pan screws	<b>TEST PIN SET L4938</b> Attaches to the tip of the L4930/ L4940, CAT III 600V	<b>BREAKER PIN SET L4939</b> Attaches to the tip of the L4930/ L4940, CAT III 600V	<b>GRABBER CLIP L9243*</b> Attaches to the tip of the L4930/ L4940, CAT II 1000 V, 185 mm (7.28 in.) length

# Clamp Meters

## Compact & Easy, One-Touch Maintenance on All Types of AC/DC Equipment

### CLAMP ON AC/DC HITESTER 3288



3288



True RMS  
3288-20



CAT III 600 V (Current)  
CAT III 300 V (Voltage)



- Model 3288-20: True RMS
- Use the 3288 for high current measurements such as UPS emergency batteries and train motors
- Voltage, resistance, and continuity check functions

Model No. (Order Code) **3288** (Average rectified)  
**3288-20** (True RMS)

#### Basic specifications (Accuracy guaranteed for 1 year)

	3288	3288-20
DC Current range	100.0/ 1000 A, Basic accuracy: $\pm 1.5\%$ rdg $\pm 5$ dgt	
AC Current range	100.0/ 1000 A, (10 Hz to 500 Hz, Average rectified), Basic accuracy: $\pm 1.5\%$ rdg $\pm 5$ dgt	100.0/ 1000 A, (10 Hz to 500 Hz, True RMS), Basic accuracy: $\pm 1.5\%$ rdg $\pm 5$ dgt
DC Voltage range	419.9 mV to 600 V, 5 ranges, Basic accuracy: $\pm 1.3\%$ rdg $\pm 4$ dgt	
AC Voltage range	4,199 V to 600 V, 4 ranges, Basic accuracy: $\pm 2.3\%$ rdg $\pm 8$ dgt (30 to 500 Hz, Average rectified)	4,199 V to 600 V, 4 ranges, Basic accuracy: $\pm 2.3\%$ rdg $\pm 8$ dgt (30 to 500 Hz, True RMS)
Resistance range	419.9 $\Omega$ to 41.99 M $\Omega$ , 6 ranges, Basic accuracy: $\pm 2\%$ rdg $\pm 4$ dgt	
Crest factor	N/A	3 or less (2 at 1000 A range, 1.5 at Voltage)
Other functions	Continuity: (50 $\Omega$ $\pm 40$ $\Omega$ ) or less buzzer sounds, Data hold, Auto power save, Auto zero (DC A)	
Display	LCD, max. 4199 dgt, Display refresh rate: 2.5 times/s	
Power supply	Coin type lithium battery (CR2032) $\times 1$ , Continuous use 60 hours	Coin type lithium battery (CR2032) $\times 1$ , Continuous use 35 hours
Core jaw dia.	$\phi$ 35 mm (1.38 in.)	
Dimensions and mass	57 mm (2.24 in.)W $\times$ 180 mm (7.09 in.)H $\times$ 16 mm (0.63 in.)D, 150 g (5.3 oz.)	
Included accessories	Coin type lithium battery (CR2032) $\times 1$ , Carrying case 9398 $\times 1$ , Test lead L9208 $\times 1$ , Instruction manual $\times 1$	

Bundled  
Accessories



Option



## Compact & Easy, One-Touch Maintenance on All Types of AC/DC Equipment

### CLAMP ON AC/DC HITESTER 3287



CAT III 600 V (Current)  
CAT III 300 V (Voltage)



True RMS

- Accurately measure even small currents with 10 A range
- Voltage, resistance, and continuity check functions

Model No. (Order Code) **3287** (True RMS)

#### Basic specifications (Accuracy guaranteed for 1 year)

DC Current range	10.00/ 100.0 A, Basic accuracy: $\pm 1.5\%$ rdg $\pm 5$ dgt
AC Current range	10.00/ 100.0 A (10 Hz to 1 kHz, True RMS) Basic accuracy: $\pm 1.5\%$ rdg $\pm 5$ dgt
DC Voltage range	419.9 mV to 600 V, 5 ranges, Basic accuracy: $\pm 1.3\%$ rdg $\pm 4$ dgt
AC Voltage range	4,199 V to 600 V, 4 ranges (30 to 500 Hz, True RMS) Basic accuracy: $\pm 2.3\%$ rdg $\pm 8$ dgt
Resistance range	419.9 $\Omega$ to 41.99 M $\Omega$ , 6 ranges, Basic accuracy: $\pm 2\%$ rdg $\pm 4$ dgt
Crest factor	2.5 or less (150 A, 1000 V max.)
Other functions	Continuity: (50 $\Omega$ $\pm 40$ $\Omega$ ) or less buzzer sounds, Data hold, Auto power save, Auto zero (DC A)
Display	LCD, max. 4199 dgt, Display refresh rate: 2.5 times/s
Power supply	Coin type lithium battery (CR2032) $\times 1$ , Continuous use 25 hours
Core jaw dia.	$\phi$ 35 mm (1.38 in.)
Dimensions and mass	57 mm (2.24 in.)W $\times$ 180 mm (7.09 in.)H $\times$ 16 mm (0.63 in.)D, 170 g (6.0 oz.)
Included accessories	Coin type lithium battery (CR2032) $\times 1$ , Carrying case 9398 $\times 1$ , Test lead L9208 $\times 1$ , Instruction manual $\times 1$

Bundled  
Accessories



Option



# Clamp Meters

## True RMS 2000 A AC Clamp Meter Innovative Current Sensor Design - Easily Get Into Tight Spaces

### AC CLAMP METER CM4141-50



**CE**  
CAT IV 600 V  
CAT III 1000 V  
When using P2010:  
CAT IV 1000 V  
CAT III 2000 V



**True RMS**

**Bluetooth**  
When Z3210 is installed

- Easily get into tight spaces between cables thanks to thin sensor with a mini-mum cross-section span of 11 mm
- Measure up to 2000 A AC
- Measure DC voltages of up to 2000 V<sup>(1)</sup> for open voltage inspections of solar panels
- AC A, AC and DC V, DC+AC V, resistance, frequency, temperature, and more
- Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel® file<sup>(2)</sup>
- Harmonic analysis from 1st to 30th order with GENNECT Cross<sup>(2)</sup>

<sup>1</sup> When using the optional DC High Voltage Probe P2010. The clamp meter itself is capable of measuring up to 1000 V DC.

<sup>2</sup> Wireless Adapter Z3210 is necessary.

Model No. (Order Code) **CM4141-50** (Wireless Adapter Z3210 not included)  
**CM4141-90** (Bundled with the Wireless Adapter Z3210)

Shared options for CM4141-50, CM4371-50, CM4373-50 and CM4375-50

#### Basic specifications (Accuracy guaranteed for 1 year)

AC Current range	60.00 A to 2000 A, 3 ranges (45 Hz to 1 kHz, True RMS), Basic accuracy 45-66 Hz: $\pm 1.5\%$ rdg. $\pm 0.08$ A (60 A range)
Crest factor	For the 60.00 A range: 2.5 (greater than 50.00 A and less than or equal to 60.00 A) to 2000 A range: 1.5 (2000 A or less)
DC Voltage range	600.0 mV to 1000 V (When using P2010: 600.0 V to 2000 V)
AC Voltage range	6.000 V to 1000 V, 4 ranges (15 Hz to 1 kHz, True RMS), Basic accuracy 45-66 Hz: $\pm 0.9\%$ rdg. 0.003 V (at 6 V)
DC+AC Voltage range	6.000 V to 1000 V, 4 ranges, Basic accuracy DC, 45-66 Hz: $\pm 1.0\%$ rdg. $\pm 0.013$ V (at 6 V)
Resistance range	600.0 $\Omega$ to 6.000 M $\Omega$ , 5 ranges, Basic accuracy: $\pm 0.7\%$ rdg. $\pm 0.5$ $\Omega$ (at 600 $\Omega$ )
Capacitance range	1.000 $\mu$ F to 1000 $\mu$ F, 4 ranges, Basic accuracy: $\pm 1.9\%$ rdg. $\pm 0.005$ $\mu$ F (at 1 $\mu$ F)
Frequency range	Voltage: 9.999 Hz to 999.9 Hz 3 ranges, Current: 99.99 Hz to 999.9 Hz 2 ranges, Basic accuracy: $\pm 0.1\%$ rdg. $\pm 0.01$ Hz (at 99.99 Hz)
Temperature (K)	-40.0 to 400.0 °C, Basic accuracy: $\pm 0.5\%$ rdg $\pm 3.0$ °C + temperature probe accuracy
Other functions	Continuity check, Diode check, Automatic AC/DC detection (Voltage check only), Max/Min/AVG/Peak waveform MAX/Peak waveform MIN value display, Low-pass filter function, Display value hold, Backlight, Auto power save, Buzzer sound, Zero-adjustment, and other function
Dustproof, water-proof	IP20 (current measurement of voltage or hazardous live conductors under completely dry condition. Do not use when wet.) IP50 (when measuring resistance, or current of an insulated conductor (completely dry), and in storage)
Power supply	LR03 Alkaline battery $\times 2$ Continuous use: approx. 48 hr (without Z3210 installed), approx. 24 hr. (with Z3210 installed and using wireless communications) Other conditions: 100 A AC measurement, backlight off, 23°C reference value
Core jaw diameter	$\phi 55$ mm (2.17 in.), Jaw dimension: 82 mm (3.23 in.) W $\times$ 11 mm (0.43 in.) D (D dimension is a range value of 44 mm (1.73 in.) from the tip of the jaw)
Smallest dimension of jaw cross-section	11 mm (0.43 in.) (Range value of 44 mm (1.73 in.) from the tip of the jaw)
Dimensions and mass	65 mm (2.56 in.) W $\times$ 247 mm (9.72 in.) H $\times$ 35 mm (1.38 in.) D, 300 g (10.6 oz.)
Included accessories	Test Lead L9300 $\times 1$ , Carrying Case C0203 $\times 1$ , LR03 Alkaline battery $\times 2$ , Instruction Manual $\times 2$ , Operating Precautions $\times 1$

## Rugged & Compact, Quickly Clamp Wires in Even More Confined Spaces!

### AC CLAMP METER 3280-10F, CM3289



3280-10F



CM3289

**CE**  
CAT IV 300 V (Current)  
CAT III 600 V (Current)  
CAT III 300 V (Voltage)



**True RMS**

- The CM3289 is the successor to the popular 3280-20F with a redesigned thinner sensor to help you get into the tightest spaces.
- New redesigned sensor for even easier clamping (CM3289)
- Expanded -25 °C to 65 °C operating temperature range
- Model CM3289: Measure even harmonic waveform components using the True RMS method
- Model 3280-10F: Measure the fundamental waveform component using the average rectified method
- Connect the CT6280 flexible sensor to measure up to 4199 A in thick or paired wires

Model No. (Order Code) **3280-10F** (Average rectified)  
**3280-70F** (3280-10F, CT6280 bundled model)  
**CM3289** (True RMS)

Note: the 3280-70F includes both the meter and an AC Flexible Current Sensor.

1: AC CLAMP METER 3280-10F  $\times 1$

2: AC FLEXIBLE CURRENT SENSOR CT6280  $\times 1$  3: CARRYING CASE C0205  $\times 1$

#### Basic specifications (Accuracy guaranteed for 1 year)

	3280-10F	CM3289
AC Current range	42.00 to 1000 A, 3 ranges (50 to 60 Hz, Average rectified), Basic accuracy: $\pm 1.5\%$ rdg $\pm 5$ dgt	42.00 to 1000 A, 3 ranges (40 Hz to 1 kHz, True RMS), Basic accuracy: $\pm 1.5\%$ rdg $\pm 5$ dgt
DC Voltage range	420.0 mV to 600 V, 5 ranges, Basic accuracy: $\pm 1.0\%$ rdg $\pm 3$ dgt	420.0 mV to 600 V, 5 ranges, Basic accuracy: $\pm 1.0\%$ rdg $\pm 3$ dgt
AC Voltage range	4.200 V to 600 V, 4 ranges (45 to 500 Hz, Average rectified), Basic accuracy: $\pm 1.8\%$ rdg $\pm 7$ dgt	4.200 V to 600 V, 4 ranges (45 to 500 Hz, True RMS), Basic accuracy: $\pm 1.8\%$ rdg $\pm 7$ dgt
Crest factor	N/A	2.5 or less at 2500 counts (Linearly decreases to 1.5 or less at 4200 count)
Resistance range	420.0 $\Omega$ to 42.00 M $\Omega$ , 6 ranges, Basic accuracy: $\pm 2\%$ rdg $\pm 4$ dgt	420.0 $\Omega$ to 42.00 M $\Omega$ , 6 ranges, Basic accuracy: $\pm 2\%$ rdg $\pm 4$ dgt
Other functions	Continuity: Buzzer sounds at 50 $\Omega$ $\pm 40$ $\Omega$ or less, Data hold, Auto power save, Drop-proof from height of 1 meter	
Display	LCD, max. 4199 dgt, Display refresh rate: 400 ms	
Power supply	Coin type lithium battery (CR2032) $\times 1$ , Continuous use 120 hours	Coin type lithium battery (CR2032) $\times 1$ , Continuous use 70 hours
Core jaw dia.	$\phi 33$ mm (1.30 in.)	
Dimensions and mass	57 mm (2.24 in.) W $\times$ 175 mm (6.89 in.) H $\times$ 16 mm (0.63 in.) D, 100 g (3.5 oz.)	57 mm (2.24 in.) W $\times$ 181 mm (7.13 in.) H $\times$ 16 mm (0.63 in.) D, 100 g (3.5 oz.)
Included accessories	CARRYING CASE 9398 $\times 1$ , TEST LEAD L9208 $\times 1$ , Coin type lithium battery (CR2032) $\times 1$ , Instruction manual $\times 1$	

#### CT6280 Basic specifications (Accuracy guaranteed for 1 year)

Core jaw dia.	$\phi 130$ mm (5.12 in.) Cable cross-section diameter: 5 mm (0.20 in.), tip cap diameter: 7 mm (0.28 in.)
AC Current	419.9 A/ 4199 A, 2 ranges ( $\pm 3.0\%$ rdg $\pm 5$ dgt)
Cable length	800 mm (31.5 in.)

**Bundled Accessories**

The 9398 is a bundled accessory for the 3280-10F, the CM3289.

**TEST LEAD L9208**  
70 cm (2.30 ft.) length

**CARRYING CASE 9398**

**Options**

The C0205 is a bundled accessory for the CT6280, 3280-70F.

**AC FLEXIBLE CURRENT SENSOR CT6280**  
Includes C0205 and attachment

**CARRYING CASE C0205**  
The CT6280, L9208, and tester can be stored

**TEST LEADS HOLDER 9209**  
Secures one end of each test lead to the rear of the meter

Attach L9208 with the cap removed.

**CONTACT PIN SET L4933**  
Attaches to the tip of the Test Lead L9208, 60V DC/30V AC

**SMALL ALLIGATOR CLIP SET L4934**  
Attaches to the tip of the L9208, CAT III 300V, CAT II 600V

Field Measuring Instruments



# Clamp Meters

## Large Jaw Lets You Clamp with Ease, Measure Thick Cables Right at the Terminal

### AC CLAMP METER CM3281, CM3291



**True RMS**  
CM3291

- AC only, measure up to 2000 AAC
- -25 °C to 65 °C operating temperature range
- Also measure resistance, continuity, AC and DC voltage

Model No. (Order Code) **CM3281** (Average rectified)  
**CM3291** (True RMS)

#### Basic specifications (Accuracy guaranteed for 1 year)

	CM3281	CM3291
AC Current range	42.00 to 2000 A, 3 ranges (50 Hz to 60 Hz, Average rectified), Basic accuracy 50-60 Hz: $\pm 1.5\%$ rdg $\pm 5$ dgt	42.00 to 2000 A, 3 ranges (40 Hz to 1 kHz, True RMS), Basic accuracy 45-66 Hz: $\pm 1.5\%$ rdg $\pm 5$ dgt
DC Voltage range	420.0 mV to 600 V, 5 ranges, Basic accuracy: $\pm 1.0\%$ rdg $\pm 3$ dgt (at 4.2 V range)	
AC Voltage range	4.200 V to 600 V, 4 ranges (45 to 500 Hz, Average rectified), Basic accuracy 45-66 Hz: $\pm 1.8\%$ rdg $\pm 7$ dgt (at 4.2 V range)	4.200 V to 600 V, 4 ranges (45 to 500 Hz, True RMS), Basic accuracy 45-66 Hz: $\pm 1.8\%$ rdg $\pm 7$ dgt (at 4.2 V range)
Crest factor	N/A	For 2500 counts or less: 2.5 Reduces linearly to 1.5 or less at 4200 counts But, 1.5 or less for 2000 A ACA range
Resistance range	420.0 $\Omega$ to 42.00 M $\Omega$ , 6 ranges, Basic accuracy: $\pm 2.0\%$ rdg $\pm 4$ dgt (at 420 $\Omega$ range)	
Other functions	Continuity check: Buzzer sounds at 50 $\Omega$ $\pm 40$ $\Omega$ or less, Data hold, Auto power save, Drop-proof from height of 1 meter	
Power supply	Coin type lithium battery (CR2032) $\times 1$ , Continuous use 120 hours	Coin type lithium battery (CR2032) $\times 1$ , Continuous use 70 hours
Core jaw diameter	$\phi$ 46 mm (1.81 in.), Jaw dimension: 65 mm (2.56 in.) W $\times$ 13 mm (0.51 in.) D	
Dimensions and mass	57 mm (2.24 in.) W $\times$ 198 mm (7.80 in.) H $\times$ 16 mm (0.63 in.) D, 103 g (3.6 oz.)	
Included accessories	Carrying case $\times 1$ , TEST LEAD L9208 $\times 1$ , Coin type lithium battery CR2032 (for trial purposes only) $\times 1$ , Instruction manual $\times 1$ , Download guide $\times 1$ , Operating precautions $\times 1$	

#### CT6280 Basic specifications (Accuracy guaranteed for 1 year)

Core jaw dia.	$\phi$ 130 mm (5.12 in.) (Cable cross-section diameter: 5 mm (0.20 in.); tip cap diameter: 7 mm (0.28 in.))
AC Current	419.9 A / 4199 A, 2 ranges ( $\pm 3.0\%$ rdg $\pm 5$ dgt)
Cable length	800 mm (31.5 in.)

#### Shared options for the CM3281, CM3291

Bundled Accessories			Options			
	TEST LEAD L9208 70 cm (2.30 ft.) length	Carrying case C0205 Hard type, 222 mm (8.74 in.) W $\times$ 115 mm (4.53 in.) H $\times$ 46 mm (1.81 in.) D		AC FLEXIBLE CURRENT SENSOR CT6280 Includes carrying case C0205	CONTACT PIN SET L4933 Attaches to the tip of the Test Lead L9208, 60V DC / 30V AC	SMALL ALLIGATOR CLIP SET L4934 Attaches to the tip of the L9208, CAT III 300V, CAT II 600V

## For Large Diameter and Large Current Measurement in Combination with AC Clamp Meter

### AC FLEXIBLE CURRENT SENSOR CT6280



CT6280 + 3280-10F

- Large-diameter loop is ideal for measuring large wires and pairs of wires.
- In small spaces
- Freely bendable

Model No. (Order Code) **CT6280** (For the CM3291/89, 3280-10F and similar products)

#### CT6280 Basic specifications (Accuracy guaranteed for 1 year)

Maximum input current	4200 A AC, continuous (50 Hz to 60 Hz)
Core jaw dia.	$\phi$ 130 mm (5.12 in.) (Cross-section diameter of sensor cable: $\phi$ 5 mm (0.20 in.); Sensor-tip cap diameter: $\phi$ 7 mm (0.28 in.))
Dimensions and mass	42 mm (1.65 in.) W $\times$ 65 mm (2.56 in.) H $\times$ 18 mm (0.71 in.) D (excluding the flexible loop and output cable), 71 g (2.5 oz.)
Cable length	800 mm (31.5 in.)
Included accessory	Carrying case C0205 $\times 1$

Note: CT6280 is a flexible current sensor for measuring large currents. It is not suitable for measuring minute current such as leakage current.



#### Essential equipment for professional electricians (AC FLEXIBLE CURRENT SENSOR CT6280/option)

**Thin and strong clamp meter**

AC FLEXIBLE CURRENT SENSOR

$\phi$  130 mm (5.12")  
4200 A AC

Use with an AC Clamp Meter to measure large wires and currents.

Large diameter loop is ideal for measuring large wires and pairs of wires.

In small spaces

Tip is fixed in an L-shape for easy manipulation in confined spaces

Note: CT6280 is a flexible current sensor for measuring large currents. It is not suitable for measuring minute current such as leakage current.

Freely bendable

CARRYING CASE C0205

# Clamp Meters/Leak Current

## Leakage Current Meter with Remarkable Ease of Use. Double Your Work Speed with Innovative Jaw Design.

### AC LEAKAGE CLAMP METER CM4001



Slim jaws,  
Core jaw diameter:  $\phi 24$  mm



When Z3210 is installed



#### Basic specifications (Accuracy guaranteed for 1 year)

AC Current range	60.00 mA / 600.0 mA / 6.000 A / 60.00 A / 600.0 A, 5 ranges (40 Hz to 1 kHz, True RMS) Basic accuracy (45-66 Hz): $\pm 1.5\%$ rdg $\pm 5$ dgt (60.00 mA to 6.000 A), $\pm 2.5\%$ rdg $\pm 5$ dgt (60.00 A to 600.0 A) Guaranteed accuracy: from 0.60 mA to 600.0A
AC Voltage range	N/A
Frequency range	40.0 Hz to 999.9 Hz
Crest factor	4.5 (4000 counts or less) 3 (more than 4000 counts, 6000 counts or less)
Filter function	Cut off frequency: 180 Hz $\pm 30$ Hz at filter ON (-3 dB)
Output function	N/A
Other functions	Comparator function, record Max/Min/Avg value, backlight, data hold, auto power off, AC inrush function
Display	Display refresh rate: 5 times/s
Power supply	LR03 alkaline battery $\times 1$ ; 32 hours of continuous use
Core jaw diameter	$\phi 24$ mm (0.94 in.)
Dimensions and mass	37 mm (1.46 in.) W $\times$ 160 mm (6.30 in.) H $\times$ 27 mm (1.06 in.) D, 115 g (4.1 oz.)
Included accessories	Carrying case $\times 1$ , Strap $\times 1$ , Instruction manual $\times 1$ , Operating Precautions $\times 1$ , LR03 alkaline battery $\times 1$

- Slim jaws let you work with ease
- Measure everything from leakage to load
- Identify intermittent GFCI and RCD trips to prevent unplanned equipment downtime by testing for earth leakage current
- Find issues faster with comparator function
- Wireless support. Transfers measurements to your smartphone or tablet and allows you to quickly create reports with field photos and drawings. (Optional Wireless Adapter Z3210 is necessary)

Model No. (Order Code) **CM4001** (Wireless Adapter Z3210 not included)  
**CM4001-90** (Bundled with the Wireless Adapter Z3210)



## Prevent Unexpected Downtime! Identify Potential Problems and Avoid Large Problems

### AC LEAKAGE CLAMP METER CM4002, CM4003



CM4002

CM4003



CAT IV 300 V  
CAT III 600 V (CM4002)  
CAT III 300 V (CM4003)



When Z3210 is installed





#### Basic specifications (Accuracy guaranteed for 1 year)

	CM4002	CM4003
AC Current range	6.000 mA, 60.00 mA, 600.0 mA, 6.000 A, 60.00 A, 200.0 A, 6 ranges, True RMS Basic accuracy 45 Hz - 400 Hz: $\pm 1.0\%$ rdg $\pm 5$ dgt (6.000 mA to 6.000 A), $\pm 1.5\%$ rdg $\pm 5$ dgt (60.00 A, 200.0 A) Basic accuracy 15 Hz - 45 Hz, 400 Hz - 2 kHz: $\pm 2.0\%$ rdg $\pm 5$ dgt Defined accuracy range: 0.060 mA to 200.0 A	
AC Voltage range	N/A	
Frequency range	15.0 Hz to 2000 Hz	
Crest factor	3 (other than 200.0 A range), 1.5 (200.0 A range)	
Filter function	Cut off frequency: 180 Hz $\pm 30$ Hz at filter ON (-3 dB)	
Output function	N/A	RMS (RMS value output), WAVE (waveform output)
Other functions	Max/Min/AVG/PEAK MAX/PEAK MIN value display, Display value hold and auto hold; Backlight, Auto power save, Buzzer sound, Event count display, Comparator, Simple event recording, Rush current measurement	
Display	Display refresh rate: 5 times/s	
Power supply	AA-size alkaline battery (LR6) $\times 2$ ; Continuous operating time: 48 hr. (without Z3210 installed), 30 hr. (with Z3210 installed and using wireless communications)	
Core jaw diameter	$\phi 40$ mm (1.57 in.)	
Dimensions and mass	64 mm (2.52 in.) W $\times$ 233 mm (9.17 in.) H $\times$ 37 mm (1.46 in.) D, 400 g (14.1 oz.)	
Included accessories	Carrying case C0203 $\times 1$ , Instruction manual $\times 1$ , Operating Precautions $\times 1$ , AA-size alkaline battery (LR6) $\times 2$	

- Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel® file. (Wireless Adapter Z3210 is necessary)
- Detect minuscule leakage currents with a newly designed sensor. (Core jaw diameter up to  $\phi 40$  mm)
- Broad measurement range extending from leakage currents to load currents
- Complies with the performance standard set forth in IEC/EN 61557-13, an international standard on leak clamp meters
- Solve GFCI and RCD problems quickly
- Speed up pass/fail judgments with the built-in comparator function
- Output function (waveform/RMS): use with a recorder to record waveforms and fluctuations (CM4003 only)
- External power supply: use an optional AC adapter for continuous, long-term measurement (CM4003 only)

Model No. (Order Code) **CM4002** (Wireless Adapter Z3210 not included)  
**CM4002-90** (Bundled with the Wireless Adapter Z3210)  
**CM4003** (Wireless Adapter Z3210 not included)  
**CM4003-90** (Bundled with the Wireless Adapter Z3210)

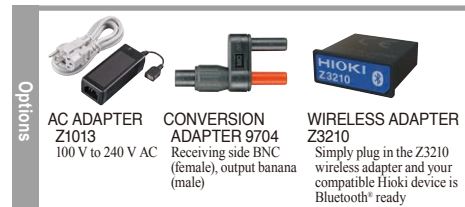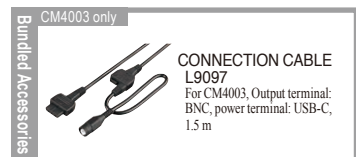

Field Measuring Instruments

## Field-capable, Fast-working, Extensive Measurement Functionality

### EARTH TESTER FT6041



**Bluetooth®**  
When Z3210 is installed



- Compatible with 4-pole method
- Measure ground resistance without disconnecting ground electrodes
- IP67 protected, built tough to withstand use at harsh sites
- Make measurements, even on concrete by using Earth Nets Module
- Fast measurement! Cord rewinding that doesn't tangle or twist
- Clamp sensor (optional) to fit both narrow and wide bus bars
- Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel® file (Wireless Adapter Z3210 is necessary)

Model No. (Order Code) **FT6041**  
**FT6041-91** (Includes clamp sensors FT9847 and CT9848)

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement parameters	<ul style="list-style-type: none"> <li>• Ground resistance measurement: 4-pole method, 3-pole method, 2-pole method, MEC<sup>1</sup> function, clamp-on measurement (two clamps)</li> <li>• Soil resistivity measurement: 4-pole method</li> <li>• Low-resistance measurement: 4-terminal method, 2-terminal method</li> <li>• Ground potential measurement</li> </ul>
Ground potential	0 to 30.0 V RMS, accuracy: ±2.3% rdg. ±8 dgt. (50/60 Hz), ±1.3% rdg. ±4 dgt. (DC)
Functions	Live wire warning, auto power save, soil resistivity display (4-pole method only), zero-adjustment, auto-hold, continuous measurement mode, wireless communication (only when Z3210 is connected), buzzer sound, comparator, switching the display, ground potential overload display (when measuring ground resistance)
Operating temperature and humidity	-25°C to 65°C <sup>2</sup> (non-condensing)
Storage temperature and humidity	-25°C to 65°C: 80% RH or less (non-condensing)
Dustproof and waterproof	IP65, IP67 (EN60529)
Standards	EN61010 (safety), EN61326 (EMC), EN61557-1/EN61557-10/EN61557-4 (low-resistance measurement, earth testers), EN61557-5 (earth testers)
Power supply	HR6 nickel-metal hydride battery x 4 or LR03 alkaline battery x 4
Number of measurements per battery charge <sup>3</sup>	500 times (3-pole method, without Z3210 installed) 400 times (3-pole method, with Z3210 installed and using wireless communication)
Dimensions and weight	Approx. 189 mm (7.44 in.)W × 148 mm (5.83 in.)H × 48 mm (1.89 in.)D, approx. 765 g (26.98 oz.) (including battery, protector)
Included accessories	Auxiliary Earthing Rod L9840 (2 piece set) ×2, Measurement Cable L9845-31 ×1, Measurement Cable L9845-33 ×1, Measurement Cable L9845-52 ×1, Measurement Cable L9841 ×1, Test Lead L9787 ×1, Earth Nets Module L9846 ×2, Carrying Case C0208 ×1, Carrying Case C0209 ×1, Protector ×1, LR6 Alkaline battery ×4, Instruction manual ×1, Operating precautions ×1

1: Measuring Earth resistance using a Clamp  
2: -25°C to 40°C, -13°F to 104°F (80% RH or less), 40°C to 45°C, 104°F to 113°F (60% RH or less), 45°C to 50°C, 113°F to 122°F (50% RH or less), 50°C to 55°C, 122°F to 131°F (40% RH or less), 55°C to 60°C, 131°F to 140°F (30% RH or less), 60°C to 65°C, 140°F to 149°F (25% RH or less)  
3: NiMH battery x 4 (reference value at 23°C)

#### Ground resistance measurement: 4-pole method, 3-pole method, 2-pole method

Measurement principle	Apply voltage and measure voltage and current (measures effective resistance by synchronous detection)				
Ground resistance range	3 Ω (0 to 3.000 Ω)	30 Ω (0 to 30.00 Ω)	300 Ω (30.0 Ω to 300.0 Ω)	3000 Ω (300 Ω to 3000 Ω)	30.00 k Ω (30.0 k Ω to 300.0 k Ω)
Accuracy	-	±1.5% rdg. ±6 dgt.	±1.5% rdg. ±4 dgt.		
Allowable resistance of auxiliary grounding electrode	5 k Ω		50 k Ω	100 k Ω	
Allowable ground potential	30 V RMS or 42.4 V peak				

#### MEC function: 4-pole method with clamp sensor, 3-pole method with clamp sensor

Measurement principle	Apply voltage and measure voltage and current (measures effective resistance by synchronous detection)			
Ground resistance range	30 Ω (0.00 to 30.00 Ω)	300 Ω (30.0 Ω to 300.0 Ω)	3000 Ω (300 Ω to 3000 Ω)	30.00 k Ω (3 k Ω to 30.00 k Ω)
Accuracy	±5% rdg. ±6 dgt.		±5% rdg. ±3 dgt.	

#### Ground resistance measurement: 2-clamp method

Measurement principle	Apply voltage and measure voltage and current (measures effective resistance by synchronous detection)		
Ground resistance range	20 Ω (0.02 Ω to 20.00 Ω)	200 Ω (20.0 Ω to 200.0 Ω)	500 Ω (200 Ω to 500 Ω)
Accuracy	±7% rdg. ±3 dgt.		±35% rdg.

#### Ground resistance measurement: 2-clamp method

Open-circuit voltage	4.0 V to 6.9 V		
Measuring current	200 mA or more		
Measurement range	30 Ω (0.00 to 30.00 Ω)	300 Ω (30.0 Ω to 300.0 Ω)	3000 Ω (300 Ω to 3000 Ω)
Accuracy	±3 dgt. (0.00 to 0.19 Ω) ±2% rdg. ±2 dgt. (0.20 Ω to 10.00 Ω)		±2% rdg. ±2 dgt.

To ensure safety, use the Test Lead L9787 when making measurements using the two-pole method.

**TEST LEAD L9787**  
Bundled with alligator clip, 1.2 m (3.94 ft.) length

**AUXILIARY EARTHING ROD L9840**  
2 piece set, stainless steel

**MEASUREMENT CABLE L9841**  
Black alligator clip, 4 m (13.12 ft.) length

**MEASUREMENT CABLE L9845-31**  
Yellow, 25 m (82.02 ft.), equipped with winder

**MEASUREMENT CABLE L9845-33**  
Blue, 25 m (82.02 ft.), equipped with winder

**MEASUREMENT CABLE L9845-52**  
Red, 50 m (164.04 ft.), equipped with winder

**EARTH NETS MODULE L9846**  
Use with measuring cord set, built-in grounding/earth nets

**CARRYING CASE C0208**  
For storing main unit of measuring instrument and clamp sensors, hard type

**CARRYING CASE C0209**  
For storing measurement cables, soft type

**Field Measuring Instruments**

**SIGNAL INDUCTION CLAMP FT9847**  
For signal induction, including resistance check loop, φ52 mm (2.05 in.) or less, 78 mm (3.07 in.) × 20 mm (0.79 in.) bus-bar

**CLAMP ON SENSOR CT9848**  
For detection, φ52 mm (2.05 in.) or less, 78 mm (3.07 in.) × 20 mm (0.79 in.) bus-bar

**PIN TYPE LEAD 9772**  
For low-resistance measurement by 4-terminal method, 60 V DC

**LARGE CLIP TYPE LEAD 9467**  
For low-resistance measurement by 4-terminal method, tip φ 28 mm (1.10 in.), 50 V DC

**EARTH NETS 9050**  
Set of two, 30 cm (11.81 in.) × 30 cm (11.81 in.)

**MEASUREMENT CABLE L9844**  
Red/yellow/black 1.2 m (3.94 ft.) length

**MEASUREMENT CABLE L9842-11**  
Yellow, 10 m (32.81 ft.), equipped with winder

**MEASUREMENT CABLE L9842-22**  
Red, 20 m (65.62 ft.), equipped with winder

**MEASUREMENT CABLE L9843-51**  
Yellow, 50 m (164.04 ft.) length, equipped with flat cable winder

**MEASUREMENT CABLE L9843-52**  
Red, 50 m (164.04 ft.) length, equipped with flat cable winder

**WIRELESS ADAPTER Z3210**  
Simply plug in the Z3210 wireless adapter and your compatible Hioki device is Bluetooth® ready

**GENNECT Cross SF4071, SF4072**  
Mobile app for iOS, Android

When Z3210 is installed

114 www.hioki.com



## Tough and Ready for the Field, IP67 Dustproof and Waterproof

### EARTH TESTER FT6031-50



Bluetooth

When Z3210 is installed

CE

CAT IV 100 V  
CAT III 150 V  
CAT II 300 V

Drop-proof

3 Year Warranty

- Wireless support. Transfers measurements to your smartphone or tablet and allows you to quickly create reports with field photos and drawings. (Optional Wireless Adapter Z3210 is necessary)
- Excellent noise resistance
- IP67 protected – top of the industry
- Test all ground types from Class A to Class D with a single meter
- Wide 0Ω to 2000Ω measurement range
- Minimize cabling time with innovative earthing rods and cable winder

Model No. (Order Code) **FT6031-50** (Wireless Adapter Z3210 not included)  
**FT6031-90** (Bundled with the Wireless Adapter Z3210)

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement system	Two-electrode method/three-electrode method (switchable)		
Measurement range	20 Ω (0 to 20.00 Ω)	200 Ω (0 to 200.0 Ω)	2000 Ω (0 to 2000 Ω)
Accuracy	±1.5 %rdg ±8 dgt	±1.5 %rdg ±4 dgt	±1.5 %rdg ±4 dgt
Earth voltage	0 to 30.0 V rms Accuracy: ±2.3% rdg ±8 dgt (50 Hz/60 Hz), ±1.3% rdg ±4 dgt (DC)		
Allowable earth potential	25.0 V rms (DC or sine wave)		
Dustproof and waterproof	IP65/IP67 (EN60529)		
Power supply	LR6 Alkaline battery ×4, Possible number of measurements: 500 times (measurement conditions: three-electrode method, measuring 10 Ω at 10-second intervals without Z3210 installed)		
Functions	Live wire warning, zero-adjustment, continuous measurement mode, wireless communication (only when Z3210 is connected), and comparator		
Dimensions and mass	185 mm (7.28 in.)W × 111 mm (4.37 in.)H × 44 mm (1.73 in.)D, 570 g (20.1 oz.) (including batteries and protector, excluding terminal covers and other accessories)		
Included accessories	Auxiliary Earthing Rod L9840 (2 piece set) ×1, Measurement Cable L9841 (black 4 m) ×1, Measurement Cable L9842-11 (yellow 10 m, equipped with winder) ×1, Measurement Cable L9842-22 (red 20 m, equipped with winder) ×1, Carrying Case C0106 ×1, Protector ×1, LR6 Alkaline battery ×4, Instruction manual ×1		

To ensure safety, use the optional Test Lead L9787 when making measurements using the two-electrode method.

When Z3210 is installed

**Software**

GENNECT Cross SF4071, SF4072  
Mobile app for iOS, Android

**Bundled Accessories**

MEASUREMENT CABLE L9842-11  
Yellow, 10 m (32.81 ft.), equipped with winder

MEASUREMENT CABLE L9842-22  
Red, 20 m (65.62 ft.), equipped with winder

MEASUREMENT CABLE L9841  
Black alligator clip, 4 m (13.12 ft.) length

AUXILIARY EARTHING ROD L9840  
2 piece set, stainless steel

CARRYING CASE C0106  
Soft type, includes compartment for options

**Options**

WIRELESS ADAPTER Z3210  
Simply plug in the Z3210 wireless adapter and your compatible Hioki device is Bluetooth® ready

EARTH NETS 9050  
Set of two, 30 cm (11.81 in.) × 30 cm (11.81 in.)

MEASUREMENT CABLE L9844  
Red/yellow/black 1.2 m (3.94 ft.) length

TEST LEAD L9787  
Bundled with alligator clip, 1.2 m (3.94 ft.) length

MEASUREMENT CABLE L9843-51  
Yellow, 50 m (164.04 ft.) length, equipped with flat cable winder

MEASUREMENT CABLE L9843-52  
Red, 50 m (164.04 ft.) length, equipped with flat cable winder

L9844: for earthing terminal board, L9787: for two-electrode method, indoor use only

## Classic Ground Resistance Tester via 3-Pole Method with Easy Cord Winding System

### ANALOG EARTH TESTER FT3151



CE

CAT II 300 V

3 Year Warranty

- Three-electrode method, Two-electrode method (Simple Measurement)
- Wide measurement range for 0 to 1150 Ω, based on EN standard
- Switchable measurement frequency to reduce the effects of power supply harmonics
- Dramatically faster setup: Comes with improved earthing rods and cord winders.

Model No. (Order Code) **FT3151**

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement system	AC potentiometer method, Three-electrode method/ two-electrode method (switchable) Measuring frequency: 575 Hz/ 600 Hz Measurement current: Three-electrode method: 15 mA rms or less; Two-electrode method: 3 mA rms or less Open circuit voltage: 50 V AC rms or less		
Measurement range	10 Ω (0 to 11.5 Ω)	100 Ω (0 to 115 Ω)	1000 Ω (0 to 1150 Ω)
Nominal Deviation	±0.25 Ω	±2.5 Ω	±25 Ω
Functions	Auxiliary earth resistance check S (P)/ H(C)		
Earth potential measurement	0 to 30 V, Nominal Deviation: ±3.0 % f.s.		
Power supply	LR6 (AA) Alkaline battery ×6, 1100 times operation (at 30 sec. measurement/ 30 sec. rest cycle)		
Dimensions and mass	164 mm (6.46 in.)W × 119 mm (4.69 in.)H × 88 mm (3.46 in.)D, 760 g (26.8 oz.)		
Included accessories	Auxiliary Earthing Rod L9840 (2 piece set) ×1, Measuring cable L9841 (alligator clip, black 4 m (13.12 ft.)), Measurement Cable L9842-11 (yellow 10 m (32.81 ft.), equipped with winder), Measurement Cable L9842-22 (red 20 m (65.62 ft.), equipped with winder) ×1, LR6 (AA) Alkaline battery ×6, Carrying Case C0106 ×1, Instruction manual ×1		

To ensure safety, use the optional Test Lead L9787 when making measurements using the two-electrode method.

**Option**

SHOULDER STRAP Z5022  
(Photograph shows strap affixed to instrument.)

**Bundled Accessories**

MEASUREMENT CABLE L9842-11  
Yellow, 10 m (32.81 ft.), equipped with winder

MEASUREMENT CABLE L9842-22  
Red, 20 m (65.62 ft.), equipped with winder

MEASUREMENT CABLE L9841  
Black alligator clip, 4 m (13.12 ft.) length

AUXILIARY EARTHING ROD L9840  
2 piece set, stainless steel

CARRYING CASE C0106  
Soft type, includes compartment for options

**Options**

EARTH NETS 9050  
Set of two, 30 cm (11.81 in.) × 30 cm (11.81 in.)

MEASUREMENT CABLE L9844  
Red/yellow/black 1.2 m (3.94 ft.) length

TEST LEAD L9787  
Bundled with alligator clip, 1.2 m (3.94 ft.) length

MEASUREMENT CABLE L9843-51  
Yellow, 50 m (164.06 ft.) length, equipped with flat cable winder

MEASUREMENT CABLE L9843-52  
Red, 50 m (164.06 ft.) length, equipped with flat cable winder

L9844: for earthing terminal board, L9787: for two-electrode method, indoor use only

## Easy Pole Clamp-On Ground Resistance Tester with Super Slim Jaw

### CLAMP ON EARTH TESTER FT6380-50



When Z3210 is installed

- Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel® file. (Wireless Adapter Z3210 is necessary)
- Earth resistance measurement for multi-grounded systems
- Measure leak current with absolute certainty with highly sensitive 0.01 mA resolution (at 20.00 mA range)
- Measure load current up to 60.0 A range
- Clamp at the narrowest point

Model No. (Order Code) **FT6380-50** (Wireless Adapter Z3210 not included)  
**FT6380-90** (Bundled with the Wireless Adapter Z3210)

#### Basic specifications (Accuracy guaranteed for 1 year)

Measurement principle	Instrument has two cores for voltage injection and current measurement. From the defined voltage and measured current, the total circuit loop resistance is calculated Note: for multi grounded systems only. In a multi-grounded system, the larger the number of grounding poles, the more accurate the measured value.
Earthing resistance range	0.20 Ω (0.01 Ω resolution) to 1600 Ω (20 Ω resolution), 10 ranges, Zero suppression: Less than 0.02 Ω, Accuracy: ±1.5 % rdg. ±0.02 Ω
AC Current range	20.00 mA (0.01 mA resolution) to 60.0 A (0.1 A resolution), 5 ranges, Zero suppression: Less than 0.05 mA, Accuracy: ±2.0 % rdg. ±0.05 mA (30 Hz to 400 Hz, True RMS), Crest factor 5.0 or less (for the 60 A range, 1.7 or less)
Maximum input current (Current measurement)	100 A AC continuous, AC 200 A for 2 minutes or shorter (at 50 Hz/60 Hz, requires derating at frequency)
Maximum rated terminal-to-ground voltage	600 VAC measurement category IV (anticipated transient overvoltage 8000 V)
Memory function	2000 data
Alarm function	For resistance measurement and current measurement, Beeps when measured value is less than or greater than threshold.
Other functions	Data hold, Backlight, Filter, Auto power save, Wireless communication (without Z3210 installed)
Display	LCD, Max. 2,000 count Display refresh rate: Approx. 2 times/sec.
Dust-proof and waterproof	IP40 (EN60529) With Jaws Closed
Power supply	LR6 alkaline battery × 2
Continuous operating time	Approx. 40 hours (25 Ω measurement, backlight off, without Z3210 installed) Approx. 35 hours (25 Ω measurement, backlight off, with Z3210 installed and using wireless communications)
Maximum measurable conductor diameter	φ 32 mm (1.26 in.)
Dimensions and mass	73 mm (2.87 in.) W × 218 mm (8.58 in.) H × 43 mm (1.69 in.) D, 620 g (21.9 oz.)
Included accessories	Carrying case, Resistance check loop (1 Ω±2%, 25Ω±1%), Strap, LR6 alkaline battery × 2, Instruction manual



## Non-Metallic Contact Voltage Detector with LED Light

### VOLTAGE DETECTOR 3481



White LED light illuminates dim locations.



- Non-contact detection of AC voltage from 40 V to 600 V with bright LED light
- Pen-style, compact detector with pocket clip
- Both visual and audible voltage detection indication
- Meets safety standards for CAT IV 600 V environments
- Prevent dead batteries with battery self-check function and auto power-off function

Model No. (Order Code) **3481-20**

#### Basic specifications

Measurement function	Voltage detection
Operating voltage range	40 V to 600 V AC (When brought into contact with a 2 mm <sup>2</sup> insulated cable equivalent to 600 V polyvinyl chloride insulated wire) Maximum sensitivity variable range 40 V to 80 V AC (80 V at the time of shipment)
Operating frequency	50 Hz/ 60 Hz
Pilot light	Red LED lights up and the buzzer sounds when the wire is live
Battery check	White LED is dim or out when the batteries are low.
Auto power off	The power will be turned off automatically if the instrument remains idle for 3 minutes after the power is turned on.
Power supply	LR44 button alkaline batteries ×3, Continuous use: 5 hr (Power ON standby state)
Dimensions and mass	20 mm (0.79 in.)W× 126 mm (4.96 in.)H× 15 mm (0.59 in.)D (excluding projections), 30 g (1.1 oz.) (including LR44 button alkaline batteries)
Included accessories	Instruction manual ×1, LR44 button alkaline batteries ×3 (for trial purposes only)

## Digital Phase Rotation Meter with Three-Phase Voltage Measurement Functionality

### DIGITAL PHASE DETECTOR PD3259-50



- Easily transfer measurement data to your smartphone or tablet by using our free app GENNECT Cross or to an Excel® file. (Wireless Adapter Z3210 is necessary)
- Available to check the unbalance rate and vector diagram in our free app GENNECT Cross
- World's first non-metallic contact voltage detection and testing
- Simply clip onto wire insulation
- Phase detection check and line-to-line voltage inspection at the same time
- Easy and intuitive phase detection check with backlight and buzzer
- Ideal for work certification photos, offering simultaneous display of phase sequence and 3-phase voltage

Model No. (Order Code) **PD3259-50** (Wireless Adapter Z3210 not included)  
**PD3259-90** (Bundled with the Wireless Adapter Z3210)

#### Basic specifications (Accuracy guaranteed for 1 year)

Detection functions	Positive phase, negative phase (Three-phase 3-wire, Three-phase 4-wire), open phase, prediction of ground phase (Three-phase 3-wire)
Measurement parameters	Three-phase AC voltage (line-to-line voltage and voltage to ground), Frequency • Voltage measurement accuracy: $\pm 2.0\%$ rdg. $\pm 8$ dgt., • Frequency measurement accuracy: $\pm 0.5\%$ rdg. $\pm 1$ dgt., • Response time: 3 s or less, Display update rate: 500 ms
Measurement targets	Covered cables, Metal portions *Use on shielded cables not supported Three-phase 90.0 to 520.0 V AC (45 to 66 Hz)
Diameter of measurable conductors	Finished outer diameter: 6 to 30 mm (0.24 to 1.18 in.)
Maximum rated voltage to earth	600 V AC (CAT IV)
Environmental protection	Main unit (excluding voltage sensors): IP54 (EN60529) dustproof and waterproof
Other functions	Hold function, Backlight, Buzzer, Auto power-off, Low battery warning, Drop proof (on concrete, 1 m / 1 time)
Power supply	AA alkaline batteries (LR6) $\times 4$ , Maximum rated power: 3 VA, Continuous operating time: 5 hours (Backlight off, standby state, Without Z3210)
Dimensions and mass	84 mm (3.31 in.)W $\times$ 146 mm (5.75 in.)H $\times$ 46 mm (1.81 in.)D, 590 g (20.8 oz, including batteries), cord length: 0.5 m (1.64 ft.)
Included accessories	AA alkaline batteries (LR6) $\times 4$ , Instruction manual $\times 1$ , Carrying case C0203 $\times 1$ , Color clip (White $\times 2$ , red $\times 2$ , blue $\times 2$ , yellow $\times 2$ ), Spiral tubes (black $\times 1$ )

Note: multi-core cables, thick cables, and dirty cables may not be measured accurately.

<b>Bundled Accessory</b> CARRYING CASE C0203	<b>Option</b> WIRELESS ADAPTER Z3210 Simply plug in the Z3210 wireless adapter and your compatible Hioki device is Bluetooth® ready	<b>MAGNETIC STRAP Z5020</b> Extra strength	<b>Software</b> When Z3210 is installed GENNECT Cross SF4071, SF4072 Mobile app for iOS, Android
---	---	---	---

## Easy-To-Read Arrow and No-Metal-Contact Clips for the Ultimate in Safety

### PHASE DETECTOR PD3129-10



- Simply clip clamps onto wire insulation
- Green LED arrow clearly shows phase direction, perfect for visual reports
- CAT III 1000V
- Rotating LED indicator shows the phase sequence for a 3-phase power supply at a glance
- Intermittent beeps signal positive phase; continuous tone signals reverse phase
- Magnetic base allows the instrument to be secured on a distribution panel

Model No. (Order Code) **PD3129-10** (Large clips)

#### Basic specifications

Functions	Phase detection (positive and negative)
Voltage detection method	Static induction
Voltage range	70 to 1000 V AC (50/60 Hz) (sine wave, continuous input)
Frequency range	45 Hz to 66 Hz
Object to be connected	7 mm (0.28 in.) to 40 mm (1.57 in.) of insulated wiring
Display	Phase detection : Positive ; 4 LEDs lit in clockwise order and the buzzer sounds intermittently, green arrow lights up Negative ; 4 LEDs lit in counterclockwise order and the buzzer sounds continuously
Battery check function	Power ON lamp: lights up (Power ON), blinks (Battery LOW)
Auto power off	Auto shut off if no activity is detected after power is turned ON for 15 minutes
Power supply	AA alkaline battery (LR6) $\times 2$ , Continuous use: 200 hr
Dimensions and mass	70 mm (2.76 in.)W $\times$ 75 mm (2.95 in.)H $\times$ 30 mm (1.18 in.)D, 240 g (8.5 oz.), Cord length : 0.7 m (2.30 ft.)
Included accessories	Carrying case $\times 1$ , Strap $\times 1$ , Spiral tube $\times 1$ , Instruction manual $\times 1$ , AA alkaline battery (LR6) $\times 2$

## Easy-To-Read Arrow and No-Metal-Contact Clips for the Ultimate in Safety

### PHASE DETECTOR PD3129



- Simply clip clamps onto wire insulation
- Green LED arrow clearly shows phase direction, perfect for visual reports
- Rotating LED indicator shows the phase sequence for a 3-phase power supply at a glance
- Intermittent beeps signal positive phase; continuous tone signals reverse phase
- Magnetic base allows the instrument to be secured on a distribution panel

Model No. (Order Code) **PD3129**

#### Basic specifications

Functions	Phase detection (positive and negative)
Voltage detection method	Static induction
Voltage range	70 to 600 V AC (50/60 Hz) (sine wave, continuous input)
Frequency range	45 Hz to 66 Hz
Object to be connected	2.4 mm (0.09 in.) to 17 mm (0.67 in.) of insulated wiring
Display	Phase detection : Positive ; 4 LEDs lit in clockwise order and the buzzer sounds intermittently, green arrow lights up Negative ; 4 LEDs lit in counterclockwise order and the buzzer sounds continuously
Battery check function	Power ON lamp: lights up (Power ON), blinks (Battery LOW)
Auto power off	Auto shut off if no activity is detected after power is turned ON for 15 minutes
Power supply	AA alkaline battery (LR6) $\times 2$ , Continuous use: 200 hr
Dimensions and mass	70 mm (2.76 in.)W $\times$ 75 mm (2.95 in.)H $\times$ 30 mm (1.18 in.)D, 200 g (7.1 oz.), Cord length : 0.7 m (2.30 ft.)
Included accessories	Carrying case $\times 1$ , Strap $\times 1$ , Spiral tube $\times 1$ , Instruction manual $\times 1$ , AA alkaline battery (LR6) $\times 2$



## Cloud service for the GENNECT series

### GENNECT Cloud SF4180



- Connects to the GENNECT series to provides added value through cloud services
- Makes measurement more convenient with features like exchanging data via the cloud and enabling remote measurement
- Offers a range of plans and payment methods

Model No. (Order Code)	SF4180	(Free plan with basic functions)	Free
	SF4181-01	(GENNECT Cloud Standard 1 month license)	Fees apply
	SF4181-03	(GENNECT Cloud Standard 3 months license)	Fees apply
	SF4181-12	(GENNECT Cloud Standard 12 months license)	Fees apply
	SF4182-01	(GENNECT Cloud Pro 1 month license)	Fees apply
	SF4182-03	(GENNECT Cloud Pro 3 months license)	Fees apply
	SF4182-12	(GENNECT Cloud Pro 12 months license)	Fees apply

#### Basic specifications

	Trial (Free, usage limited to 3 months)	Free (Free)	Standard (Fees apply)	Pro (Fees apply)
Monitor function	Collect and save GENNECT polled data (logged at a 1 min. interval) and display it in real time.			
Drive functionality	Manage and export GENNECT polled data and instrument data files.			
Alarm function	Alarm notification destinations: Email, Microsoft Teams, Slack, LINE, GENNECT Cross			
Console function	-	-	Control instruments remotely (not supported by GENNECT Cross)	
Cloud storage space	500 MB	5 GB	50 GB	500 GB
No. of users / No. of teams / No. of measurement groups	1 / 0 / 1	3 / 3 / 1	10	100
Max. no. of alarms per measurement group	1	3	30	100
WebAPI use	No	No	No	Yes

You can also set up automatic ongoing payments (a subscription) by credit card.

For details of GENNECT Cloud and compatible products, please visit the webpage below.


<https://www.gennect.net/en/cloud>



## Get Results from the Job Site in Real-Time & Capture Data on the PC while Testing Remotely

### GENNECT One SF4000

#### GENNECT One

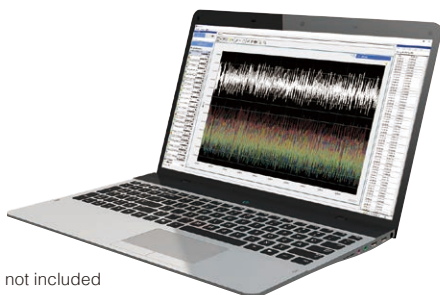

PC not included

- Connect measuring instruments to a PC via a LAN cable
- Acquire measurement values from multiple measuring instruments at regular intervals and display them on a graph in real time. \*1
- Lay out measurement values on the image and able to check graphically \*1
- Operate measuring instruments connected via LAN from a PC \*2
- Automatically transfer files saved on a LAN-connected measuring instrument to a PC \*3
- Software automatically recognizes LAN-connected measuring instrument
- Manage and save results with software
- List MAX, MIN and AVG values (Display time of MAX & MIN data)
- Real-time calculation of measurement values of arbitrary measurement items (calculation between channels)
- Automatically output measurement data to daily/weekly/monthly report or CSV file

\*1 Max. number of connections: 30 units, The measurement value (current location) displayed by the instrument is acquired at a fixed interval (minimum 1 second) by the PC timer.

\*2 Max. number of connections: 30 units

\*3 Max. number of connections: 15 units

Model No. (Order Code)	SF4000	(Application for Windows)	Free
------------------------	--------	---------------------------	------

#### Basic specifications (Free software)

##### [Logging]

Functions	Graph and list displays that present measured values from LAN-connected instruments in real time * Acquire measured values (current values) displayed on instruments at a set interval (as short as 1 sec.) using the computer's timer.
Logging intervals	1, 2, 5, 10, 30 sec. / 1, 2, 5, 10, 30 min. / 1 hour
Number of log items	Max. 512 items + 16 items (calculation between channels) *Maximum 32 items when simultaneously displaying graphs
Recording time	Recording time: Continuous measurement, set time File segmentation: 1 day, 1 hour Logging stops when the storage capacity of the PC is below 512 MB

##### [Dashboard]

Functions	Display measured valued from LAN-connected measuring instruments on optional backgrounds of monitors and alarms * Acquire measured values (current values) displayed on instruments at a set interval (as short as 1 sec.) according to the computer's timer.
Monitoring intervals	1, 2, 5, 10, 30 sec. / 1, 2, 5, 10, 30 min. / 1 hour
Number of measured parameters	Max. 512 items + 16 items (calculation between channels)

##### [Remote control]

Functions	Control LAN-connected instruments from a computer
-----------	---

##### [File transfer (Manual)]

Functions	Acquire files stored in LAN-connected instruments from a PC The BT3554-50 series can be acquired via USB.
-----------	--

##### [File transfer (Automatic)]

Functions	Automatically send files saved by LAN-connected instruments to a computer.
-----------	--

##### [Other functions]

Instrument clock synchronization	Set the clocks of measuring instruments connected via LAN to the PC (manual, automatic)
Files loading	Data file obtained by GENNECT Cross for iOS/Android Note: Logging, General Measurement, image and battery formats only Note: no direct Bluetooth® connection is possible, please use the smartphone app for Bluetooth® data collection Data acquired by GENNECT Remote
Others	CSV output (battery, logging), data statistics (logging), report generation (battery, logging)

For details of GENNECT One and compatible products, please visit the webpage below.

<https://www.gennect.net/en/one>



Share data via the GENNECT Cloud

## Free App for Easy Instrument Connectivity, Data Recording, and Report Creation

### GENNECT Cross SF4071, SF4072

**GENNECT Cross**



- Connect instruments to your smart phone or tablet
- Save all measured values on your smart phone
- Use the logging function to save measured values automatically at a set interval
- Use the simple oscilloscope function to view current and voltage waveforms on your smart phone (CM/DT series, etc.)
- Continuously measure the internal resistance and voltage of lead-acid batteries (BT3554-50 series only)

Model No. (Order Code)	<b>SF4072</b>	(Mobile app for Android)	Free
	<b>SF4071</b>	(Mobile app for iOS)	Free

■ Data can be downloaded to tablets and smartphones using Hioki's dedicated apps available from the Google Play or App Store. Search for "HIOKI" and download the "GENNECT Cross" app.



\*Android, Google Play and the Google Play logo are trademarks of Google Inc.  
 \*iOS is a registered trademark of Cisco Technology, Inc. and/or its affiliates in the United States and certain other countries.  
 \*iPhone, iPad, iPad mini, iPad Pro and iPod touch are trademarks of Apple Inc.  
 \*Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.  
 \*Microsoft, Windows, Windows Vista, and Excel are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.  
 \*Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.  
 \*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license.  
 \*For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website.

#### ■ SF4071, SF4072 Basic specifications (Free software)

Bluetooth® connection	Bluetooth® LE
OS which GENNECT Cross can be installed	SF4071: iOS 10.0 or later, iPadOS 13.0 or later SF4072: Android™ 5.0 or later
Measurement data management	Local, e-mail / cloud sharing
Report function	Various template reports
Picture / Memo recording	Ok
Measurement functions	General measurement: Ok Logging: Ok Pass/Faile judge: Ok Photo/Drawing with Values Measurement: Ok Waveform display: CM/DT series, etc. Battery: BT3554-50 series only Detect electricity theft: CM3286-50 only Harmonic measurement: CM/DT series compatible with Z3210, etc. Lux measurement: FT3425 only Event Recording: CM/DT series compatible with Z3210, etc. Vector Measurement: PD3259-50 only
	The above is an example. For details, please refer to the catalogs and web-sites of compatible products.
Firmware upgrade for measuring instruments: Measurement instruments compatible with Z3210	

For details of GENNECT Cross and compatible products, please visit the webpage below.

<https://www.gennect.net/en/cross>



Share data via the GENNECT Cloud

## Get Connected to Create and Share Graphical Reports in a Flash!

### WIRELESS ADAPTER Z3210



- Increase your work efficiency, by eliminating human errors from manual reporting
- Transfer readings on instruments to easy-to-read graphical reports to prove integrity
- Increase your work productivity & save costs!
- Provide additional new functions for Hioki instruments such as waveform display & more!
- Compliance with wireless regulations in more than 50 countries and regions

Model No. (Order Code) **Z3210**

Note: Z3210 cannot be used by itself. Wireless communication will be possible by connecting to a compatible measuring instrument.

#### ■ Basic specifications

Operating environment	Indoors, pollution degree 2, operable at an altitude specified in specifications of each measuring instrument to which the adapter is attached
Operating temperature and humidity (Storage temperature and humidity)	-30°C (-22°F) to 70°C (158°F), 90% RH or less (no condensation)
Standards	Safety: EN61010 RF: EN300 328 RF EMC: EN301 489-1, EN301 489-17 Exposure: EN62479
Maximum attaching/detaching count	5000 times
GENNECT Cross App confirmed compatible OSs	iOS 13 or later, Android 8 or later, Bluetooth® 4.0 or later
Bluetooth® communication distance	About 10 m (line-of-sight distance)
Product warranty period	3 years (do not exceed the maximum attaching/detaching count)
Dimensions and mass	Approx. 16.4 mm (0.65in)W × 6.7 mm (0.26in)H × 15.6 mm (0.61in)D, 1.5 g (0.05 oz.)
Included accessory	Instruction manual

\*For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website.



Compatible Products

AC/DC CLAMP METER  
CM4371-50, CM4373-50, CM4375-50

AC CLAMP METER  
CM4141-50

AC CLAMP POWER METER  
CM3286-50

AC LEAKAGE CLAMP METER  
CM4001, CM4002, CM4003

CLAMP ON EARTH TESTER  
FT6380-50

DIGITAL MULTIMETER  
DT4261

EARTH TESTER  
FT6031-50

DIGITAL PHASE DETECTOR  
PD3259-50

INSULATION TESTER  
IR4057-50

BATTERY TESTER  
BT3554-50 series

## Visualizing Dynamic Characteristics of Electrolysis Cells & Optimizing Operational Efficiency

### ELECTROLYSIS CELL ANALYZER ALDAS-Mini



- Innovative impedance measurement: max. 500 A electrolysis current
- Ease of integration: requiring no modifications to existing systems
- Simultaneous multi-cell measurement: up to 8 cells in a stack
- High-precision measurements in noisy environments: consistent and reliable results
- Wide compatibility: supports electrolysis cell types including PEM, SOEC, AEM, AWE, etc.

Model No. (Order Code)	EA5301-01	EA5301-02	EA5301-03	EA5301-04	EA5301-05	EA5301-06	EA5301-07	EA5301-08	EA5501	EA5701
	SENSE module 1 ch	SENSE module 2 ch	SENSE module 3 ch	SENSE module 4 ch	SENSE module 5 ch	SENSE module 6 ch	SENSE module 7 ch	SENSE module 8 ch	SOURCE module	PC application software

A separately sold current sensor and connection cable are required for measurements. Please purchase the optional current sensor and connection cable separately.

#### Basic specifications (Accuracy guaranteed: 1 year)

Measurement target	Electrolysis cell, cell stack
Measurement parameters	Impedance (R,X,θ,Z), voltage (V), current (I)
Measurement modes	Logging mode, Nyquist plot mode, Bode plot mode
Max. input voltage	30 V
Max. measurable current	20 A to 500 A (the necessary current sensor will change according to the rated current) If your measurement requirements exceed 500 A, please contact your Hioki representative.
Max. measured signal level	20 Ap-p (at 10 V)
Measurement frequency	0.01 Hz to 10 kHz
Number of input channels	Up to 8 channels
Dimensions and weight	SENSE Module EA5301 (with 8 channels): approx. 430W × 221H × 361D mm (16.9W × 8.7H × 14.2D in.) (excluding protruding parts), approx. 12.7 kg (28.0 lbs) SOURCE module EA5501: approx. 520W × 197H × 540D mm (20.5W × 7.8H × 21.3D in.) (excluding protruding parts), approx. 27.0 kg (59.5 lbs) (not including cables)
Power supply	100 V to 240 V AC, 50 Hz/60 Hz, 500 VA
PC requirements	OS: Windows 11 Interface: wired LAN



Current Sensors				
	<b>AC/DC CURRENT SENSOR CT6904A, CT6904A-1</b>	<b>AC/DC CURRENT SENSOR CT6875A</b>	<b>AC/DC CURRENT SENSOR CT6873</b>	<b>AC/DC CURRENT SENSOR CT6872</b>
	• DC to 4 MHz (CT6904A), DC to 2 MHz (CT6904A-1)	• DC to 2 MHz	• DC to 10 MHz	• DC to 10 MHz
	• Rated 500 A AC/DC	• Rated 500 A AC/DC	• Rated 200 A AC/DC	• Rated 50 A AC/DC
	<b>AC/DC CURRENT PROBE CT6845A</b>	<b>AC/DC CURRENT PROBE CT6844A</b>	<b>AC/DC CURRENT PROBE CT6843A</b>	<b>AC/DC CURRENT PROBE CT6841A</b>
	• DC to 200 kHz	• DC to 500 kHz	• DC to 700 kHz	• DC to 2 MHz
	• Rated 500 A AC/DC	• Rated 500 A AC/DC	• Rated 200 A AC/DC	• Rated 20 A AC/DC
• Automatic Phase Correction function	• Automatic phase correction function	• Automatic phase correction function	• Automatic phase correction function	



## By synergizing complementary technologies, Hioki delivers solutions that fully meet next-generation needs.

Ours is a global era underpinned by state-of-the-art electronic technologies. Hioki's bare board testing systems and populated board testing systems are hard at work in plants that manufacture printed circuit boards with increasingly advanced, high-density designs. Hioki's printed circuit board testing systems are an ideal choice for manufacturing plants seeking to achieve rational production through high precision, reliability, and ease of use and for companies striving to ship products with the world's fastest cycle times.

With product series ranging from flying probe systems designed to test small lots of boards representing multiple models to bed-of-nails systems engineered for use with mass-produced boards, Hioki's ATE offerings deliver optimized functionality and cost performance for bare board and populated board testing processes. Hioki's printed circuit board testing systems, which can accommodate BGAs, CSPs, boards with embedded passive and active devices, and silicon interposers, continue to evolve. We invite you to put them to work in your own demanding applications.

### Bare Board and Package Testing



■ FLYING PROBE TESTER FA1283



■ FLYING PROBE TESTER FA1813



■ FLYING PROBE TESTER FA1815-20



■ FLYING PROBE TESTER FA1816



■ FLYING PROBE TESTER FA1817



■ FLYING PROBE TESTER FA1811

### Populated Board Testing



■ IN-CIRCUIT TESTER FA1220-11



■ IN-CIRCUIT TESTER FA1220-02



■ FLYING PROBE TESTER FA1240-60 series



■ SHORT-OPEN TESTER FA1221



Computer and peripherals not included in FA1220. A separate control computer is required in order to use the FA1220 on a standalone basis.

■ IN-CIRCUIT TESTER FA1220

# Bare Board and Package Testing

## Improved efficiency and reliability take board production to the next level

### FLYING PROBE TESTER FA1815-20

CE compliance available Inquire for detail



- Gentle low voltage insulation resistance measurement of 10 V, 100 GΩ
- Achieves both high-speed testing up to 100 points/sec. and improved probing accuracy
- Includes a Flexible Fixture suitable for various shapes, such as circular and square
- Enhanced measurement functions for substrates with embedded components, including capacitance measurement and diode testing

Model No. (Order Code) **FA1815-20** (Horizontal double sided)

#### ■ Specifications Overview

Number of arms	4 (2 each, top and bottom)
Compatible probes	1172 series, CP1072 series, CP1073 series
Number of test steps	Max. 4,000,000 steps
Test parameters and measurement ranges	DC constant-current continuity measurement: 400.0 mΩ to 1.000 kΩ DC constant-current resistance measurement: 40.00 μΩ to 400.0 kΩ DC constant-voltage resistance measurement: 4.000 Ω to 40.00 MΩ Insulation resistance measurement: 1.000 kΩ to 100.0 GΩ Low voltage insulation resistance measurement: 1.000 MΩ to 100.0 GΩ AC constant-voltage capacitance measurement: 100.0 fF to 10.00 μF Leakage current measurement: 1.000 μA to 100.0 mA High-voltage resistance measurement: 1.000 kΩ to 100.0 GΩ Capacitor insulation measurement: 1.000 kΩ to 250.0 MΩ Open measurement: 4.000 Ω to 4.000 MΩ Short measurement: 400.0 mΩ to 40.00 kΩ
<Embedded device board test>	LSI connection test: 0.000 V to 12.00 V AC constant-voltage resistance measurement: 10.00 Ω to 100.0 kΩ AC constant-voltage capacitance measurement: 10.00 pF to 100.0 μF AC constant-voltage inductance measurement: 1.000 μH to 1.000 mH
Judgment range	-99.9% to +999.9% or absolute value
Movement resolution	XYZ: 0.1 μm
Minimum pad pitch	Top surface: 34 μm (with CP1075-09) Bottom surface: 44 μm (with CP1075-09)
Minimum pad size	Top surface: 4 μm square (with CP1075-09) Bottom surface: 14 μm square (with CP1075-09)
Measurement speed	Max. 100 points/sec. (0.15 mm movements, 4-arm simultaneous probing, capacitance measurement)
Testable board size	Thickness: 1 mm (0.04 in.) to 12 mm (0.47 in.) Outer dimensions: 50 mm (1.97 in.) W × 50 mm (1.97 in.) D to 340 mm (13.39 in.) W × 340 mm (13.39 in.) D
Maximum testable area	340 mm (13.39 in.) W × 340 mm (13.39 in.) D
Clamp method	Flexible Fixture, Vacuum Unit for Capacitance Test (Options)
Air requirements	Primary-side pressure: 0.5 MPa to 0.99 MPa (dry air) Maximum consumption: 0.3 L/min. (ANR)
Power supply	200 V, 220 V, 230 V, 240 V AC single-phase (specified at time of order); 50/60 Hz; maximum power consumption: 5 kVA
Dimensions and weight	1355 mm (53.35 in.) W × 1190 mm (46.85 in.) H × 1265mm (49.8 in.) D (excluding protruding parts); 1100 kg ±50 kg (38800 oz. ±1763 oz.)

## Evaluate high-density package board reliability with super-high-precision probing

### FLYING PROBE TESTER FA1813

CE



- Four-terminal measurement with a minimum pad diameter of 28 μm
- Reduce probe marks in combination with the latest probes
- Defect analysis using Hioki's Process Analyzer

Model No. (Order Code) **FA1813** (Horizontal double sided)

#### ■ Specifications Overview

Number of arms	4 (2 each, top and bottom)
Compatible probes	1172 series, CP1072 series, CP1073 series
Number of test steps	999,999 steps
Test parameters and measurement ranges	DC constant-current continuity measurement: 400.0 mΩ to 1.000 kΩ DC constant-current resistance measurement: 40.00 μΩ to 400.0 kΩ DC constant-voltage resistance measurement: 4.000 Ω to 40.00 MΩ Insulation resistance measurement: 1.000 kΩ to 100.0 GΩ AC constant-voltage capacitance measurement: 100.0 fF to 10.00 μF Leakage current measurement: 1.000 μA to 100.0 mA High-voltage resistance measurement: 1.000 kΩ to 100.0 GΩ Capacitor insulation measurement: 1.000 kΩ to 250.0 MΩ Open measurement: 4.000 Ω to 4.000 MΩ Short measurement: 400.0 mΩ to 40.00 kΩ
<Embedded device board test>	LSI Connection test: 0.000 V to 12.00 V AC constant-voltage resistance measurement: 10.00 Ω to 100.0 kΩ AC constant-voltage capacitance measurement: 10.00 pF to 100.0 μF AC constant-voltage inductance measurement: 1.000 μH to 1.000 mH
Judgment range	-99.9% to +999.9% or absolute value
Movement resolution	XY: 0.1 μm / pulse; Z: 1 μm / pulse
Minimum pad pitch	Top surface: 32 μm (with CP1075-09) Bottom surface: 44 μm (with CP1075-09)
Minimum pad size	Top surface: 2 μm (with CP1075-09) Bottom surface: 14 μm (with CP1075-09)
Measurement speed	Max. 76 points/sec. (0.5 mm movements, 4-arm simultaneous probing, capacitance measurement)
Testable board size	Thickness: 0.5 mm (0.02 in.) to 2.5 mm (0.10 in.) Outer dimensions: 50 mm (1.97 in.) W × 50 mm (1.97 in.) D to 400 mm (15.75 in.) W × 330 mm (12.99 in.) D
Maximum testable area	398 mm (15.67 in.) W × 304 mm (11.97 in.) D
Clamp method	2-side holder
Air requirements	Primary-side pressure: 0.5 MPa to 0.99 MPa (dry air) Maximum consumption: 0.3 L/min. (ANR)
Power supply	200 V, 220 V, 230 V, 240 V AC single phase (specified at time of order); 50 Hz/60 Hz; Maximum power consumption: 5 kVA
Dimensions and weight	1355 mm (53.35 in.) W × 1200 mm (47.24 in.) H × 1265mm (49.8 in.) D (excluding protruding parts); 1130 kg (39860 oz.)

# Bare Board and Package Testing

## Significantly lower testing costs while maintaining high-speed performance

### FLYING PROBE TESTER FA1816



- High-speed pattern testing using the capacitive measurement method
- Reduce probe marks in combination with the latest probes
- Significantly improved operability

Model No. (Order Code) **FA1816** (Horizontal single sided)

#### ■ Specifications Overview

Number of arms	2 (top surface × 2)
Compatible probes	1172 series, CP1072 series
Number of test steps	999,999 steps
Test parameters and measurement ranges	DC constant-current continuity measurement: 400.0 mΩ to 1.000 kΩ DC constant-current resistance measurement: 40.00 μΩ to 400.0 kΩ DC constant-voltage resistance measurement: 4.000 Ω to 40.00 MΩ Insulation resistance measurement: 1.000 kΩ to 500.0 MΩ AC constant-voltage capacitance measurement: 100.0 fF to 10.00 μF Leakage current measurement: 1.000 μA to 100.0 mA High-voltage resistance measurement: 1.000 kΩ to 500.0 MΩ Capacitor insulation measurement: 1.000 kΩ to 250.0 MΩ Open measurement: 4.000 Ω to 4.000 MΩ Short measurement: 400.0 mΩ to 40.00 kΩ
Test parameters and measurement for MLCC tests	AC constant-voltage capacitance measurement: 100.0 pF to 100.0 μF
Judgment range	-99.9% to +999.9% or absolute value
Minimum pad pitch	40 μm (with CP1075-09)
Minimum pad size	10 μm (with CP1075-09)
Measurement speed	Max. 100 points/sec. (0.1 mm movements, 2-arm simultaneous probing, capacitance measurement)
Testable boards	50 mm (1.97 in.) W × 50 mm (1.97 in.) D to 610 mm (24.02 in.) W × 510 mm (20.08 in.) D, Thickness 0.1 mm (0.004 in.) to 3.2 mm (0.13 in.)
Maximum testable area	610 mm (24.02 in.) W × 510 mm (20.08 in.) D
Air requirements (only with the option for air equipment)	Primary-side pressure: 0.5 MPa to 0.99 MPa (dry air) Maximum consumption: 0.3 L/min. (ANR)
Power supply	200 V, 220 V, 230 V, 240 V AC single phase (specify at time of order), 50 Hz/ 60 Hz, Maximum power consumption: 3 kVA
Dimensions and mass	1303 mm (51.30 in.) W × 1194 mm (47.01 in.) H × 1167 mm (45.94 in.) D (excluding protruding parts), 900 kg (31746 oz.)

## Detect Latent Defects on High-Density Printed Wiring Boards with Absolute Reliability

### FLYING PROBE TESTER FA1817



- Optimization of probe movement reduces inspection time by up to 20%
- Reduce probe marks in combination with the latest probes
- Fault analysis using newly developed "Process Analyzer"

Model No. (Order Code) **FA1817** (Vertical double sided)

#### ■ Specifications Overview

Number of arms	4 (front × 2, rear × 2)
Compatible probes	1172 series, CP1072 series
Number of test steps	999,999 steps
Test parameters and measurement ranges	DC constant-current continuity measurement: 400.0 mΩ to 1.000 kΩ DC constant-current resistance measurement: 40.00 μΩ to 400.0 kΩ DC constant-voltage resistance measurement: 4.000 Ω to 40.00 MΩ Insulation resistance measurement: 1.000 kΩ to 100.0 GΩ AC constant-voltage capacitance measurement: 100.0 fF to 10.00 μF Leakage current measurement: 1.000 μA to 100.0 mA High-voltage resistance measurement: 1.000 kΩ to 100.0 GΩ Capacitor insulation measurement: 1.000 kΩ to 250.0 MΩ Open measurement: 4.000 Ω to 4.000 MΩ Short measurement: 400.0 mΩ to 40.00 kΩ LSI Connection test: 0.000 V to 12.00 V AC constant-voltage resistance measurement: 10.00 Ω to 100.0 kΩ AC constant-voltage capacitance measurement: 10.00 pF to 100.0 μF AC constant-voltage inductance measurement: 1.000 μH to 1.000 mH
Judgment range	-99.9% to +999.9% or absolute value
Minimum pad pitch	45 μm (with CP1075-09)
Minimum pad size	15 μm (with CP1075-09)
Measurement speed	Max. 100 points/sec. (0.15 mm movements, 4-arm simultaneous probing, capacitance measurement)
Testable boards	Standard specification: 50 mm (1.97 in.) W × 50 mm (1.97 in.) H to 610 mm (24.02 in.) W × 510 mm (20.08 in.) H, Thickness 1.0 mm (0.04 in.) to 3.2 mm (0.13 in.) Pneumatic board clamp (option): 50 mm (1.97 in.) W × 70 mm (2.76 in.) H to 610 mm (24.02 in.) W × 510 mm (20.08 in.) H, Thickness: 0.6 mm (0.02 in.) to 6.0 mm (0.24 in.)
Maximum testable area	604 mm (23.78 in.) W × 504 mm (19.84 in.) H
Air requirements (only with the option for air equipment)	Primary-side pressure: 0.5 MPa to 0.99 MPa (dry air) Maximum consumption: 0.3 L/min (ANR)
Power supply	200 V, 220 V, 230 V, 240 V AC single-phase (specify at time of order), 50 Hz/ 60 Hz, Maximum power consumption: 3 kVA
Dimensions and mass	1485 mm (58.46 in.) W × 1950 mm (76.77 in.) H × 800 mm (31.50 in.) D, (excluding protruding parts), 1070 kg (37742.5 oz.)

Installation area: FA1817 can inspect boards (610 × 510 mm) of the same size as the conventional Model 1271, but the installation area for the equipment is even smaller than the conventional Model 1270 (inspection board size is smaller than on the 1271), contributing to space saving measures. In addition, a back door is available as an option, supporting easier maintenance.



# Bare Board and Package Testing

Complete Electrical Testing of High-Function Boards with a Single Unit. Max. 100 points/sec.

## FLYING PROBE TESTER FA1283



Horizontal and both sides

- 15 μm square high precision contact and high speed probing
- Max.100 points/s ultra-high speed inspection
- Inspect general bareboards to fine and high density substrates such as flexible substrate and CSP
- Full lineup of functions including capacitance measurement and testing of diodes and other embedded components


Model No. (Order Code) **FA1283-01** (without board-carrier)  
**FA1283-11** (with board-carrier)

### Specifications Overview

Number of arms	4 (2 each, top and bottom)	
Mountable probes	1172 series	
Number of test steps	Max. 900,000 steps	
Measurement parameters and measurement ranges	Resistance :	40.00 μΩ to 100.0 MΩ
	Capacitance :	10.00 fF to 40.00 mF
	Inductance :	10.00 μH to 100.0 mH
	Diode VZ measurement :	0.000 V to 25.00 V
	Insulation resistance :	200.0 Ω to 100.0 GΩ
	Capacitance Insulation resistance :	200.0 Ω to 10.00 MΩ
	High voltage resistance :	200.0 Ω to 25.00 GΩ
	High voltage short resistance :	400.0 mΩ to 400.0 kΩ
	Leak current measurement :	100.0 nA to 10.00 mA
	Zener diode VZ measurement :	0.000 V to 25.00 V
	Digital transistor measurement :	0.000 V to 25.00 V
	Photo couplers measurement :	0.000 V to 25.00 V
	Continuity test :	400 mΩ to 1.000 kΩ
Open test :	4.000 Ω to 4.000 MΩ	
Short test :	400.0 mΩ to 40.00 kΩ	
DC voltage measurement :	40.00 mV to 25.00 V	
Judgment range	-99.9% to +999.9% or absolute value	
Minimum pad pitch	35um (with CP1075-09)(when using FA1971-01), 40um (with CP1075-09)	
Minimum pad size	5um (with CP1075-09)(when using FA1971-01), 10um (with CP1075-09)	
Measurement speed	Max. 100 points/ s (X-Y movements of 0.1 mm, 4-arm simultaneous probing, when capacitance measurement)	
Testable board size	Thickness :	0.1 mm to 2.5 mm (0.10 in.)
	Outer dimensions :	50 mm (1.97 in.) W × 50 mm (1.97 in.) D to 400 mm (15.75 in.) W × 330 mm (12.99 in.) D
Maximum testable area	400 mm (15.75 in.) W × 324 mm (12.76 in.) D	
Board clamping	Board 2-side chuck method (with tension function)	
Air requirements	Primary-side pressure:	0.5 MPa to 0.99 MPa (dry air)
	Maximum consumption:	0.3 L/min (ANR)
Power supply	200 V, 220 V, 230 V, 240 V AC single-phase (specify at time of order), 50/60 Hz, 5 kVA	
Dimensions and mass	1360 mm (53.54 in.) W × 1200 mm (47.24 in.) H × 1280 mm (50.39 in.) D, (Excluding protruding parts), 1,100 kg (38,800.7 oz.)	

## 1/2 Data Generation Time With New Platform, 3-in-1 Editing Software for Bare Board Testing

### FEB-LINE INSPECTION DATA CREATION SYSTEM UA1781

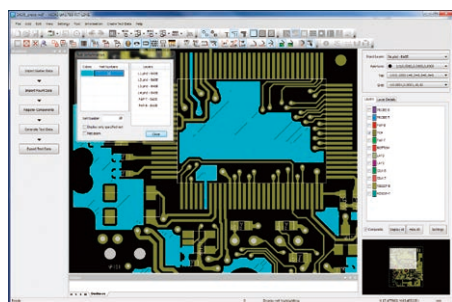

Gerber editing software that embodies the know-how for substrate testing

Built-in commands eliminate need for special know-how

- Easily generate test points even on the inner layer for cavity structures (One-point test-point generation)
- Expanded touch panel functions for printed boards (Optional E7001)
- Support for built-in component boards
- High-precision relay-point deletion functionality that reliably delete only the unnecessary relay-points

Model No. (Order Code) **UA1781** (Permanent license version)

### Specifications Overview

License content	Install CD, license key (USB), instruction manual *Note: please purchase hardware such as PC and monitor separately.	
Supported OS	Windows 11, 10 Pro 64-bit	
Data entry function	Gerber file, aperture file, drill file, U-ART database, DXF (optional E7001)	
Test data generation function	Net information generation, part test data generation, test point generation, relay-point deletion	
Test data output format	SFD, SFDX, NND, IND, CON, COT, COTX, PRTX, LAYOUT	

### Options

Model No. (Order Code)	Product Name	Remarks
Options		
<b>E7001</b>	FEB-LINE TOUCH PANEL DESIGN EXTENSION SOFTWARE	For the UA1781
<b>E7002</b>	FEB-LINE TEST FIXTURE FUNCTION SOFTWARE	For the UA1781

Note: inquire separately about setup of the E7002.

# Bare Board and Package Testing

Meeting Ever Increasing Demands for Greater Analytical Power, Faster Testing Speeds and Reduced Costs

## FLYING PROBE TESTER FA1811



Not CE Marked

- Achieve both high precision contact and high-speed probing in a space of 10  $\mu\text{m}$ .
- Double test method delivers an operation rate of 100%.
- Full-net insulation continuity test using resistance: x10 max. speed\*
- High-speed test using capacitance: x2 max. speed\*

(\* Compared to the double-sided 4-arm FLYING PROBE TESTER)

Model No. (Order Code) **FA1811** (4096 channels built-in)

Testing requires either the CP1165-11 or the E4101.

### TEST FIXTURE CP1165-11 Specifications

Board dimensions	Square 10 mm (0.39 in.) to Square 80 mm (3.15 in.)
Supported range of board thicknesses for clamping	0.1 mm (0.004 in.) to 5.0 mm (0.20 in.)
Notes	Designed for each board
Board clamping	Holder, shutter, and vacuum pump required separately
Supported pad diameter	200 $\mu\text{m}$ or larger, 300 $\mu\text{m}$ or larger when using Kelvin probe
Max. number of pins	8192

### Specifications Overview


Number of arms	2 (Upper: 2)	
Mountable probes	CPI073 series	
Measurement parameters and measurement ranges	Resistance measurement :	400.0 $\mu\Omega$ to 40.00 M $\Omega$ 4.000 $\Omega$ to 4.000 M $\Omega$ (T)
	Capacitance measurement :	100.0 fF to 10.00 $\mu\text{F}$
	MLCC measurement :	100.0 nF to 100.0 $\mu\text{F}$
	Insulation measurement :	1.000 k $\Omega$ to 100.0 G $\Omega$ 1.000 k $\Omega$ to 250.0 M $\Omega$ (T)
	Capacitor insulation measurement :	1.000 k $\Omega$ to 10.00 M $\Omega$
	High-voltage resistance measurement :	1.000 k $\Omega$ to 100.0 G $\Omega$ 1.000 k $\Omega$ to 250.0 M $\Omega$ (T)
	Leak current measurement :	1.000 $\mu\text{A}$ to 10.00 mA
	Continuity :	400 m $\Omega$ to 1.000 k $\Omega$
	Open measurement :	4.000 $\Omega$ to 4.000 M $\Omega$
	Short measurement :	400.0 m $\Omega$ to 40.00 k $\Omega$
		(T): When measuring via the TEST FIXTURE
Judgment range	-99.9% to +999.9% or absolute value	
Total probing precision	10 $\mu\text{m}$ (Square)	
Probing pitch	Min. 40 $\mu\text{m}$ (when using CPI073-01)	
Supported range of board thicknesses for clamping	Follow option on BGA side	
Probing area	75 mm (2.95 in.) $\times$ 75 mm (2.95 in.)	
Power supply	200 V AC $\pm$ 10% (three phase) 50/60 Hz (200 V, 220 V AC: specify at time of order) Maximum power consumption: 5 kVA	
Dimensions and mass	1300 mm (51.18 in.) W $\times$ 1670 mm (65.75 in.) H $\times$ 1700 mm (66.93 in.) D (Excluding protruding parts), 2000 kg (70,546.7 oz.)	

### VACUUM UNIT FOR CAPACITANCE TEST E4101 Specifications

Board dimensions	50 mm (1.97 in.) W $\times$ 90 mm (3.54 in.) D to 105 mm (4.13 in.) $\times$ 250 mm (9.84 in.)
Supported range of board thicknesses for clamping	0.1 mm (0.004 in.) to 0.8 mm (0.031 in.)
Notes	To accommodate the entire range of substrate thickness, it is necessary to replace the spacer for substrate thickness adjustment.
Board clamping	VACUUM PUMP E4106 required separately

## Data Analysis Software for Detecting Latent Defects on PASS Boards

### DATA ANALYSIS SOFTWARE UA1801

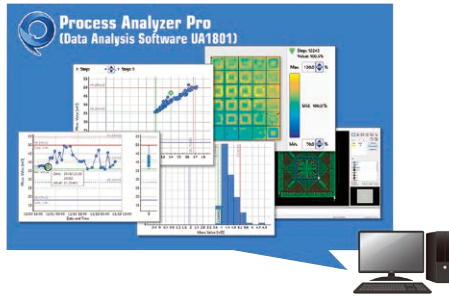

#### Detect Latent Defects Hidden in PASS Boards

- Perform statistical analysis using the latest AI technologies
- Detect significant points that can cause latent defects
- Provide feedback to improve quality in board production and design processes

Model No. (Order Code) **UA1801-01** (Limited 1-year license)  
**UA1801-02** (Unlimited license)



#### Specifications Overview

License contents	License key (USB) only *Note: please purchase computer, display and other hardware separately and download the installer and documentation from Hioki's website.
Supported test equipment	FA1813, FA1815-20, FA1817, FA1816, FA1811, FA1282-01, FA1282-11, FA1283-01, FA1283-11, 1281, 1281-11, 1281-12, 1281-50, FA1116-03, 1116, 1116-01, 1116-02, 1116-12, 1116-21, 1116-22, 1116-23, 1116-24, 1116-32, 1116-41, 1116-42, 1116-43, 1116-44, 1116-45, 1116-51, 1116-52, 1116-53, 1116-54, 1116-62, 1116-71, 1116-72, 1116-73, 1116-74, 1116-75, 1270, 1271
Operating environment	Operating system: Windows 11, 10 Pro 64-bit; CPU: x64 processor running at 1.0 GHz or better (2.0 GHz or better recommended); memory: 2 GB or better (4 GB or better recommended); other software: Microsoft .NET Framework 4.6 and appropriate language pack
Supported languages	English, Japanese, Simplified Chinese, Traditional Chinese, Korean

#### Real-time anomaly monitoring


### Process Analyzer Client (E4781)



#### Adding Process Analyzer Pro's Singularity Detection Function to Inspection Equipment

Detects latent defects in real time at the same time as normal inspection.


- Supported Products FA1811, FA1813, FA1816, FA1817

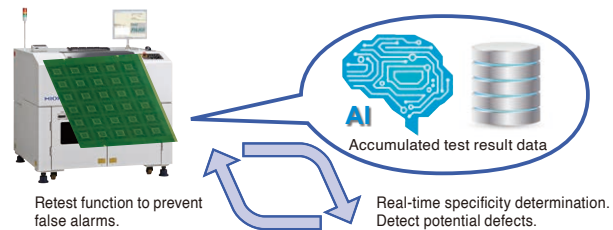

Step	Judg.	Stat. Judg.	StOrz Judg.	J	Mode	R	Reference	Measure	Up-Lin.	Low-Lin.	S.D.	Point	H Point
1	PASS	PASS	PASS		R-DC	3	68.34 mΩ	54.81 mΩ	30.0 %	-30.0 %	1.357	418	1
2	PASS	PASS	PASS		R-DC	3	12.73 mΩ	13.39 mΩ	30.0 %	-30.0 %	1.904	2380	1
3	PASS	PASS	PASS		R-DC	3	421.4 mΩ	444.5 mΩ	30.0 %	-30.0 %	1.808	2378	1
4	SH	SH	PASS		R-DC	3	408.5 mΩ	593.9 mΩ	30.0 %	-30.0 %	-5.200	2378	2
5	PASS	PASS	PASS		R-DC	3	142.0 mΩ	152.3 mΩ	30.0 %	-30.0 %	-1.284	423	2
6	PASS	PASS	PASS		R-DC	3	336.2 mΩ	330.2 mΩ	30.0 %	-30.0 %	0.358	424	2
7	SH	SH	PASS		R-DC	3	385.0 mΩ	387.8 mΩ	30.0 %	-30.0 %	5.700	291	3
8	PASS	PASS	PASS		R-DC	3	459.5 mΩ	500.0 mΩ	30.0 %	-30.0 %	-0.347	2378	3
9	PASS	PASS	PASS		R-DC	3	139.7 mΩ	150.7 mΩ	30.0 %	-30.0 %	2.865	2375	3
10	PASS	PASS	PASS		R-DC	3	119.8 mΩ	110.4 mΩ	30.0 %	-30.0 %	-1.358	2374	4

## Robust Support for Repair Work Using Simple Operations and Assistive Functionality

### FAIL VISUALIZER UA1782

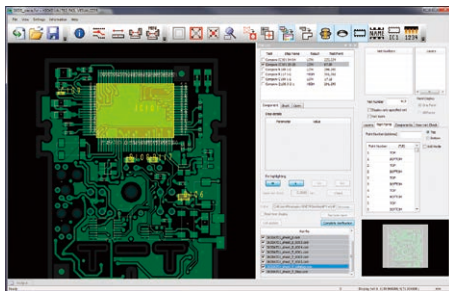

Robust support for repair work through simple operation and assistive functionality

Dedicated visualization software for Hioki electrical testing equipment and data creation systems

- Visualize test results from flying-probe testers
- Pinpoint components and patterns from test result files
- Display the probing positions of test fixtures or test heads for both ICT and bare board testers
- Search for components and nets on device embedded substrates

Model No. (Order Code) **UA1782** (supports UA1780 database input)  
**UA1782-01** (supports IPC-D-356 format input)  
**UA1782-02** (supports CAN & ADR format input)

#### Specifications Overview

License content	Install CD, license key (USB), instruction manual *Note: please purchase hardware such as PC and monitor separately.
Database import	Load UA1780 and U-ART databases
Supported OS	Windows 11, 10 Pro 64-bit
Net highlighting	Display user-specified nets with color highlighting. The user can select whether to display all layers or only top and bottom layers.
Fail list loading with real-time monitoring	Monitor a test result output folder for a testing system at a specified interval and automatically load new test data as it becomes available.



## Electrical Testing Verifies Correct Mounting ----- Populated Board Testing System

### FLYING PROBE TESTER FA1240-60



Photo is the FA1240-61




- Quickly complete programs that take into account component height
- Automatic calculation of arm interference (when used with the UA1780)
- Designed to improve probe replaceability, dramatically reducing system downtime caused by probe replacement
- High-speed testing at up to 0.025 sec./step
- Proprietary Hioki lead float detection reliably detects issues up to and including pseudo-contact
- Provides a superior level of solder quality assurance
- Phase-isolated measurement and guarding functionality are ideal for analog circuits
- Support for active testing (optional feature)
- High-precision probing
- Large testing area of 510 x 460 mm (FA1240-61)
- Standard transport capability
- Automatic alignment function and simple visual test function

Model No. (Order Code) **FA1240-61** (for large boards)  
**FA1240-63** (for medium rack boards)  
**FA1241-61** (CE compliant model, for large boards)

### Specifications Overview

	FA1240-61 FA1241-61	FA1240-63
Number of arms	4 (L, ML, MR, R)	
Number of test steps	40,000 (max.)	
Measurement ranges	Resistance: 400 μΩ to 40 MΩ Capacitance: 1 pF to 400 mF Inductance: 1 μH to 100 H Diode VZ measurement: 0 to 25 V Zener diode VZ measurement: 0 to 25 V, 25 to 80 V (optional feature) Digital transistors: 0 to 25 V Photo couplers: 0 to 25 V Short: 0.4 Ω to 400 kΩ Open: 4 Ω to 40 MΩ DC voltage measurement: 0 to 25 V	
Measurement time	Max. 0.025 sec./step	Max. 0.025 sec./step
Probing precision	Within ±100 μm for each arm (X and Y directions)	
Positioning repeatability	Within ±50 μm (probing positions)	
Inter-probe pitch	Min. 0.15 mm Min. 0.5 mm (when using 4-terminal probes)	Min. 0.15 mm Min. 0.5 mm (when using 4-terminal probes)
Testable board dimensions	510 mm (20.08 in.) W × 460 mm (18.11 in.) D	400 mm (15.75 in.) W × 330 mm (12.99 in.) D
Power supply	200 V AC (single-phase), 50/60 Hz, 6 kVA (FA1241: 230 V AC)	200 V AC (single-phase), 50/60 Hz, 5 kVA
Dimensions and mass	1406 mm (55.35 in.) H × 1300 mm (51.18 in.) H × 1380 mm (54.33 in.) D, 1150 kg (40,564.4 oz.)	1266 mm (49.84 in.) H × 1369 mm (53.90 in.) H × 1425 mm (56.10 in.) D, 1050 kg (37,037 oz.)




**FIT-LINE INSPECTION DATA CREATION SYSTEM**

**UA1780** (software with a four-year license term)  
**UA1780-01** (software with a one-year license term)  
**UA1780-11** (one year license renewal)  
**UA1780-14** (four year license renewal)

## Data Creation Software for Populated Board Testing

### FIT-LINE INSPECTION DATA CREATION SYSTEM UA1780

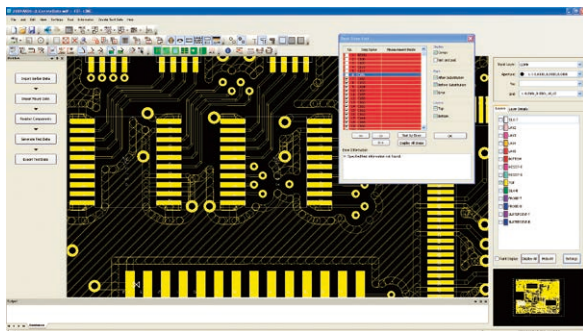

The UA1780 generates data from Gerber data and mounting data while referencing component library information

- No need for camera-based teaching
- No need to visually trace patterns under components
- Easy generation of high-quality test data without boards
- Support for the new FA1240 data format

Thanks to these features, programs can be created with plenty of time to spare before the prototyping stage. Anybody can generate high-quality test programs in a short period of time by using net information that has been reverse-generated from Gerber data and component information libraries. The UA1780 delivers maximum performance when used in conjunction with Hioki's new FA1240-60 flying probe tester.

Model No. (Order Code) **UA1780** (Software and 4 years license)  
**UA1780-01** (Software and 1 year license)  
**UA1780-11** (1 year license)  
**UA1780-14** (4 years license)

### Specifications Overview

Included	Installation CD, license key (USB), instruction manual (× 1 each) *Caution: Computer, monitor, and other hardware not included.
Gerber data input functions	Loading of Gerber files (RS-274X, RS-274D), aperture files, and drill files
Mounting data input functions	Loading of CSV files containing circuit names, layout coordinates, angles of rotation, shape names, and component names Support for operations such as rotation and mirroring, and display of data such as mounting locations
Graphic editing functions	Copying, movement, deletion, and other manipulation of figures
Component library registration functions	Registration of component list displays and component size, height, and pin numbers; registration of test pin pairs, test modes, ratings (thresholds), and upper and lower limit values; duplication of libraries
Test data generation functions	Reverse net generation, test point extraction taking into account components and patterns, automatic movement of test points underneath components, generation of open tests between adjacent pads, etc.
Test point confirmation functions	Display of test points on a graphical screen
Test data output functions	FA1240 files, 1240/1114 files
Data management functions	Saving of databases and management of component libraries

## Batch Testing System for Improved Populated Circuit Board Productivity

### IN-CIRCUIT TESTER FA1220-02



- Slide-in mechanism simplifies installation and removal of test fixtures, reducing man-hours and workload.
- Extension range of options that reduces setup man-hours and boosts productivity.
- Numerous measurement parameters and detecting defects for a wide variety of inspections.
- Productivity, quality, and safety.
- Data creation support functionality: ATG function.

Model No. (Order Code) **FA1220-02**

- The FA1220-02 does not have a CD or DVD drive. You will need to provide an external CD or DVD drive in order to use the included application disc.

#### FA1220-02 Specifications Overview

Number of test points	Standard: 0 pins (scanner boards optional) Max. 2048 pins (expandable in blocks of 128 pins)* * The maximum number of active pins for each test type depends on the total number of scanner board pins installed in the product.
Number of test steps	Group data: 256 groups Round-robin short/open data: 2048 pins* Macro data: 2048 pins/2048 steps (regardless of pin count) Component data: 10000 steps Charge data: 40 groups Pin contact data: 2048 pins* IC data: 500 steps (max. 2048 pins/step)* * The maximum number of active pins for each test type depends on the total number of scanner board pins installed in the product.
Measurement unit	DC voltmeter: 800 $\mu$ V f.s. to 25 V f.s., 8 ranges DC ammeter: 100 nA f.s. to 250 mA f.s., 9 ranges AC ammeter: 10 $\mu$ A rms to 10 mA rms, 4 ranges HV voltmeter: 25 mV f.s. to 250 V f.s. (Requires E4210 and E4203) HV ammeter: 1.2 $\mu$ A f.s. to 120 mA f.s. (Requires E4210 and E4203)
Scanner unit	Switch type: analog (Scanner Board E4201 and E4202), read relay (Scanner Board E4203) Number of channels: 128 per board Input protection: $\pm$ 15 V (Scanner Board E4201 and E4202), none (Scanner Board E4203)
External I/O	Ethernet (LAN) 100Base-TX $\times$ 1 (please contact Hioki for communication with external devices.)
Control unit	- Measurement control Operating system: Real-time operating system Storage device: SD card (for booting system)  - Main unit control Operating system: Windows 10 Pro (64-bit) Storage device: 64 GB SSD Operation: keyboard and mouse Display: 15-inch display Printer: E4243 (option)
Power supply	Rated supply voltage: 100 to 240 V AC, 50 Hz/60 Hz Maximum power consumption: 1 kVA
Dimensions and mass	655 mm (25.79 in.) W $\times$ 1830 mm (72.05 in.) H $\times$ 705 mm (27.76 in.) D, 310 kg (10934.7 oz.)
Included accessories	Instruction Manual $\times$ 1, Test lead $\times$ 1, Application disc $\times$ 1, Positioning screws $\times$ 4, Maintenance key (for opening and closing the maintenance door) $\times$ 1

## Boost Productivity of Populated Circuit Board Testing with the Inline Automatic Testing System

### IN-CIRCUIT TESTER FA1220-11



- Installation area about 23% smaller than the previous model. Offers new flexibility for production line layout by saving space.
- Extension range of options that reduces setup man-hours and boosts productivity.
- Numerous measurement parameters and detecting defects for a wide variety of inspections
- Safeguard people, products, and lines with many safety features.
- Data creation support functionality: ATG function.

Model No. (Order Code) **FA1220-11**

- The FA1220-11 does not have a CD or DVD drive. You will need to provide an external CD or DVD drive in order to use the included application disc.

#### FA1220-11 Specifications Overview

Number of test points	Standard: 0 pins (scanner boards optional) Max. 2048 pins (expandable in blocks of 129 pins)* * The maximum number of active pins for each test type depends on the total number of scanner board pins installed in the product.
Number of test steps	Group data: 256 groups Round-robin short/open data: 2048 pins* Macro data: 2048 pins/2048 steps (regardless of pin count)* Component data: 10000 steps Charge data: 40 groups Pin contact data: 2048 pins* IC data: 500 steps (max. 2048 pins/step)* * The maximum number of active pins for each test type depends on the total number of scanner board pins installed in the product.
Measurement unit	DC voltmeter: 800 $\mu$ V f.s. to 25 V f.s., 8 ranges DC ammeter: 100 nA f.s. to 250 mA f.s., 9 ranges AC ammeter: 10 $\mu$ A rms to 10 mA rms, 4 ranges
Scanner unit	Switch type: analog (E4201 and E4202), read relay (E4203) Number of channels: 128 per board Input protection: $\pm$ 15 V / $\pm$ 0.5 V (batch-configurable, E4201 and E4202), none (E4203)
External I/O	Ethernet (LAN) 100Base-TX $\times$ 1 (please contact Hioki for communication with external devices.) USB 2.0 $\times$ 1
Control unit	- Measurement control Operating system: Real-time operating system Storage device: SD card (for booting system)  - Main unit control Operating system: Windows 10 Pro (64-bit) Storage device: 64 GB SSD Operation: keyboard and mouse Display: 15-inch display Printer: E4243 (option)
Power supply	Rated supply voltage: 100 to 240 V AC, 50 Hz/60 Hz Maximum power consumption: 1 kW Maximum current consumption: 10 A
Dimensions and mass	780 mm (30.71 in.) W $\times$ 1760 mm (69.29 in.) H $\times$ 750 mm (29.53 in.) D, 390 kg (13756.6 oz.)
Included accessories	Instruction Manual $\times$ 1, Test lead $\times$ 1, Application disc $\times$ 1, Positioning screws $\times$ 4, Maintenance key (for opening and closing the maintenance door) $\times$ 1, Set of transport motor accessories $\times$ 1, Before and after process communication connector set $\times$ 2

# Populated Board Testing

## Embed Electronic Circuit Board Component, Mounting Status, and Function Testing into Existing Equipment

### IN-CIRCUIT TESTER FA1220



- Functionality has been consolidated in a single, desktop tower that can be easily embedded in existing equipment
- Extensive function testing
- Electrolytic capacitor and IC reverse insertion detection
- Macro-testing function to increase test efficiency
- Four-terminal low-resistance measurement for stable measurement of low resistance
- High-voltage Zener diode measurement capability up to 100 V (requires options E4204 and E4210)
- Insulation measurement function (requires option E4210)

Model No. (Order Code) **FA1220** (Main unit only)

- Data from the legacy 1101 and 1102 cannot be converted for use by the 1220 (FA1220) because Hioki is unable to supply computers that can run the 1137 Support Software.
- Data compatibility between the FA1220/FA1221 and legacy products (1220-00/-01/-02/-11/-50/-51/-52/-55): Although data created for legacy products can be used, such data is not fully compatible with the FA1220/FA1221. It may be necessary to perform stray capacitance acquisition, wiring resistance acquisition, S/O data acquisition, IC data acquisition, and component test debugging. In particular, it may be necessary to reacquire stray capacitance in applications that involve measurement of minuscule capacitance values.

#### FA1220 Specifications Overview

Number of test points	Max. 1024 pins (Can be added in blocks of 128 pins.) Standard : 0 pins (Scanner boards are sold as options.)
Number of test steps	Round-robin short/open data : 1024 pins Component data : Max. 10000 steps Macro data : 1024 pins/1024 steps (regardless of number of pins) IC data : 500 steps (max. 1024 pins/step) Charge data : 40 sets Pin contact data : 1024 pins Group data : 255 groups
Test parameters and measurement ranges	Round-robin short/open : 4 Ω to 400 kΩ (Default: 40 Ω) Macro testing (impedance) : 1 Ω to 10 MΩ Component tests : Possible IC reverse insertion detection : Possible
Measurement unit	DC voltmeter : 800 μV f.s. to 25 V f.s., 8 ranges DC ammeter : 100 nA f.s. to 250 mA f.s., 9 ranges AC ammeter : 10 μArms f.s. to 10 mA rms f.s., 4 ranges Macro test : Ammeter 10 μ / 100 μ / 1 m / 10 m Arms, 4 ranges
Scanner unit*2	Software used : Analog switch (Scanner board E4201, E4202) Number of channels : 128 channels/board (2-/4-terminal switchable) Input protection : ±15 V / ±0.5 V (Batch-configurable, Scanner Board E4201 / E4202 only)
External I/O *2	Using I/O Board E4220*1 : 60 inputs, 56 outputs *1 Hioki plans to update the FA1220/FA1221 to provide functionality for configuring the I/O Board E4220. *2 Sold separately.
Control unit	External computer (sold separately) FA1220: Real-time operating system, LAN for PC connectivity (10 / 100 ×1 port)
Power supply	100 to 240 V AC (±10%), single-phase, 50 Hz / 60 Hz, max. 260 W (with full 1024 pins of scanner boards)
Dimensions and mass	200 mm (7.87 in.) W × 323 mm (12.72 in.) H × 298 mm (11.73 in.) D, 10 kg (352.7 oz.)
Included accessories	Instruction manual ×1, Test leads ×1, Power cord ×1, Metal fittings ×1, Installation CD ×1

**Factory-installed options**

**SCANNER BOARD E4201**  
Semiconductor scanner board with guarding; 128 channels per board \*Cannot be combined with other scanner/relay boards.

**SCANNER BOARD E4202**  
Semiconductor scanner board without guarding; 128 channels per board \*Cannot be combined with other scanner/relay boards.

**SCANNER BOARD E4204**  
Reed relay scanner board, with guarding; 64 channels per board \*Cannot be combined with other scanner/relay boards.

**I/O BOARD E4220**  
Configurable pin numbers.

**INTERNAL POWER SUPPLY E4230**  
Internal 24 V power supply for external control use; adds outlet to rear of main unit; requires I/O Board E4220

**INSULATION MEASUREMENT FUNCTION E4210**  
High voltage Zener diode, high voltage measurement, insulation measurement (requires E4204)

**PERSONAL COMPUTER UNIT 1913-01**  
Computer, LCD, miniprinter, LAN cable, 1220 computer application (FA1221 control computer is an option.)

**UNINTERRUPTIBLE POWER SUPPLY UNIT 1913-02**  
For computer and LCD

**LAN CONNECT UNIT 1913-03**  
For connecting computer to an external network

**CALIBRATION UNIT FOR MEASUREMENT SECTION 1330**

**I2C TEST UNIT 1960-10**

**Options**

**1220 DATA COMPOSITION SOFTWARE 1137-05**  
Create data on a general-purpose computer

**SHIELDED SCANNER CABLE E4232**  
64 pins, single-sided angled type, 2 m (6.56 ft.) length

**CONTROL CABLE E4240**  
E4220-compatible I/O connector, 64-channel MIL connector, 2 m (6.56 ft.) length

**RECORDING PAPER 1197**  
58 mm (2.28 in.) × 30 m (98.43 ft.), 10 rolls/set

## Multichannel Short/Open Tester that can be Embedded in Your Test Equipment

### SHORT-OPEN TESTER FA1221



- Functionality has been consolidated in a single, desktop tower that can be easily embedded in existing equipment
- Specifically designed for short/open testing
- Four-terminal low-resistance measurement for stable measurement of low resistance

Model No. (Order Code) **FA1221** (Main unit only)

#### FA1221 Specifications Overview

Number of test points	128 pins (during 4-terminal measurement, up to 32 sets)
Number of test steps	Round-robin short/open : 128 pins Component data : Max. 10000 steps Charge data : 40 sets Pin contact data : 128 pins Group data : 255 groups
Test parameters and measurement ranges	Round-robin short/open : 4 Ω to 400 kΩ (Default: 40 Ω) Component tests : Possible
Component tests	Resistance : 400 μΩ to 40 MΩ Open : 4 Ω to 4 MΩ Short : 400 mΩ to 40 Ω
Test signals	DC constant voltage : 100 m / 400 mV : 2 ranges DC constant current : 2 m / 20 mA, 2 ranges
Measurement unit	DC ammeter : Ammeter 80 μ / 800 μ / 4 m / 40 m Arms, 4 ranges DC ammeter : 250 n / 2.5 μ / 25 μ / 250 μ / 2.5 m / 25 mA f.s., 6 ranges
Scanner unit	Analog software : 128 channels/board (2-/4-terminal switchable, no guarding)
Judgment range	-99.9% to +999.9% or absolute value
Measurement times	Round-robin short/open : From approx. 0.8 ms per pin Component : From approx. 0.9 ms per step
Statistics functionality	Defect rate tabulation and graph display test, group, and overall; component test histogram; operating time cumulative and subtotal displays
External I/O *2	Using I/O Board E4220*1 : 60 inputs, 56 outputs *1 Hioki plans to update the FA1220/FA1221 to provide functionality for configuring the I/O Board E4220. *2 Sold separately.
Power supply	100 to 240 V AC (±10%), single-phase, 50 Hz / 60 Hz, max. 130 W
Dimensions and mass	200 mm (7.87 in.) W × 323 mm (12.72 in.) H × 298 mm (11.73 in.) D, 10 kg (352.7 oz.)
Included accessories	Instruction manual ×1, Test leads ×1, Power cord ×1, Metal fittings ×1, Installation CD ×1

**Options**

**1220 DATA COMPOSITION SOFTWARE 1137-05**  
Create data on a general-purpose computer

**SHIELDED SCANNER CABLE E4232**  
64 pins, single-sided angled type, 2 m (6.56 ft.) length

**CONTROL CABLE E4240**  
E4220-compatible I/O connector, 64-channel MIL connector, 2 m (6.56 ft.) length

**RECORDING PAPER 1197**  
58 mm (2.28 in.) × 30 m (98.43 ft.), 10 rolls/set

**Factory-installed Options**

**INTERNAL POWER SUPPLY E4230**  
Internal 24 V power supply for external control use; adds outlet to rear of main unit; requires I/O Board E4220

**PERSONAL COMPUTER UNIT 1913-01**  
Computer, LCD, miniprinter, LAN cable, 1220 computer application (FA1221 control computer is an option.)

**I/O BOARD E4220**  
Configurable pin numbers.

**LAN CONNECT UNIT 1913-03**  
For connecting computer to an external network

**UNINTERRUPTIBLE POWER SUPPLY UNIT 1913-02**  
For computer and LCD

Populated Board Testing



## Model No. (Order Code) Index

# Model No. (Order Code) Index

Note: D mark indicates discontinued or discontinuation scheduled models.

Model No.	Name	Page	Note	Model No.	Name	Page	Note
OGA00019	MEASURING LEAD (RED)	60	For SM7810, DSM-LR010	9465-90	TIP PIN	51	For the RM3548 series and BT3554-50 (9465-10, L2020)
OGA00021	MEASURING LEAD (RED)	60	For SM7810, DSM-LR020	9466	REMOTE CONTROL SWITCH	59	For the BT3554-50 (use with the L2020), 9772, 9465-10
OGA00027	MEASURING LEAD (RED)	60	For SM7810, DSM-LR050	9467	LARGE CLIP TYPE LEAD	51	For the RM3548, 3561, 3541/40 and similar products
1196	RECORDING PAPER	--	For the 9442 (ST5540), 112mm width	9478	SHEATH TYPE TEMPERATURE PROBE	41	For the IM3590/IM3533/3447, P1100
3030-10	HITESTER	103		9500	4-TERMINAL PROBE	49	For the RM3543, 3532-80
3153	AUTOMATIC INSULATION/WITHSTANDING HITESTER	70	Insulation, AC/DC Withstanding Voltage	9500-10	4-TERMINAL PROBE	41	For the IM3590/3570/3533/3523 and similar products
3174	AC AUTOMATIC INSULATION/WITHSTANDING HITESTER	69		9613	REMOTE CONTROL BOX(SINGLE)	69	For the 3174, 3153/57/58/59 series
3244-60	CARD HITESTER	103		9614	REMOTE CONTROL BOX(DUAL)	69	For the 3174, 3153/57/58/59 series
3246-60	PENCIL HITESTER	103		9615	H.V.TEST LEAD	69	For the 3174/73/59/58/53
3269	POWER SUPPLY	85	For the CT6710 series, CT6700 series	9615-01	H.V.TEST LEAD	70	For the 3930
3272	POWER SUPPLY	85	For the CT6700 series, up to 1	D 9631-14	TEMPERATURE SENSOR(9631-04,5m)	--	For the 3630 series
3273-50	CLAMP ON PROBE	85	DC to 50 MHz, 30 Arms	9637	RS-232C CABLE(9pin-9pin/1.8m)	38	For the BT3563 and similar products
3274	CLAMP ON PROBE	85	DC to 10 MHz, 150 Arms	9641	CONNECTION CABLE	32	For the LR8431-20, 8430-20 and similar products
3275	CLAMP ON PROBE	85	DC to 2 MHz, 500 Arms	9642	LAN CABLE	26	For the Memory HiCorder, LR8450, and similar products
3276	CLAMP ON PROBE	85	DC to 100 MHz, 30 Arms	9657-10	CLAMP ON LEAK SENSOR	94	For the PQ3100, PW3360/65, LR8513 and similar products
3280-10F	AC CLAMP METER	111	Average rectified	9660	CLAMP ON SENSOR	94	For the PW3360, PW3365, PW3198 and similar products
3280-70F	AC CLAMP METER SET	111	3280-10F, CT6280 bundled model	9661	CLAMP ON SENSOR	94	For the PW3360, PW3365, PW3198 and similar products
3287	CLAMP ON AC/DC HITESTER	110	True RMS	9665	10:1PROBE	26	For the Memory HiCorder series
3288	CLAMP ON AC/DC HITESTER	110	Average rectified	9666	100:1PROBE	26	For the Memory HiCorder series
3288-20	CLAMP ON AC/DC HITESTER	110	True RMS	9669	CLAMP ON SENSOR	94	For the PW3360/65, LR8513 and similar products
D 3333	POWER HITESTER	78		9675	CLAMP ON LEAK SENSOR	94	For the PW3360/65, LR8513 and similar products
D 3333-01	POWER HITESTER	78	Built-in GP-IB	9677	SMD TEST FIXTURE	41	For the IM3570 and similar products
D 3334	AC/DC POWER HITESTER	78		9683	CONNECTION CABLE	73	For the PW3390
D 3334-01	AC/DC POWER HITESTER	78	Built-in GP-IB	9690-01	TERMINATOR(ID1-5)	95	For the 3665-20
3481-20	VOLTAGE DETECTOR	116		9690-02	TERMINATOR(ID6-10)	95	For the 3665-20
3490	ANALOG MΩ HITESTER	107	Bundled with standard Test Lead L9787	9690-03	TERMINATOR(ID11-15)	95	For the 3665-20
3504-40	C HITESTER	45	Built-in RS-232C interface	9690-04	TERMINATOR(ID16-20)	95	For the 3665-20
3504-50	C HITESTER	45	Built-in GP-IB, RS-232C	9694	CLAMP ON SENSOR	94	For the PW3360/65, 3169, PW3198 and similar products
3504-60	C HITESTER	45	Built-in GP-IB, RS-232C	9695-02	CLAMP ON SENSOR	94	For the PW3360/65, 3169, PW3198 and similar products
3506-10	C METER	44	Measurement frequencies: 1 kHz and 1 MHz	9695-03	CLAMP ON SENSOR	94	For the PW3360/65, 3169, PW3198 and similar products
3561	BATTERY HITESTER	58		9699	SMD TEST FIXTURE	41	For the IM3533, and similar products
3561-01	BATTERY HITESTER	58	Built in GP-IB interface	9704	CONVERSION ADAPTER	93	For the CT9667 series, 9132-50 and similar products
3665-20	LAN CABLE HITESTER	95	English model	9713-01	CAN CABLE	21	For the MR8904(MR8875), U8555/LR8535(LR8450)
3930	HIGH VOLTAGE SCANNER	70	For the 3153 and similar products	9728	PC CARD 512M	22	512 MB
8966	ANALOG UNIT	19	For MR6000, MR8848, MR8827, and similar products	9729	PC CARD 1G	22	1 GB
8967	TEMP UNIT	19	For MR6000, MR8848, MR8827, and similar products	9758	EXTENSION CABLE	97	For the FT3470-52/-51
8968	HIGH RESOLUTION UNIT	19	For MR6000, MR8848, MR8827, and similar products	9759	OUTPUT CABLE	97	For the FT3470-52/-51
8970	FREQ UNIT	19	For MR6000, MR8848, MR8827, and similar products	9770	PIN TYPE LEAD	57	For the BT3563, BT3562, 3561 and similar products
8971	CURRENT UNIT	19	For MR6000, MR8848, MR8827, and similar products	9770-90	TIP PIN	57	For the 9770, L2102, replacement tip
8972	DC/RMS UNIT	19	For MR6000, MR8848, MR8827, and similar products	9771	PIN TYPE LEAD	57	For the BT3563, BT3562, 3561 and similar products
8973	LOGIC UNIT	19	For MR6000, MR8848, MR8827, and similar products	9771-90	TIP PIN	57	For the 9771, L2103, replacement tip
9010-50	CLAMP ON PROBE	93	BNC output terminal	9772	PIN TYPE LEAD	51	For the RM3548 series, BT3554-50 and similar products
9017	HIGH VOLTAGE PROBE	103	For the 3030-10	9772-90	TIP PIN	51	For the 9772(RM3548/BT3554-50), L2100(BT3563/62)
9018-50	CLAMP ON PROBE	93	Wide band, BNC output terminal	9780	BATTERY PACK	22	For the MR8870-20, LR8431-20, LR8432-20
9050	EARTH NETS	115	For the FT6031, FT3151	9782	CARRYING CASE	22	For the MR8870-20, LR8431-20, LR8432-20, SS7012
9132-50	CLAMP ON PROBE	93	BNC output terminal	9783	CARRYING CASE	20	For the MR8848 and the MR8847 series
9140	4-TERMINAL PROBE	45	For the RM3542, RM3543, 3504 and similar products	9784	DC POWER UNIT	20	For the MR8848 and the MR8847 series
9140-10	4-TERMINAL PROBE	41	For the IM3590/3570/3533/3523 and similar products	9790-02	GRABBER CLIP	26	For the L9790
9151-02	GP-IB CONNECTOR CABLE	71	For the PW3335 and similar products	9790-03	CONTACT PIN	26	For the L9790
9165	CONNECTION CORD	26	For the Memory HiCorder and similar products	9794	CARRYING CASE	73	For the PW3390, 3390
9166	CONNECTION CORD	26	For the Memory HiCorder and similar products	9804	MAGNETIC ADAPTER	79	For the CM3286-50, CM4371-50 and similar products
9168	INPUT CORD	64	For the SS7012, 7011/10	9804-01	MAGNETIC ADAPTER	81	For the L9438 series (PW3360 series and similar products), red x1
D 9184	TEMPERATURE PROBE	64	For the SS7012, 7011	9804-02	MAGNETIC ADAPTER	81	For the L9438 series (PW3360 series and similar products), black x1
9195	ENCLOSURE PROBE	66	For the ST5540 series, 3156/3155	9809	PROTECTION SHEET	22	For the MR8870-20, LR8431-20, LR8432-20
9199	CONVERSION ADAPTOR	26	For Memory HiCorder, the 3283 and similar products	9812	SOFT CASE	22	For the MR8870-20, LR8431-20, LR8432-20
9209	TEST LEADS HOLDER	110	For the 3280-10F and similar products	9830	PC CARD 2G	22	2 GB
9219	CONNECTION CABLE	94	For the 9695-02/-03	BT3554-50	BATTERY TESTER	59	Pin Type Lead not included
9221	RECORDING PAPER	26	For the 8835-01, 8815/30/35, 8852, 10 rolls	BT3554-51	BATTERY TESTER	59	Bundled with Pin Type Lead 9465-10
9229	RECORDING PAPER	26	For the 8826, 8825, 6 rolls/set	BT3554-52	BATTERY TESTER	59	Bundled with Pin Type Lead L2020
9229-01	RECORDING PAPER(PERFORATED)	26	For the 8826, 8825, (Perforated) 6 rolls/set	BT3554-91	BATTERY TESTER	59	BT3554-51 + Wireless Adapter Z3210
9231	RECORDING PAPER	26	For the MR8848 optional printer, the MR8847 series, 6 rolls/set	BT3554-92	BATTERY TESTER	59	BT3554-52 + Wireless Adapter Z3210
9232	RECORDING PAPER	26	For the 3193-10, 8804 and similar products, 10 rolls	BT3561A	BATTERY HITESTER	56	Compact packs up to 60 V
9234	RECORDING PAPER	26	For the MR8880-20, 8807/08, 8420 series, 10 rolls/set	BT3562A	BATTERY HITESTER	56	Medium-size packs up to 100 V
9235	RECORDING PAPER	26	For the 8205-10, 8206-10, 60mm width	BT3562-01	BATTERY HITESTER	58	Built in GP-IB and analog output
9236-01	RECORDING PAPER	26	For the 8205-10, 8206-10, 60mm width (Climate-resistant)	BT3563A	BATTERY HITESTER	57	Large packs up to 300 V
9248	POWER CORD	25	For the 9322 to 9687 connect	BT3563-01	BATTERY HITESTER	58	Built in GP-IB and analog output
9249	CARRYING CASE	95	For the 3665-20	BT3564	BATTERY HITESTER	57	
9261	TEST FIXTURE	45	For the LCR meters	BT4560-50	BATTERY IMPEDANCE METER	55	
9261-10	TEST FIXTURE	41	For the IM3590/3570/3533/3523 and similar products	BT5525	BATTERY INSULATION TESTER	68	
9262	TEST FIXTURE	41	For the LCR meters	BT6065	PRECISION BATTERY TESTER	55	
9263	TEST FIXTURE	41	For the LCR meters	BT6075	PRECISION BATTERY TESTER	55	
9267	SAFETY TEST DATA MANAGEMENT SOFTWARE	70	For ST5540/ST5541, 3153 and similar products	C0106	CARRYING CASE	115	For the FT6031, FT3151 and similar products
9268-10	DC BIAS VOLTAGE UNIT	41	For the IM3590/3570/3533/3523 and similar products	C0200	CARRYING CASE	102	For the DT4220 series
9269-10	DC BIAS CURRENT UNIT	41	For the IM3590/3570/3533/3523 and similar products	C0201	CARRYING CASE	99	For the DT4250 series, DT4210 series, FT3424
9272-05	CLAMP ON SENSOR	90	20/200 A AC, ME15W terminal	C0202	CARRYING CASE	99	For the DT4280 series, DT4250 series, DT4210 series, FT3424
9290-10	CLAMP ON ADAPTER	94		C0203	CARRYING CASE	109	For the CM4370 series, and similar products
9299	SWITCHED PROBE	68	For the ST5520 and similar products	C0204	CARRYING CASE	103	For the 3244-60
9318	CONVERSION CABLE	87	To connect HIOKI PL23 (10 pin) connector to the 8971/40/51	C0205	CARRYING CASE	111	For the CT6280, CM3291/3280-70F and similar products
9320-01	LOGIC PROBE	26	For the Memory HiCorder, miniature terminal type	C0206	CARRYING CASE	96	For the FT4310
9322	DIFFERENTIAL PROBE	25	For the Memory HiCorder series	C0207	CARRYING CASE	99	Bag type
9327	LOGIC PROBE	26	For the MR6000, MR8848, MR8827 and similar products	C0208	CARRYING CASE	114	For the FT6041
9333	LAN COMMUNICATOR	28	For the MR8848, MR8827 and similar products	C0209	CARRYING CASE	114	For the FT6041
9335	WAVE PROCESSOR	28	For the Memory HiCorder series	C0212	CARRYING CASE	107	For the IR5050 and IR5051, IP65
9355	CARRYING CASE	90	For the 9272-10, 9270 series, and similar products	C0220	CARRYING CASE	92	For the CT7600 series, 7700 series
D 9380	CARRYING CASE	64	For the SS7012, 7011	C0221	CARRYING CASE	92	For the CT7600 series, 7700 series
9390	CARRYING CASE	103	For the 3030-10	C1002	CARRYING CASE	81	For the PQ3198, PQ3100, PW3198
9398	CARRYING CASE	110	For the 3287, 3288, 3280-10F, CM3289	C1003	CARRYING CASE	22	For the MR8880
9418-15	AC ADAPTER	25	For the 9322 and similar products	C1004	CARRYING CASE	21	For the MR8875
9445-02	AC ADAPTER	92	For the CM7290 and similar products, 100 to 240 V AC	C1005	CARRYING CASE	83	For the PW3365/3360 series
9451	TEMPERATURE PROBE	59	For the BT3554-50 series	C1006	CARRYING CASE	51	For the RM3548
9451-01	TEMPERATURE PROBE	59	For the BT3554-50 series	C1008	CARRYING CASE	83	For PW3365
9453	FOUR TERMINAL LEAD	51	For the RM3548, 3561/60, 3541/40 and similar products	C1009	CARRYING CASE	81	For the PQ3100 and similar products
9454	ZERO ADJUSTMENT BOARD	51	For the RM3548(9465-10), BT3563(L2100) and similar products	C1010	CARRYING CASE	19	For the MR6000 series
9459	BATTERY PACK	83	For the PW3360 series, 3351, 3197, 3455	C1012	CARRYING CASE	31	For the LR8450 series
9460	CLIP TYPE LEAD WITH TEMPERATURE SENSOR	59	For the BT3554-50 and similar products	C1013	CARRYING CASE	24	For the SP7000 series
9465-10	PIN TYPE LEAD	51	For the RM3548 series, BT3554-50 and similar products	C1014	CARRYING CASE	59	For the BT3554-50 series
9465-11	PIN TYPE LEAD	51	For the RM3548 series	C1015	CARRYING CASE	51	For the RM3548-50

# Model No. (Order Code) Index

Note: D mark indicates discontinued or discontinuation scheduled models.

Model No.	Name	Page	Note	Model No.	Name	Page	Note
CM3281	AC CLAMP METER	112	Average rectified	DT4282	DIGITAL MULTIMETER	99	10 A direct input
CM3286-50	AC CLAMP POWER METER	79	Wireless Adapter Z3210 not included	DT4900-01	COMMUNICATION PACKAGE (USB)	99	For the DT4280 series , DT4250 series
CM3286-90	AC CLAMP POWER METER/WIRELESS ADAPTER	79	Bundled with the Wireless Adapter Z3210	DT4910	THERMOCOUPLES(K)	99	For the DT4280 series ,DT4253, and similar products
CM3289	AC CLAMP METER	111	True RMS	DT4911	TEST LEAD	102	For the DT4220 series
CM3291	AC CLAMP METER	112	True RMS	EA5301-01	SENSE MODULE	120	For the ALDAS-Mini, 1ch
CM4001	AC LEAKAGE CLAMP METER	113	Wireless Adapter Z3210 not included	EA5301-02	SENSE MODULE	120	For the ALDAS-Mini, 2ch
CM4001-90	AC LEAKAGE CLAMP METER/WIRELESS ADAPTER	113	Bundled with the Wireless Adapter Z3210	EA5301-03	SENSE MODULE	120	For the ALDAS-Mini, 3ch
CM4002	AC LEAKAGE CLAMP METER	113	Wireless Adapter Z3210 not included	EA5301-04	SENSE MODULE	120	For the ALDAS-Mini, 4ch
CM4002-90	AC LEAKAGE CLAMP METER/WIRELESS ADAPTER	113	Bundled with the Wireless Adapter Z3210	EA5301-05	SENSE MODULE	120	For the ALDAS-Mini, 5ch
CM4003	AC LEAKAGE CLAMP METER	113	Wireless Adapter Z3210 not included	EA5301-06	SENSE MODULE	120	For the ALDAS-Mini, 6ch
CM4003-90	AC LEAKAGE CLAMP METER/WIRELESS ADAPTER	113	Bundled with the Wireless Adapter Z3210	EA5301-07	SENSE MODULE	120	For the ALDAS-Mini, 7ch
CM4141-50	AC CLAMP METER	111	Wireless Adapter Z3210 not included	EA5301-08	SENSE MODULE	120	For the ALDAS-Mini, 8ch
CM4141-90	AC CLAMP METER/WIRELESS ADAPTER	111	Bundled with the Wireless Adapter Z3210	EA5501	SOURCE MODULE	120	For the ALDAS-Mini
CM4371-50	AC/DC CLAMP METER	109	Wireless Adapter Z3210 not included	EA5701	ELECTROLYSIS CELL ANALYZER	120	For the ALDAS-Mini, PC application software
CM4371-90	AC/DC CLAMP METER/WIRELESS ADAPTER	109	Bundled with the Wireless Adapter Z3210	FR-RD	INK PEN	--	For the EPR-1FA
CM4373-50	AC/DC CLAMP METER	108	Wireless Adapter Z3210 not included	FT3151	ANALOG EARTH TESTER	115	
CM4373-90	AC/DC CLAMP METER/WIRELESS ADAPTER	108	Bundled with the Wireless Adapter Z3210	FT3424	LUX METER	98	
CM4373-93	AC/DC CLAMP METER SOLAR SET	108	Bundled with DC High Voltage Probe P2010 and Wireless Adapter Z3210	FT3425	LUX METER	98	Built in Bluetooth® wireless technology
CM4375-50	AC/DC CLAMP METER	108	Wireless Adapter Z3210 not included	FT3470-51	MAGNETIC FIELD HITESTER	97	100 cm <sup>2</sup> Sensor bundled
CM4375-90	AC/DC CLAMP METER/WIRELESS ADAPTER	108	Bundled with the Wireless Adapter Z3210	FT3470-52	MAGNETIC FIELD HITESTER	97	100 cm <sup>2</sup> Sensor, 3 cm <sup>2</sup> Sensor bundled
CM4375-93	AC/DC CLAMP METER SOLAR SET	108	Bundled with DC High Voltage Probe P2010 and Wireless Adapter Z3210	FT3700-20	INFRARED THERMOMETER	97	Long-focus type
CM7290	DISPLAY UNIT	92	For the CT7000 series	FT3701-20	INFRARED THERMOMETER	97	Long focus, precise-field type
CT6280	AC FLEXIBLE CURRENT SENSOR	112	For the CM3291/89, 3280-10F and similar products	FT4310	BYPASS DIODE TESTER	96	Built in Bluetooth® wireless technology
CT6500	CLAMP ON SENSOR	33	For the LR8513, LR5051	FT6031-50	EARTH TESTER	115	Wireless Adapter Z3210 not included
CT6700	CURRENT PROBE	84	From 1mA, 50MHz bandwidth	FT6031-90	EARTH TESTER/WIRELESS ADAPTER	115	Bundled with the Wireless Adapter Z3210
CT6701	CURRENT PROBE	84	From 1mA, 120MHz bandwidth	FT6041	EARTH TESTER	114	
CT6710	CURRENT PROBE	84	From 200µA, 50MHz bandwidth	FT6041-90	EARTH TESTER	114	Bundled with the FT9847 and CT9848
CT6711	CURRENT PROBE	84	From 200µA, 120MHz bandwidth	FT6380-50	CLAMP ON EARTH TESTER	116	Wireless Adapter Z3210 not included
CT6830	AC/DC CURRENT SENSOR	89	2 A AC/DC, ME15W terminal	FT6380-90	CLAMP ON EARTH TESTER/WIRELESS ADAPTER	116	Bundled with the Wireless Adapter Z3210
CT6831	AC/DC CURRENT SENSOR	89	20 A AC/DC, ME15W terminal	FT9847	SIGNAL INDUCTION CLAMP	114	For the FT6041
CT6833	AC/DC CURRENT PROBE	88	200 A AC/DC, ME15W terminal, 5m(16.4 ft.) cable length	IM3523	LCR METER	43	
CT6833-01	AC/DC CURRENT PROBE	88	200 A AC/DC, ME15W terminal, 10m(32.8 ft.) cable length	IM3523A	LCR METER	43	
CT6834	AC/DC CURRENT PROBE	88	500 A AC/DC, ME15W terminal, 5m(16.4 ft.) cable length	IM3533	LCR METER	44	
CT6834-01	AC/DC CURRENT PROBE	88	500 A AC/DC, ME15W terminal, 10m(32.8 ft.) cable length	IM3533-01	LCR METER	44	Advanced function model
CT6841A	AC/DC CURRENT PROBE	89	20 A AC/DC, ME15W terminal	IM3536	LCR METER	43	
CT6843A	AC/DC CURRENT PROBE	89	200 A AC/DC, ME15W terminal	IM3536-01	LCR METER	43	Special order products up to 10 MHz
CT6844A	AC/DC CURRENT PROBE	88	500 A AC/DC, ME15W terminal	IM3570	IMPEDANCE ANALYZER	42	
CT6845A	AC/DC CURRENT PROBE	88	500 A AC/DC, ME15W terminal	IM3590	CHEMICAL IMPEDANCE ANALYZER	41	For electrochemical components
CT6846A	AC/DC CURRENT PROBE	88	1000 A AC/DC, ME15W terminal	IM7580A-1	IMPEDANCE ANALYZER	40	Connection cable 1 m is bundled
CT6862-05	AC/DC CURRENT SENSOR	87	50 A AC/DC, ME15W terminal	IM7580A-2	IMPEDANCE ANALYZER	40	Connection cable 2 m is bundled
CT6863-05	AC/DC CURRENT SENSOR	87	200 A AC/DC, ME15W terminal	IM7581-01	IMPEDANCE ANALYZER	40	Connection cable 2 m is bundled
CT6872	AC/DC CURRENT SENSOR	87	50 A AC/DC, ME15W terminal, 3 m (9.84 ft.) cable length	IM7581-02	IMPEDANCE ANALYZER	40	Connection cable 2 m is bundled
CT6872-01	AC/DC CURRENT SENSOR	87	50 A AC/DC, ME15W terminal, 10 m (32.81 ft.) cable length	IM7583-01	IMPEDANCE ANALYZER	39	Connection cable 1 m is bundled
CT6873	AC/DC CURRENT SENSOR	87	200 A AC/DC, ME15W terminal, 3 m (9.84 ft.) cable length	IM7583-02	IMPEDANCE ANALYZER	39	Connection cable 2 m is bundled
CT6873-01	AC/DC CURRENT SENSOR	87	200 A AC/DC, ME15W terminal, 10 m (32.81 ft.) cable length	IM7585-01	IMPEDANCE ANALYZER	39	Connection cable 1 m is bundled
CT6875A	AC/DC CURRENT SENSOR	86	500 A AC/DC, ME15W terminal, 3 m (9.84 ft.) cable length	IM7585-02	IMPEDANCE ANALYZER	39	Connection cable 2 m is bundled
CT6875A-1	AC/DC CURRENT SENSOR	86	500 A AC/DC, ME15W terminal, 10 m (32.81 ft.) cable length	IM7587-01	IMPEDANCE ANALYZER	38	Connection cable 1 m is bundled
CT6876A	AC/DC CURRENT SENSOR	86	1000 A AC/DC, ME15W terminal, 3 m (9.84 ft.) cable length	IM7587-02	IMPEDANCE ANALYZER	38	Connection cable 2 m is bundled
CT6876A-1	AC/DC CURRENT SENSOR	86	1000 A AC/DC, ME15W terminal, 10 m (32.81 ft.) cable length	IM9000	EQUIVALENT CIRCUIT ANALYSIS FIRMWARE	42	Factory option firmware for the IM3570
CT6877A	AC/DC CURRENT SENSOR	86	2000 A AC/DC, ME15W terminal, 3 m (9.84 ft.) cable length	IM9100	SMD TEST FIXTURE	41	For the IM3536, and similar products
CT6877A-1	AC/DC CURRENT SENSOR	86	2000 A AC/DC, ME15W terminal, 10 m (32.81 ft.) cable length	IM9110	SMD TEST FIXTURE	41	For the IM3570, and similar products
CT6904A	AC/DC CURRENT SENSOR	86	500 A AC/DC Rated, ME15W terminal, 3 m (9.84 ft.) cable length	IM9200	TEST FIXTURE STAND	38	For the IM7580 series
CT6904A-1	AC/DC CURRENT SENSOR	86	Special order product up to 500 A, ME15W terminal, 10 m (32.81 ft.) cable length	IM9201	SMD TEST FIXTURE	38	For the IM7580 series
CT6904A-2	AC/DC CURRENT SENSOR	86	Special order product up to 800 A, ME15W terminal, 3 m (9.84 ft.) cable length	IM9202	TEST FIXTURE	38	For the IM7580 series
CT6904A-3	AC/DC CURRENT SENSOR	86	Special order product up to 800 A, ME15W terminal, 10 m (32.81 ft.) cable length	IM9901	CONTACT TIPS	41	To replace the tip on the L2001
CT7044	AC FLEXIBLE CURRENT SENSOR	92	6000 A, φ100 mm (3.94 in.)	IM9902	CONTACT TIPS	41	To replace the tip on the L2001
CT7045	AC FLEXIBLE CURRENT SENSOR	92	6000 A, φ180 mm (7.09 in.)	IM9905	CALIBRATION KIT	38	For the IM7580 series
CT7046	AC FLEXIBLE CURRENT SENSOR	92	6000 A, φ254 mm (10.00 in.)	IM9906	ADAPTER(3.5mm/7mm)	38	For the IM7580 series
CT7116	AC LEAKAGE CURRENT SENSOR	94	For the PQ3100, 6 A, PL14 terminal	IR4016-20	ANALOG MΩ HITESTER	106	500 V/ 100 MΩ, Test Lead L9787 bundled
CT7126	AC CURRENT SENSOR	94	For the PQ3100, 60 A, PL14 terminal	IR4017-20	ANALOG MΩ HITESTER	106	500 V/ 1000 MΩ, Test Lead L9787 bundled
CT7131	AC CURRENT SENSOR	94	For the PQ3100, 100 A, PL14 terminal	IR4018-20	ANALOG MΩ HITESTER	106	1000 V/ 2000 MΩ, Test Lead L9787 bundled
CT7136	AC CURRENT SENSOR	94	For the PQ3100, 600 A, PL14 terminal	IR4053-10	INSULATION TESTER	105	Bundled with Test Lead L9787
CT7631	AC/DC CURRENT SENSOR	91	100 A AC/DC, φ33 mm (1.30 in.)	IR4056-20	INSULATION TESTER	105	Economic model
CT7636	AC/DC CURRENT SENSOR	91	600 A AC/DC, φ33 mm (1.30 in.)	IR4056-21	INSULATION TESTER	105	Economic model, Not CE marked
CT7642	AC/DC CURRENT SENSOR	91	2000 A AC/DC, φ55 mm (2.17 in.)	IR4057-50	INSULATION TESTER	104	Wireless Adapter Z3210 not included
CT7731	AC/DC AUTO-ZERO CURRENT SENSOR	91	100 A AC/DC, φ33 mm (1.30 in.)	IR4057-90	INSULATION TESTER/WIRELESS ADAPTER	104	Bundled with the Wireless Adapter Z3210
CT7736	AC/DC AUTO-ZERO CURRENT SENSOR	91	600 A AC/DC, φ33 mm (1.30 in.)	IR4059	INSULATION TESTER	104	Wireless Adapter Z3210 not included
CT7742	AC/DC AUTO-ZERO CURRENT SENSOR	91	2000 A AC/DC, φ55 mm (2.17 in.)	IR5050	HIGH VOLTAGE INSULATION TESTER	107	
CT7812	AC/DC CURRENT SENSOR	91	2 A AC/DC	IR5051	HIGH VOLTAGE INSULATION TESTER	107	For solar PV system
CT7822	AC/DC CURRENT SENSOR	91	20 A AC/DC	IR5051-90	HIGH VOLTAGE INSULATION TESTER	107	For solar PV system, bundled with the Z3210
CT9555	SENSOR UNIT	90	For the CT6841A, etc., ME15W connector	L0220-01	EXTENSION CABLE	92	For the CT7600/CT7700 series
CT9556	SENSOR UNIT	90	For the CT6841A, etc., ME15W connector	L0220-02	EXTENSION CABLE	92	For the CT7600/CT7700 series
CT9557	SENSOR UNIT	90	For the CT6841A, etc., ME15W connector	L0220-03	EXTENSION CABLE	92	For the CT7600/CT7700 series
CT9667-01	AC FLEXIBLE CURRENT SENSOR	93	φ100 mm (3.94 in.)	L0220-04	EXTENSION CABLE	92	For the CT7600/CT7700 series
CT9667-02	AC FLEXIBLE CURRENT SENSOR	93	φ180 mm (7.09 in.)	L0220-05	EXTENSION CABLE	92	For the CT7600/CT7700 series
CT9667-03	AC FLEXIBLE CURRENT SENSOR	93	φ254 mm (10.00 in.)	L0220-06	EXTENSION CABLE	92	For the CT7600/CT7700 series
CT9848	CLAMP ON SENSOR	114	For the FT6041, for detection	L0220-07	EXTENSION CABLE	92	For the CT7600/CT7700 series
CT9900	CONVERSION CABLE	75	For the CT6841, PW8001 and similar products	L1000	VOLTAGE CORD	71	For the PW8001, PW6001, PW3390, PQ3198
CT9902	EXTENSION CABLE	86	For the CT6841A and similar products	L1000-05	VOLTAGE CORD	81	For the PQ3100
CT9904	CONNECTION CABLE	75	For the CT9557, PW8001/PW6001/PW3390	L1002	USB CABLE(A-B)	54	For the DM7276 and similar products
CT9920	CONVERSION CABLE	73	For the PW3390 and similar products	L1010	CONNECTION CABLE	33	For the LR8512
DM7275-01	PRECISION DC VOLTMETER	63		L1011	CONVERSION CABLE	25	For the P9000 and similar products
DM7275-02	PRECISION DC VOLTMETER	63	Built-in GP-IB	L1011-10	CONVERSION CABLE	25	For the P9000 and similar products
DM7275-03	PRECISION DC VOLTMETER	63	Built-in RS-232C	L1012	POWER CABLE	29	Unprocessed ends, 2 m (6.6 ft.) length
DM7276-01	PRECISION DC VOLTMETER	63		L1021-01	PATCH CORD	71	For the PW3390 and similar products
DM7276-02	PRECISION DC VOLTMETER	63	Built-in GP-IB	L1021-02	PATCH CORD	71	For the PW3390 and similar products
DM7276-03	PRECISION DC VOLTMETER	63	Built-in RS-232C	L1025	VOLTAGE CORD	71	For the PW8001
DSM8104F	INTERLOCK CABLE	62	For the SM7110, SM7120, DSM-8104/8542	L1050-01	VOLTAGE CORD	74	For the VT1005, 1.6 m (5.25 ft.) length
DT4223	DIGITAL MULTIMETER	102	With resistance measurement, for electrical work	L1050-03	VOLTAGE CORD	74	For the VT1005, 3 m (9.84 ft.) length
DT4224	DIGITAL MULTIMETER	102	With C/R measurement, for general use	L1100	SENSE CABLE	120	For the ALDAS-Mini
DT4252	DIGITAL MULTIMETER	101	10 A direct input	L1150	SOURCE CABLE	120	For the ALDAS-Mini
DT4253	DIGITAL MULTIMETER	101	With mA DC, temperature	L2000	4-TERMINAL PROBE	41	For the IM3590/IM3570, 3506-10, 3505/06
DT4255	DIGITAL MULTIMETER	101	With fused measurement terminals	L2001	PINCHER PROBE	41	For the IM3523, and similar products
DT4256	DIGITAL MULTIMETER	101	Multi-functional model, with 10 A direct input	L2002	CLIP TYPE PROBE	55	For the BT4560, 1.5 m (4.92 ft.) length
DT4261	DIGITAL MULTIMETER	100	Multi-functional, for on-site maintenance	L2003	PIN TYPE PROBE	55	For the BT4560, 1.5 m (4.92 ft.) length
DT4261-90	DIGITAL MULTIMETER/WIRELESS ADAPTER	100	Bundled with the Wireless Adapter Z3210	L2004	CONNECTION CABLE	54	For the SW1001 and similar products
DT4281	DIGITAL MULTIMETER	99	Direct and current clamp input terminals	L2005	CONNECTION CABLE	65	For connecting the SW2001 and the IM3533



# Model No. (Order Code) Index

Note: D mark indicates discontinued or discontinuation scheduled models.

Model No.	Name	Page	Note	Model No.	Name	Page	Note
L2020	PIN TYPE LEAD	59	For the BT3554-50	L9845-52	MEASUREMENT CABLE	114	For the FT6041
L2100	PIN TYPE LEAD	48	For the BT3562, BT3563, BT6065, BT6075, and RM3545	L9846	EARTH NET MODULE	114	For the FT6041
L2101	CLIP TYPE LEAD	48	For the RM3544, RM3545 series	L9850-01	TEST LEAD	107	For the IR5050 and IR5051, red, 3 m (9.84 ft.) length
L2102	PIN TYPE LEAD	48	For the RM3544, RM3545 series	L9850-02	TEST LEAD	107	For the IR5050 and IR5051, black, 3 m (9.84 ft.) length
L2103	PIN TYPE LEAD	48	For the RM3544, RM3545 series	L9850-03	TEST LEAD	107	For the IR5050 and IR5051, blue, 3 m (9.84 ft.) length
L2104	4-TERMINAL LEAD	48	For the RM3544, RM3545 series	L9850-11	TEST LEAD	107	For the IR5050 and IR5051, red, 10 m (32.81 ft.) length
L2105	LED COMPARATOR ATTACHMENT	48	For the RM3544, RM3545 series, RM3548 series	L9850-12	TEST LEAD	107	For the IR5050 and IR5051, black, 10 m (32.81 ft.) length
L2107	CLIP TYPE LEADS	51	For the RM3548 series, BT3563 and similar products	L9850-13	TEST LEAD	107	For the IR5050 and IR5051, blue, 10 m (32.81 ft.) length
L2108	CONNECTION CABLE	54	For the SW1001 and similar products	L9851-01	ALLIGATOR CLIP	107	For the L9850, red
L2110	PIN TYPE LEAD	56	For the BT3562(-01), BT3563(-01), BT3564	L9851-02	ALLIGATOR CLIP	107	For the L9850, black
L2111	CONNECTION CABLE	65	For connecting SW2001 and RM3545	L9851-03	ALLIGATOR CLIP	107	For the L9850, blue
L2120	PIN TYPE LEAD	55	For the BT6065, BT6075	L9852	TEST PIN SET	107	Red and black, for L9850
L2121	CLIP TYPE LEAD	55	For the BT6065, BT6075	L9910	CONVERSION CABLE	81	For the PQ3100
L2130	CLIP TYPE LEAD	68	For the BT5525	LR5001	HUMIDITY LOGGER	35	Temperature / Humidity each 1ch
L2131	CLIP TYPE LEAD	68	For the BT5525	LR5011	TEMPERATURE LOGGER	35	Temperature 1ch
L2132	UNTERMINATED LEAD L2132	68	For the BT5525	LR5031	INSTRUMENTATION LOGGER	36	mA DC, 1ch
L2133	UNTERMINATED LEAD L2132	68	For the BT5525	LR5041	VOLTAGE LOGGER (50mV)	36	±50mV DC
L2140	TEST LEADS	51	For the RM3548-50	LR5042	VOLTAGE LOGGER (5V)	36	±5V DC
L2140-01	TEST LEAD (RED)	51		LR5043	VOLTAGE LOGGER (50V)	36	±50V DC
L2140-02	TEST LEAD (BLACK)	51		LR5051	CLAMP LOGGER	37	2ch, clamp sensor is sold separately
L2141	PIN TYPE LEAD	51	For the RM3548-50	LR5091	COMMUNICATION ADAPTER	37	For the LR5000 series
L2142	PIN TYPE LEAD	51	For the RM3548-50	LR5092-20	DATA COLLECTOR	37	For the LR5000 series
L2200	TEST LEAD	66	For the ST5540/ST5541, MR8990	LR8101	DATA LOGGER	29	Main unit only, standard model
L2220	CONNECTOR	60	For the SM7810	LR8102	DATA LOGGER	29	Main unit only, advanced model
L2221	CONNECTOR	60	For the SM7860	LR8431-20	MEMORY HILOGGER	32	10 ch, English model
L2230	PIN TYPE LEAD (RED)	61	For the SM7110 and similar products	LR8431-30	MEMORY HILOGGER	--	10ch, Chinese model
L2231	PIN TYPE LEAD (BLACK)	61	For the SM7110 and similar products	LR8432-20	HEAT FLOW LOGGER	32	10 ch, English model
L2232	CLIP TYPE LEAD (RED)	61	For the SM7110 and similar products	LR8432-30	HEAT FLOW LOGGER	--	10 ch, Chinese model
L2233	CLIP TYPE LEAD (BLACK)	61	For the SM7110 and similar products	LR8450	MEMORY HILOGGER	30	Standard model (Plug-in model), main unit only
L2234	OPEN LEAD (RED)	61	For the SM7110 and similar products	LR8450-01	MEMORY HILOGGER	30	Wireless LAN equipped model, main unit only
L2235	OPEN LEAD (BLACK)	61	For the SM7110 and similar products	LR8512	WIRELESS PULSE LOGGER	33	2 ch
L2250	CLIP TYPE LEAD	66	For the ST4030A, ST4030	LR8513	WIRELESS CLAMP LOGGER	33	2 ch, sensor is sold separately
L2252	UNPROCESSED LEAD CABLE	66	For the ST4030A	LR8514	WIRELESS HUMIDITY LOGGER	34	2 ch, sensor is sold separately
L2255	CONNECTION CABLE	65	For connecting the SW2001 and the ST4030A	LR8515	WIRELESS VOLTAGE/TEMP LOGGER	34	2 ch, sensor is sold separately
L2265	UNTERMINATED LEAD CABLE	65	Red: for connecting DUT to the SW2001	LR8530	WIRELESS VOLTAGE/TEMP UNIT	31	For the LR8450-01
L2266	UNTERMINATED LEAD CABLE	65	Black: for connecting DUT to the SW2001	LR8531	WIRELESS UNIVERSAL UNIT	31	For the LR8450-01
L2270	CONNECTION CABLE	65	Red Hi: for connecting the 3153 and the SW2001	LR8532	WIRELESS VOLTAGE/TEMP UNIT	31	For the LR8450-01
L2271	CONNECTION CABLE	65	Black Low: for connecting the 3153 and the SW2001	LR8533	WIRELESS HIGH SPEED VOLTAGE UNIT	31	For the LR8450-01
L2280-01	CONNECTION CABLE	52	For the Powder Impedance Measurement System	LR8534	WIRELESS STRAIN UNIT	31	For the LR8450-01
L2280-03	CONNECTION CABLE	52	For the Powder Impedance Measurement System	LR8535	WIRELESS CAN UNIT	31	For the LR8450-01
L4930	CONNECTION CABLE SET	99	For the DT4280 series, DT4250 series	LR8536	WIRELESS CURRENT MODULE	31	For the LR8450-01
L4931	EXTENSION CABLE SET	26	For the L4930/L4940	LR9501	HUMIDITY SENSOR	35	For the LR5001
L4932	TEST PIN SET	99	For the L4930/L4940	LR9502	HUMIDITY SENSOR	35	For the LR5001
L4933	CONTACT PIN SET	99	For the L9207-10, DT4911(DT4280 series, DT4250 series)	LR9503	HUMIDITY SENSOR	35	For the LR5001
L4934	SMALL ALLIGATOR CLIP SET	99	For the L4932, L9207-10, DT4911(DT4280 series, DT4250 series)	LR9504	HUMIDITY SENSOR	35	For the LR5001
L4935	ALLIGATOR CLIP SET	26	For the L4930/L4940 (DT4280 series, DT4250 series)	LR9601	TEMPERATURE SENSOR	35	For the LR5011
L4936	BUS BAR CLIP SET	63	For the L4930/L4940 (DT4280 series, DT4250 series)	LR9602	TEMPERATURE SENSOR	35	For the LR5011
L4937	MAGNETIC ADAPTER SET	99	For the L4930/L4940 (DT4280 series, DT4250 series)	LR9603	TEMPERATURE SENSOR	35	For the LR5011
L4938	TEST PIN SET	99	For the L4930 (DT4280 series, DT4250 series)	LR9604	TEMPERATURE SENSOR	35	For the LR5011
L4939	BREAKER PIN SET	99	For the L4930 (DT4280 series, DT4250 series)	LR9611	TEMPERATURE SENSOR	35	For the LR5011
L4940	CONNECTION CABLE SET	26	For the MR8905	LR9612	TEMPERATURE SENSOR	35	For the LR5011
L6000	OPTICAL CONNECTION CABLE	71	For the PW8001, PW6001	LR9613	TEMPERATURE SENSOR	35	For the LR5011
L6101	OPTICAL CONNECTION CABLE	29	For the LR8101, LR8102, 1 m (3.3 ft.) length	LR9621	TEMPERATURE SENSOR	35	For the LR5011
L6102	OPTICAL CONNECTION CABLE	29	For the LR8101, LR8102, 10 m (32.8 ft.) length	LR9631	TEMPERATURE SENSOR	35	For the LR5011
L9094	OUTPUT CORD	26	For Memory HiCorder, CM7290 and similar products	LR9801	CONNECTION CABLE	36	For the LR5031
L9095	OUTPUT CORD	26	For Memory HiCorder, CM7290 and similar products	LR9802	CONNECTION CABLE	36	For the LR5041, LR5042, LR5043 and LR5061
L9096	OUTPUT CORD	26	For Logger, CM7290 and similar products	LR9901	WALL-MOUNTED HOLDER	36	For the LR5000 series (cannot use with the LR5051)
L9097	CONNECTION CABLE	113	For the CM4003	M1100	AC POWER MODULE	29	For the LR8101/LR8102, M7100/M7102/M7103
L9170-10	TEST LEAD	64	For the SS7012, 3237 series, 3156	M7100	VOLTAGE/TEMP MODULE	29	For the LR8101/LR8102
L9197	CONNECTION CORD	26	For the Memory HiCorder series	M7102	VOLTAGE/TEMP MODULE	29	For the LR8101/LR8102
L9198	CONNECTION CORD	26	For the Memory HiCorder series	M7103	POWER MEASUREMENT MODULE	29	For the LR8101/LR8102
D L9207-10	TEST LEAD	99	For the DT4280 series, DT4250 series, CT4370 series, and similar products	MR6000	MEMORY HiCORDER	19	Main unit only, input modules up to 8 units
L9207-30	TEST LEAD	103	For the 3030-10	MR6000-01	MEMORY HiCORDER	19	Built-in real-time waveform calculation and other functionality
L9208	TEST LEAD	110	For the 3288, 3287, 3280 series	D MR6740	MEMORY HiCORDER	23	Max. 54ch, 864MW memory, main unit only
L9217	CONNECTION CORD	26	1.6 m (5.25 ft.) length	MR8740-50	MEMORY HiCORDER	23	Max. 108ch, 1GW memory, main unit only
L9217-01	CONNECTION CORD	74	3 m (9.84 ft.) length	D MR8741	MEMORY HiCORDER	23	Max. 16ch, 256MW memory, main unit only
L9217-02	CONNECTION CORD	74	10 m (32.81 ft.) length	MR8790	WAVEFORM GENERATOR UNIT	64	For the MR6000, MR8848 and similar products
L9218	CONNECTION CABLE	65	For connecting the ST4200 and the SW2001	MR8791	PULSE GENERATOR UNIT	64	For the MR6000, MR8848 and similar products
L9243	GRABBER CLIP	25	For the Memory HiCorder, L4930/9197, 9322	MR8827	MEMORY HiCORDER	21	Max. 32ch, 512MW memory, main unit only
L9257	CONNECTION CORD	68	For the CM3286-50 and similar products	MR8848	MEMORY HiCORDER	20	Max. 32ch, 512MW memory, main unit only
L9300	TEST LEAD	99	For the DT4200 series, CM4000 series and similar products	MR8870-20	MEMORY HiCORDER	22	2ch, English model
L9438-50	VOLTAGE CORD	71	For the PW8001, PW6001, PW3390	MR8870-30	MEMORY HiCORDER	--	2ch, Chinese model
L9438-53	VOLTAGE CORD	83	For the PW3360 series, 3169 series, and similar products	MR8875	MEMORY HiCORDER	21	Max. 16 - 60ch, 32MW memory, main unit only
L9500	POWER CABLE	24	For the SP7100	MR8875-30	MEMORY HiCORDER	--	Chinese model
L9510	USB CABLE	24	For the SP7150	MR8880-20	MEMORY HiCORDER	22	4ch, printer unit option, English model
L9637	RS-232C CABLE	68	For the BT5525	MR8880-21	MEMORY HiCORDER	--	4ch, printer unit option, Chinese model
L9769	CONVERSION CABLE	--	Bundled with the U8869, for the MR6000 and similar products	MR8901	ANALOG UNIT	21	For the MR8875
L9787	TEST LEAD	104	For the IR4050 series, IR4010 series, FT6031	MR8902	VOLTAGE/TEMP UNIT	21	For the MR8875
L9787-91	BREAKER PIN	104	For the L9787(IR4050 series, IR4010 series)	MR8903	STRAIN UNIT	21	For the MR8875
L9788-10	TEST LEAD WITH REMOTE SWITCH (RED)	104	For the IR4050 series, IR4010 series	MR8904	CAN UNIT	21	For the MR8875
L9788-11	TEST LEAD SET WITH REMOTE SWITCH	104	For the IR4050 series, IR4010 series	MR8905	ANALOG UNIT	21	For the MR8875
L9788-90	TIP PIN	104	For the L9788 (IR4050 series, IR4010 series)	MR8990	DIGITAL VOLTMETER UNIT	63	For the MR6000, MR8740, MR8848, MR8827, and similar products
L9788-92	BREAKER PIN	104	For the L9788-10/L9788-11(IR4050 series, IR4010 series)	MR9000	PRINTER UNIT	22	For the MR8880
L9790	CONNECTION CORD	26	For the Memory HiCorder series	MR9001-01	DIRECT WRITE TO STORAGE	20	For the MR8848, additional function
L9790-01	ALLIGATOR CLIP	26	For the L9790 (for the Memory HiCorder series)	MR9321-01	LOGIC PROBE	26	For the Memory HiCorder, miniature terminal type
L9795-01	CONNECTION CABLE	64	For the U8793, MR6000 and similar products	P-1201A	FELT PEN (RED)	--	For the PR8111 series, INR-9000 series, EPR-3000 series
L9795-02	CONNECTION CABLE	64	For the U8793, MR6000 and similar products	P-1201B	FELT PEN (RED)	--	For the INR-9000 series, EPR-3000 series
L9820	CONNECTION CABLE	98	For the FT3424, FT3425	P-1201C	FELT PEN (RED)	--	For the INR-9000 series, EPR-3000 series
L9840	AUXILIARY EARTHING ROD	115	For the FT6031, FT3151	P-1202A	FELT PEN (GREEN)	--	For the PR8111 series, INR-9000 series, EPR-3000 series
L9841	MEASUREMENT CABLE	115	For the FT6031, FT3151	P-1202C	FELT PEN (GREEN)	--	For the INR-9000 series, EPR-3000 series
L9842-11	MEASUREMENT CABLE	115	For the FT6031, FT3151	P-1203A	FELT PEN (BLUE)	--	For the PR8111 series, INR-9000 series, EPR-3000 series
L9842-22	MEASUREMENT CABLE	115	For the FT6031, FT3151	P-1203C	FELT PEN (BLUE)	--	For the INR-9000 series, EPR-3000 series
L9843-51	MEASUREMENT CABLE	115	For the FT6031, FT3151	P-1204A	FELT PEN (BROWN)	--	For the INR-9000 series, EPR-3000 series
L9843-52	MEASUREMENT CABLE	115	For the FT6031, FT3151	P-1205A	FELT PEN (BLACK)	--	For the INR-9000 series
L9844	MEASUREMENT CABLE	115	For the FT6031, FT3151	P2010	DC HIGH VOLTAGE PROBE	100	2000 V compatible
L9845-31	MEASUREMENT CABLE	114	For the FT6041	P9000-01	DIFFERENTIAL PROBE	25	For the Memory HiCorder series, Wave only
L9845-33	MEASUREMENT CABLE	114	For the FT6041	P9000-02	DIFFERENTIAL PROBE	25	For the Memory HiCorder series, Wave/RMS

# Model No. (Order Code) Index

Note: D mark indicates discontinued or discontinuation scheduled models.

Model No.	Name	Page	Note	Model No.	Name	Page	Note
PD3129	PHASE DETECTOR	117		SA9005	MOLD RELEASE UNIT	52	For the Powder Impedance Measurement System
PD3129-10	PHASE DETECTOR	117	Large clips	SE-10	RECORDING PAPER	26	For the PR8111, PR8112, EPR-3500 series, EPR-10B
PD3129-31	PHASE DETECTOR	--	Chinese model	SE-10Z-2	RECORDING PAPER	26	For the PR8111, PR8112, EPR-3500 series, EPR-10B
PD3129-32	PHASE DETECTOR	--	Large clips, Chinese model	SF-10CXZ-35	-	26	For the INR-9000
PD3259-50	DIGITAL PHASE DETECTOR	117	Wireless Adapter Z3210 not included	SF-10PXZ-45	-	26	For the PRR-5000
PD3259-90	DIGITAL PHASE DETECTOR/WIRELESS ADAPTER	117	Bundled with the Wireless Adapter Z3210	SF1001	POWER LOGGER VIEWER	83	For the PW3360/3365 series, 3169 series
PQ3100	POWER QUALITY ANALYZER	80	Main unit, current sensor is sold separately	SF4000	GENNECT One	118	Application for Windows
PQ3100-91	POWER QUALITY ANALYZER KIT	80	Kit includes 600 A sensor x 2 and other options	SF4071	GENNECT Cross	119	Mobile app for iOS
PQ3100-92	POWER QUALITY ANALYZER KIT	80	Kit includes 600 A sensor x 4 and other options	SF4072	GENNECT Cross	119	Mobile app for Android
PQ3100-94	POWER QUALITY ANALYZER KIT	80	Kit includes 6000 A sensor x 4 and other options	SF4180	GENNECT Cloud	118	Free plan with basic functions
PQ3198	POWER QUALITY ANALYZER	80	Main unit, current sensor is sold separately	SF4181-01	GENNECT Cloud Standard	118	GENNECT Cloud Standard 1 month license
PQ3198-92	POWER QUALITY ANALYZER KIT	80	Kit includes 600 A sensor x 4 and other options	SF4181-03	GENNECT Cloud Standard	118	GENNECT Cloud Standard 3 months license
PQ3198-94	POWER QUALITY ANALYZER KIT	80	Kit includes 6000 A sensor x 4 and other options	SF4181-12	GENNECT Cloud Standard	118	GENNECT Cloud Standard 12 months license
PR-1RD	SOFT PEN (RED)	--	For the EPR-151/152/131/132/133	SF4182-01	GENNECT Cloud Pro	118	GENNECT Cloud Pro 1 month license
PR-2GN	SOFT PEN (GREEN)	--	For the EPR-151/152/131/132/133	SF4182-03	GENNECT Cloud Pro	118	GENNECT Cloud Pro 3 months license
PW3335	POWER METER	77	Built-in LAN, RS-232C	SF4182-12	GENNECT Cloud Pro	118	GENNECT Cloud Pro 12 months license
PW3335-01	POWER METER	77	Built-in LAN, GP-IB	SG-10Z	-	26	For the FBR-250 series
PW3335-02	POWER METER	77	Built-in LAN, RS-232C, D/A output	SH-OZ-T1	-	26	For the PSR-2101
PW3335-03	POWER METER	77	Built-in LAN, RS-232C, external sensor terminal	SM7110	SUPER MEGOHM METER	61	1 ch, 1000 V output
PW3335-04	POWER METER	77	Built-in LAN, RS-232C, GP-IB, D/A output, external sensor terminal	SM7120	SUPER MEGOHM METER	61	1 ch, 2000 V output
PW3336	POWER METER	76	2ch	SM7420	SUPER MEGOHM METER	61	4ch, dedicated micro current measurement
PW3336-01	POWER METER	76	2ch, built-in GP-IB	SM7810	SUPER MQ HITESTER	60	100/110V AC power supply
PW3336-02	POWER METER	76	2ch, built-in D/A output	SM7810-20	SUPER MQ HITESTER	60	220V AC power supply
PW3336-03	POWER METER	76	2ch, built-in GP-IB, D/A output	SM7860-51	POWER SOURCE UNIT	60	100V AC power supply
PW3337	POWER METER	76	3ch	SM7860-52	POWER SOURCE UNIT	60	100V AC power supply
PW3337-01	POWER METER	76	3ch, built-in GP-IB	SM7860-53	POWER SOURCE UNIT	60	100V AC power supply
PW3337-02	POWER METER	76	3ch, built-in D/A output	SM7860-54	POWER SOURCE UNIT	60	100V AC power supply
PW3337-03	POWER METER	76	3ch, built-in GP-IB, D/A output	SM7860-55	POWER SOURCE UNIT	60	100V AC power supply
PW3360-20	CLAMP ON POWER LOGGER	82	English model, main unit only	SM7860-56	POWER SOURCE UNIT	60	100V AC power supply
PW3360-21	CLAMP ON POWER LOGGER	82	English model, with harmonic analysis function	SM7860-57	POWER SOURCE UNIT	60	100V AC power supply
PW3360-30	CLAMP ON POWER LOGGER	--	Chinese model, main unit only	SM7860-58	POWER SOURCE UNIT	60	100V AC power supply
PW3360-31	CLAMP ON POWER LOGGER	--	Chinese model, with harmonic analysis function	SM7860-61	POWER SOURCE UNIT	60	220V AC power supply
PW3365-20	CLAMP ON POWER LOGGER	82	English model, main unit only	SM7860-62	POWER SOURCE UNIT	60	220V AC power supply
PW3365-30	CLAMP ON POWER LOGGER	--	Chinese model, main unit only	SM7860-63	POWER SOURCE UNIT	60	220V AC power supply
PW3390-01	POWER ANALYZER	73		SM7860-64	POWER SOURCE UNIT	60	220V AC power supply
PW3390-02	POWER ANALYZER	73	D/A output	SM7860-65	POWER SOURCE UNIT	60	220V AC power supply
PW3390-03	POWER ANALYZER	73	D/A output, motor analysis	SM7860-66	POWER SOURCE UNIT	60	220V AC power supply
PW6001-01	POWER ANALYZER	72	1ch	SM7860-67	POWER SOURCE UNIT	60	220V AC power supply
PW6001-02	POWER ANALYZER	72	2ch	SM7860-68	POWER SOURCE UNIT	60	220V AC power supply
PW6001-03	POWER ANALYZER	72	3ch	SM9001	SURFACE VOLUME RESISTANCE MEASUREMENT ELECTRODE	62	For the SM-8200 series
PW6001-04	POWER ANALYZER	72	4ch	SM9002	VERIFICATION FIXTURE FOR SURFACE RESISTANCE MEASUREMENT	62	For the SM9001(SM-8200 series)
PW6001-05	POWER ANALYZER	72	5ch	SME-8301	SURFACE RESISTANCE MEASUREMENT ELECTRODE	62	
PW6001-06	POWER ANALYZER	72	6ch	SME-8302	ELECTRODE FOR SURFACE RESISTANCE	62	
PW6001-11	POWER ANALYZER	72	1ch, motor analysis, D/A output	SME-8310	PLATE SAMPLE ELECTRODE	62	
PW6001-12	POWER ANALYZER	72	2ch, motor analysis, D/A output	SME-8311	ELECTRODE FOR FLAT SAMPLE	62	
PW6001-13	POWER ANALYZER	72	3ch, motor analysis, D/A output	SME-8320	WEIGHT ELECTRODE	62	
PW6001-14	POWER ANALYZER	72	4ch, motor analysis, D/A output	SME-8330	LIQUID SAMPLE ELECTRODE	62	
PW6001-15	POWER ANALYZER	72	5ch, motor analysis, D/A output	SME-8350	SHIELDING BOX	62	
PW6001-16	POWER ANALYZER	72	6ch, motor analysis, D/A output	SME-8360	ELECTRODE FOR CHIP CAPACITOR	62	
PW8001-01	POWER ANALYZER	71		SP7001	NON-CONTACT CAN SENSOR	24	Sensor box only, supports CAN FD / CAN signals
PW8001-02	POWER ANALYZER	71	D/A output	SP7001-90	NON-CONTACT CAN SENSOR	24	Supports CAN FD / CAN signals, SP7001, SP7100, SP9200 set
PW8001-03	POWER ANALYZER	71	CAN	SP7001-95	NON-CONTACT CAN SENSOR	24	Supports CAN FD / CAN signals, SP7001, SP9250, SP7150 set
PW8001-04	POWER ANALYZER	71	Optical link	SP7002	NON-CONTACT CAN SENSOR	24	Sensor box only, supports CAN signals
PW8001-05	POWER ANALYZER	71	D/A output, Optical link	SP7002-90	NON-CONTACT CAN SENSOR	24	Supports CAN signals, SP7002, SP7100, SP9200 set
PW8001-06	POWER ANALYZER	71	CAN, Optical link	SP7100	CAN INTERFACE	24	For the SP7001, SP7002
PW8001-11	POWER ANALYZER	71	Motor analysis	SP7150	CAN INTERFACE	24	For the SP7001, SP7002
PW8001-12	POWER ANALYZER	71	Motor analysis, D/A output	SP9200	SIGNAL PROBE	24	For the SP7001, SP7002, screw type
PW8001-13	POWER ANALYZER	71	Motor analysis, CAN	SP9250	SIGNAL PROBE	24	For the SP7001, SP7002, trigger type
PW8001-14	POWER ANALYZER	71	Motor analysis, Optical link	SP9900	SPLIT CABLE	24	For the SP7100
PW8001-15	POWER ANALYZER	71	Motor analysis, D/A output, Optical link	SR-2	STANDARD RESISTOR	62	
PW8001-16	POWER ANALYZER	71	Motor analysis, CAN, Optical link	D SS7012	DC SIGNAL SOURCE	64	
PW9000	WIRING ADAPTER	73	For the PW3390, PQ3198/3196 and similar products	SS7081-50	BATTERY CELL VOLTAGE GENERATOR	54	
PW9001	WIRING ADAPTER	73	For the PW3390, PQ3198/3196 and similar products	D SS9000	COMMUNICATION PACKAGE	64	For the SS7012
PW9002	BATTERY SET	83	For the PW3360/PW3365	ST4030A	IMPULSE WINDING TESTER	65	
PW9003	VOLTAGE LINE POWER ADAPTER	83	For the PW3360	ST4200-50	PARTIAL DISCHARGE DETECTOR	65	
PW9005	GPS BOX	81	For the PQ3198, PW33198	ST5520	INSULATION TESTER	68	Built-in external I/O output
PW9020	SAFETY VOLTAGE SENSOR	83	For PW3365	ST5520-01	INSULATION TESTER	68	Built-in BCD output
PW9100A-3	AC/DC CURRENT BOX	74	For the PW8001/PW6001/PW3390, 3 ch	ST5540	LEAK CURRENT HITESTER	66	For medical-use and electrical devices
PW9100A-4	AC/DC CURRENT BOX	74	For the PW8001/PW6001/PW3390, 4 ch	ST5541	LEAK CURRENT HITESTER	66	For electrical devices
RM2610	ELECTRODE RESISTANCE MEASUREMENT SYSTEM	53	System product	ST9000	DISCHARGE DETECTION UPGRADE	66	Factory option firmware for the ST4030A
RM3542	RESISTANCE HITESTER	50		ST9200	PD SENSOR	65	Specify at time of order, built into SW2001
RM3542-01	RESISTANCE HITESTER	50	Built in GP-IB interface	ST9201	PD SENSOR	65	Specify at time of order, built into SW2001
RM3542-50	RESISTANCE METER	50		ST9210	PD SENSOR	65	For the ST4200
RM3542-51	RESISTANCE METER	50	Built in GP-IB interface	SW1001	SWITCH MAINFRAME	54	3 slots
RM3543	RESISTANCE HITESTER	49		SW1002	SWITCH MAINFRAME	54	12 slots
RM3543-01	RESISTANCE HITESTER	49	Built in GP-IB interface	SW2001	HIGH VOLTAGE MULTIPLEXER	65	
RM3544	RESISTANCE METER	49		SW9001	MULTIPLEXER MODULE	54	For SW1001 and similar products
RM3544-01	RESISTANCE METER	49	Built in EXT I/O, RS-232C, USB	SW9002	MULTIPLEXER MODULE	54	For SW1001 and similar products
D RM3545	RESISTANCE METER	48		U7001	2.5MS/S INPUT UNIT	71	For the PW8001
RM3545A-1	RESISTANCE METER	47	Single-channel model	U7005	15MS/S INPUT UNIT	71	For the PW8001
RM3545A-2	RESISTANCE METER	47	Support for the multiplexer unit	U8330	SSD UNIT	21	For the MR8827, factory option
D RM3545-01	RESISTANCE METER	48	Built-in GP-IB interface	U8332	SSD UNIT	19	For the MR6000, factory option
D RM3545-02	RESISTANCE METER	48	Support for the multiplexer unit	U8334	INTERNAL STORAGE	20	For the MR8848, factory option
RM3548	RESISTANCE METER	51		U8350	PRINTER UNIT	21	For the MR8827, factory option
RM3548-50	RESISTANCE METER	51		U8351	PRINTER UNIT	20	For the MR8848, factory option
RM9006	MAINTENANCE TOOL	53	For the RM2610	U8550	VOLTAGE/TEMP UNIT	31	For the LR8450, LR8450-01
RM9010-01	FOUR-POINT ARRAY PROBE	48	For the RM3545 series	U8551	UNIVERSAL UNIT	31	For the LR8450, LR8450-01
RM9010-02	FOUR-POINT ARRAY PROBE	48	For the RM3545 series	U8552	VOLTAGE/TEMP UNIT	31	For the LR8450, LR8450-01
SA2631-01	3-DAY LICENSE	53	License card, for the Slurry Analytical System	U8553	HIGH SPEED VOLTAGE UNIT	31	For the LR8450, LR8450-01
SA2631-03	30-DAY LICENSE	53	License card, for the Slurry Analytical System	U8554	STRAIN UNIT	31	For the LR8450, LR8450-01
SA2631-05	365-DAY LICENSE	53	License card, for the Slurry Analytical System	U8555	CAN UNIT	31	For the LR8450, LR8450-01
SA2653	MEASUREMENT SOFTWARE	52	For the Powder Impedance Measurement System	U8556	CURRENT MODULE	31	For the LR8450, LR8450-01
SA2654	SENSOR UNIT	52	For the Powder Impedance Measurement System	U8793	ARBITRARY WAVEFORM GENERATOR UNIT	64	For the MR6000, MR8848, MR8827, and similar products
SA9001	ELECTRODE CELL	53	For the Slurry Analytical System	U8794	VIR GENERATOR UNIT	64	For the MR8740-50
SA9002	TEST FIXTURE	53	For the Slurry Analytical System	U8969	STRAIN UNIT	19	For the MR6000, MR8848, MR8827, and similar products
SA9003	PRESS UNIT	52	For the Powder Impedance Measurement System	U8974	HIGH VOLTAGE UNIT	19	For the MR6000, MR8848, MR8827, and similar products
SA9004	TEST FIXTURE	52	For the Powder Impedance Measurement System	U8975	4CH ANALOG UNIT	19	For the MR6000 and similar products

# Model No. (Order Code) Index

Note: D mark indicates discontinued or discontinuation scheduled models.

Model No.	Name	Page	Note	Model No.	Name	Page	Note
U8976	HIGH SPEED ANALOG UNIT	19	For the MR6000				
U8977	3CH CURRENT UNIT	19	For the MR6000 and similar products				
U8978	4CH ANALOG UNIT	19	For the MR6000 and similar products				
U8979	CHARGE UNIT	19	For the MR6000 and similar products				
U8991	DIGITAL VOLTMETER UNIT	63	For the MR8740-50				
VT1005	AC/DC HIGH VOLTAGE DIVIDER	74	For the PW8001, PW6001, PW3390				
Z1000	BATTERY PACK	22	For the MR8880				
Z1002	AC ADAPTER	22	For the MR8880, MR8875, PQ3198				
Z1003	BATTERY PACK	21	For the MR8875, PQ3198/PW3198, PQ3100				
Z1005	AC ADAPTER	22	For the MR8870, LR8431, LR8432				
Z1006	AC ADAPTER	83	For the PW3360 series				
Z1007	BATTERY PACK	31	For the LR8450, LR8450-01				
Z1008	AC ADAPTER	24	For the PW3365 series, P9000, SP7001, SP7001, SP7100				
Z1013	AC ADAPTER	24	For the SP7001, SP7002, CM4003				
Z1014	AC ADAPTER	31	For the LR8450 and similar products				
Z1016	AC ADAPTER	29	For the LR8101, LR8102				
Z2000	HUMIDITY SENSOR	31	For the LR8450 series				
Z2001	TEMPERATURE SENSOR	48	For the RM3544/RM3545A series, DM7275/DM7276, RM2611				
Z2002	TEMPERATURE SENSOR	51	For the RM3548				
Z2003	AC ADAPTER	34	For the LR8512 series				
Z2005	TEMPERATURE SENSOR	55	For the BT4560, 1 m (3.28 ft.) length				
Z2010	HUMIDITY SENSOR	34	For the LR8514				
Z2011	HUMIDITY SENSOR	34	For the LR8514				
Z3000	GP-IB INTERFACE	38	For the IM3590, IM3523/33 series				
Z3001	RS-232C INTERFACE	38	For the IM3590, IM3523/33 series				
Z3002	LAN INTERFACE	41	For the IM3590, IM3523/33 series				
Z3003	MULTIPLEXER UNIT	48	For the RM3545-02, input scanner				
Z3210	WIRELESS ADAPTER	119	For the CM4001, FT6031-50 etc.				
Z4001	SD MEMORY CARD 2GB	19					
Z4003	SD MEMORY CARD	19	8GB				
Z4006	USB DRIVE	19	16GB				
Z5003	CONTACT ADAPTER	--	For the FT3405, FT3406				
Z5004	MAGNETIC STRAP	81	For the PQ3198, PQ3100, LR5000 series and similar products				
Z5008	THERMALLY CONDUCTIVE TAPE	--	For the Z2012 series(discontinued), 20 sheets set				
Z5010	CONVERSION ADAPTER	61	For the SM7110, SM7120 and similar products, custom order product				
Z5020	MAGNETIC STRAP	117	For the PD3259-50, DT4250/4280 series				
Z5021	PROBE POWER UNIT	19	For the MR6000, factory option				
Z5022	SHOULDER STRAP	115	For the FT3151				
Z5023	EXTENSION CART	98	For the FT3424, FT3425				
Z5038	0 ADJ BOARD	57	For the L2100, L2110 (BT3564) and similar products				
Z5040	FIXED STAND	31	For the LR8450, LR8450-01				
Z5041	PROTECTOR	51	For the BT3554-50 series, RM3548-50 series				
Z5042	PROTECTOR	104	For the IR4059				
Z5050	FUSE SET	59	For the BT3554-50 series				



## Product Warranties

Hioki products are generally covered by a three-year warranty.


Product warranty	In the event Hioki is responsible for the failure of a product during the warranty term beginning on the date of purchase (or beginning in the month the product was manufactured if the date of purchase is unclear), we will repair or replace the product free of charge.
Warranty scope	We check products on a standalone basis to verify their specifications, performance, and functionality. Although we verify proper operation of components that are connected to Hioki products in standard configurations, we ask that customers verify proper operation of their Hioki products when connected to other manufacturers' products. The scope of Hioki's warranty is limited to Hioki products. Connected devices and issues caused by connected devices are considered outside the scope of the warranty. In the event of physical damage, any compensation that might be provided by Hioki is limited to the purchase price of the product.
Accuracy guarantee	For products with an accuracy guarantee, we guarantee the level of accuracy indicated in the specifications for a certain period of time following shipment from the factory. In the event of an accuracy defect during that period of time, we will adjust the product free of charge.

## Calibration and Repair Service

Calibration Expiration (Calibration Interval)	Values obtained on the date of calibration are used as the calibration results. When calibration expires (i.e., the calibration interval) depends on the customer's operating conditions and environment. Consequently, the customer is ultimately responsible for determining calibration expiration while taking into account the calibration interval recommended by Hioki.
Recommended calibration interval	Hioki recommends that each product's accuracy guarantee period be treated as the recommended calibration interval.
Guarantee after Calibration Service**1	If a customer reports a loss of accuracy after calibration while the instrument in question is covered by the recommended calibration interval and we are able to verify the issue, we will adjust the instrument free of charge. (If the product is subject to a regular calibration request, we will adjust it as part of the calibration fee.)
Guarantee Conditions	<ul style="list-style-type: none"> <li>• If a loss of accuracy is caused by a part's having reached its service life or deteriorated, fees will apply to the repair.</li> <li>• If the loss of accuracy is deemed likely to have been caused by damage or by the operating or storage environment, fees will apply to the repair.</li> <li>• If a product is deemed likely to experience a loss of accuracy after shipment, for example due to the end of the repair period, we may contact the customer and decline to offer a guarantee.</li> <li>• The guarantee applies to products that are calibrated at Hioki.</li> </ul>
Guarantee of repaired products	If, within six months of the original repair, Hioki is responsible for an issue requiring an additional repair (a repair of the same issue) of a product that has been used as described in its user manual, we will repair it free of charge.
Repair term	<p>We may improve products or switch models without notice in order to enhance the competitiveness of our products and our productivity. We will repair discontinued products for a minimum of five years from the date of their discontinuation, although we may elect to propose that the customer switch to an alternative model if it is difficult to repair a product due to social or economic conditions.</p> <p>*Once five years have passed since a product's discontinuation, we will only accept inspection and calibration requests for that product if we are able to perform that work in-house.</p>

\*1: Not all products are covered by this guarantee.

## Quality of Hioki's calibration and repair service

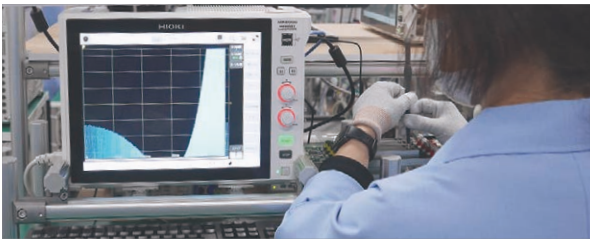

### 90 years of history and fine-grained, expert service

Technicians performing calibration, adjustment, and repair work undergo in-house training to ensure they possess the specialized expertise and skills that such work demands.

### Precise calibration and adjustment guidelines compiled by product designers

We determine everything from the procedures for measuring instrument functionality checks to calibration points based on the results of reviews conducted by designers who are well versed in the characteristics of products' internal circuitry and the principles that underlie their operation. In this way, we are able to provide optimal, extensive calibration and adjustment service as only the manufacturer can.


### Highly reliable service that's traceable to national standards

The standard devices we use to calibrate and adjust products are all linked to national standards, ensuring that we can issue inspection reports with accurate, reliable calibrated values.

### Comprehensive calibration and repair service with fast turnaround

If we discover a malfunction or failure during the calibration process, we'll contact you to let you know where the problem is and what's necessary to address it. If you wish, we'll then repair the product. This capability eliminates unnecessary back-and-forth so you can put your product back to work as soon as possible.

### Traceability Sample

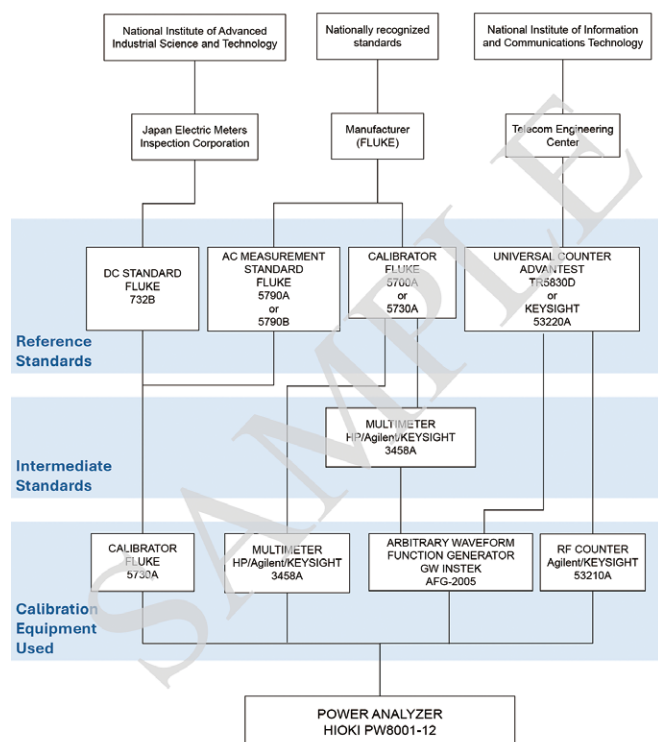

# Calibration and Repair Service

## (1) Service content

Hioki's calibration services were updated effective April 2022.

### "Calibration Services"


When an instrument is calibrated and its measured values are found not to satisfy internal Hioki standards, the instrument is adjusted. Through the ongoing use of calibration services offered as only an instrument manufacturer can, customers are able to use their instruments with peace of mind while maintaining their precision.

This calibration service will allow us to return products to customers with minimal downtime, since there are no work interruptions.

### Notes

\*If you do not wish your instrument to be adjusted, please let us know when you request calibration. Your product will be returned without adjustment, even if the calibration report indicates a FAIL judgment (non-compliance).

\*This service does not extend to products that cannot be adjusted or to discontinued products.

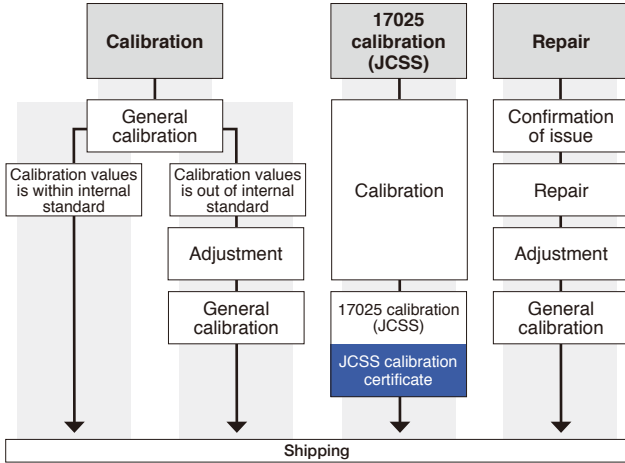

\*JCSS calibration is also available as a standalone service

## (2) Documents we can issue and their content

Sample documents are also available on Hioki's website.




Test report

- Calibration results
- Judgment



General calibration certificate

- Calibration certificate declaration
- Information about equipment used in calibration



Traceability chart (overall)

An overview tracing Hioki product groups to national standards via individual standard devices



Traceability chart (model-specific)

A detailed diagram tracing a particular product model to national standards via individual standard devices



JCSS calibration certificate

- Calibration results
- Inaccuracies
- Coverage factor
- Calibration certificate declaration
- ilac-MRA, IA Japan, and JCSS logos

## Calibration


Calibration provides a way to check the condition of a measuring instrument by comparing the ideal value indicated by a standard device with the value indicated by the instrument being calibrated.

## Adjustment


Calibration values will be optimized so that the instrument satisfies Hioki's internal standards.

### If an instrument is adjusted as part of calibration service

Values are optimized so that they satisfy Hioki's internal standards to reduce the risk that they will subsequently exceed the tolerance.

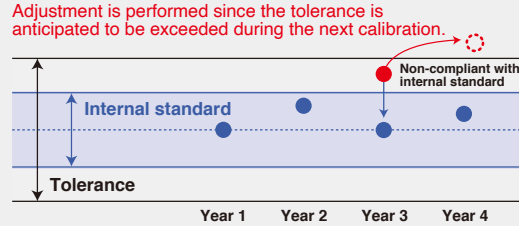

## Difference between general calibration and 17025 calibration (JCSS)

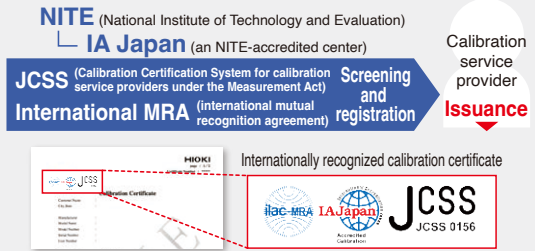

This is the mark of the calibration service provider registration program based on the Measurement Act. JCSS-registered service providers are registered under the ISO/IEC 17025 standard. HIOKI E.E. CORPORATION is an international MRA-capable JCSS-accredited service provider. Hioki's accreditation number is JCSS 0156.

JCSS calibration is a type of third-party-accredited calibration based on ISO/IEC 17025. General calibration is a type of calibration determined by Hioki based on ISO 9001. Hioki can issue calibration certificates bearing the JCSS mark for instruments that have undergone JCSS certification, and they are valid internationally since they are international MRA-compliant.

### Differences in calibration points

- |   |   |
|---|---|
| <b>General calibration</b><br>Calibration is performed for all parameters that need to be checked in order to maintain the performance of the measuring instrument as determined by the product designer. | <b>17025 calibration (JCSS)</b><br>Calibration is performed using points registered as the JCSS calibration range and selected by the customer. |
|---|---|

### Differences in information on calibration documents

- |   |   |
|---|---|
| <b>General calibration</b><br>• Calibration results: Included on inspection report<br>• Inaccuracies: Not included<br>• Traceability chart: Yes | <b>17025 calibration (JCSS)</b><br>• Calibration results: Included on calibration certificate<br>• Inaccuracies: Included on calibration certificate<br>• Traceability chart: No<br>(*JCSS and other logos certify traceability.) |
|---|---|

## Service capability and warranty duration

You can find out whether Hioki accepts repair and calibration requests for your instrument, associated lead times if so, and the information listed below simply by entering the product model number on Hioki's website.

Product Search:

**Availability of repair and calibration service**

**Results**

Model	Product	Available function	Calibration	Repair	Discontinued date
014256	DIGITAL MULTIMETER	1: Contact	✓	✓	
Recommended calibration interval	12 months				
Product warranty period	12 months				


**Calibration Interval**

**Product warranty period**

**Date production discontinued**

# Sales and service network

● HQ ● Regional Group HQ ● Offices of Group Companies

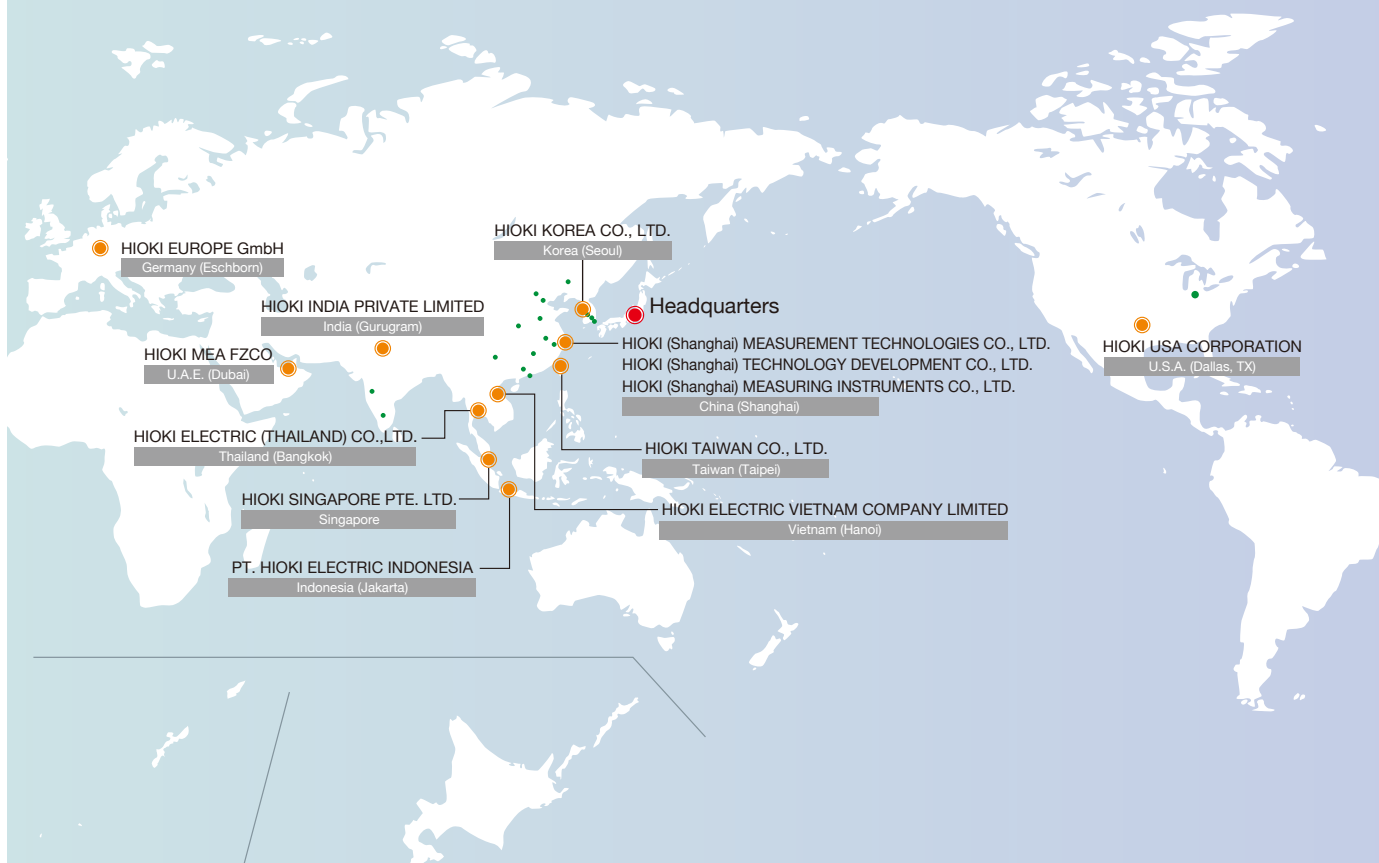

Bringing the Hioki brand and products to the world through a global network.

We're working to develop markets worldwide through sales companies in ten overseas locations. We work closely with local employees to assess markets needs quickly and accurately and to provide feedback to aid in new-product development. In this way, we're focused on globalizing Hioki's high-quality products.



*Note: company names and product names appearing in this catalog are trademarks or registered trademarks of various companies.*

**HIOKI**  
HIOKI E. E. CORPORATION

**HEADQUARTERS**  
81 Koizumi,  
Ueda, Nagano 386-1192 Japan  
<https://www.hioki.com/>



DISTRIBUTED BY